Remit Home Deployment Manual

Ver. 1.0

Contents

A) Web.Config Settings: 3

B) Report's Web Config: 4

C) Service's Web Config: 4

D) Main JS Setting:..... 5

E) IIS Setting:..... 5

F) Crystal Report Deployment: 13

G) Header and Logo images Setting:..... 15

Detailed Application Deployment Manual

A) Web.Config Settings:

1) Application's Web Config

In application's web configuration file the following details needs to be update according to the deployment in environment:

a) In following change the **IP of web server will be replace by the current IP** address (as shown in Fig) in both attribute, (**if required changes should be done on of name of the folder where service and pool file are reside**).

```
<!--ViewStateStore: Defines where we'll save the ViewState: Cache|Session-->
<add key="ViewStateStore" value="Session"/>
<add key="DisabilityStyle" value="test"/>
<add key="NoOfListerRows" value="20"/>
<add key="NoOfTabularRows" value="20"/>
<add key="Audit" value="Y"/>
<!-- Error Log -->
<add key="ExceptionLogEnabled" value="false"/>
<add key="ExceptionLogPath" value="errorlogs\SampleXMLLog.xml"/>
<add key="ExceptionLogTokens" value="Found,Foreign,Timeout,timeout,TIMEOUT,Thread"/>
<!-- Batch Process values -->
<add key="Bank.webReference.BatchProcess" value="http://128.1.40.70:70/Service/BatchProcess.asmx" />
<add key="PoolPage" value="http://128.1.40.70:70/app/Presentation/BatchPool.aspx" />
<!-- Global Values store : Defines where we'll save global values : Session|Application  -->
<add key="GlobalVariable" value="Application"/>
<!-- Custom Command Builder where clause field exceptions -->
<add key="ConcurrencyIgnoreTypes" value="String(4000)"/>
<add key="OMRExecuteMode" value="T"/>
<add key="ApplyPageVerification" value="Y"/>
<add key="BrowserCheck" value="N"/>
<add key="CheckLoginProc" value="Y"/>
<add key="FullScreenMode" value="Y"/>
<add key="APP_NAME" value="\APP" />
<add key="SRV_NAME" value="\Service" />
<add key="Audit" value="Y"/>
```

b) Following attribute should be set to **"False"** in client environment to stop debugging.

```
<compilation defaultLanguage="c#" debug="true"><assemblies>
                <add assembly="System.Core, Version=3.5.0.0, Culture=n
                <add assembly="System.Web.Extensions, Version=3.5.0.0,
                <add assembly="System.Xml.Linq, Version=3.5.0.0, Cultu
                <add assembly="System.Data.DataSetExtensions, Version=
<!--  CUSTOM ERROR MESSAGES
```

c) The following attributes must be change and revalidated in **"DSN"** key according to the new client environment:

- **User ID** → Database User Id
- **Password** →Database User's Password
- **Initial Catalog** →Database Name
- **Data Source** → Server Name where Database resides

```
<!-- new security features-->
<add key="DSN" value="Provider=SQLOLEDB.1;Persist Security Info=False;User ID=sa;Password=123qwe!@#;Initial Catalog=r
```

B) Report's Web Config:

1) The following attributes must be change and revalidated in **"DSN"** key in Reports web configuration file, according to the new client environment :

- **User ID** → Database User Id
- **Password** →Database User's Password
- **Initial Catalog** →Database Name
- **Data Source** → Server Name where Database resides

```
<!-- new security features-->
<add key="DSN" value="Provider=SQLOLEDB.1;Persist Security Info=False;User ID=sa;Password=123qwe!@#;Initial Catalog=r
```

C) Service's Web Config:

1) The following attributes must be change and revalidated in "DSN" key in Web Service's web configuration file, according to the new client environment :

- **User ID** → Database User Id
- **Password** →Database User's Password
- **Initial Catalog** →Database Name
- **Data Source** → Server Name where Database resides

```
<!-- new security features-->
<add key="DSN" value="Provider=SQLOLEDB.1;Persist Security Info=False;User ID=sa;Password=123qwe!@#;Initial Catalog=r
```

2) If applicable the folder path or name should be updated in Web Service's web configuration file

```
        <!-- Global Values store : Defines where we'll save global values : Session|Application  -->
        <add key="GlobalVariable" value="Application"/>
    <add key ="APP_NAME" value ="\\app"/>
    <add key ="SRV_NAME" value ="\\service"/>
```

D) Main JS Setting:

1) The on following position changes should be done in Main.js file according the setting of client environment, here “IP” should be change b y New Web Server IP and “SHMA-CR” will be replace be folder the crystal reports resides.

```
//Possible values  "Y" or "N"
var separateVirtualDir = "Y";

function fcgetReportUrl() {


    if(separateVirtualDir == "Y")
    {
        return "http://128.1.40.70/SHMA-CR/Crystal Reports/CrystalReport.aspx";
    }
    else
    {
        return "../../Crystal Reports/CrystalReport.aspx";
    }

}
```

The Main .js file will be available at on following path ”**ABC**\APP\shmalib\jscript\Shma” where ABC represent name of web site folder where web application reside.


E) IIS Setting:

1) First, ensure that IIS 6 Management Compatibility is installed on IIS 7, for this go into **Control Panel → Administrative Tools → Server Manager**, now Click on **Role** in left pane and then Click on **Web Server**.

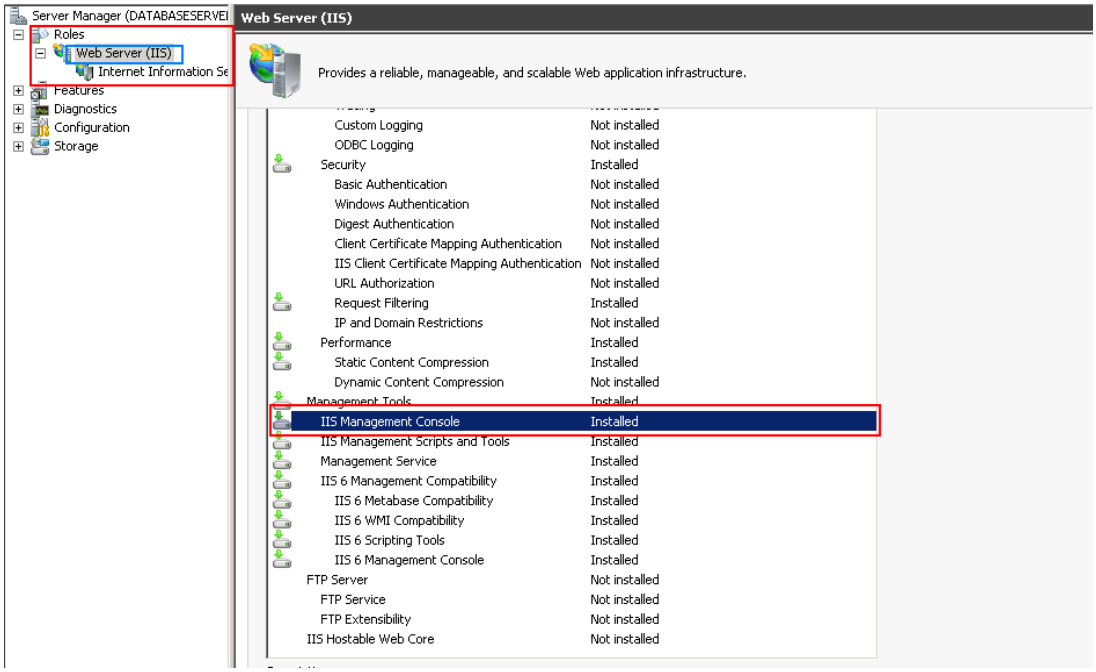


2) Adding New Website

To create a default website on server the following step need to be done, open IIS Manager and click on **Add Website**.

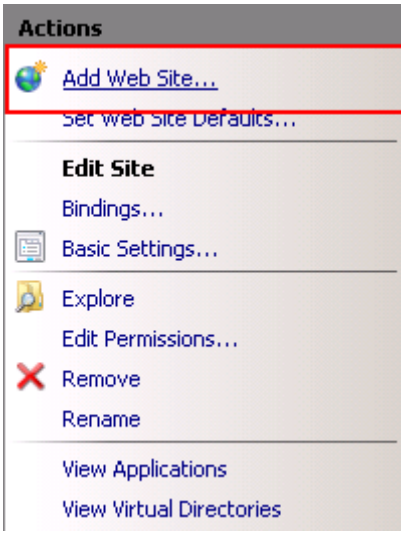


In the following windows enter the details in required fields i.e. Site Name: Name of Website, Physical Path: Location where Website folder is physically resided. (The Port is an optional field in case of default website and should be leave as "80", but if server is hosting multiple websites the port needs to define as per client environment.


Note: if port is define in website configuration the same port should be define or update in all web configuration associated to that web site.

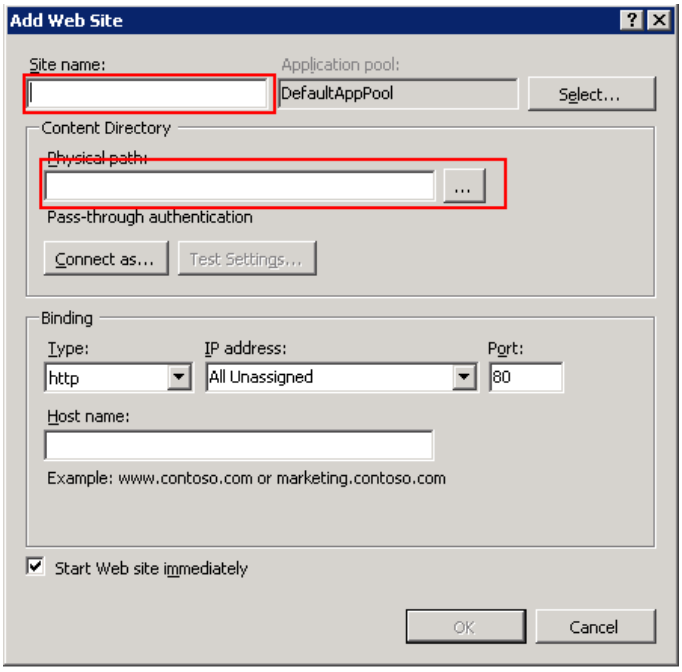


3) Right click on available sub folder(s) in tree and Select Convert to Application

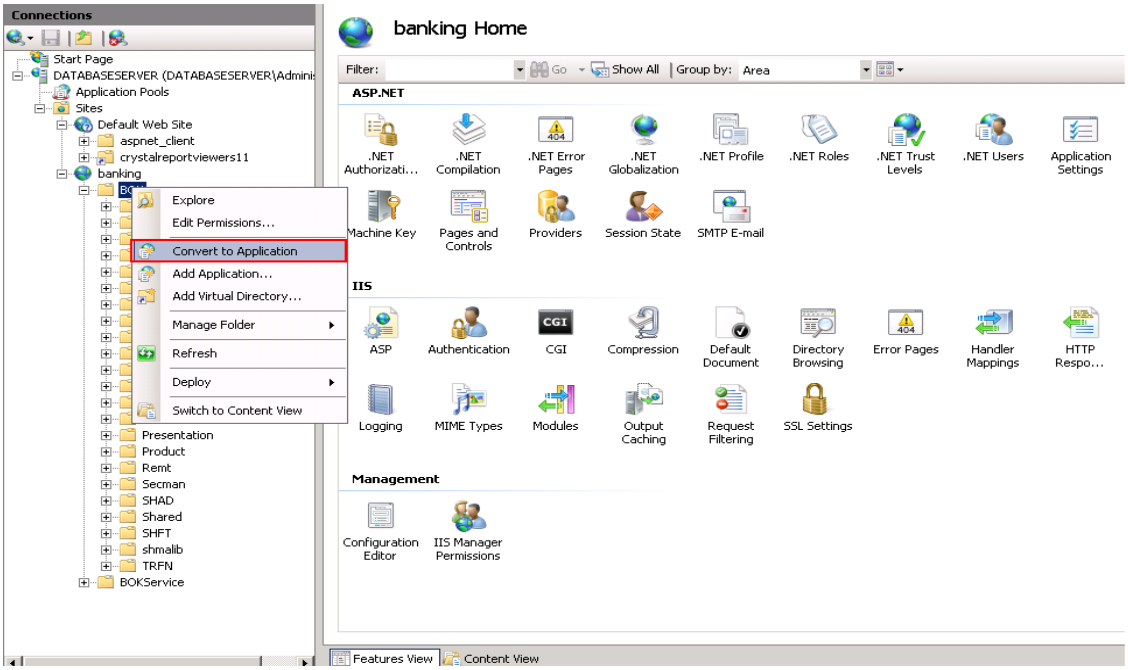


4) Right click on "Website" folder and select **Manage Application → Advanced Settings**. In **Advanced Settings** dialog box select **Application Pool and** click on (…) ellipse button. Select **"Application Pool"** dialog box appears. Select appropriate (Application's development Frame work) ASP.NET Frame work from drop down list. Click OK button

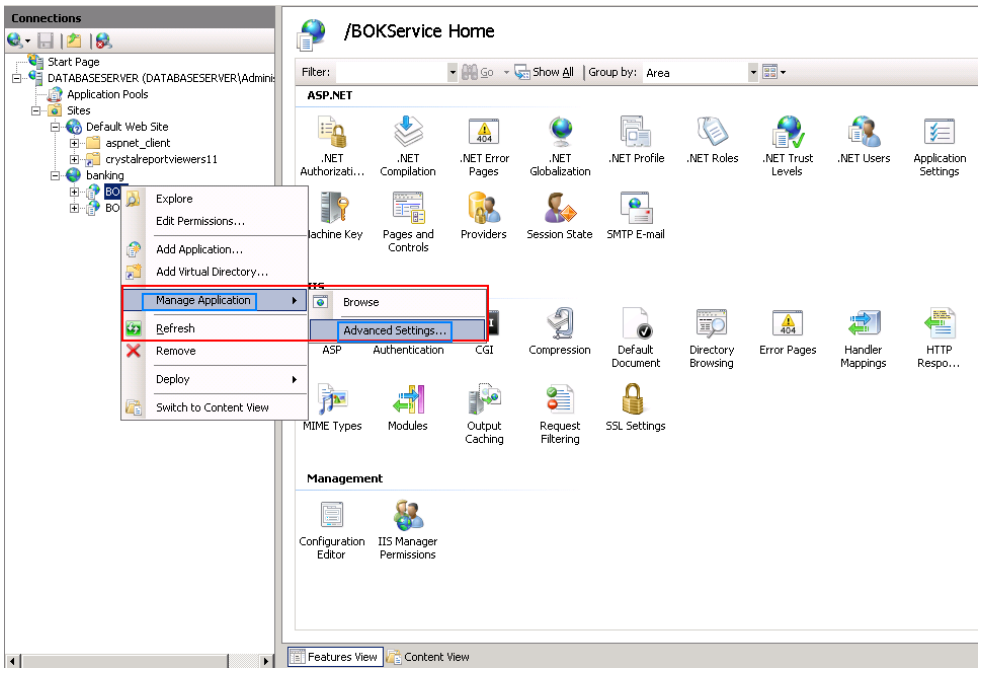

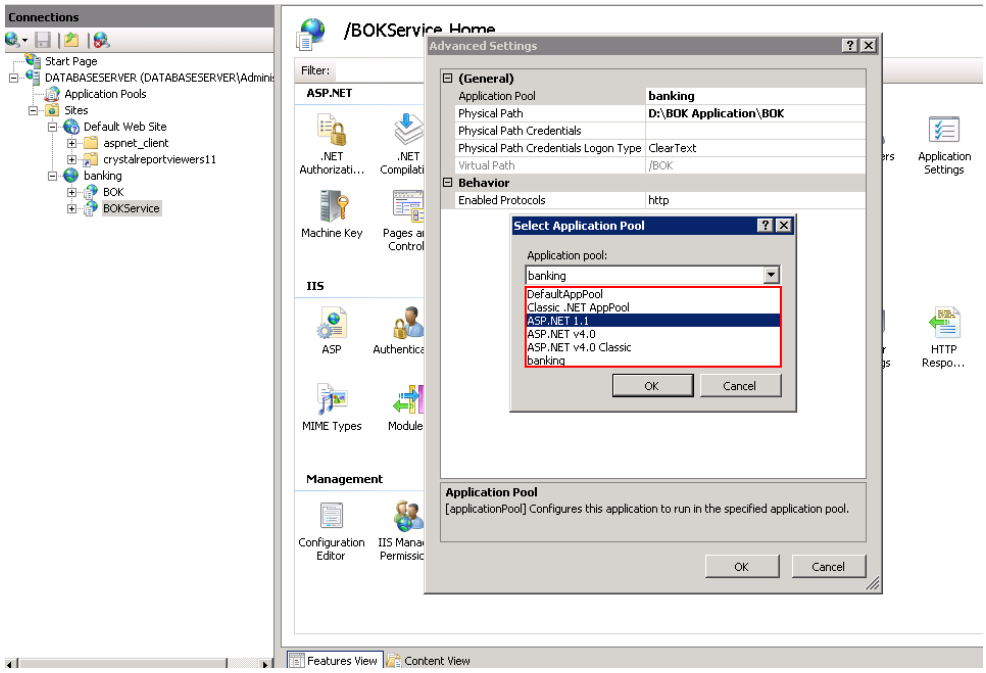


Note: This same step is followed for **Services** as well.

5) Select **Presentation** folder and double click on **Default Document** icon

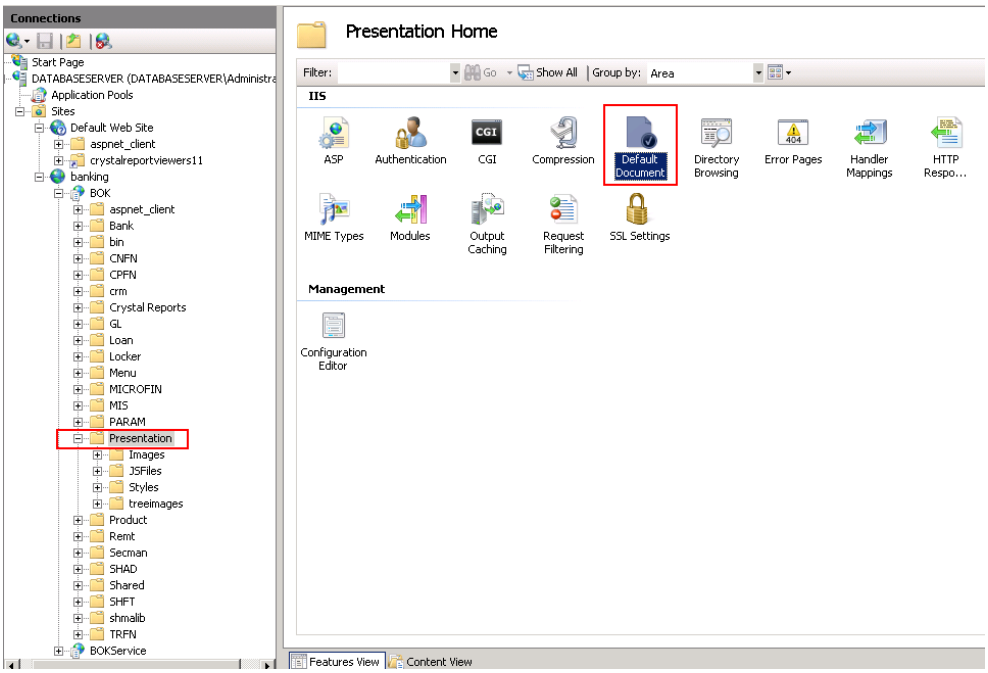


6) If the required ASP.NET Framework Service Pack or ASP.NET Framework is not available then following Error will appeared.

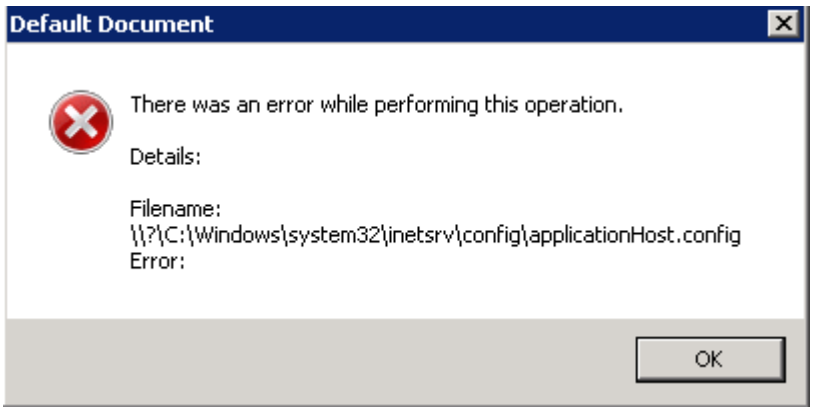


Note: This problem most likely face on those application(s) which are built on ASP.NET Framework1.1 e.g. Soneri Bank, BOK etc. To resolve this issue go on following link and download

http://www.microsoft.com/download/en/details.aspx?id=33


a) Create directory named **v1.1.4322** under %windir%\Microsoft.NET\Framework64

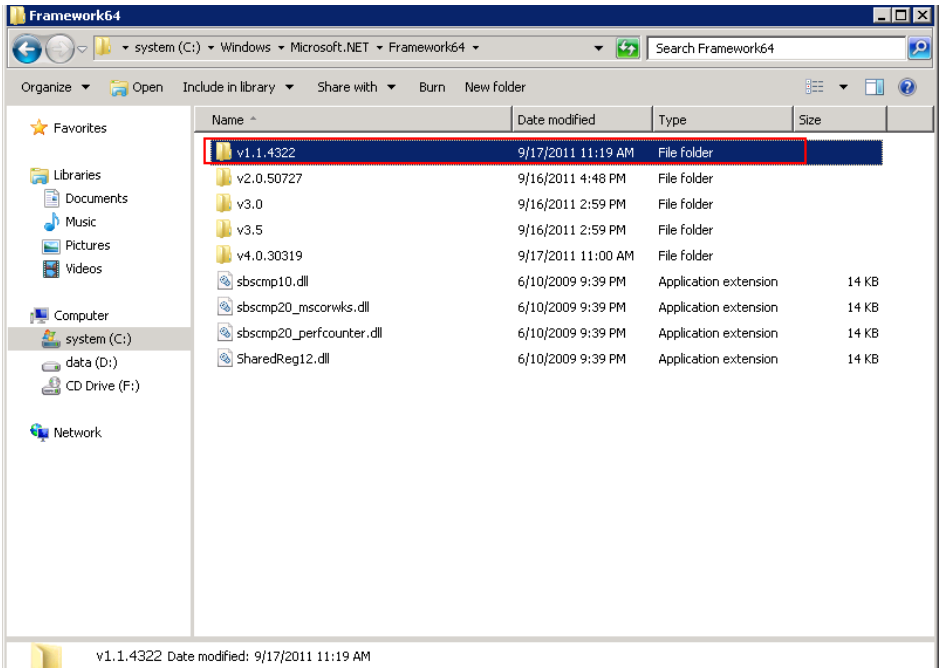


b) Install the downloaded software. (Microsoft .NET Framework 1.1 Service Pack 1)

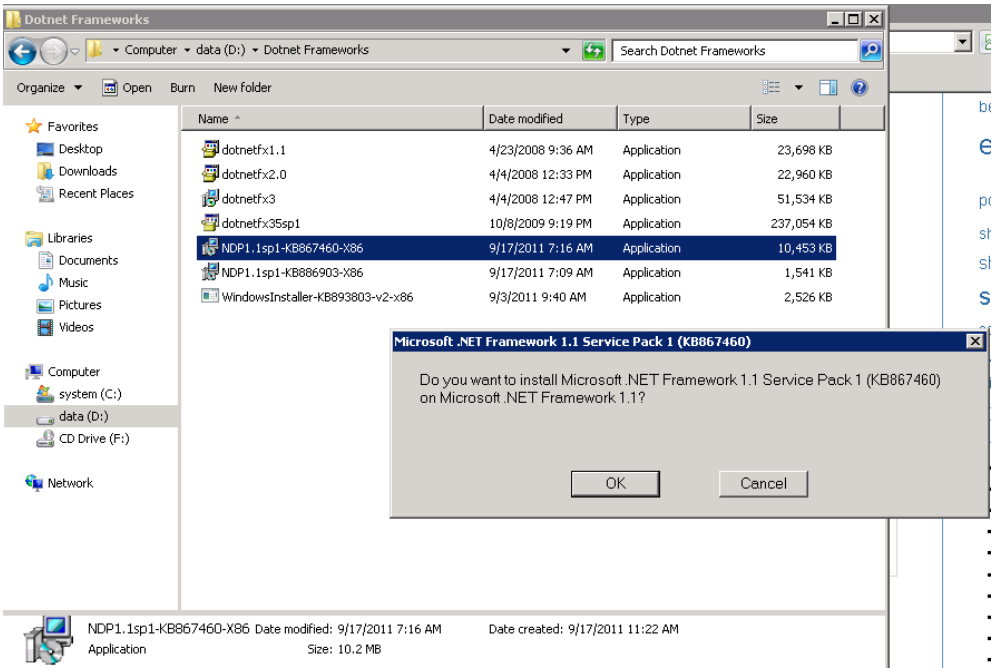


c) Copy the contents of %windir%\Microsoft.NET\Framework\v1.1.4322 to %windir%\Microsoft.NET\Framework64\v1.1.4322

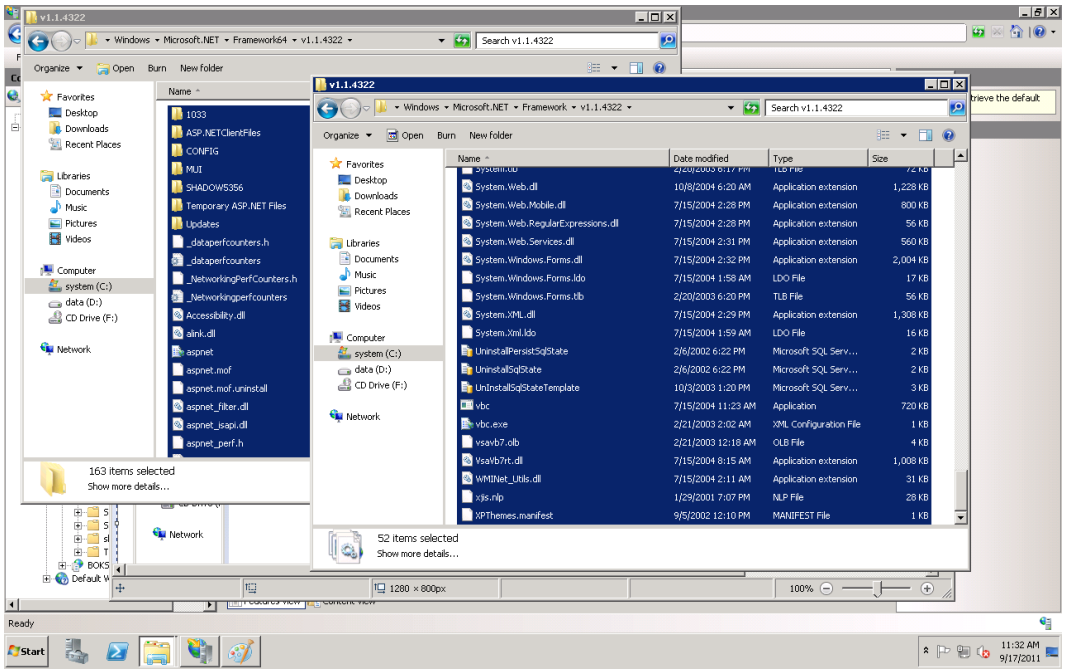


d) To ensure that the "Enable 32-bit Applications" attribute is enabled for the application pool, since ASP.NET 1.1 is 32-bit only. Open **IIS Manager** and go to **Application Pools**. In right pane, **check and see ASP.NET 1.1 is installed and status is Started**

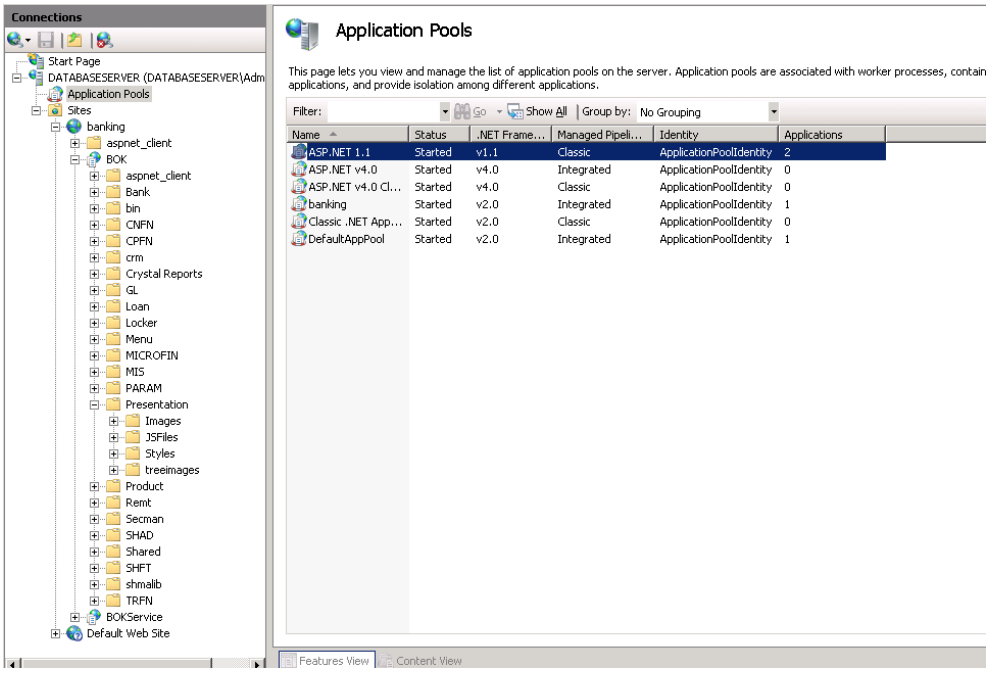


7) Right click the Presentation folder and in right hand Actions pane click ADD link. Add Login.aspx and click OK.

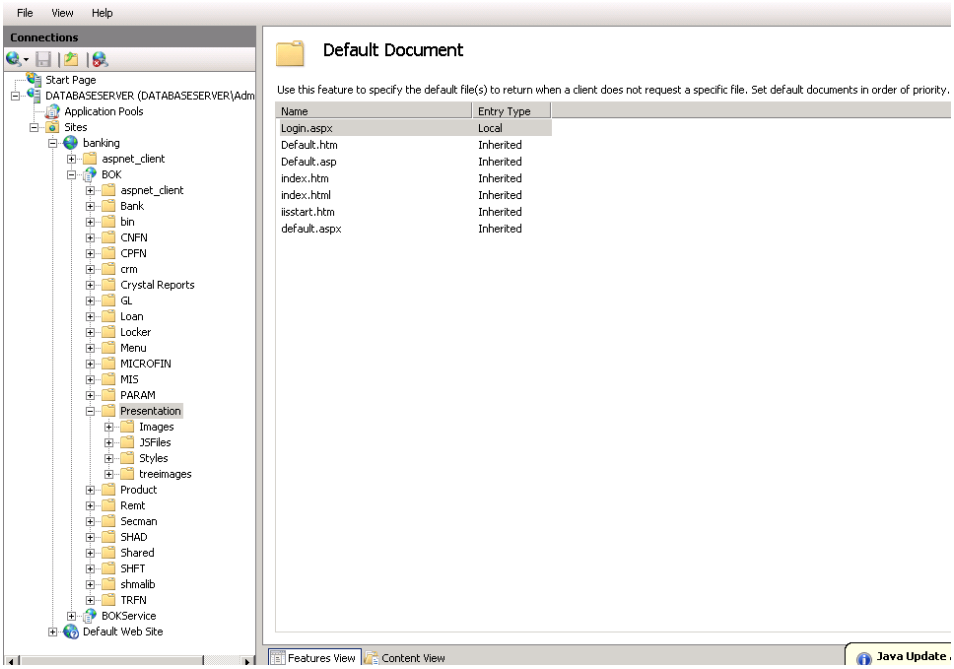


8) (Applicable only on those application which were build on ASP.NET Framework 1.1) In IIS manager select “Server Name” in left hand pane and in right hand pane **ISAPI and CGI Restriction**, check to ensure ASP.NET v1.1.4322 restriction is Allowed.

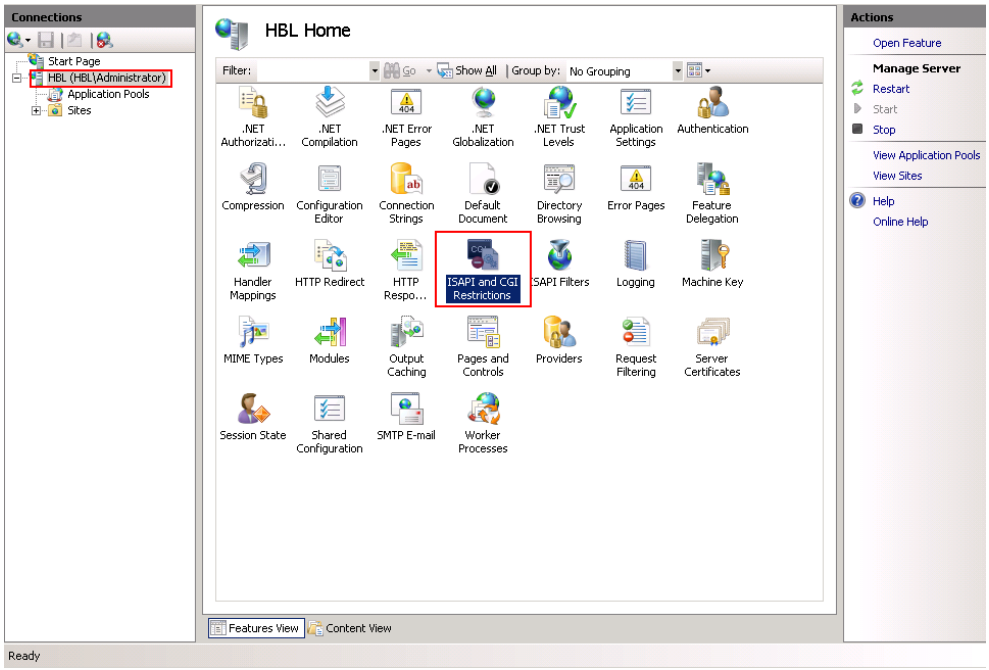


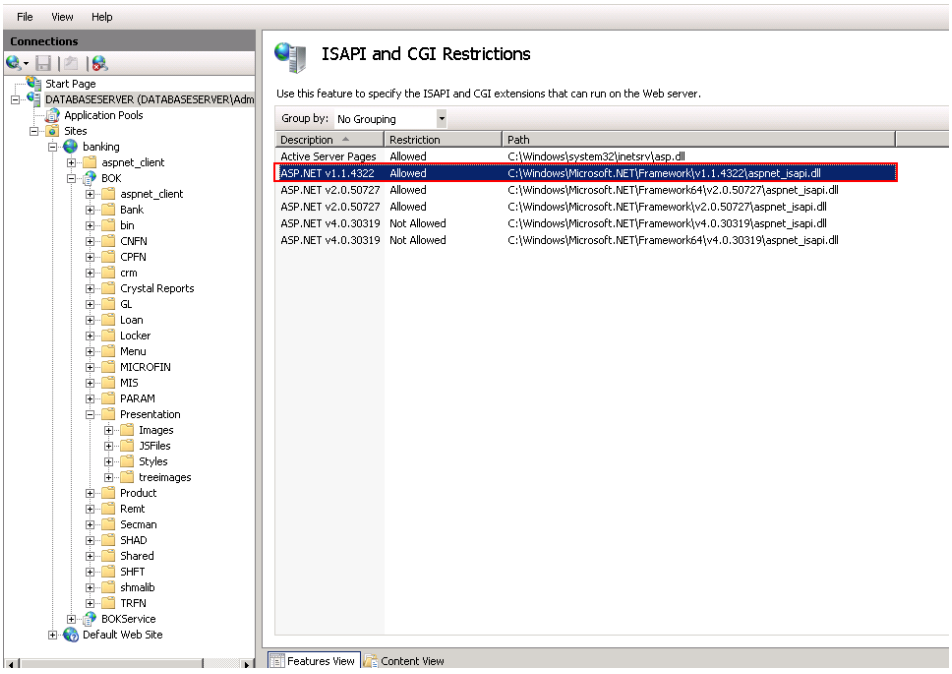

9) To adding up new Application Pool click on left Pane on application pool and then click on **"Add Application Pool"** in right Pane.

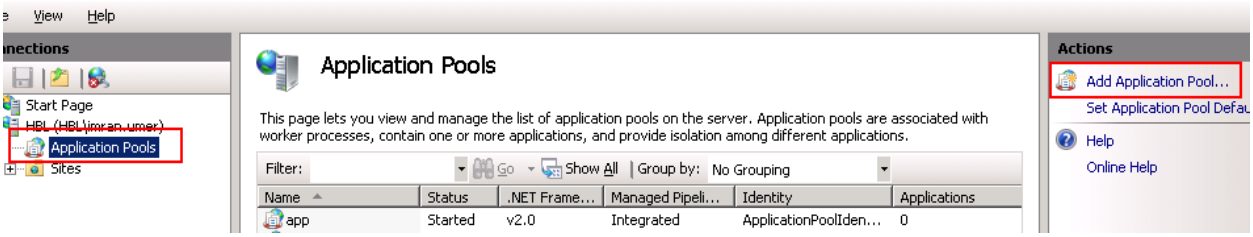

On the following window insert the "Name" of application **pool ideally should be same as the name of the Application /Service /Report Folder.**

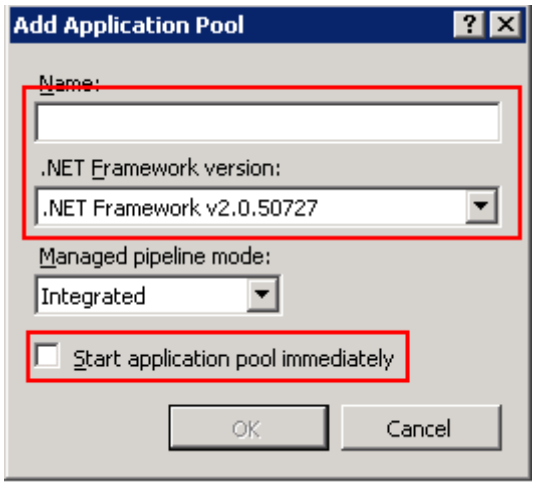


F) Crystal Report Deployment:


Crystal report 12 required 32bit environment, for this purpose we need to setup separate virtual directory on IIS and **change link in calling form to view report**, the following procedure should be follows to deploy Crystal Report (32bit) on Windows 2008 64x environment.

1) Install Crystal report 12 redistributable kit (cr2008sp3_redist.zip)
2) Deploy Crystal reports folder at Web server
3) Set connection string in web config file
4) Run IIS Manager
5) Create New Application Pool In IIS Manager

   a) At Defined "**Crystal Report Application Pool**" click on right click and select **"Advance Setting"**:

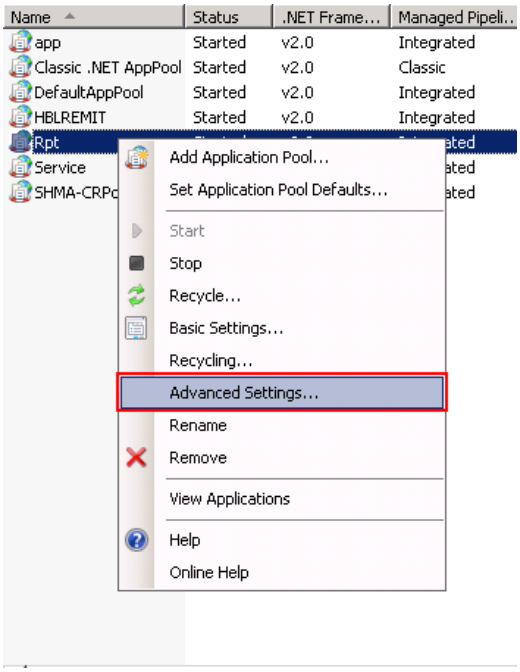

Now set the **"Enable 32-bit Applications"** equal to **"True"** and click on "OK"

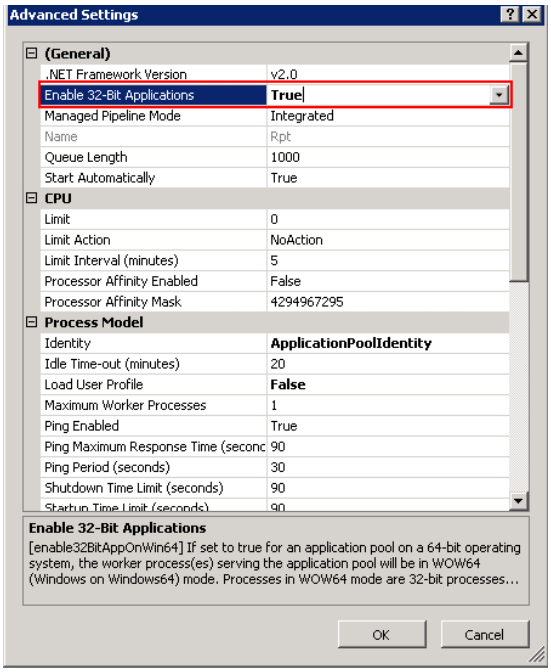


G) Header and Logo images Setting:

1) To Update images go logon to the application with administrative user and go on following menu:

   Parameter>>Global>>Global Values

   In Global Values select the “Type”, and now on right pane select “IMAGEPATH” as shown picture:

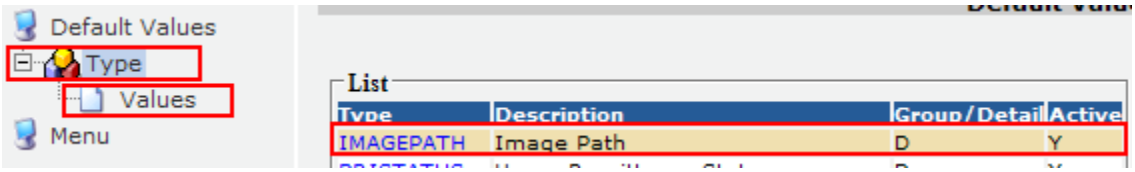

   After the selection of “IMAGEPATH” Click on values option available in left Pane. On following screen the value old value of images can reset through changing there path according to the current environment.

