


Protocol parameters

Two choice (social-sucrose) operant assay

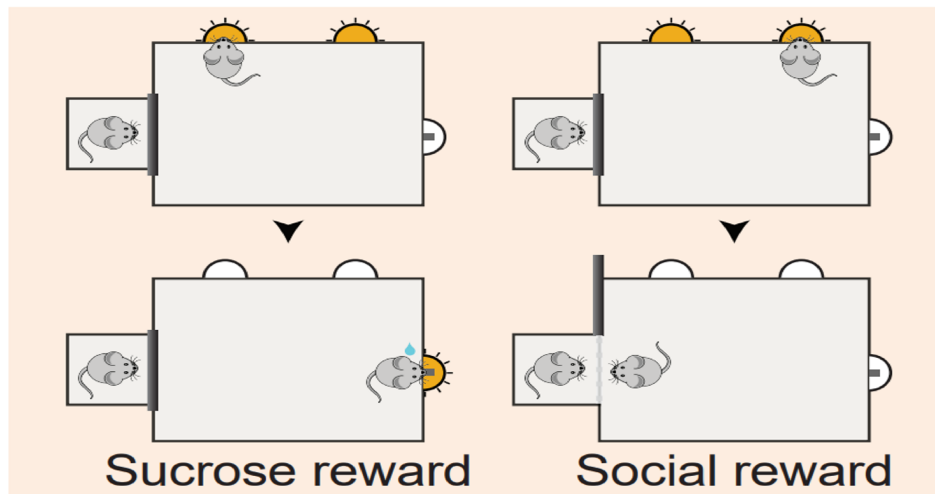

Basic settings

Choose recoding type

Behavior

Choose Bpod

Bpod1

Inter-trial interval (secs)

30

Duration of behavior (mins)

60

Sucrose reward settings

Maximum reward latency (secs)

8

Sucrose reward amount (uL)

10

Social reward settings

Social gate open time (secs)

8

« Back

Next »