


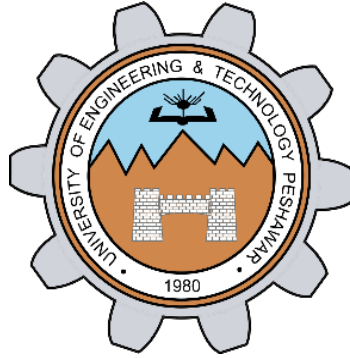

**UNIVERSITY OF ENGINEERING AND TECHNOLOGY PESHAWAR
(NOWSHERA CAMPUS)**

**COMPUTER
PROGRAMMING**

<i>Name:</i>	MUHAMMAD MUSA
<i>Reg:No:</i>	<i>BF25NWELE0754</i>
<i>Subject:</i>	<i>Computer Programming</i>
<i>Department:</i>	<i>Electrical Engineering</i>

Lab Report

Professor : Sir Rizwan

Program No: 1

```
#include <iostream>
using namespace std;
int main() { int arr[10],
max, min, sum = 0;

// Taking input from user
cout << "Enter 10 integers:\n";
for(int i = 0; i < 10; i++) { cin >>
arr[i];
}

// Initialize max and min with first element max
= min = arr[0];

// Loop to find max, min and sum
for(int i = 0; i < 10; i++) { if(arr[i] > max)
max = arr[i]; // Update max if(arr[i] < min)
min = arr[i]; // Update min sum += arr[i];
// Add to sum
}

// Display results cout << "Maximum: "
<< max << endl; cout << "Minimum: " <<
min << endl; cout << "Average: " << sum /
10.0 << endl;

return 0;
}
```

Program No: 2

```
#include <iostream>
using namespace std;

// Function to reverse array void
reverseArray(int arr[], int size) { for(int i = 0; i
< size/2; i++) { swap(arr[i], arr[size - i - 1]); //
Swap elements
}
}
```

```

int main() { int arr[5]
= {1,2,3,4,5}; //
Display original array
cout << "Before
Reversal: "; for(int
i=0;i<5;i++) cout <<
arr[i] << " ";

reverseArray(arr, 5); // Function call

// Display reversed array cout <<
"\nAfter Reversal: "; for(int
i=0;i<5;i++) cout << arr[i] << " ";

return 0;
}

```

Program No: 3

```

#include <iostream>
using namespace std;

```

```

int main() { int A[3][3],
B[3][3], C[3][3];

```

```

// Input Matrix A cout <<
"Enter Matrix A:\n"; for(int
i=0;i<3;i++) for(int
j=0;j<3;j++) cin >> A[i][j];

```

```

// Input Matrix B cout <<
"Enter Matrix B:\n"; for(int
i=0;i<3;i++) for(int
j=0;j<3;j++) cin >> B[i][j];

```

```

// Add matrices for(int
i=0;i<3;i++) for(int
j=0;j<3;j++)
C[i][j] = A[i][j] + B[i][j];

```

```

// Display result cout <<
"Result Matrix:\n"; for(int
i=0;i<3;i++) {
for(int j=0;j<3;j++)
cout << C[i][j] << " ";
cout << endl;
}

return 0;
}

```

Program No: 4

```

#include <iostream>
using namespace std;

```

```

int main() { string
names[5];

```

```

// Input names cout <<
"Enter 5 names:\n"; for(int
i=0;i<5;i++) cin >> names[i];

```

```

// Sorting using simple comparison
for(int i=0;i<5;i++) { for(int j=i+1;j<5;j++) {
if(names[i] > names[j]) { swap(names[i],
names[j]); // Swap names
}
}
}

```

```

// Display sorted names
cout << "Sorted Names:\n";
for(int i=0;i<5;i++) cout <<
names[i] << endl;

```

```

return 0;
}

```

Program No: 5

```

#include <iostream>
using namespace std; //

```

Function to calculate

```
total load double  
totalLoad(double arr[],  
int size) { double sum =  
0; for(int i=0;i<size;i++)  
sum += arr[i]; return  
sum;  
}
```

// Function to find peak load double

```
peakLoad(double arr[], int size) {  
double max = arr[0]; for(int  
i=1;i<size;i++) if(arr[i] > max) max =  
arr[i]; return max;  
}
```

```
int main() { double  
load[24];
```

```
// Input load data cout << "Enter  
24-hour load:\n"; for(int  
i=0;i<24;i++) cin >> load[i];
```

```
// Display results cout << "Total Load: " <<  
totalLoad(load,24) << endl; cout << "Peak Load: " <<  
peakLoad(load,24) << endl;
```

```
return 0;  
}
```

Program No: 6

```
#include <iostream>  
using namespace std;
```

```
// Function to find topper void topper(string  
names[], int marks[], int size) { int max =  
marks[0], index = 0; for(int i=1;i<size;i++) {  
if(marks[i] > max) { max = marks[i]; index = i;  
}  
}  
cout << "Topper: " << names[index] << endl;
```

```
}
```

```
// Function to display pass/fail void
```

```
passFail(string names[], int marks[], int size) {  
for(int i=0;i<size;i++) { cout << names[i] << " - ";  
if(marks[i] >= 50) cout << "Pass\n"; else cout <<  
"Fail\n";  
}  
}
```

```
// Function to search student void
```

```
search(string names[], int size, string key) {  
for(int i=0;i<size;i++) { if(names[i] == key) { cout  
<< "Found: " << names[i] << endl; return;  
}  
}  
cout << "Not Found\n";  
}
```

```
int main() { string names[3] =  
{"Ali","Ahmed","Sara"}; int marks[3] =  
{80,45,90};
```

```
topper(names, marks, 3);  
passFail(names, marks, 3);  
search(names, 3, "Ahmed");
```

```
return 0;  
}
```

Program No: 7

```
#include <iostream>  
using namespace std; //
```

```
Calculate total energy
```

```
double  
totalEnergy(double  
arr[]) { double sum=0;  
for(int i=0;i<24;i++)  
sum+=arr[i]; return  
sum;
```

```
}
```

```
// Find hour of maximum generation
```

```
int maxHour(double arr[]) { int  
index=0; for(int i=1;i<24;i++) if(arr[i]  
> arr[index]) index = i; return index;  
}
```

```
int main() { double  
energy[24];
```

```
// Input data
```

```
for(int i=0;i<24;i++)  
cin >> energy[i];
```

```
cout << "Total Energy: " << totalEnergy(energy) << endl;  
cout << "Max Hour: " << maxHour(energy) << endl; cout  
<< "Average: " << totalEnergy(energy)/24 << endl;
```

```
return 0;  
}
```

Program No: 8

```
#include <iostream>  
using namespace std;
```

```
int main() {  
double v[20]; int  
low=0, high=0;
```

```
// Input voltage readings for(int  
i=0;i<20;i++) cin >> v[i]; // Check  
safe limits for(int i=0;i<20;i++) {  
if(v[i] < 3.0) low++; if(v[i] > 4.2)  
high++;  
}
```

```
// Find max and min voltage
```

```
double max=v[0], min=v[0];  
for(int i=1;i<20;i++) { if(v[i] >
```

```

max) max=v[i]; if(v[i] < min)
min=v[i];
}

cout << "Low: " << low << endl; cout
<< "High: " << high << endl; cout <<
"Max: " << max << endl; cout <<
"Min: " << min << endl;

// Warning if unsafe if(low>0 ||
high>0) cout << "Warning: Unsafe
readings!\n";

return 0;
}

```

Program No: 9

```

#include <iostream>
using namespace std;

int main() { int
arr[4][7];

// Input data for(int
i=0;i<4;i++) for(int
j=0;j<7;j++) cin >>
arr[i][j];

// Calculate total per region
for(int i=0;i<4;i++) { int
sum=0; for(int j=0;j<7;j++)
sum+=arr[i][j]; cout <<
"Region " << i+1 << " Total: "
<< sum << endl;
}
return 0;
}

```

Program No: 10

```

#include <iostream>
using namespace std;

```



```
int main() { int  
att[5][7];
```

```
// Input attendance
```

```
for(int i=0;i<5;i++)  
for(int j=0;j<7;j++) cin  
>> att[i][j];
```

```
int max=0, index=0;
```

```
// Calculate attendance
```

```
for(int i=0;i<5;i++) { int  
sum=0; for(int  
j=0;j<7;j++)  
sum+=att[i][j];
```

```
cout << "Student " << i+1 << ": " << sum << endl;
```

```
if(sum > max) {  
max = sum; index  
= i;  
}  
}
```

```
cout << "Highest Attendance: Student " << index+1 << endl; return  
0;  
}
```