


Experiment no: 03

Experiment name: Implementation of Factory Design Pattern in Java.

Problem Statement :

<https://www.hackerrank.com/challenges/java-factory/problem>

Code & Output :

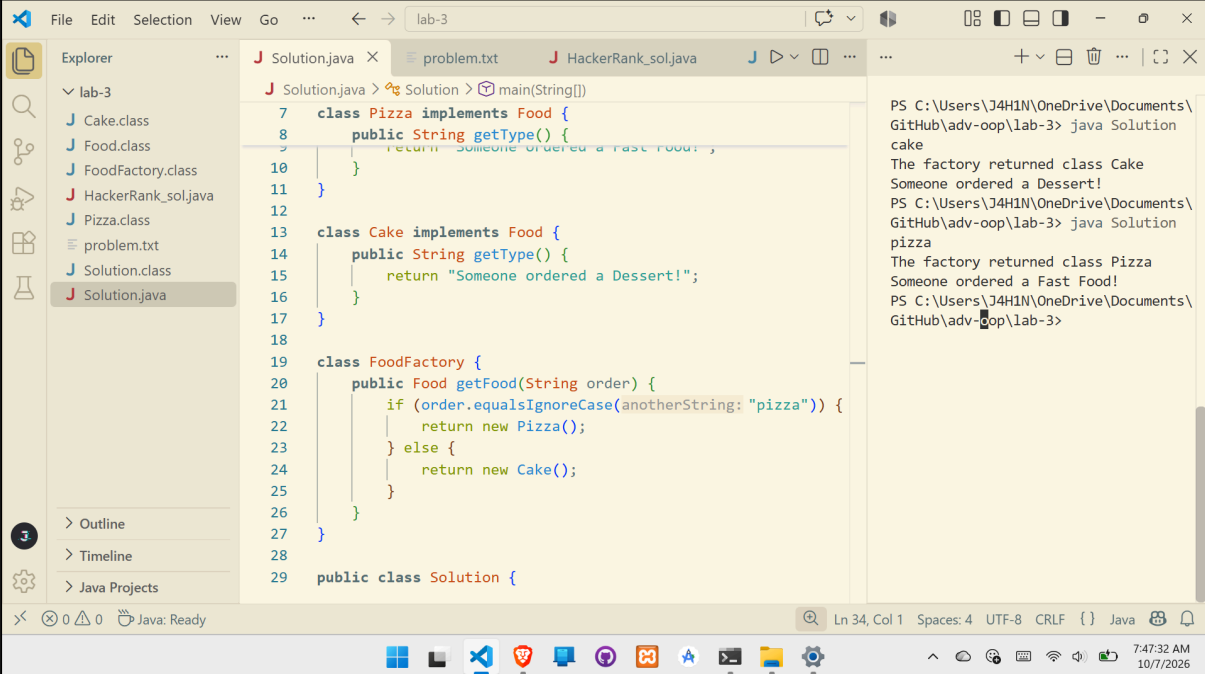

The screenshot shows an IDE with the following code in `Solution.java`:

```
7 class Pizza implements Food {
8     public String getType() {
9         return "Someone ordered a Fast Food!";
10    }
11 }
12
13 class Cake implements Food {
14     public String getType() {
15         return "Someone ordered a Dessert!";
16    }
17 }
18
19 class FoodFactory {
20     public Food getFood(String order) {
21         if (order.equalsIgnoreCase("pizza")) {
22             return new Pizza();
23         } else {
24             return new Cake();
25         }
26     }
27 }
28
29 public class Solution {
```

The output on the right shows the execution results:

```
PS C:\Users\J4H1N\OneDrive\Documents\
GitHub\adv-oop\lab-3> java Solution
cake
The factory returned class Cake
Someone ordered a Dessert!
PS C:\Users\J4H1N\OneDrive\Documents\
GitHub\adv-oop\lab-3> java Solution
pizza
The factory returned class Pizza
Someone ordered a Fast Food!
PS C:\Users\J4H1N\OneDrive\Documents\
GitHub\adv-oop\lab-3>
```

GitHub Repo: https://j4h1n0.web.app/?u=adv_oop_lab-3