



Anatomy of one trial: where each exogenous variable enters


(1) Scene: table, object, gripper. (ϕ, θ) set the camera.

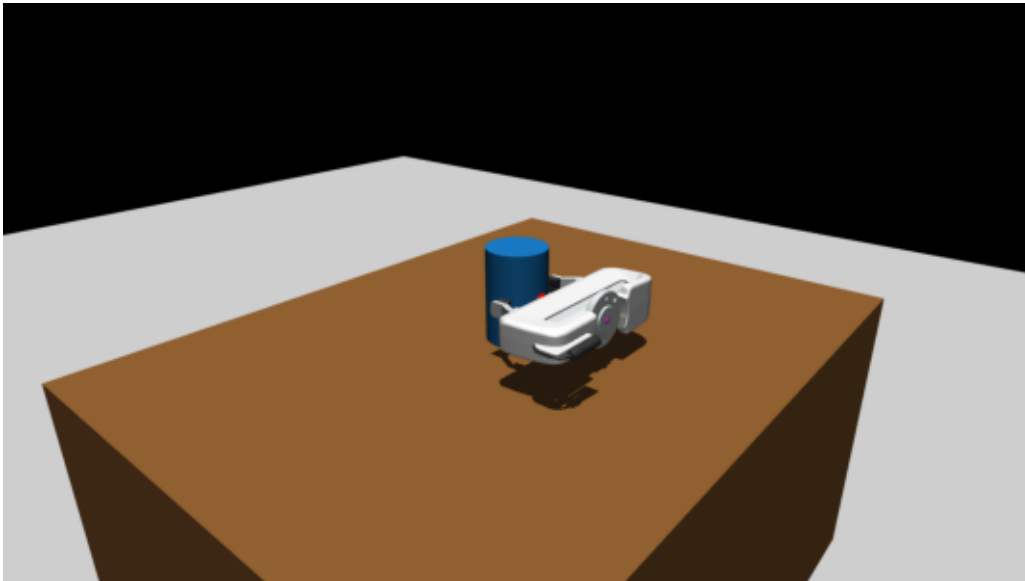

(2) Depth buffer. σ_d is added here; C_{pc} is read from the mask first.

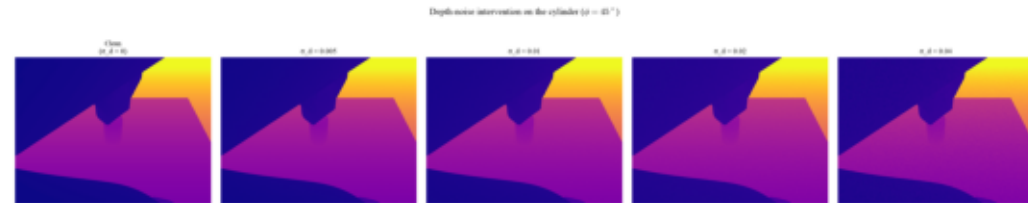

(3) Contact-GraspNet on $\mathcal{P}_\rho$. ρ downsamples the cloud.

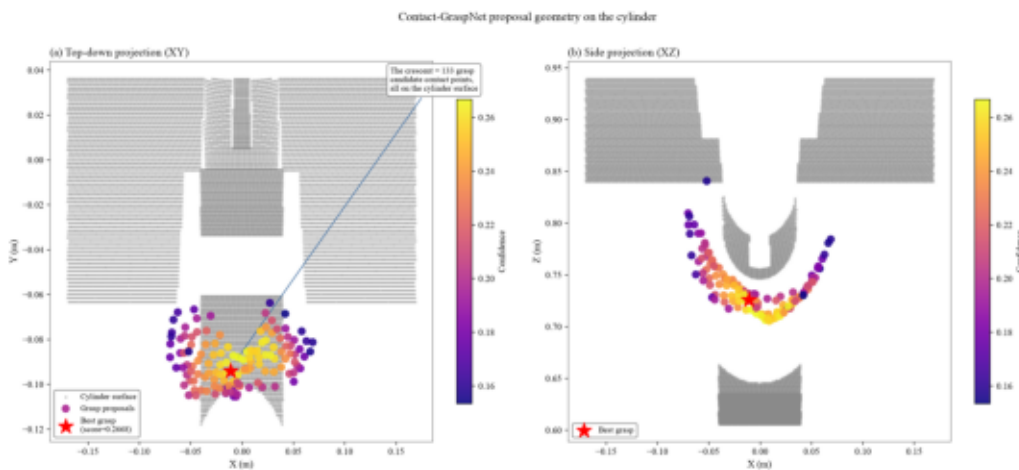

(4) Open-hand pose is the collision gate (72.8% of the grid dies here).

