

Activation Override

Added in version	1.0.3
Status	Up-to date

Sample overview

Sample overview

`ContentProviderWithActivationOverride.cs` - implements `IInputModule` with `bool UpdateInputModule()`. It gets called from DebugPanel each frame and if true returned that means panel need to change its state Activate/Deactivate

Current example showcases activation with regular Button in Canvas.

```
/// <summary>
/// Based on <see cref="ContentProviderExample"/> from first sample but now also overrides <see cref="IInputModule"/>
/// </summary>
1 asset usage
public class ContentProviderWithActivationOverride : ContentProviderExample, IInputModule
{
    [SerializeField] private Button _button;  ActivationButton (Button)

    private DebugPanel.Runtime.DebugPanel _debugPanel;
    private bool _buttonPressed;

    Event function
    private void Awake()
    {
        // Checking is application is playing to subscribe for button event since content provider has [ExecuteAlways] attribute
        if (Application.isPlaying)
        {
            if (_button !=  null) _button.onClick.AddListener(OnButtonClick);
        }
    }


    1 usage
    private void OnButtonClick() => _buttonPressed = true;

    Frequently called  0+1 usages
    public override IInputModule GetInputModule(DebugPanel.Runtime.DebugPanel panel)
    {
        _debugPanel = panel;
        return this;
    }


    Frequently called  0+2 usages
    public bool UpdateInputModule()
    {
        if (_buttonPressed)
        {
            _buttonPressed = false;
            return true;
        }

        // Fallback for default input
        return _debugPanel.DefaultInputModule.UpdateInputModule();
    }
}
```

`InputModule` property of DebugPanel can be stetted directly

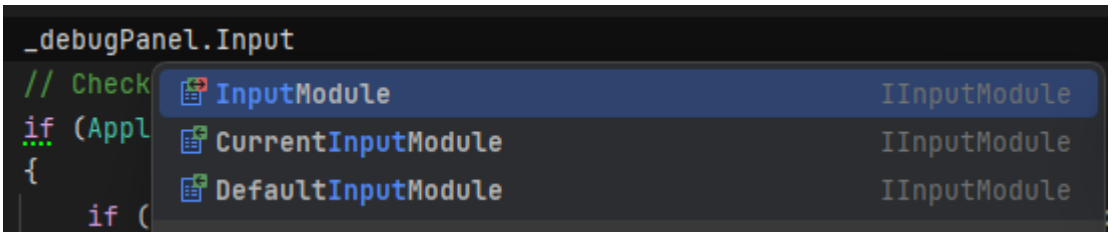

Or override `GetInputModule()` method in `ContentProvider`

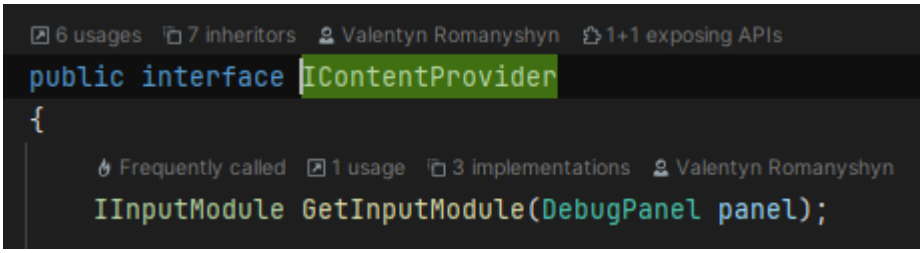
6 usages
7 inheritors
Valentyn Romanyshyn
1+1 exposing APIs
public interface IContentProvider
{
Frequently called
1 usage
3 implementations
Valentyn Romanyshyn
IInputModule GetInputModule(DebugPanel panel);