S3 Bucket Setup and Website Deployment

Yu2437 – Mustafa Khattak
Ez9838 - Kokila Ganesan
Zt8484 Xiaoqin Tang

CS651 Web Systems

Overview

In Part 3 of Project 1, the website was deployed using **Amazon S3 static website hosting**. Amazon S3 allows developers to host static websites by uploading HTML, CSS, JavaScript, and other assets into a bucket and configuring the bucket for public web access.

The process involved creating an S3 bucket, uploading the website files, enabling static website hosting, and configuring permissions to allow public access via a generated URL.

Screenshot 1 - Files uploaded to S3 bucket

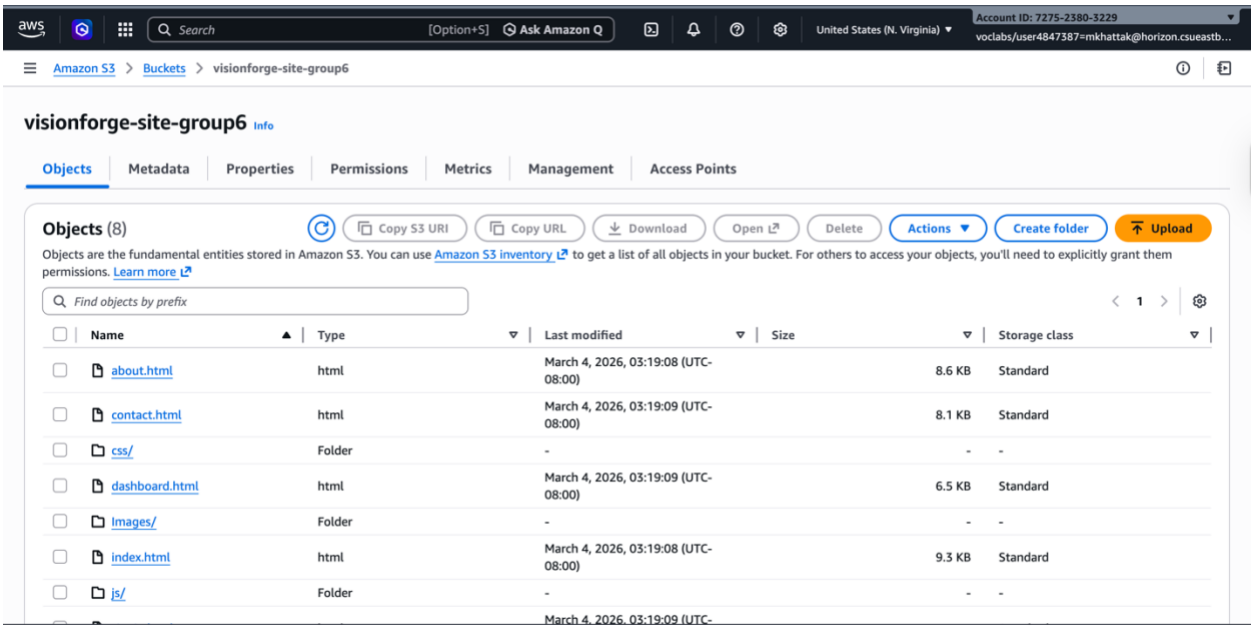

Figure 1: S3 bucket showing all website files, including HTML pages, CSS folder, JavaScript folder, and image assets uploaded successfully.

Screenshot 2 - Static website hosting enabled

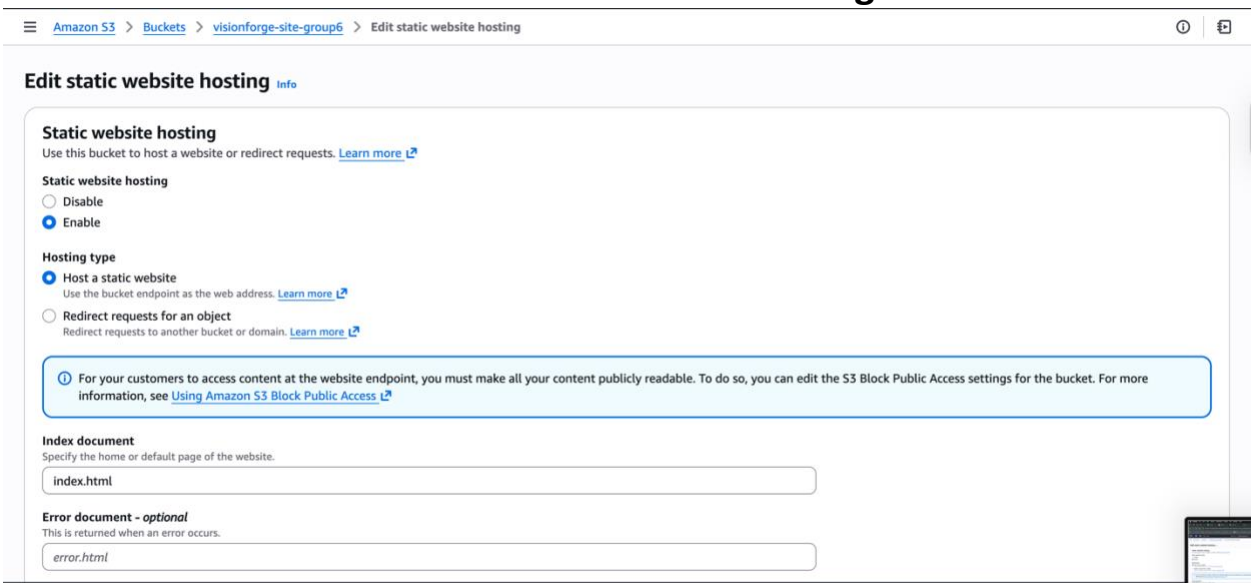

Figure 2: Static website hosting enabled in the S3 bucket properties with `index.html` configured as the index document.

Screenshot 3 - S3 Bucket Policy configuration

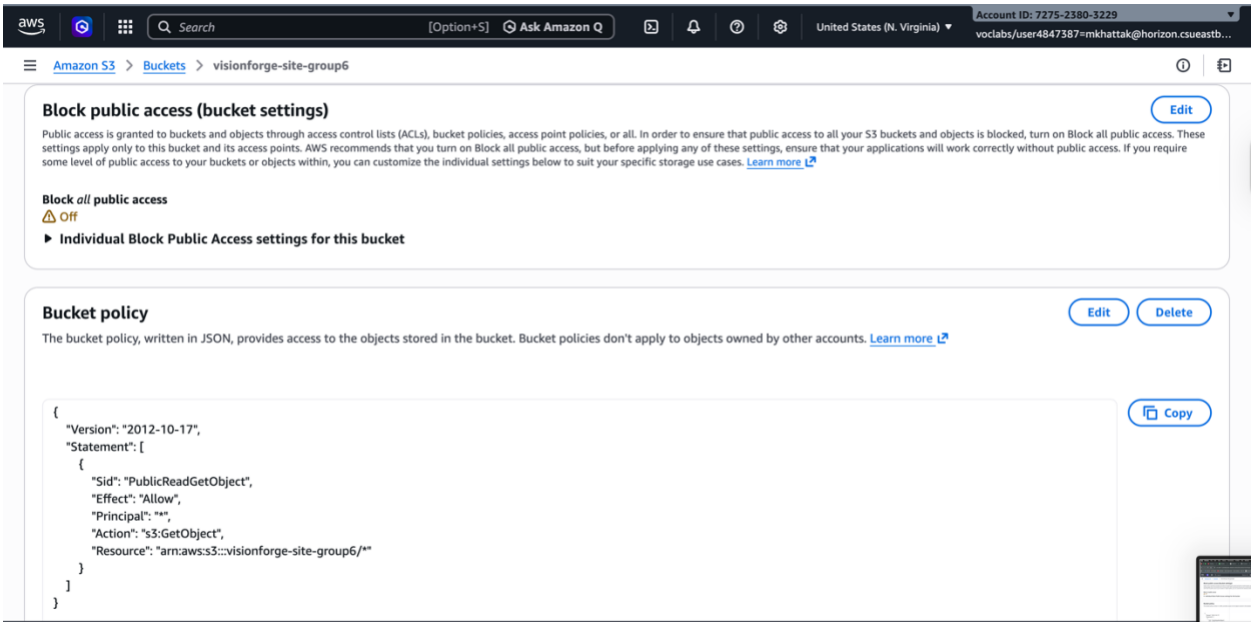

Figure 3: Bucket policy configured to allow public read access (s3:GetObject) for all objects inside the S3 bucket.

Screenshot 4 - Website running from S3 endpoint

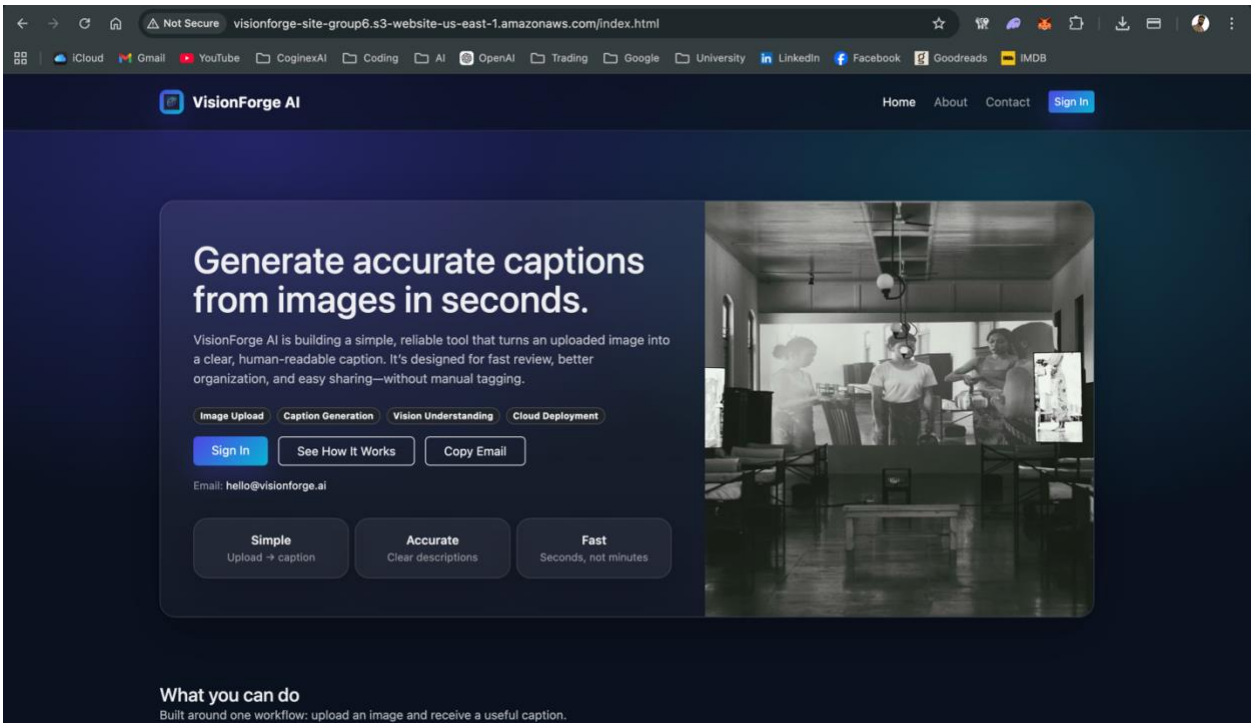

Figure 4: The deployed website successfully running from the S3 static website hosting endpoint.