Build the 2-of-3

Three public keys go in. No seed ever touches this build. What comes out is the wallet map — it can watch the money, never spend it.

You will boot Tails four times: once per seed to copy its public key, then once more with no seed to build the vault.

What is required

- The data USB with the checked Sparrow file (sparrowwallet-2.5.5-x86_64.tar.gz)
- The three paper seeds. Only one comes out per boot.

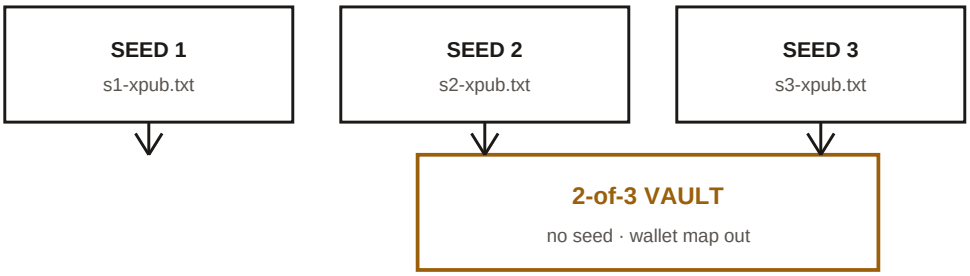

1. Boot Tails. Networking stays off.

The entire sheet happens with networking Disabled. Check it on every boot.

2. Open the terminal. Launch Sparrow.

Type these four lines, one at a time. Wait for the prompt to come back after each. Wait 15–30 seconds. Sparrow opens. Type exactly — spaces count. If a line turns red, stop.

```
$ cd ~/Desktop
$ tar -xvf sparrowwallet-2.5.5-x86_64.tar.gz
$ cd Sparrow
$ ./bin/Sparrow
```

3. New wallet: 2 of 3, native Segwit.

File → New Wallet. Pick Multi Signature, Native Segwit, 2 of 3. The path must read m/48'/0'/0'/2'. Anything else — stop.

4. Keystore 1: Seed 1 in, public key out.

Keystore 1 → New or Imported Software Wallet → type Seed 1's 24 words. Export the xpub. Save it to the data USB as s1-xpub.txt. Close Sparrow. Shut down. Wait for a dark screen.

5. Twice more. One seed per boot.

Boot again for Seed 2 → s2-xpub.txt. Shut down. Boot again for Seed 3 → s3-xpub.txt. Shut down.

6. Fresh boot. No seed. Build the vault.

Boot Tails again — do not type any seed. New wallet → Multi Signature → Native Segwit → 2 of 3 → import the three xpub files. Confirm the path. Export the output descriptor to the data USB. That file is the wallet map.

7. Watch-only on the everyday computer.

On the everyday computer, open Sparrow and import the map as a watch-only wallet. It can see the money. It can never spend it.

STOP. The path doesn't read m/48'/0'/0'/2' — stop, don't type a different path. Networking is on at any point — stop. Tempted to type a second seed without shutting down — stop. One seed per boot.