Build the 2-of-3

Time	Difficulty	Steps	You will need
45-60 min	Careful	9 sections	The three paper keys · Verified Sparrow

Three public keys go in. No seed ever touches this build. What comes out is the wallet map. It can watch the money, never spend it.

You will boot Tails four times: once per seed to copy its public key, then once more with no seed to build the vault.

What is required

- The data USB with the checked Sparrow file (sparrowwallet-2.5.5-x86_64.tar.gz)
- The three paper seeds. Only one comes out per boot.

Step 1 · Boot Tails. Networking stays off.

IF THE NETWORK IS ON: STOP

The entire sheet happens with networking Disabled. Check it on every boot.

Step 2 · Open the terminal. Launch Sparrow.

Type these four lines, one at a time. Wait for the prompt to come back after each.

```
$ cd ~/Desktop

$ tar -xvf sparrowwallet-2.5.5-x86_64.tar.gz

$ cd Sparrow
```


Content SHA-256: 3195ede4fd9dd1018b0bf6c7c33cc837fb8afabe3e2129d3a0e1e3f2d9f36b99

scan for the full sheet

```
$ ./bin/Sparrow
```

Wait 15 to 30 seconds. Sparrow opens. Type exactly. Spaces count. If a line turns red, stop.

Step 3 · New wallet: 2 of 3, native Segwit.

File → New Wallet. Pick Multi Signature, Native Segwit, 2 of 3. The path must read m/48'/0'/0'/2'. Anything else: stop.

Step 4 · Keystore 1: Seed 1 in, public key out.

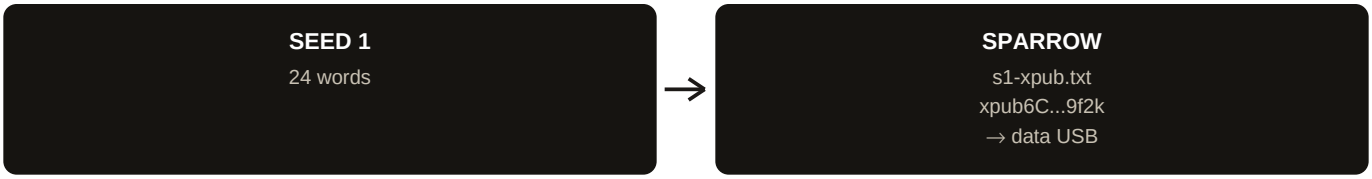

THEN: CLOSE · SHUT DOWN · DARK SCREEN

Keystore 1 → New or Imported Software Wallet → type Seed 1's 24 words. Export the xpub. Save it to the data USB as s1-xpub.txt. Close Sparrow. Shut down. Wait for a dark screen.

Step 5 · Twice more. One seed per boot.

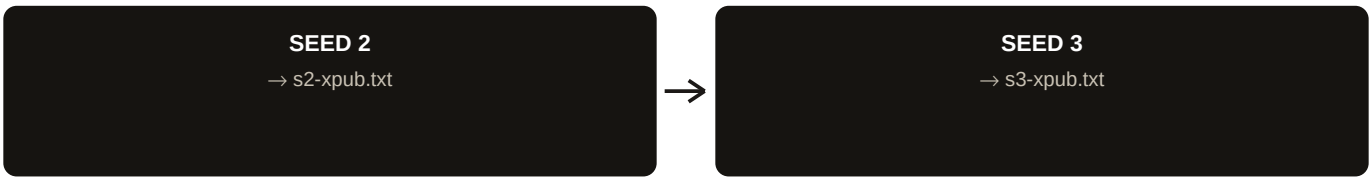

NEVER CONTINUE FROM THE PREVIOUS BOOT

Boot again for Seed 2 → s2-xpub.txt. Shut down. Boot again for Seed 3 → s3-xpub.txt. Shut down.

Step 6 · Fresh boot. No seed. Build the vault.

Content SHA-256: 3195ede4fd9dd1018b0bf6c7c33cc837fb8afabe3e2129d3a0e1e3f2d9f36b99

scan for the full sheet

s1-xpub · s2-xpub · s3-xpub
2-of-3 · m/48'/0'/0'/2'
MAP: descriptor

NO SEED IS TYPED ON THIS BOOT

Boot Tails again. Do not type any seed. New wallet → Multi Signature → Native Segwit → 2 of 3 → import the three xpub files. Confirm the path. Export the output descriptor to the data USB. That file is the wallet map.

STOP

Confirm the first address on a second screen.

Sparrow built your wallet from your seeds. But if malware sat on the build machine, it could show you **an address it controls** while you trust it. A second screen the malware can't reach closes that hole. **Do not fund the wallet until this matches.**

1 · Build in Sparrow. Finish the 2-of-3 build on the airgapped machine as usual. Write down the **first receiving address** it shows. Write the full string, not the QR code.

2 · Cross-check in Electrum. Rebuild the same 2-of-3 in Electrum offline from the same seeds and compare the first address. This catches entry mistakes.

3 · NEW: Display it on a second device. Load the wallet as **watch-only** (xpubs / wallet descriptor only, never seeds) on your phone or a second computer. Compare the first receiving address **character for character**. If all three agree, the coordinator didn't lie. If anything differs, stop and rebuild.

Step 7 · Watch-only on the everyday computer.

WATCH ONLY
THIS COMPUTER NEVER HOLDS A SEED

On the everyday computer, open Sparrow and import the map as a watch-only wallet. It can see the money. It can never spend it.

STOP IF

- The path doesn't read m/48'/0'/0'/2': stop. Don't type a different path.
- Networking is on at any point: stop.
- You're tempted to type a second seed without shutting down: stop. One seed per boot.

Next. Practice spend. A small payment goes out and comes back before the plates are stamped.

Plebum Dominium · plebumbtc.io · Version 2026.10.21 · Built October 21, 2026
Content SHA-256: 3195ede4fd9dd1018b0bf6c7c33cc837fb8afabe3e2129d3a0e1e3f2d9f36b99