← 06 · Make the three keys | Step 7 of 15 — Build the 2-of-3 | 10 · Rehearse on testnet →

Build the 2-of-3

Time	Difficulty	Steps	You will need
45–60 min	Careful	9 sections	The three paper keys, Verified Sparrow

Three public keys go in. No seed ever touches this build. What comes out is the wallet map — it can watch the money, never spend it.

You will boot Tails four times: once per seed to copy its public key, then once more with no seed to build the vault.

What is required

- The data USB with the checked Sparrow file (sparrowwallet-2.5.5-x86_64.tar.gz)
- The three paper seeds. Only one comes out per boot.

Step 1 · Boot Tails. Networking stays off.



IF THE NETWORK IS ON — STOP

The entire sheet happens with networking Disabled. Check it on every boot.

Step 2 · Open the terminal. Launch Sparrow.



Type these four lines, one at a time. Wait for the prompt to come back after each.

```
$ cd ~/Desktop

$ tar -xvf sparrowwallet-2.5.5-x86_64.tar.gz


$ cd Sparrow
```


Plebum Dominium · plebumbtc.io · Version 2026.10.20 · Built October 20, 2026
Content SHA-256: 7548d84e93c663627376f095080a0b4beb4bcce823b4d78056d09ff775597544

```
$ ./bin/Sparrow
```


Wait 15–30 seconds. Sparrow opens. Type exactly — spaces count. If a line turns red, stop.

Step 3 · New wallet: 2 of 3, native Segwit.

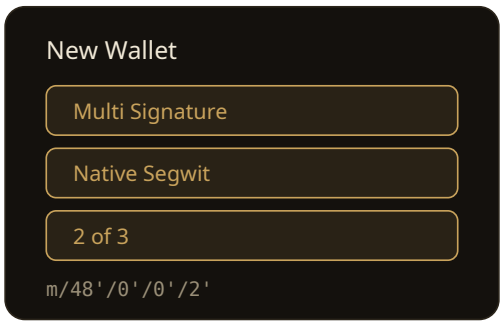

File → New Wallet. Pick Multi Signature, Native Segwit, 2 of 3. The path must read m/48'/0'/0'/2'. Anything else — stop.

Step 4 · Keystore 1: Seed 1 in, public key out.

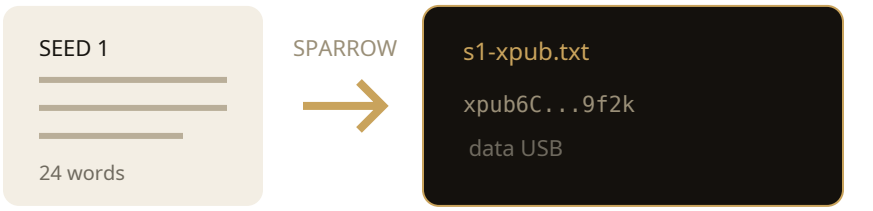

THEN: CLOSE · SHUT DOWN · DARK SCREEN

Keystore 1 → New or Imported Software Wallet → type Seed 1's 24 words. Export the xpub. Save it to the data USB as s1-xpub.txt. Close Sparrow. Shut down. Wait for a dark screen.

Step 5 · Twice more. One seed per boot.




NEVER CONTINUE FROM THE PREVIOUS BOOT

Boot again for Seed 2 → s2-xpub.txt. Shut down. Boot again for Seed 3 → s3-xpub.txt. Shut down.

Step 6 · Fresh boot. No seed. Build the vault.

Content SHA-256: 7548d84e93c663627376f095080a0b4beb4bcce823b4d78056d09ff775597544

scan for the full sheet

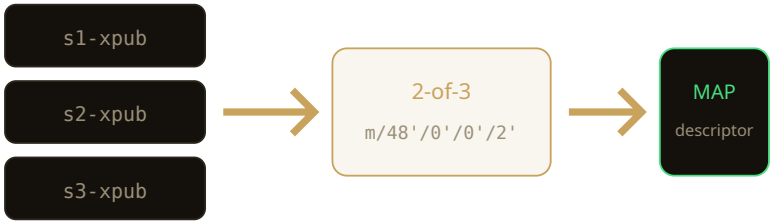

NO SEED IS TYPED ON THIS BOOT

Boot Tails again — do not type any seed. New wallet → Multi Signature → Native Segwit → 2 of 3 → import the three xpub files. Confirm the path. Export the output descriptor to the data USB. That file is the wallet map.

Confirm the first address on a second screen.

Stop

Confirm the first address on a second screen.


Sparrow built your wallet from your seeds — but if malware sat on the build machine, it could show you **an address it controls** while you trust it. A second screen the malware can't reach closes that hole. **Do not fund the wallet until this matches.**

1 · Build in Sparrow. Finish the 2-of-3 build on the airgapped machine as usual. Write down the **first receiving address** it shows — the full string, not the QR code.

2 · Cross-check in Electrum. Rebuild the same 2-of-3 in Electrum offline from the same seeds and compare the first address. This catches entry mistakes.

3 · NEW — Display it on a second device. Load the wallet as **watch-only** (xpubs / wallet descriptor only — never seeds) on your phone or a second computer. Compare the first receiving address **character for character**. If all three agree, the coordinator didn't lie. If anything differs, stop and rebuild.

Step 7 · Watch-only on the everyday computer.

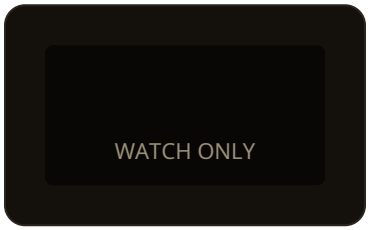

THIS COMPUTER NEVER HOLDS A SEED

Content SHA-256: 7548d84e93c663627376f095080a0b4beb4bcce823b4d78056d09ff775597544

scan for the full sheet

On the everyday computer, open Sparrow and import the map as a watch-only wallet. It can see the money but can never spend it.

STOP

Stop if

Next. Practice spend. A small payment goes out and comes back before the plates are stamped.

Plebum Dominium · plebumbtc.io · Version 2026.10.20 · Built October 20, 2026
Content SHA-256: 7548d84e93c663627376f095080a0b4beb4bcce823b4d78056d09ff775597544