## 仅仅只是测试

```
0 ₽ □ □
                                                     ♦ MINGW64:/c/Users/tan/repo/ × +
 D
           EXPLORER
                                                       at Module._resolveFilename (node:internal/modules/cjs/loader:1232:15)
at Module._load (node:internal/modules/cjs/loader:1058:27)
at c._load (node:electron/js2c/node_init:2:16955)
at Function.executeUserEntryPoint [as runMain] (node:internal/modules/run_main:188:12)
at node:internal/main/run_main_module:28:49 {
code: 'MODULE_NOT_FOUND',
requireStack: []

    .gitignore
    .genvironment.yml

            Node.js v20.18.2
(base) tan@LAPTOP-EORLMOVC MINGW64 ~/repo/week04 (main)
$ 1s -1 .../myproject/
total 6722
-rw-r--r- 1 tan 197121 87 4月 3 01:01 environment.yml
-rw-r--r- 1 tan 197121 6881280 4月 3 01:13 EPA_SmartLocationDatabase_V3_Jan_2021_Final.csv
-rw-r--r- 1 tan 197121 85 4月 3 01:01 main.py
(base) tan@LAPTOP-EORLMOVC MINGW64 ~/repo/week04 (main)
$ cat ../myproject/environment.yml
name: myproject
channels:
                                                   channels:
    - conda-forge
dependencies:
    - python=3.12
    - pandas(base) tan@LAPTOP-EORLMOVC MINGW64 ~/repo/week04 (main)
$ ccd ../myproject/environment.yml
bash: ccd: command not found
(base) tan@LAPTOP-EORLMOVC MINGW64 ~/repo/week04 (main)
$ cp ../myproject/environment.yml ./
(base) tan@LAPTOP-EORLMOVC MINGW64 ~/repo/week04 (main)
$
> OUTLINE > TIMELINE
 8 Q
  ♦ MINGW64:/c/Users/tan/repo/ × + ∨
 Example: conda --no-plugins install <package>
 Alternatively, you can set the CONDA_NO_PLUGINS environment variable on the command line to run the command without plugins enabled.
 Example: CONDA_NO_PLUGINS=true conda install <package>
 If submitted, this report will be used by core maintainers to improve future releases of conda. Would you like conda to send this report to the core maintainers? [y/N]: y Upload did not complete.
 Thank you for helping to improve conda.
Opt-in to always sending reports (and not see this message again)
by running
          $ conda config --set report_errors true
 (base) tan@LAPTOP-EORLMOVC MINGW64 ~/repo/week04 (main) $ cat contacts.txt (base) tan@LAPTOP-EORLMOVC MINGW64 ~/repo/week04 (main)
```

```
Q week04
                                                                                                                                                                                                    89 ~
                                                                                                                                                                                                                               00 □ □ □ -
                                                                                                                                                                                                                                                           ⊳ ~ ৸ ⊟ …
 Ф
          ∨ WEEK04
            .gitignore
                                                                                                      with open("contacts.txt", "r", encoding="utf-8") as file:
   contacts = []
   for line in file:

    LICENSE

    README.md


                                                                                              # 按邮箱域名和用户名排序
sorted_contacts = sorted(
contacts, key=Lambda x: (x[2].split("@")[1], x[2].split("@")[0])
                                                                                              # in incomproved email_content = []

for name, gender, email in sorted_contacts:
    title = "先生" if gender == "男" else "女士"
    email_text = (
        f"to: <{email}>\n
        pmon(name) ftitle}, 您的会员资格即将到期,请及时续费。\n---"
                                                                                                  ry:
with open("emails.txt", "w", encoding="utf-8") as output_file:
output_file.write("\n".join(email_content).rstrip("---"))
print("邮件内容已成功写入 emails.txt 文件. ")
                                                                                                 except <u>Exception</u> as e:
print(f"错误:写入文件时出现问题 - {e}")
> OUTLINE > TIMELINE
                                                                                                                                                                     Ln 33, Col 1 Spaces: 4 UTF-8 CRLF () Python ❸ 3.12.7 ('base': conda) ♀
XI File
                                                     ♦ MINGW64:/c/Users/tan/repo/ × + ∨
<sub>C</sub>
          ∨ WEEK04
                                                     done
                                                   done
#
# To activate this environment, use
#
# $ conda activate week04
#
# To deactivate an active environment, use
#
# $ conda deactivate

≡ emails.txt

! environment.yml
 60
            ① README.md
                                                    (base) tan@LAPTOP-EORLMOVC MINGW64 ~/repo/week04 (main) $ conda activate week04 (week04) tan@LAPTOP-EORLMOVC MINGW64 ~/repo/week04 (main) $ ls -l total 30
                                                   total 30
-rw-r--r-- 1 tan 197121 204 4月 9 22:37 contacts.txt
-rw-r--r-- 1 tan 197121 72 4月 9 22:57 environment.yml
-rw-r--r-- 1 tan 197121 18805 4月 9 21:49 LICENSE
-rw-r--r-- 1 tan 197121 1128 4月 9 22:49 main.py
-rw-r--r-- 1 tan 197121 2239 4月 9 21:49 README.md
(week04) tan@LAPTOP-EORLMOVC MINCW64 "/repo/week04 (main)
$ python main.py

邮件内容已成功写入 emails.txt 文件.
(week04) tan@LAPTOP-EORLMOVC MINCW64 "/repo/week04 (main)
$ |
> OUTLINE > TIMELINE
                                                                                                                                                                                                     Ln 1, Col 1 Spaces: 4 UTF-8 CRLF Plain Text 😝 🚨
  y main* ↔ ⊗ 0 🛦 0
```

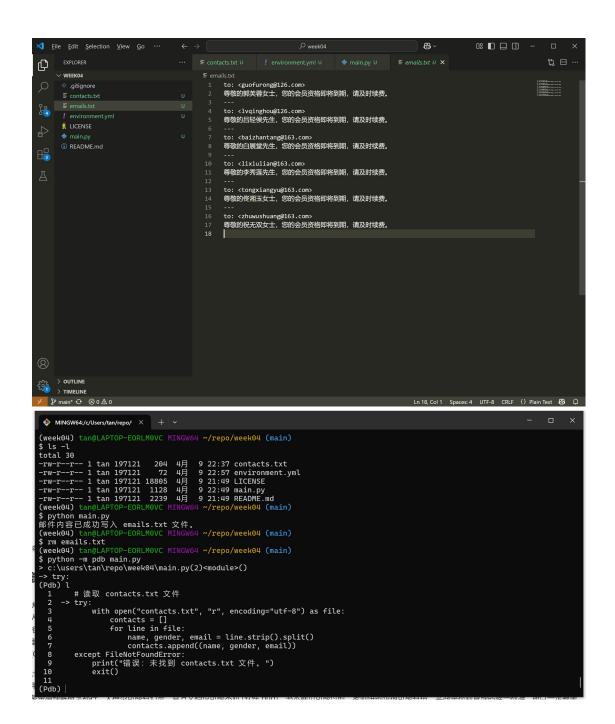

```
with contents of the current file. Without arguments, list il lines starting at that the current file. Without arguments, list il lines argument, list il lines argument, list il lines argument, lines that in the current file. Without arguments, list il lines argument, lines continue the previous listing. With . as argument, list il lines argument argument is less than the first, it is a count.

The current line in the current frame is indicated by ">"".

If an exception is being debugged, the line where the exception was originally raised or propagated is indicated by ">"".

If an exception on an originally raised or propagated is indicated by ">"".

If an exception is being debugged, the line where the exception was originally raised or propagated is indicated by ">"".

If a skill contacts.txt \( \tilde{X} \) = "" (" encoding="utf-8") as file:

contacts = If if iffers from the current line.

The current line in the current line in the current line.

The current line in the current line in the current line.

The cur
```

Ln 6, Col 18 Spaces: 2 UTF-8 CRLF {} YAML

> OUTLINE > TIMELINE