Muthu Venkatesh M

24BCE1389

Procedure

Step 1: Launch Cisco Packet Tracer

Open Cisco Packet Tracer and create a new project file.

Step 2: Place Network Devices

Add the following devices to the workspace:

- One **Wireless Router**
- One **PC**
- One **Laptop**

Step 3: Connect the PC (Wired)

Use **Copper Straight-Through cable** to connect:

- PC → FastEthernet0
- Wireless Router → Any Ethernet (LAN) port

CLASSFUL ADDRESSING CONFIGURATION

Step 7: Assign Classful IP Addresses

Since the first letter of the name is **M**, ASCII value is **77**, hence all IP addresses begin with **77.x.x.x**.

Wireless Router:

- IP Address: `77.1.1.1`

PC:

- IP Address: `77.1.1.2`
- Subnet Mask: `255.255.255.0`
- Default Gateway: `77.1.1.1`

Laptop:

- IP Address: `77.1.1.3`
- Subnet Mask: `255.255.255.0`
- Default Gateway: `77.1.1.1`

Output screenshot:

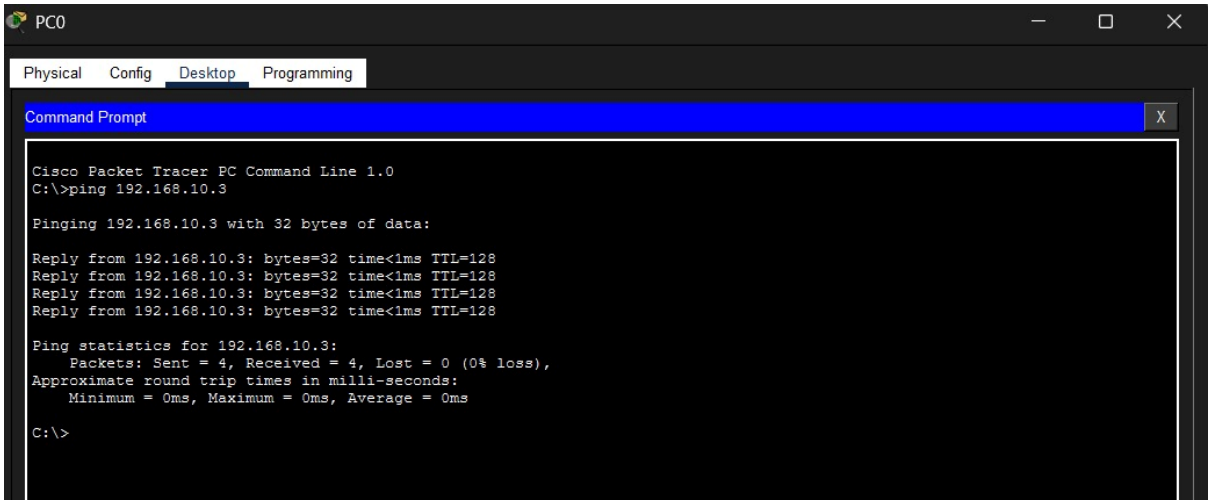

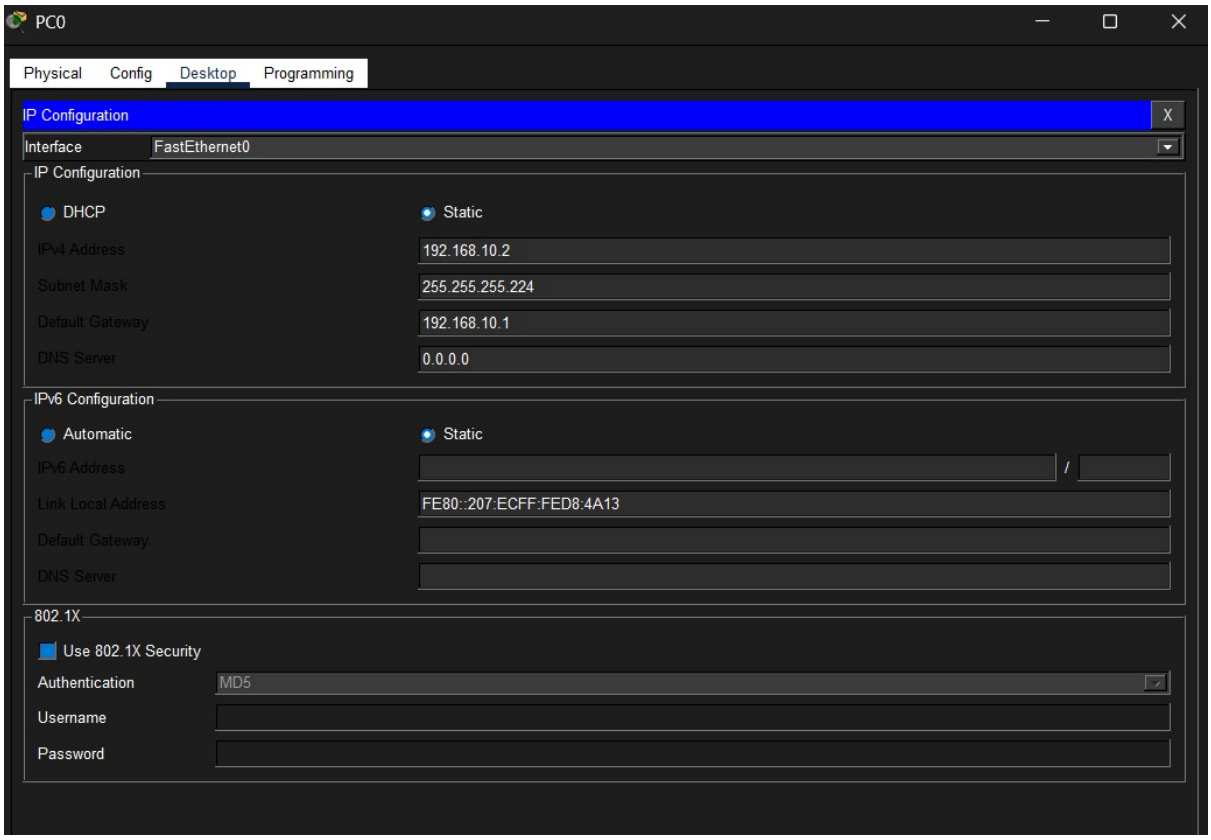

```
C:\>ping 77.10.10.2

Pinging 77.10.10.2 with 32 bytes of data:

Reply from 77.10.10.2: bytes=32 time<1ms TTL=128
Reply from 77.10.10.2: bytes=32 time<1ms TTL=128
Reply from 77.10.10.2: bytes=32 time<1ms TTL=128
Reply from 77.10.10.2: bytes=32 time<1ms TTL=128

Ping statistics for 77.10.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

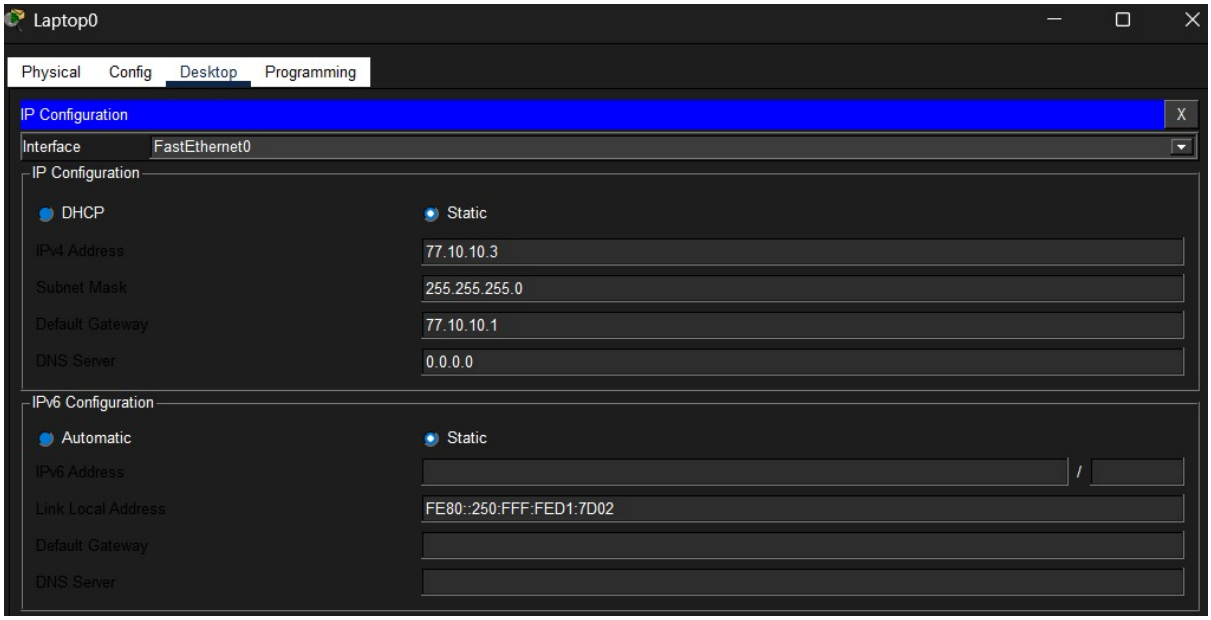

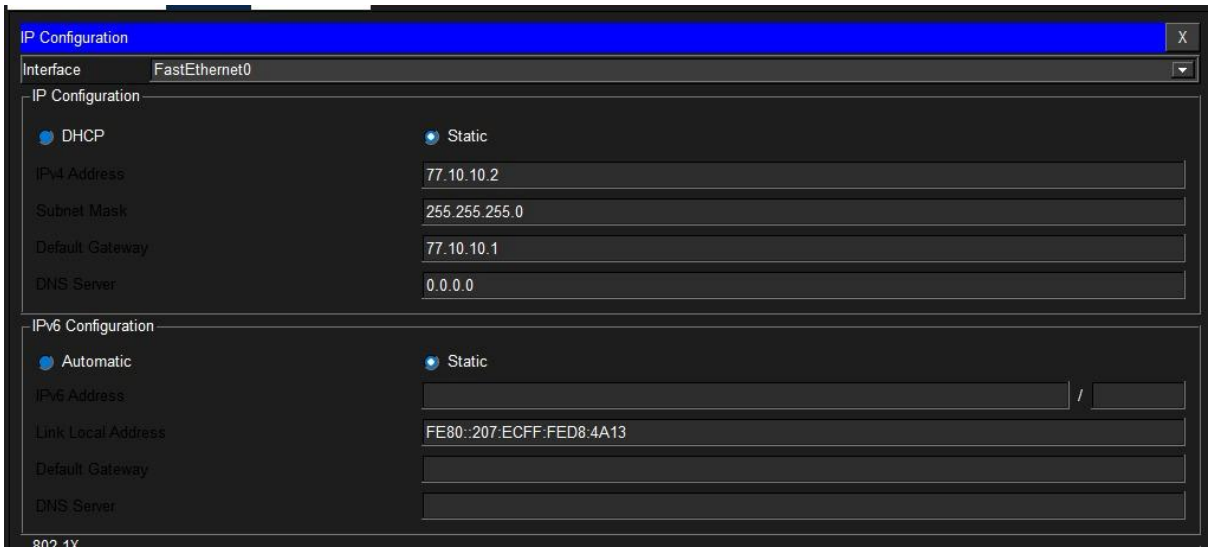

Cisco certificate:

Networking Academy

This certificate is awarded to

Muthu Venkatesh

for successfully completing

Getting Started with Cisco Packet Tracer

offered by Networking Academy
through the Cisco Networking Academy program.

Lynn Bloomer
Director
Cisco Networking Academy

07 Feb 2026
Completion Date