

Git指南v0.1.1(新建‘分支合并‘， 补充‘分支全流程步骤简述‘操作图文)

一文包含仓库管理、分支管理、git简单命令；

前置

IDE：Cursor

仓库管理：

待定

分支管理：



建议创建三类用途的分支；

master-稳定的线上分支，个人分支以此为基准拉取，协同开发时，应避免个人分支代码直接推送到本分支；
develop-功能最新的开发分支，个人分支应当优先推送至此分支，协同开发时，应修复所有合并冲突后，再推送至master；
个人分支-本地分支，建议命名
feature/{个人姓名缩写}/{分支用途，即开发功能}，如：
feature/li_ds/sync/product（李道爽商品同步开发分支）
或

fix/{个人姓名缩写}/{分支用途, 即修复bug}, 如:

fix/li_ds/product/memory/overflow (李道爽商品内存溢出修复分支)

分支全流程步骤简述:

1.提交并推送本地代码;

git commit -m "feat:优化跨境订单出参, 去除无用数据, 便于联调;"

```
PS D:\Program Files\code\src\jst_server>
PS D:\Program Files\code\src\jst_server> git commit -m "feat:优化跨境订单出参, 去除无用数据, 便于联调;"
[feature/li_ds/cborder/output d480831] feat:优化跨境订单出参, 去除无用数据, 便于联调;
2 files changed, 110 insertions(+), 1 deletion(-)
create mode 100644 service/jushuitan/cborder/dto.go
```

git push -u origin feature/li_ds/cborder/output

```
create mode 100644 service/jushuitan/cborder/dto.go
PS D:\Program Files\code\src\jst_server> git push -u origin feature/li_ds/cborder/output
Enumerating objects: 17, done.
Counting objects: 100% (17/17), done.
Delta compression using up to 8 threads
Compressing objects: 100% (9/9), done.
Writing objects: 100% (10/10), 1.94 KiB | 398.00 KiB/s, done.
Total 10 (delta 7), reused 0 (delta 0), pack-reused 0 (from 0)
To https://git.deepdropai.com/cross_border_shop/jst_server.git
03d3e96..d480831 feature/li_ds/cborder/output -> feature/li_ds/cborder/output
branch 'feature/li_ds/cborder/output' set up to track 'origin/feature/li_ds/cborder/output'.
```

2.若有部分代码无需推送, 使用暂存命令;

git stash

```
PS D:\Program Files\code\src\middle_server> git stash

warning: in the working copy of 'go.mod', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'go.sum', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'internal/httpapi/handler.go', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'internal/httpapi/shop/forward.go', LF will be replaced by CRLF the next time Git touches it
Saved working directory and index state WIP on master : c6843ca feat:统一获取订单列表的出参;
PS D:\Program Files\code\src\middle_server> git check
```

git stash pop

```

Switched to a new branch 'fix/li_ds/chunked/miss'
PS D:\Program Files\code\src\middle_server> git stash
pop
On branch fix/li_ds/chunked/miss
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    new file:   internal/httpheaders/chunked.go

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   go.mod
    modified:   go.sum
    modified:   internal/httpapi/handler.go
    modified:   internal/httpapi/shop/forward.go

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    .cursor/
    doc/json/
    middleServer

Dropped refs/stash@{0} (c4bec81f4a5417f20095ca1d95a38dc3cbf8e9d1)

```

3.合并个人分支至develop分支;

不建议直接使用git merge, 缺失审查合并, 建议网页操作[^3b97af](#)

4.修复冲突后合并develop分支至master分支;

不建议直接使用git merge, 缺失审查合并, 建议网页操作[^3b97af](#)

5.确保本地仓库为最新;

git fetch origin

```

PS D:\Program Files\code\src\jst_server> git fetch origin
From https://git.deepdropai.com/cross_border_shop/jst_server
   4ff6e6c..03d3e96  develop    -> origin/develop
   4ff6e6c..03d3e96  master     -> origin/master
PS D:\Program Files\code\src\jst_server> 

```

6.切换至master分支;

git checkout master

```

   4ff6e6c..03d3e96  master     -> origin/master
PS D:\Program Files\code\src\jst_server> git checkout master
M      go.mod
M      go.sum
Switched to branch 'master'
Your branch is behind 'origin/master' by 3 commits, and can be fast-forwarded.
  (use "git pull" to update your local branch)
PS D:\Program Files\code\src\jst_server> 

```

7.拉取远程master分支最新代码;

git pull origin master

```
(use "git pull" to update your local branch)
PS D:\Program Files\code\src\jst_server> git pull ori
gin master
From https://git.deepdropai.com/cross_border_shop/jst
_server
 * branch          master      -> FETCH_HEAD
Updating 6a6a49f..03d3e96
Fast-forward
 controllers/merchant/common/AuthController.go      |
    2 +-
 controllers/merchant/controller.go                  |
    1 +
```

8.基于当前master 创建并切换到新分支;

git checkout -b feature/li_ds/cborder/output


```
create mode 100644 service/shopeesync/worker.go
PS D:\Program Files\code\src\jst_server> git checkout -b feature/li_ds/cborder/output
Switched to a new branch 'feature/li_ds/cborder/output'
```

9.推送当前分支至远程仓库;

git push -u origin feature/li_ds/cborder/output

```
and the repository exists.
PS D:\Program Files\code\src\jst_server> git push -u origin feature/li_ds/cborder/output
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://git.deepdropai.com/cross_border_shop/jst_server.git
 * [new branch]      feature/li_ds/cborder/output -> feature/li_ds/cborder/output
branch 'feature/li_ds/cborder/output' set up to track 'origin/feature/li_ds/cborder/output'.
PS D:\Program Files\code\src\jst_server> 
```

10.验证——远程仓库将出现你新建的个人分支;

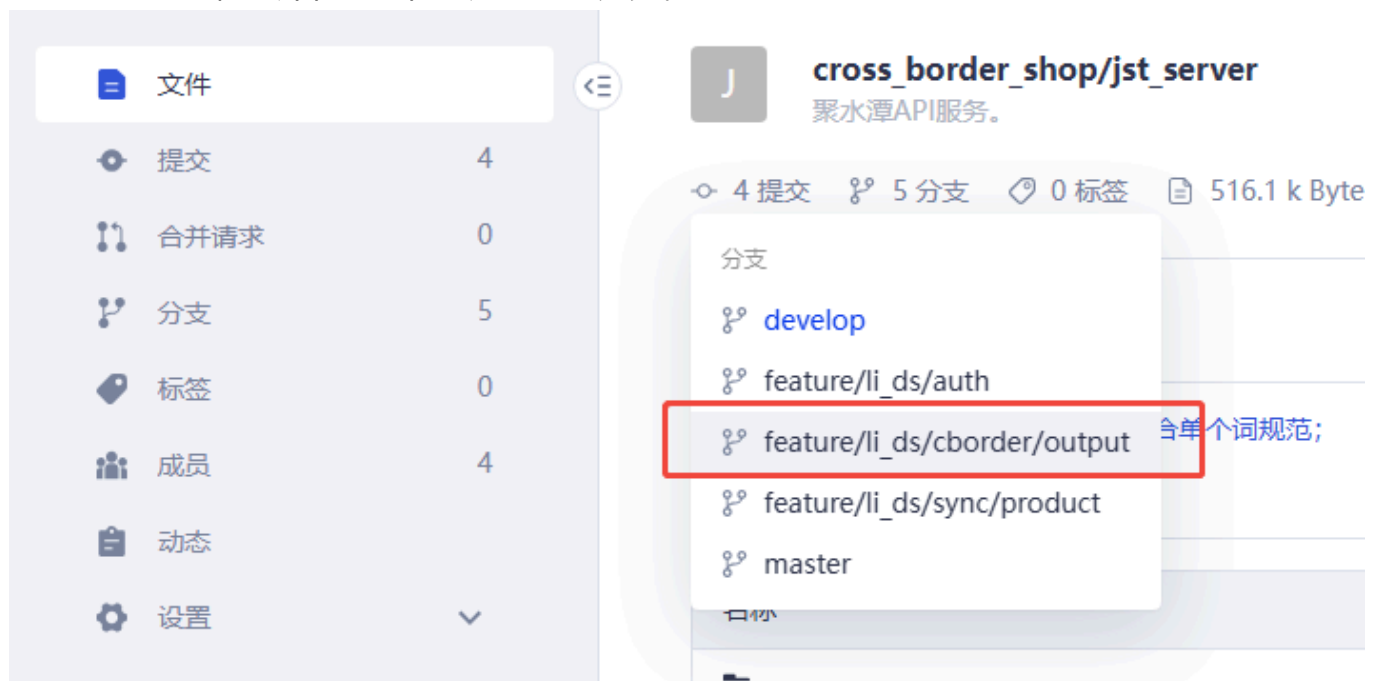

具体命令点击自查:

[^6cea53](#)

关于提交命令的注释：

git commit -m "feat:本次提交的功能简述;"

例：

```
Windows PowerShell
版权所有 (C) Microsoft Corporation。保留所有权利。

PS D:\Program Files\code\src\jst_server> git commit -m "feat:依据代码规范重构service层;"
```

或

git commit -m "fix:本次提交修复的bug简述;"


例：

```
Windows PowerShell
版权所有 (C) Microsoft Corporation。保留所有权利。

PS D:\Program Files\code\src\jst_server> git commit -m "fix:修复erp.url缺失的bug;"
```

对应类型的注释无需限制于特定分支，即feature分支上依旧可以提交fix注释；

创建分支（网页）：

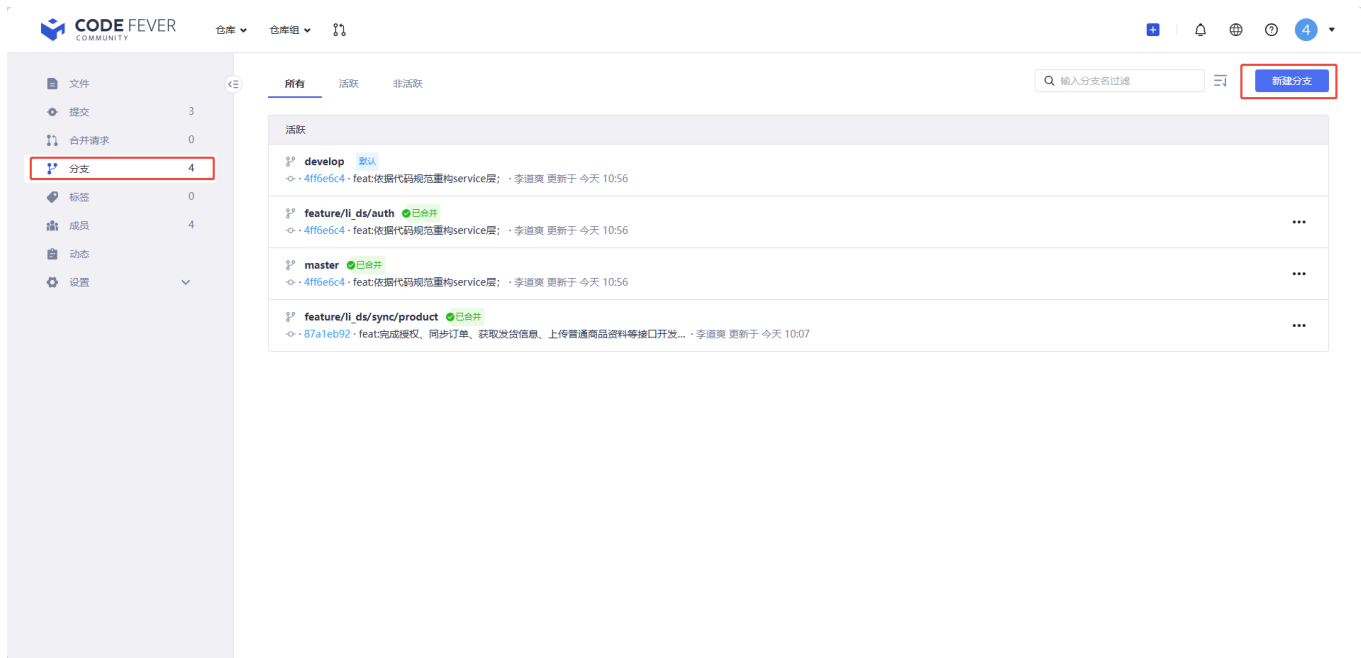

新建分支

分支名称

feature/li_ds/web/create/example


选择创建来源

master

取消

确定

创建分支 (cli) :

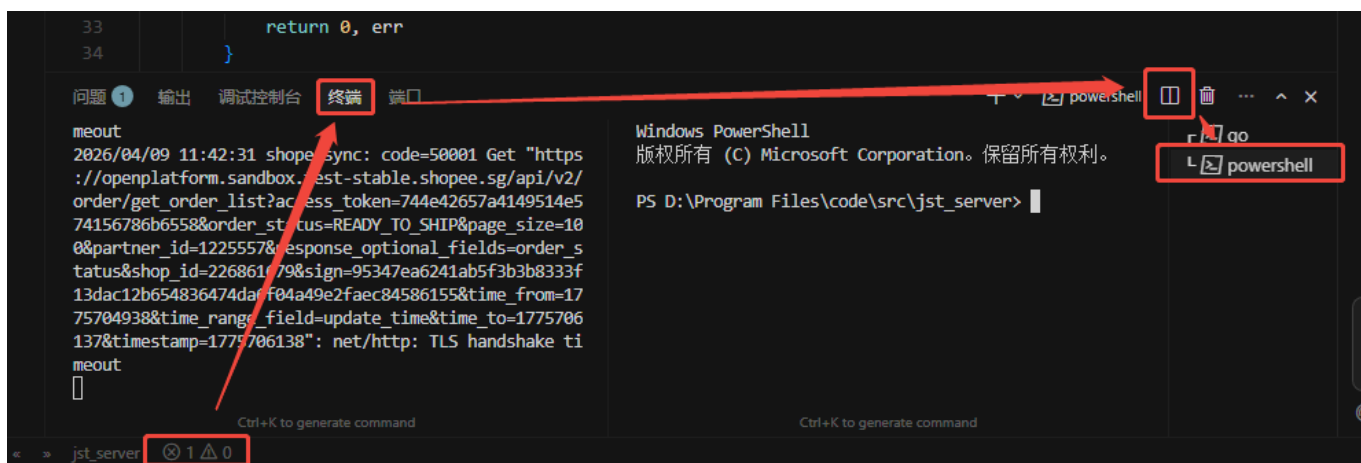

建议新建终端，即用即删，无需影响正在运行的本地服务；


具体命令点击自查：

[^6cea53](#)


分支合并（网页）：



选定分支，本操作为feature/li_ds/auth合并至develop；

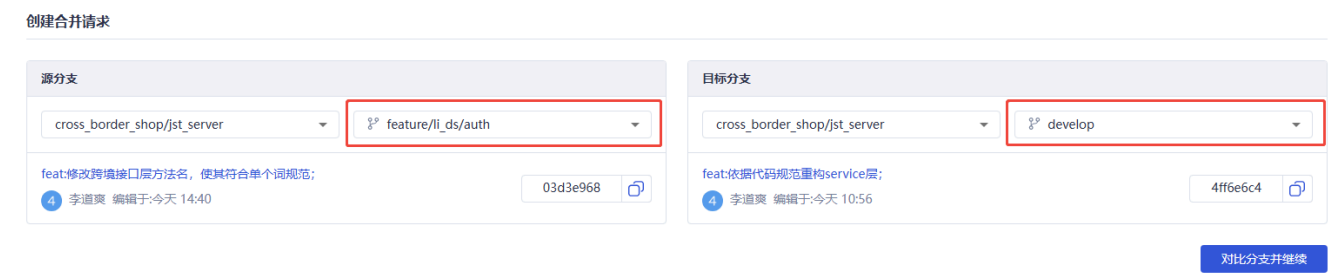

选择评审员，点击提交；

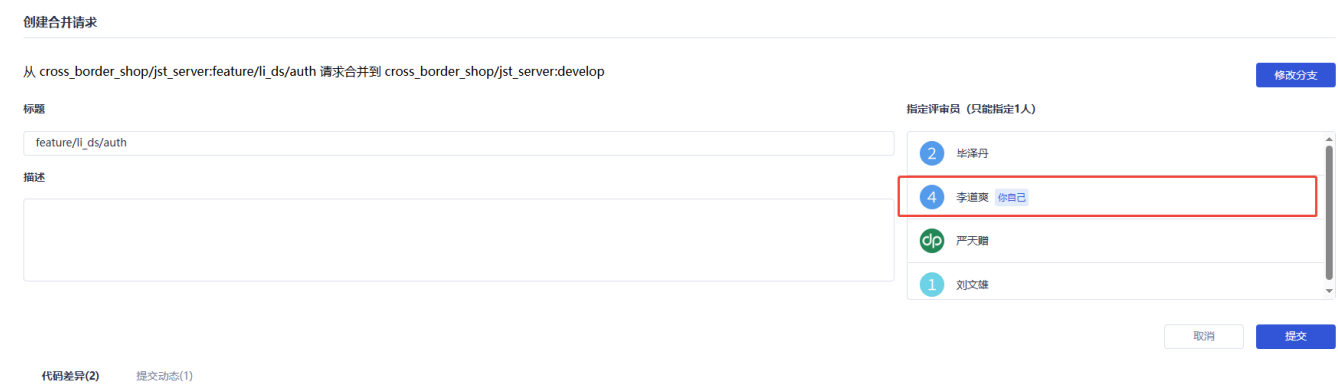

完成评审（若多次点击评审按钮无反应，刷新即可）；

CODE FEVER
COMMUNITY

仓库 ▾ 仓库 ▾

feature/li_ds/auth 已打开

代码差异(2) 提交动态(1) 合并请求动态(2)

最近修改: 03d3e968 和 Base Line-4ffe6c4 所有文件: 2 +4 -4 inline 打开文件树

controllers/merchant/jushuitan/CborderController.go

20 21 22 23 24 25 26 27

```
@@ -20,9 +20,9 @@ func init() {
    ci.BizController(spath, reflect.TypeOf(path).PkgPath())
}
// 跨店订单查询, 请求体为 JSON 对象, 与官方 biz 一致; 必填: modified_begin、
modified_end、current_page、page_size
// 其它字段如 o_ids、so_ids、status、shop_id 等按文档可传入。
func (con CborderController) GetOrders(c "gin.Context") {
    raw, err := io.ReadAll(c.Request.Body)
    if err != nil {
        ci.Error(c, 40001, "读取请求体失败")
    }
}
```

20 21 22 23 24 25 26 27

```
ci.BizController(spath, reflect.TypeOf(path).PkgPath())
}
// Orders 跨店订单查询, 请求体为 JSON 对象, 与官方 biz 一致; 必填: modified_begin、
modified_end、current_page、page_size
// 其它字段如 o_ids、so_ids、status、shop_id 等按文档可传入。
func (con CborderController) Orders(c "gin.Context") {
    raw, err := io.ReadAll(c.Request.Body)
    if err != nil {
        ci.Error(c, 40001, "读取请求体失败")
    }
}
```

docs/PROJECT_REFERENCE.md

92 93 94 95 96 97

```
'OrderController.Upload' | '.../order/upload' | 订单上传 |
'SkumapController.Upload' | '.../skumap/upload' | 店铺商品资料 |
'ProductController.Upload' | '.../product/upload' | 普通商品资料 itemsku |
'CborderController.Orders' | '.../cborder/orders' | 跨店订单查询 |
'SyncController.Run' | '.../sync/run' | **手动**触发 'shopeesync' 一轮 (无 Body) |
**同步** 'access_token' 传递** (与租户 JWT 无关) ; 'X-Jushuitan-Access-Token' 或 Query
'access_token', 否则读 Redis
```

92 93 94 95 96 97

```
'OrderController.Upload' | '.../order/upload' | 订单上传 |
'SkumapController.Upload' | '.../skumap/upload' | 店铺商品资料 |
'ProductController.Upload' | '.../product/upload' | 普通商品资料 itemsku |
'CborderController.Orders' | '.../cborder/orders' | 跨店订单查询 |
'SyncController.Run' | '.../sync/run' | **手动**触发 'shopeesync' 一轮 (无 Body) |
**同步** 'access_token' 传递** (与租户 JWT 无关) ; 'X-Jushuitan-Access-Token' 或 Query
'access_token', 否则读 Redis
```

评审员

李道爽 你自己 未评审

动态

请求合
并: cross_border_shop/jst_server/feature/li_ds/auth
-> cross_border_shop/jst_server/develop

李道爽 创建于: 今天 14:45

评审通过，点击合并（页面无反应，刷新同上）；

feature/li_ds/auth 已打开

代码差异(2) 提交动态(1) 合并请求动态(3)

最近修改: 03d3e968 和 Base Line-4ffe6c4 所有文件: 2 +4 -4 inline 打开文件树

controllers/merchant/jushuitan/CborderController.go

20 21 22 23 24 25 26 27

```
@@ -20,9 +20,9 @@ func init() {
    ci.BizController(spath, reflect.TypeOf(path).PkgPath())
}
// 跨店订单查询, 请求体为 JSON 对象, 与官方 biz 一致; 必填: modified_begin、
modified_end、current_page、page_size
// 其它字段如 o_ids、so_ids、status、shop_id 等按文档可传入。
func (con CborderController) GetOrders(c "gin.Context") {
    raw, err := io.ReadAll(c.Request.Body)
    if err != nil {
        ci.Error(c, 40001, "读取请求体失败")
    }
}
```

20 21 22 23 24 25 26 27

```
ci.BizController(spath, reflect.TypeOf(path).PkgPath())
}
// Orders 跨店订单查询, 请求体为 JSON 对象, 与官方 biz 一致; 必填: modified_begin、
modified_end、current_page、page_size
// 其它字段如 o_ids、so_ids、status、shop_id 等按文档可传入。
func (con CborderController) Orders(c "gin.Context") {
    raw, err := io.ReadAll(c.Request.Body)
    if err != nil {
        ci.Error(c, 40001, "读取请求体失败")
    }
}
```

评审员

李道爽 你自己 已评审

动态

请求合
并: cross_border_shop/jst_server/feature/li_ds/auth
-> cross_border_shop/jst_server/develop

李道爽 创建于: 今天 14:45

遇此报错，刷新；

合并失败，请稍后再试

关闭 合并

点击合并请求菜单栏，即可见新合并记录；

所有(5) 已打开(0) 已合并(5) 已关闭(0)

feature/li_ds/auth 已合并
15 · feature/li_ds/auth → develop · 李道爽 · 编辑于: 今天 14:40
更新时间: 今天 22:47

develop 已合并
14 · develop → master · 李道爽 · 编辑于: 今天 10:56
更新时间: 今天 18:59

feature/li_ds/auth 已合并
13 · feature/li_ds/auth → develop · 李道爽 · 编辑于: 今天 10:56
更新时间: 今天 18:57

develop 已合并
12 · develop → master · 李道爽 · 编辑于: 今天 10:07
更新时间: 今天 18:10

feature/li_ds/auth 已合并
11 · feature/li_ds/auth → develop · 李道爽 · 编辑于: 今天 10:07
更新时间: 今天 18:10

没有更多

创建合并请求

分支合并 (cli)：

git merge master

建议此命令仅用于从主分支更新代码至个人分支，即向下合并；

向上合并缺少审查，易导致主分支代码丢失；

建议每次push分支都执行一次merge，develop至个人分支，特别是协同开发；

```
PS D:\Program Files\code\src\jst_server> git merge master

Updating 87a1eb9..d480831
Fast-forward
.../merchant/jushuitan/CborderController.go      | 12 ++-
docs/PROJECT_REFERENCE.md                         |  4 +-
service/collectionfulfillment/service.go          |  4 +
service/jushuitan/cborder/dto.go                  | 103 ++++++
service/jushuitan/compat.go                        |  62 ++++++
.../{legacy_client.go => legacy/client.go}         |  45 ++++
.../{legacy_config.go => legacy/config.go}          |  19 +++-
.../jushuitan/{legacy_sign.go => legacy/sign.go}    |   6 +-
service/jushuitan/legacy/store.go                 |  38 ++++++
service/jushuitan/legacy_store.go                  |  58 -----
service/jushuitan/service.go                       |   4 +
service/shopeesync/service.go                      |   4 +
12 files changed, 268 insertions(+), 91 deletions(-)
create mode 100644 service/collectionfulfillment/service.go
create mode 100644 service/jushuitan/cborder/dto.go
create mode 100644 service/jushuitan/compat.go
rename service/jushuitan/{legacy_client.go => legacy/client.go} (73%)
rename service/jushuitan/{legacy_config.go => legacy/config.go} (78%)
rename service/jushuitan/{legacy_sign.go => legacy/sign.go} (67%)
create mode 100644 service/jushuitan/legacy/store.go
delete mode 100644 service/jushuitan/legacy_store.go
create mode 100644 service/jushuitan/service.go
create mode 100644 service/shopeesync/service.go
```

建议参考文章：

[【Git】Git工具的正确使用指南（系统性总结）-阿里云开发者社区](#)

Git简单命令：

git项目初始化

git init

创建 .gitignore 文件，忽略编译输出和敏感文件：

内容自查

保存当前未提交的更改（包括工作区和暂存区）

git stash

取出最新缓存内容，并删除该条stash记录

git pop

确保本地仓库是最新的

`git fetch origin`

切换到master 分支

`git checkout master`

拉取远程 master 的最新代码

`git pull origin master`

基于当前 master 创建并切换到新分支（将 替换为你的分支名）

`git checkout -b`

切换分支

`git checkout feature/li_ds`

添加所有修改文件

`git add .`

提交文件

`git commit -m "command"`

添加远程仓库地址

`git remote add origin https://github.com/yourusername/message-forwarder.git`

创建分支

`git branch -M master`

推送分支

`git push -u origin master`

将指定分支合并到当前分支，若有冲突，需手动解决冲突文件后，重新add与commit

`git merge`