



Documaker

Documaker Studio User Guide

version 11.3

Skywire Software, L.L.C.
2401 Internet Boulevard
Suite 201
Frisco, Texas 75034
www.skywiresoftware.com

Phone: (U. S.) 972.377.1110
(EMEA) +44 (0) 1372 366 200
FAX: (U. S.) 972.377.1109
(EMEA) +44 (0) 1372 366 201
Support: (U. S.) 866.4SKYWIRE
(EMEA) +44 (0) 1372 366 222

support@skywiresoftware.com

PUBLICATION COPYRIGHT NOTICE

Copyright © 2007 Skywire Software, L.L.C. All rights reserved.

Printed in the United States of America.

This publication contains proprietary information which is the property of Skywire Software or its subsidiaries. This publication may also be protected under the copyright and trade secret laws of other countries.

TRADEMARKS

Skywire® is a registered trademark of Skywire Software, L.L.C.

Docucorp®, its products (Docucreate™, Documaker™, Docupresentment™, Docusave®, Documanager™, Poweroffice®, Docutoolbox™, and Transall™), and its logo are trademarks or registered trademarks of Skywire Software or its subsidiaries.

The Docucorp product modules (Commcommander™, Docuflex®, Documerge®, Docugraph™, Docusolve®, Docuword™, Dynacomp®, DWSD™, DBL™, Freeform®, Grafxc commander™, Imagecreate™, I.R.I.S.™, MARS/NT™, Powermapping™, Printcommander®, Rulecommander™, Shuttle™, VLAM®, Virtual Library Access Method™, Template Technology™, and X/HP™) are trademarks of Skywire Software or its subsidiaries.

Skywire Software (or its subsidiaries) and Mynd Corporation are joint owners of the DAP™ and Document Automation Platform™ product trademarks.

Docuflex is based in part on the work of Jean-loup Gailly and Mark Adler.

Docuflex is based in part on the work of Sam Leffler and Silicon Graphic, Inc.

Copyright © 1988-1997 Sam Leffler.

Copyright © 1991-1997 Silicon Graphics, Inc.

Docuflex is based in part on the work of the Independent JPEG Group.

The Graphic Interchange Format® is the Copyright property of CompuServe Incorporated. GIF® is a Service Mark property of CompuServe Incorporated.

Docuflex is based in part on the work of Graphics Server Technologies, L.P.

Copyright © 1988-2002 Graphics Server Technologies, L.P.

All other trademarks, registered trademarks, and service marks mentioned within this publication or its associated software are property of their respective owners.

SOFTWARE COPYRIGHT NOTICE AND COPY LIMITATIONS

Your license agreement with Skywire Software or its subsidiaries, authorizes the number of copies that can be made, if any, and the computer systems on which the software may be used. Any duplication or use of any Skywire Software (or its subsidiaries) software in whole or in part, other than as authorized in the license agreement, must be authorized in writing by an officer of Skywire Software or its subsidiaries.

PUBLICATION COPY LIMITATIONS

Licensed users of the Skywire Software (or its subsidiaries) software described in this publication are authorized to make additional hard copies of this publication, for internal use only, as long as the total number of copies does not exceed the total number of seats or licenses of the software purchased, and the licensee or customer complies with the terms and conditions of the License Agreement in effect for the software. Otherwise, no part of this publication may be copied, distributed, transmitted, transcribed, stored in a retrieval system, or translated into any human or computer language, in any form or by any means, electronic, mechanical, manual, or otherwise, without permission in writing by an officer of Skywire Software or its subsidiaries.

DISCLAIMER

The contents of this publication and the computer software it represents are subject to change without notice. Publication of this manual is not a commitment by Skywire Software or its subsidiaries to provide the features described. Neither Skywire Software nor its subsidiaries assume responsibility or liability for errors that may appear herein. Skywire Software and its subsidiaries reserve the right to revise this publication and to make changes in it from time to time without obligation of Skywire Software or its subsidiaries to notify any person or organization of such revision or changes.

The screens and other illustrations in this publication are meant to be representative, not exact duplicates, of those that appear on your monitor or printer.

Contents

Chapter 1, Using Documaker Studio

- 2 Introduction
- 4 Studio Options
- 6 Creating a Multi-user Development Environment
 - 7 Base definition files
 - 7 Group files
 - 7 Form files
- 9 Installing Studio
- 10 Starting Studio
- 14 Using System Menus
 - 15 Using the Control menu
 - 16 File Menu
 - 18 Edit Menu
 - 19 View Menu
 - 20 Manage Menu
 - 22 Window Menu
 - 23 Help Menu
- 24 Creating Workspaces
- 30 Joining a Workspace

Chapter 2, Working with Settings and Users

- 34 Working With INI Options
 - 34 How INI files are used
- 35 Setting INI Options
 - 37 Browsing for a file
 - 37 Choosing from a list of options
 - 37 Specifying a parameter comprised of several elements
- 39 Defining Archive Options
- 40 Defining ArcSplit Options
- 41 Defining Common Options

42	Defining Database Handlers
43	Setting Development Tool Options
44	Defining Entry Options
45	Defining Import and Export Options
46	Setting Up Resource Libraries
48	Defining Print Batches and Printers
50	Defining Resource Paths
51	Defining Rules Processing Options
52	Defining WIP Options
53	Defining Uncategorized Options
54	Defining Tool Settings
56	Working with Form Options
57	Working with Image Options
57	Setting Image Filter Options
58	Selection Filter
58	Display Filter
58	Setting Document View Options
60	Working with Logo Options
61	Working with Script Options
63	Managing Users

Chapter 3, Working with Business Units

66	Overview
68	The Business Unit File
69	Defining a Business Unit
72	Storing Recipient Information
73	Defining Categories
74	Defining Transaction Types
75	Generating Reports

Chapter 4, Working with Group Forms

78	Creating a Group
81	Opening a Group

- 82 Setting Up Triggers
 - 83 Editing a trigger
- 84 SetRecip Options

Chapter 5, Managing Forms

- 88 Overview
 - 89 Objects
- 90 Using the Screen
 - 91 Using the Menu Bar
 - 91 Using the Image Menu
 - 92 Using the Trigger Menu
 - 93 Using the Workspace Menu
 - 95 Using the Tool Bar
 - 95 Standard tool bar icons
 - 96 Form tool bar icons
- 97 Creating a Form
- 100 Modifying Forms
 - 103 Dropping a form
- 104 Setting Up Triggers
 - 105 Editing a trigger
- 107 SetRecip Options
 - 108 Understanding Recipient Counts
 - 110 Using Variables to Set Copy Counts

Chapter 6, Working with Images

- 114 Overview
- 115 Using the Screen
 - 117 Using the Menu Bar
 - 118 Using the Edit Menu
 - 120 Using the View Menu
 - 121 Using the Insert Menu
 - 123 Using the Format Menu
 - 124 Using the Tools Menu

- 125 Using the Right Click Menus
- 127 Using the Tool Bar
 - 127 Standard tool bar icons
 - 128 Image tool bar icons
- 131 Creating an Image
- 132 Opening an Image
- 135 Adding Objects
 - 135 From the Insert menu
 - 135 From the toolbar

Chapter 7, Working with Logos

- 140 Using the Screen
 - 141 Using the Menu Bar
 - 141 Using the Logo Menu
 - 143 Using the Right-Click Menu
 - 146 Using the Tool Bar
 - 146 Standard tool bar icons
 - 147 Logo tool bar icons
- 148 Managing Logos
 - 149 Positioning JPEG objects
 - 149 Importing color bitmaps
 - 150 Reverse black and white file types
 - 150 Converting files
- 150 Opening a Logo
 - 151 Importing a signature or logo
- 152 Editing a Logo
 - 152 Undo
 - 152 Redo
 - 152 Rotate
 - 152 Mirror
 - 152 Reverse
 - 153 Convert to BW
 - 153 Resize
 - 153 Border Space
 - 153 Clip
- 153 Setting Rotation Names
 - 154 Changing the Resolution

155 Setting Ruler and Grid Options

Chapter 8, Creating Scripts

158 Using the Screen

159 Using the Menu Bar

159 Using the Edit Menu

160 Using the Script Menu

161 Using the Right-Click Menu

162 Using the Tool Bar

162 Standard tool bar icons

163 Script tool bar icons

164 Overview

166 Checking Syntax

Chapter 9, Managing Resources

172 Overview

173 Terminology

173 Check in

173 Check out

173 Effective dates

173 Expire

173 Extract

173 Libraries

173 Modification dates

173 Revisions

173 Response files

173 Promotion

173 Unlock

174 Versions

175 Concepts

175 Understanding Libraries

177 Processing with Effective Dates

178 Retrieving Resources with Version and Revision Numbers

179 Stringently Checking Resources

179 In Documaker 10.3

179 In Documaker 10.2 and earlier

181 Understanding Run Dates	
183 How It All Works	
183 In Documaker Workstation	
183 Entry	
183 Example 1 - Multiple versions, different effective dates	
184 Example 2 - Multiple versions, same effective dates	
185 WIP	
186 Archive and retrieval	
186 In Documaker Server	
187 In Docupresentment (IDS)	
188 Managing Workflow	
189 Creating Libraries	
189 Using xBase and CARFiles	
190 Creating the CARFile and Index Files	
190 On Windows, AIX, Solaris, and Linux	
190 Sample INI options	
191 Using the DB2 Native Driver	
191 Creating the Database and Tables	
191 On Windows, AIX, Solaris, and Linux	
192 On OS390	
193 Sample INI Options	
196 Using the DB2 ODBC Driver	
196 Creating the Database and Tables	
198 Sample INI Options	
202 Using the SQL Server ODBC Driver	
202 Creating the Database and Tables	
202 Sample INI Options	
206 Using the Oracle ODBC Driver	
206 Data Format Definition (DFD) Requirements	
206 Sample CARFILE.DFD file	
207 Creating the Database and Tables	
207 Sample INI Options	
211 Using Documanager	
218 Working with Libraries	
219 Opening a Library	
221 Adding Resources to a Library	
224 Importing Files	
225 Importing Libraries	
226 Checking Out Resources	

228	Checking In Resources
230	Unlocking Resources
231	Promoting Resources
231	Identifying the resources to promote
232	Changing the Mode, Status, Class, and Project values in the source library
233	Defining the target library
233	Using a promotion script
234	Performing the Promotion
235	Filtering Resources
237	Editing Resource Information
239	Deleting Resources
240	Searching the Library
240	Defining the resources
241	Defining the objects
242	Using a search script
243	Performing the Search
244	Extracting Resources
244	Identifying the resources to extract
245	Defining extract options
246	Using an extraction script
247	Performing the Extraction
248	Expiring Resources
249	Reviewing a History of Resource Changes
251	Running Response Files
252	Defining Mode, Status, Class, and Project Options
254	Using the LBYPROC Utility
256	Troubleshooting
256	Turning on Tracing
257	Handling Error Messages
257	ORA-00904
257	ORA-01401
257	SQL0104N

Chapter 10, Using Dictionaries

260	Working with Extract Files
261	Opening an Extract Dictionary

263 Working with Fields

264 Importing TGA Files

Chapter 11, Creating Tables

266 Overview

266 DFD Files

267 Transaction File DFD

268 Recipient Batch File DFD

268 Application Index File DFD

269 Field Section

270 Key Section

Chapter 12, Converting Files

272 Overview

274 Converting Files into FAP Files

275 Compiling FAP Files into Print Files

276 Converting Logo Files

277 Making Changes to Multiple FAP Files

278 Image Conversions

280 Field Conversions

282 Font Conversions

283 General Conversions

285 Converting Bitmap Files into LOG Files

286 Finishing a Conversion

Chapter 13, Printing Reports

288 Generating a Report

Chapter 14, Handling Fonts

- 294 Overview
 - 294 Changing the Point Size

Chapter 15, Testing Your Forms

- 298 Overview
 - 298 Breakpoints
- 300 Using the Screen
 - 301 Using the Menu Bar
 - 301 Using the View Menu
 - 302 Using the Test Menu
 - 303 Using the Right-Click Menus
 - 303 Formset View
 - 304 AFGJOB File
 - 305 Using the Tool Bar
 - 305 Standard tool bar icons
 - 306 Test tool bar icons
- 307 Creating a Test Profile
- 310 Running a Test
 - 313 Running a Trigger-Run Only Test
 - 313 Manually Triggering
- 315 Changing Test Properties
- 316 Modifying the AFGJOB File
- 317 Deleting a Test

Chapter 16, Deploying a Library

- 320 Overview
- 321 Creating or Running a Deployment
 - 323 Creating a Library Deployment
 - 325 Creating a Flat-File Deployment
- 326 Additional Resources
- 327 INI Settings
- 328 Processing the Deployment

329 Index

Chapter 1

Using Documaker Studio

Documaker Studio is a multi-user forms development system that promotes workgroup and team-based development methodologies. Documaker Studio tackles the complex development process for building and maintaining large electronic forms libraries.

Documaker Studio is designed for forms and business analysts who work to meet the requirements defined the compliance group and create the dynamic document applications that are provided to the production operations teams.

This document includes information on these topics:

- [Introduction on page 2](#)
- [Creating a Multi-user Development Environment on page 6](#)
- [Starting Studio on page 10](#)
- [Using System Menus on page 14](#)
- [Creating Workspaces on page 24](#)
- [Joining a Workspace on page 30](#)
- [Working with Settings and Users on page 33](#)
- [Working with Business Units on page 65](#)
- [Working with Group Forms on page 77](#)
- [Managing Forms on page 87](#)
- [Working with Images on page 113](#)
- [Working with Logos on page 139](#)
- [Creating Scripts on page 157](#)
- [Managing Resources on page 171](#)
- [Using Dictionaries on page 259](#)
- [Creating Tables on page 265](#)
- [Converting Files on page 271](#)
- [Printing Reports on page 287](#)
- [Handling Fonts on page 293](#)
- [Testing Your Forms on page 297](#)
- [Deploying a Library on page 319](#)

INTRODUCTION

Documaker Studio provides a new and integrated way to create and maintain the images, logos, fields, and other objects you use in your form sets. Studio also provides tools for managing these objects in libraries and for testing and deploying form sets.

NOTE Licensed users of Documaker (RP) Server or Documaker (RP) Workstation, and Docucreate (RP) are eligible to receive Documaker Studio as part of their maintenance agreement. The Documaker product has a high degree of compatibility with the DAP (Document Automation Platform) Solution Suite. DAP users should check with their account representative to explore the advantages of upgrading to Documaker.

The main features and benefits of Studio include:

- *Seamless workbench* While its predecessor provided a menuing system to access all of the graphical tools and many of the conversion tools, Studio greatly enhances the way the tools work together. For example, you can now drag and drop a field database entry onto an image. Furthermore, you can have several tools, and even multiple copies of those tools, open at the same time.
- *Editing Forms* Studio makes it easy to edit forms by providing easy access to both the tree view and graphical view of the selected form components, as well as a Trigger wizard for specifying trigger logic. SetOrigin specification of the absolute or relative placement of image sections (FAP files) is now done visually. Header, body, and footer images are automatically organized into a easier to manage tree view. Image and form attributes are easier to access and modify. Recipients are easier to specify. Multi-user development is easier since each developer can work on one or more forms at a time without impacting other developers.
- *Configuring INI options* You can now load and maintain the INI options which control your system from inside Studio. You can maintain these options at the global (system), local (unique to a developer), or deployment (specifying unique platforms, data sources, locations, and devices) level.
- *Creating DAL Scripts* DAL (Document Automation Language) offers a high degree of power and flexibility for form and section triggering logic and also for data manipulation and formatting. While other means of triggering sections and manipulating data are still supported, you'll enjoy the benefits and ease of use DAL offers. Studio includes a powerful new script editor for maintaining DAL libraries, including effective date version control and check-in and check-out.
- *Visual Debugger* Dynamic documents cannot truly be viewed without running the rules against test data. Studio includes a new visual testing tool that makes it easy to see how documents will look when run against real data. The ability to set break points and view internal variables while watching the document assemble visually makes it easy to debug problems in the form design.
- *Import Wizards* The version 11.0 runtime works with older configurations, however, taking advantage of the new Studio and its new files requires a forward migration. Studio includes powerful wizards to make it quick and easy to move an existing implementation forward to version 11.0 library members.

- *Form-level effective dates* Effective date based version control (including check-in, check-out, and expiration) can now be applied to forms. Previously this capability applied only to sections of forms, such as FAP files, and their related DDT files. Many implementations creatively combined a large number of physical images into a more complex logical form, and the need for effective date versioning at the true form level became apparent. Adding this capability requires a new library member: the *form* (FOR) file and a new tool to maintain the objects and attributes of that file.
- *Multi-user form development* Versions prior to 11.0 stored form level attributes in a number of places: the FORM.DAT file, the SETRCPTB.DAT file, other supporting tables, and DDT files. By consolidating logical form attributes into a single file, not only is it possible to do effective date version control on a form, but it is also easier to facilitate multi-user form development.
- *New files* The elimination of the FORM.DAT and SETRCPTB.DAT files and the introduction of FOR files also resulted in the addition of two new types of resource members: the *base definition* (BDF) file which defines the combinations of keys that represent the business units into which the forms are assembled, and the *group* (GRP) file which provides the default ordering sequence for the form candidates that are available to each business unit.
- *Eliminating DDT files* DDT files were introduced as a way to isolate variable data tag information that would be applied to static form overlays. By separating this information from the FAP files, it was possible to achieve a higher degree of performance in simpler implementations. Over time, as advanced formatting capabilities were devised to meet customer needs, it became necessary for the FAP files to be available at runtime because more and more documents began to be subject to dynamic composition at runtime. The DDT file became less of an advantage, and even a stumbling block within implementations.

In spite of synchronization facilities in the tools, some implementations struggled to keep DDT and FAP files in sync. With version 11.0 and the introduction of the FOR file, DDT files are eliminated. Image and field-level DDT rules previously stored in the DDT file are now either unnecessary or are stored in the FAP file. Having image level rules (such as SetOrigin) in the FOR file makes it easier to do visual form design. Having field level rules in the FAP file eliminates synchronization worries.


The following pages discuss some of these enhancements in more detail.

STUDIOOPTIONS

Most options in Documaker Studio are used to create the resource objects that make up a Master Resource Library (MRL). The options appear when you open a workspace:

The options you can use are listed here

You can also select these options from the Manage menu

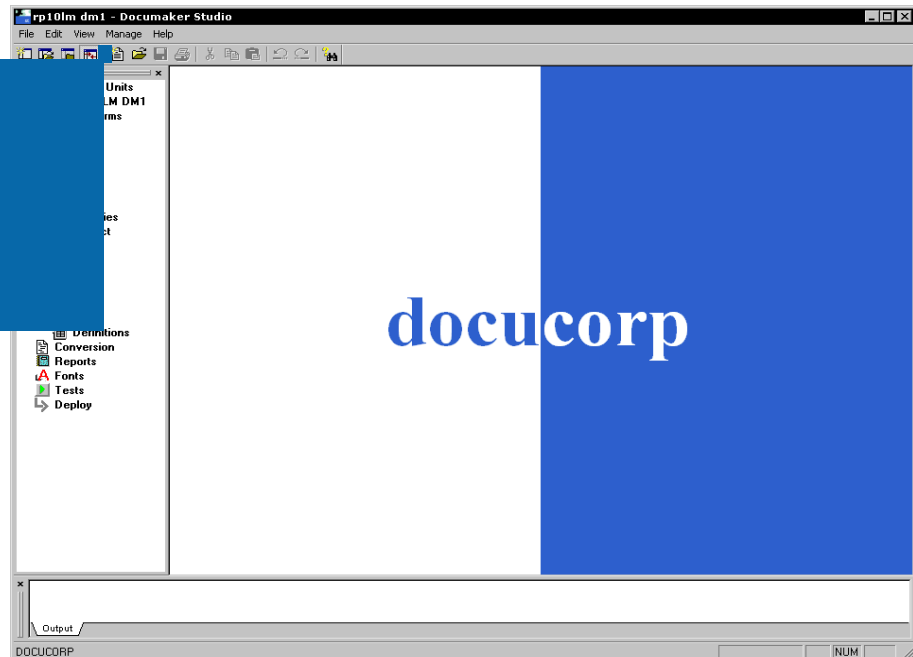

These resource objects are eventually used during the form entry process (Documaker Workstation) or in the forms processing cycle (Rules Processor). In some cases, the objects are used during both processes.

Option	Used to	Used during form		
		Entry Processing Required?		
Business units	Define valid key combinations.	Yes	Yes	Yes
Group forms	Define the list of forms available to a business unit.	Yes	Yes	Yes
Forms	Create a list of the images that comprise the form and to store triggering information.	Yes	Yes	Yes
Images	Create and manage the images that make up the forms.	Yes	Yes	Yes
Logos	Resize, reverse, rotate, and manipulate bitmap graphics used on images.	Yes	Yes	No
Scripts	Create scripts to automate tasks. You create these scripts using the Document Automation Language (DAL).	Yes	Yes	No


Option	Used to	Used during form Entry Processing Required?		
Libraries	Manage the libraries that contain the forms, images, logos, and other resources.	Yes	Yes	Yes
Dictionaries	Create and maintain mapping information for runtime data files and common field information so setting up and creating variable fields is easier.			
Extract		No	Yes	?
Rule		No	Yes	No
Fields		Yes	Yes	No
Tables	Define the format and create the tables you use.			
Batch		No	Yes	No
Entry		Yes	No	No
Definitions		Yes	Yes	No
Conversion		Yes	Yes	No
Fonts	Create and maintain the table which serves as the bridge between the system and your fonts.	Yes	Yes	Yes
Tests	Define and process test situations that simulate your production environment.	Yes	Yes	No
Deploy	Help you move your finished libraries into production mode.	Yes	Yes	No

CREATING A MULTIUSER DEVELOPMENT ENVIRONMENT

Documaker Studio provides for multi-user development cycles. For several users to work on a given set of resources, the system must be able to manage the resources to prevent conflicts.

The key to effectively managing libraries of resources is in the files used to store information. These files are designed to facilitate multiple users throughout the life cycle of a project so you can move resources from development to testing and into production.

The FORM.DAT file defined the basic lines of business and the available list of forms for each of those lines. As such, there was too much information in this one file for it to be useful in a multi-user development environment. Therefore the FORM.DAT file, along with the SETRECIP.DAT (the trigger file), have been split into multiple components.

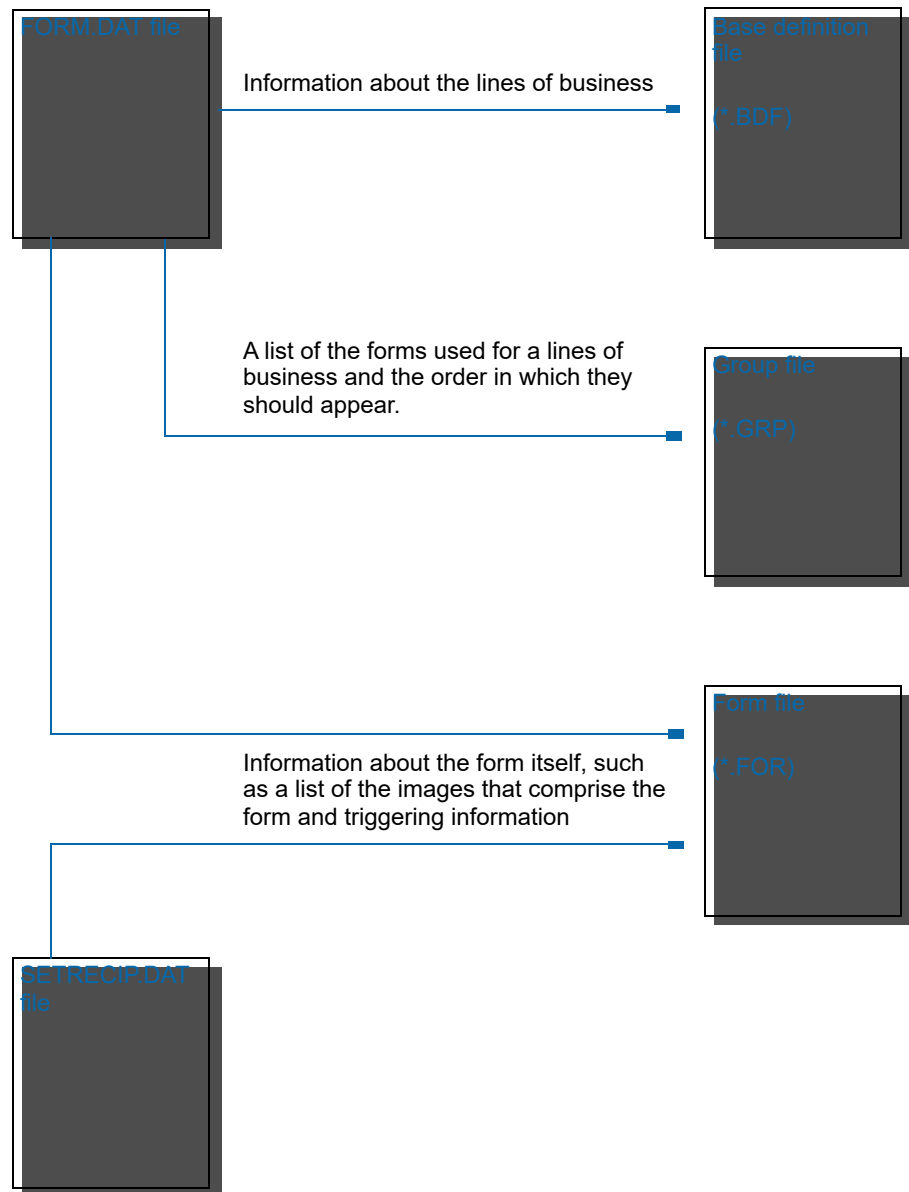

NOTE File names, types, and extensions, as well as menu names, options, and screen names may change during the development cycle.

Base definition files

The first component is a new file where you maintain what was formerly known as the *lines of business*. The extension and library type given to this file is BDF, which stands for *base definition file*. In Studio, you will see this listed in the workspace tree as *business units*.

A base definition file defines a valid key combination comprised of a Key1, a Key2, and eventually a Key3. These keys are typically known as Company, Lines of Business, and usually State, within the Insurance industry.

When you need to add a new line of business or business unit to a set of resources, you first check out the BDF file and then make the necessary changes to define a new business unit.

This file is relatively simple in design because there are not many options at this level. But because it is now a file type you can manage, you can now introduce new business units starting at a given date, which was not possible before.

See [Working with Business Units on page 66](#) for more information.

Group files

The next new file type in the workspace tree is called the *group* file. Once you define your business units, you then associate each business unit with a list of candidate forms. This file is where you define the list of forms available to a given business unit. And you can arrange the forms in the order in which you provide them.

The extension and library type for these files is known as *GRP*.

To add or remove a form from a business unit, you simply check out the appropriate group (GRP) file and make those changes.

Since unit form order files are versioned and given effective dates, the list of candidate forms can vary based upon the date associated with a given transaction.

See [Working with Group Forms on page 70](#) for more information.

Form files

The final new file type created from the FORM.DAT is known as the *form* file. These files have the extension and library type of FOR, which stands for *form*.

As a new file type in the library, you can maintain versions and revisions of a form. Effective dates are used to make sure you get the correct rendition of the form for that date.

In addition to form files containing the list of images that comprise the form, these files also contain the triggering information formerly stored in the SETRECIP.DAT file. This means that in addition to maintaining the image components, by checking this file out and back in, you automatically maintain the list of triggers used to generate specific layouts of the document.

The form file maintains the image options associated with the images that comprise the form and maintains the specific location (SetOrigin) information used to place the images correctly on the form.

As mentioned, via the Libraries option, Studio supports these new file types (BDF, GRP, and FOR). This means you can check the files in and out and provide effective dates for when each are to become available (or expire).

The date associated with a transaction is used to select the appropriate version/revision of the files to build the document set and each transaction can therefore differ if they have differing dates.

See [Managing Forms on page 87](#) for more information.

INSTALLING STUDIO

If your system supervisor has not installed the system on your computer, you can do so easily, once you have made sure your computer has the correct hardware and software. Simply insert the CD-ROM into the appropriate drive and follow the instructions that appear on your screen.

NOTE In most cases, the system supervisor will set up Studio on your computer for you. If you install the system yourself, check with your system supervisor to make sure any custom settings are configured correctly for your computer.


During installation, sample resource files are stored in the FMRes master resource library. Although you will likely set up your own resource libraries, do not delete these resources because the system may continue to use some of the files, such as the font cross-reference files (FXR).

Keep in mind...

- You must have Windows 2000 or later installed on your computer to run Studio.
- Installed under the \DLL directory are files needed to display INI configuration and help information. These files will continue to be updated with subsequent patch releases.
- There is a separate installation for Documaker RP and Documaker Studio.
- You can always find the latest installation information on the DOSS site.

STARTING STUDIO


When you first start Studio, the following window appears.

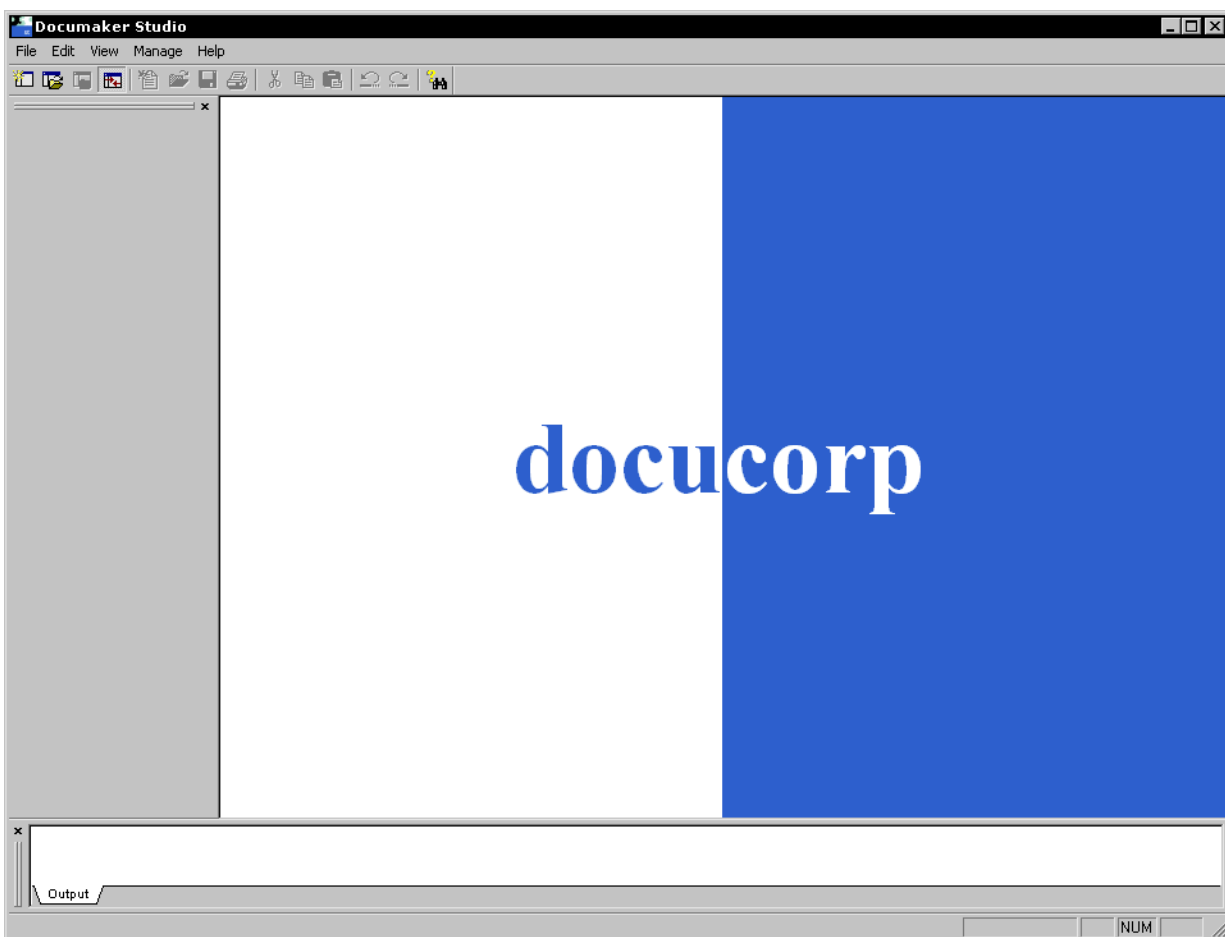


The first step is to open an workspace or create a new workspace.

NOTE For detailed instructions on creating a workspace, see [Creating Workspaces on page 24](#) For more information on joining a workspace, see [Joining a Workspace on page 30](#)

You'll find the options to open or create workspaces on the File menu and on the toolbar.

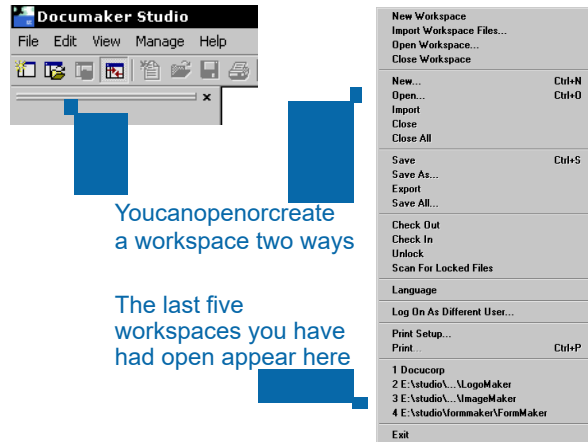

Once open, Studio shows the tools you can use to work in that workspace:

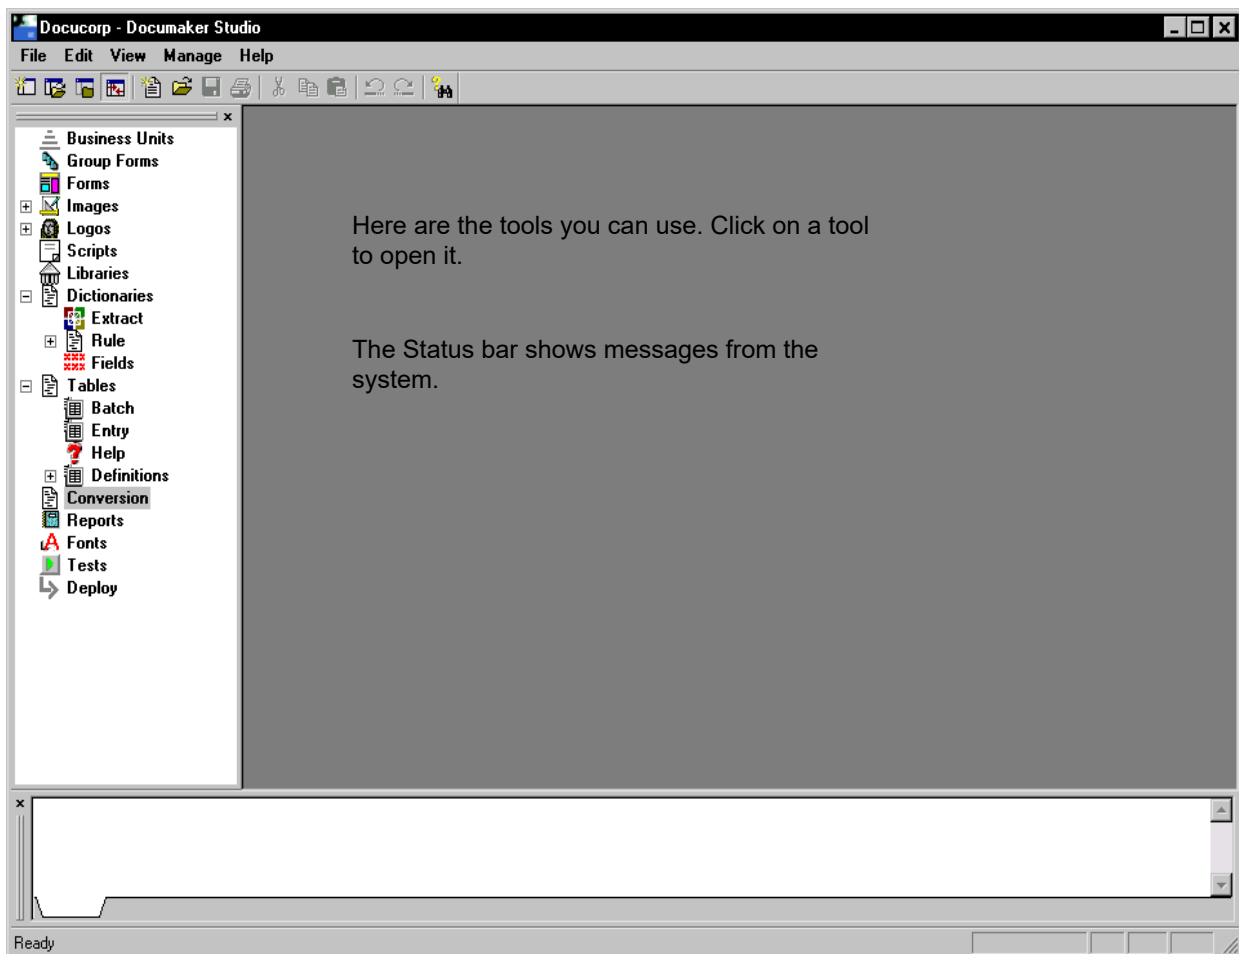


You can use these tools:

Tool	Choose this tool to...
Business Units	Define the various business units.
Group Forms	Define the characteristics of a specific group of forms. For instance all of the forms which comprise a specific type of loan or insurance policy would be listed.
Forms	Define the selection and arrangement of images that comprise the form set.
Images	Create and manage the images you use to make up forms.
Logos	Work with the bitmap graphics you use in your images. This gives you an easy way to resize, reverse, rotate, and manipulate the logo to fit your needs.
Scripts	Create scripts to automate certain tasks. You create these scripts using the Document Automation Language (DAL).
Libraries	Manage the libraries that contain the forms, images, logos, and other resources which comprise the form set.
Dictionaries	
Extract	Manage information about the extract files you use to merge information into variable fields on a form.
Rule	
Fields	Store common variable field information to make setting up and creating FAP files faster and more consistent.
Tables	Create lookup tables for the variable fields you create.
Batch	
Entry	
Definitions	
Fonts	Organize your fonts into sets of fonts you use for image creation and printing.
Tests	Test your forms in a simulated production environment.

Having the tools displayed in **tree** arrangement provides an easy way to see the files you checked out from the library. It also serves as a most recently opened file list for all files, including those not in the library.

You can remove a file from this list by highlighting the file then right clicking to display the context menu. Use the...


- Check In option to check the file into the library
- Drop option to remove it from the list.



The green check mark shows this file is checked out of the library.

This file was opened from disk and has not been checked into the library.

If you right click in this area, the following menu appears:

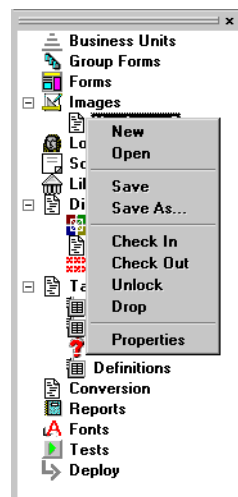

Option	Description
New	Use to create a business unit, group form, form, image, script, dictionary or table entry, or font.
Open	Use to open a business unit, group form, form, image, logo, script, library dictionary or table entry, conversion, report, font, or test.
Save	Use to save your work.
Save As...	Used to save your work with another name.
Check In	Use to save the changes and check in the item you are working on.
Check Out	Use to check out an item from the library.
Unlock	Use to unlock an item that is open when you want to release it back to the library without saving changes.
Drop	Use to temporarily remove an item that appears in the list that is a library item. Permanently remove from the list an image that is not a library item. Unlock or check in permanently removes a library member from the working list.
Properties	Use to display properties of the item.

USINGSYSTEM MENUS

This topic discusses the pull down menus available when you are working in Documaker Studio. The following topics discuss the options on these menus. When you first start Studio, you see these menus:

Select	To
File	Create, open, close, save, check in, check out, unlock, and print files. You can also use this menu to exit the system.
Edit	Perform normal editing functions such as undo, redo, cut, copy, paste, and delete.
View	Set to turn on or off the display of the toolbar, workspace, output bar and status bar.
Manage	Work with various aspects of the project, including settings, libraries, dictionaries, scripts, fields, form sets, and other resources such as fonts, logos, help, tables, and users. You can also use this menu to convert files, print reports, test forms, and work with user profiles.
Window	Use to control the display of your windows. You can elect to have the windows display in tile, stack, or cascade format. You can also open a new window or arrange icons.
Help	Display Help contents, how to topics, shortcuts, the glossary, and product information.


These menus can change, depending on which tool you are working with. For instance, if you are working with images, you have these additional menus to choose from:

Select	To
Insert	Insert the various objects that comprise an image, such as boxes, text labels, text areas, charts, lines, logos, fields, shade, and so on.
Format	Align or space objects, convert objects into text labels or areas, or specify the formatting for paragraphs, including setting tabs, defining columns, numbering, specifying shading and borders, and so on.
Tools	Run a spell or grammar checker, run a data entry check or an image report, or compile or convert the image.

In addition, some of the options on the standard menus change. For instance, if you are working with images you will find additional Edit menu options which let you bold or italicize text. The chapters that discuss working with images or form, for example, document the addition menus and options that become available.

Using the Control menu In addition in the top, left corner of most windows you can click on the Control menu icon:

Click here to display the Control menu

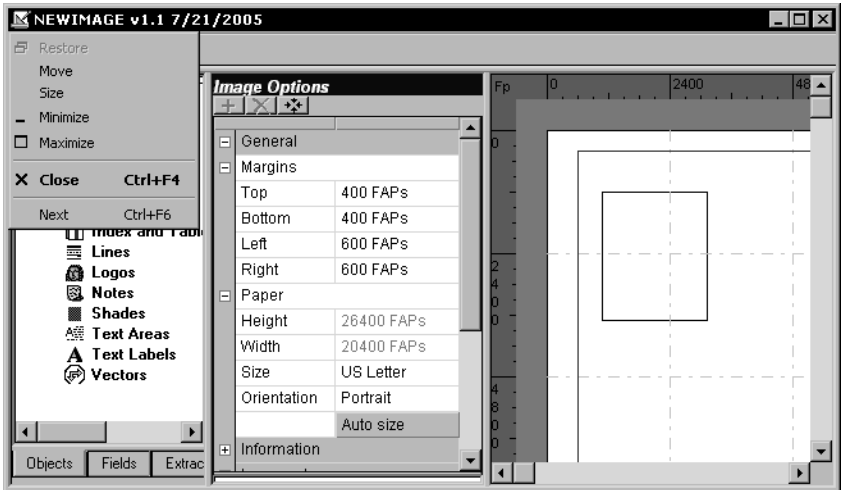

This menu provides these options:

Option	Description
Restore	Restores the window to a smaller view
Move	In the smaller view, the Forms icon appears in the upper left hand corner by the form name. The Move option lets you move the Forms window around.
Size	Lets you resize the window.
Minimize	Minimizes the window.
Maximize	Maximizes the window.
Close	Closes the window.
Next	Moves to the next open item, such as the next form or image.

FILE MENU

The File menu controls creating, opening, closing, saving, checking in or out, and printing your files. You also exit the system and return to your operating system from the File menu. When you select File, this menu appears:

New Workspace	
Import Workspace Files...	
Open Workspace...	
Close Workspace	
New...	Ctrl+N
Open...	Ctrl+O
Import	
Close	
Close All	
Save	Ctrl+S
Save As...	
Export	
Save All...	
Check Out	
Check In	
Unlock	
Scan For Locked Files	
Language	►
Log On As Different User...	
Print Setup...	
Print...	Ctrl+P
1 Docucorp	
2 E:\studio\...\LogoMaker	
3 E:\studio\...\ImageMaker	
4 E:\studio\formmaker\FormMaker	
Exit	

A brief summary of each option appears below.

Select	To
New Workspace	Create a new workspace (DXM file).
ImportWorkspace Files	Import a workspace file.
Open Workspace	Open a workspace.
Close Workspace	Close the current workspace. The system prompts you to save your work.
New	Create a new object, such as an image.
Open	Open as object, such as an image.
Import	Import an object.
Close	Close the open object window. The system prompts you to save the object if changes have been made.
Close All	Close all object windows. The system prompts you to save each object if changes have been made.
Save	Save the object you are working with.

Select	To
Save As	Save the object under a new name. This option lets you make a copy, without changing the original.
Export	Export an object
Save All	Save all open windows.
Check Out	Retrieve an object from a library and lock it, so no other user can check it out while you work with it.
Check In	Return an object to a library and unlock it. Other users can then check out the object.
Unlock	Remove the lock placed on a document when you retrieved it with Check Out, but did not use the Check In option to return it to the library.
Scan for Locked Files	Check the library index and update the workspace tree to reflect those documents you have checked-out from the library.
Language	Select the language appropriate for the forms you are working on.
Log On as a Different User	Log onto the system under another user ID.
Print Setup	Select the printer you will print to and set up printer-specific options.
Print	Print the current image or page.
<i>(recently opened files)</i>	Choose from a list of the last five files you had open. This lets you quickly reopen a workspace, for instance.
Exit	Close and exit Studio.

EDIT MENU

The Edit menu lets you make changes to objects. You can undo, copy, cut, delete, and paste individual objects or select all the objects for editing. When you select Edit, this menu appears:

Undo	Ctrl+Z
Redo	Ctrl+Y
Cut	Ctrl+X
Copy	Ctrl+C
Paste	Ctrl+V
Delete	Ctrl+D

The options on the Edit menu can vary, depending on which tool you are using. This example shows you the standard Edit menu options. Here is a brief summary of these options:

Select...	To...
Undo	Cancel or reverse your last action or choice.
Redo	Repeat the most recent change.
Cut	Remove a selection and place it on the clipboard. Use Paste to insert the selection into, for instance, another part of the image or into a different image.
Copy	Make a copy of the selection and place it in the clipboard. Use Paste to insert the selection into, for instance, another part of the image or into a different image.
Paste	Insert the contents of the clipboard at the cursor location.
Delete	Erase the selection. The selection is not stored on the clipboard so you must immediately select Undo if you change your mind.

VIEWMENU

The View menu controls lets you quickly turn on or off the display of the toolbar, workspace, output, or the status bar. When you select View, this menu appears:



A brief summary of each option appears below:

Select...	To...
Toolbar	View the toolbar.
Workspace	View the workspace.
Output	View output.
Status Bar	View the status bar.
Options	Specify grid and ruler settings.

NOTE Depending on the tool you are using, other view windows may appear on the menu. The ones shown here are for the main view windows and are always available.

MANAGE MENU

The Manage menu lets you work with the various items which make up a project, such as libraries and scripts. When you select Manage, this menu appears:




A brief summary of each option appears below.

Select...	To...
Settings	Define the INI and other configuration settings used by the system.
Business Units	Define the various business units.
Group Forms	Define the characteristics of a specific group of forms. For instance all of the forms which comprise a specific type of loan or insurance policy would be listed.
Forms	Define the selection and arrangement of images that comprise the form set.
Images	Create and manage the images you use to make up forms.
Logos	Work with the bitmap graphics you use in your images. This gives you an easy way to resize, reverse, rotate, and manipulate the logo to fit your needs.
Scripts	Create scripts to automate certain tasks. You create these scripts using the Document Automation Language (DAL).
Libraries	Manage the libraries that contain the forms, images, logos, and other resources which comprise the form set.
Dictionaries	Create and maintain mapping information for runtime data files.
Extract	Create and maintain the XDB.DBF file.

Select...	To...
Rule	Create and maintain the MASTER.DDT file.
Fields	Create and maintain the FDB.DBF file.
Tables	
Batch	Create and maintain tables (TBL files) used in a batch processing.
Entry	Create and maintain tables used in an entry processing.
Definitions	Define tables used by both the batch and entry processing.
Conversion	Convert files from one type to another, such as RTF to FAP and to change characteristics, such as a font ID) on multiple FAP files.
Reports	Print base definition, group, form, or image reports.
Fonts	Organize your fonts into sets of fonts you use for image creation and printing.
Tests	Test your forms in a simulated production environment.
Users	Create or work with user profiles.
Deploy	Put resources into production.

WINDOWMENU

Use the Window menu to control the way the system displays multiple windows. You can cascade or tile the windows. When you select Window, the following menu appears:



A brief summary of each option appears below.

Select...

To...

Cascade	Display multiple form or image windows in a layered fashion. The system stacks the forms one behind another so you easily see the name or title of each window or form.
Tile	Display multiple form or image windows on your screen.
(file list)	Jump to an open window. The system lists the windows you currently have open.

HELPMENU

The Help menu controls access to Help screens. When you select Help, this menu appears:

Contents	Ctrl+F1
How to...	Ctrl+Alt+F1
Shortcuts	
Glossary...	Ctrl+F11
Using Help	Shift+F11
About Documaker Studio...	


A brief summary of each option appears below.

Select...	To...
Contents	See a general table of contents to the Help system.
How To	Find step-by-step instructions for a variety of tasks.
Shortcuts	See a list of keyboard shortcuts.
Glossary	Review definitions of terms used in the system.
Using Help	Find an explanation of how to use help.
About Documaker Studio	Review product information such as the version and patch number. You may need to refer to this information if you contact Customer Support.

CREATING WORKSPACES

Follow these steps to create a workspace for multiple users:

- 1 Choose the File, New Workspace option.

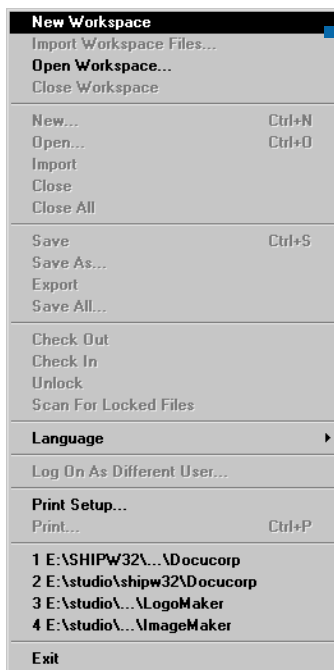

Select the New Workspace option.

This turns on the Workspace wizard. The first page of the wizard asks whether you are creating a new workspace or joining an existing workspace.

- 2 Choose the Create New Workspace option. Then enter the name and location where you want the workspace to be created. If the path you specify does not exist, the subdirectories you specify will be created (if possible). For others to join the workspace, it will have to be located on a network or in a shared directory that allows access by the other users.

NOTE The name you enter for the workspace cannot begin with a space or any of these characters: \ / : * ? "< > |

- 3 Click the Allow Other Users to Join field. Then click Next.

Click here

- 4 On the MRL Setup page, you first identify whether you are creating a new workspace or intend to import files from an existing MRL (Master Resource Library). Remember if you choose to create a new workspace, you can still manually import existing resource files later.

If you choose to import existing resources, you can browse to a working directory and an INI file (usually named FSIUSER.INI) that identifies the components of the resources you wish to import.


NOTE Remember, in some setups, the working directory and the location of the INI file for a resource library setup are different. If the INI file uses relative paths, the working directory must be set correctly, or the components of the library may not be found.

Relative paths are those that have dots to represent the current or prior directory locations, as shown here:

```
..\DEFLIB\
.\DEFLIB\
```

Two dots means to back up a directory from the current working directory. One dot means that the next value is relative to the working directory. It is important to set the working directory correctly if you use these types of relative path settings in the INI file.


If you choose to import from a resource library, the wizard asks additional questions. If you select the Create a New MRL option, the following field appears:

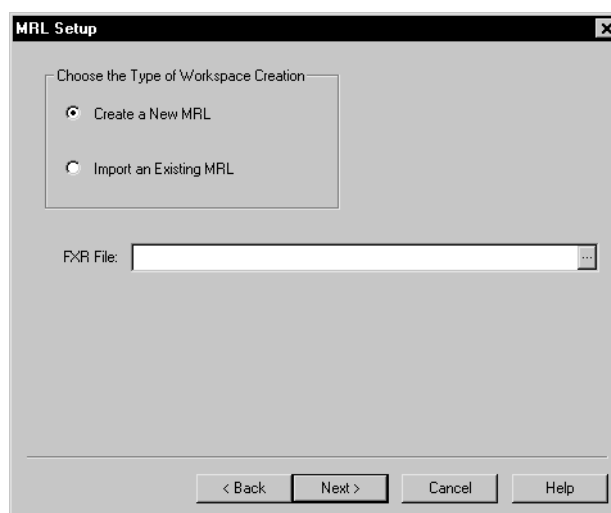

- 5 Use the FXR File field to enter the font cross-reference (FXR) file you want to use with this new workspace setup.

If you have installed the product according the default procedures, the system scans for and displays a font cross-reference (FXR) file. If the file shown is not the one you want, use the Browse button to locate that FXR. Once located, click Next.

The following page appears:

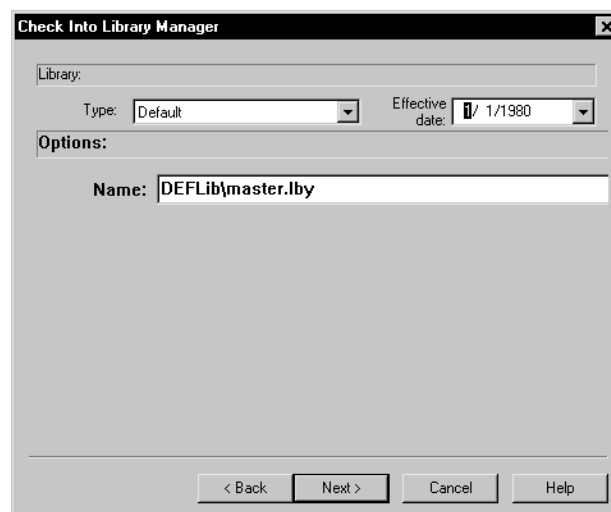

- 6 Here you define the library management method you will use. The default method uses a separate index and compressed library file. This is the method used by many legacy environments. You can also use...


An ODBC table as the index and location to store the compressed resource data

A DB/2 SQL table as the index and location to store the compressed resource data

Documanager, Docucorp's powerful document management repository.


NOTE Depending upon your library management choice, additional questions may be asked.

- 7 Use the Effective Date field to specify the default date for resources that may be imported or created for this new workspace. Remember that transactions are assumed to have a date-of-record — sometimes referred to as *the date*, *effective date*, or *policy date*. Library management uses this transaction date to locate the proper resource version/revision that was effective on that date.

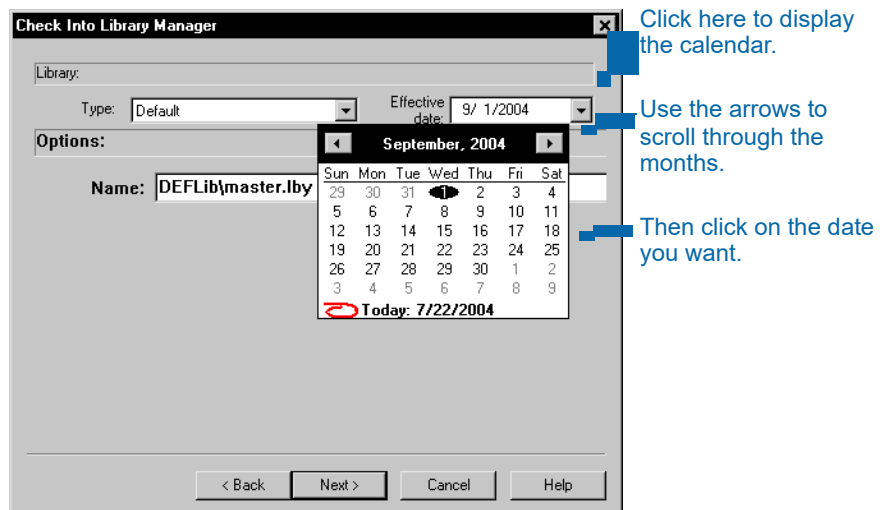

NOTE When creating a new workspace, it is important to set the date on this page back far enough to cover the transaction date range that you expect to process.

Click Next when finished. The following page appears:

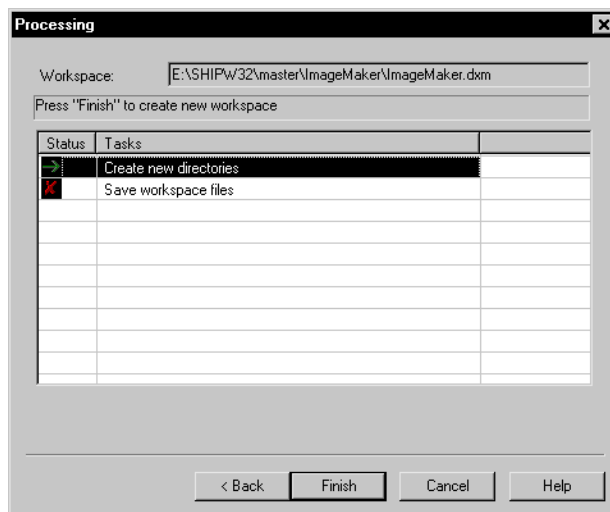


This page shows what steps the creation process has registered to activate. In this example, there are only two entries:

- Creating the new directory structure for the workspace
- Saving the workspace file

NOTE If you had chosen to import resources from an existing setup, this page would list additional tasks to accomplish the creation of the new workspace.

- 8 Click Next. The tasks listed on the window are checked off as they occur. You may notice some additional messages appear in the Output window.

This page appears after the creation tasks finish to ask if you would like to specify an alternate location to keep your local files.

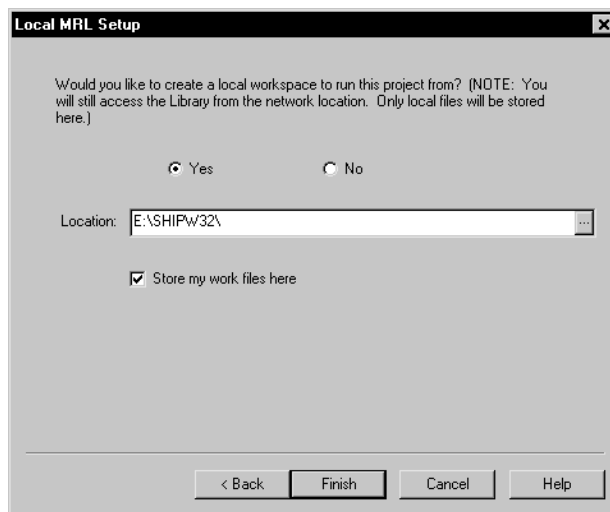

If you select **The system**

Yes	Prompts you to enter or browse to the location where your local workspace files should be stored.
No	Creates a subdirectory using your user ID in the network path where the shared workspace was created. This will be the location where files you check out are stored.


Make your choice and then click Finish.

Once created, you are designated as the administrator of the user database (USERINFO). As administrator, you can set security rights for other users who join the workspace. You do not, however, have to predefine additional users. New users who join a workspace are automatically inserted into the user database and inherit the attributes of USER1. Therefore, as administrator, you should change USER1 to have the level and security rights you want new users to have.

JOINING A WORKSPACE

To join a workspace created for multi-user development, follow these steps:

- 1 Choose the File, New Workspace option.

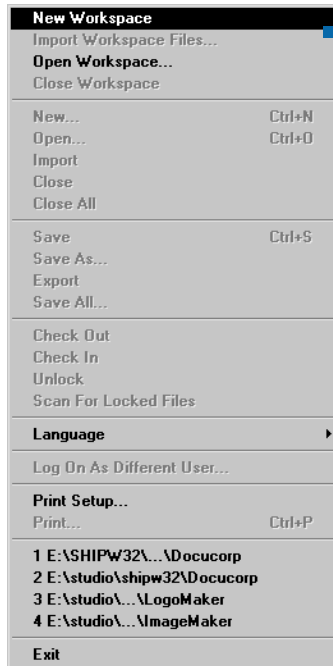


Select the New Workspace option.

This turns on the workspace creation wizard which leads you through the steps necessary to join an existing workspace.

- 2 The first page of the wizard asks whether you want to create a new workspace or to join an existing workspace. Think of joining an existing workspace as you do creating a shortcut on your Windows desktop. You are creating a local reference to a shared workspace.

Select the Join Existing Workspace option.


Click here

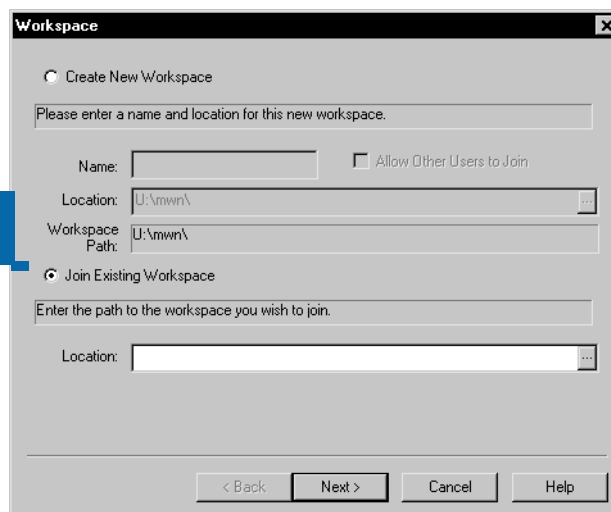

- 3 Next, specify the location of the shared workspace you want to join in the Location field. You can use the browse button to pick the location, or simply enter the path and file name.

NOTE When selecting the workspace to join, specify the DXM file and not the DXS file.

Click Next. This page appears:

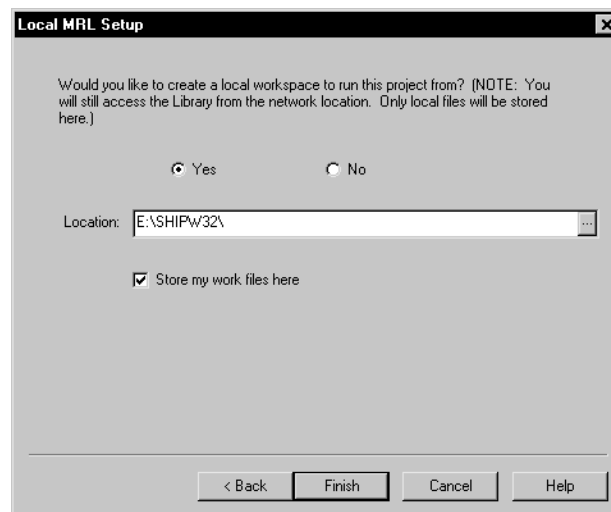

- 4 On this page, you specify whether you want a local scratch pad (where your checked-out resources are maintained) or whether you want to have the scratch pad stored in the shared location.

Choose If you want to

Yes	Specify an alternate location, such as a local drive path, where your reference files should be stored.
No	Create a user subdirectory in the shared location that will maintain your reference files.

Click Finish. The system creates your local directory, if necessary, and opens the workspace.

A new user in a workspace, may not have sufficient security rights to do certain tasks. It is up to the administrators to assign security rights to users, including what rights new users inherit.

If you accidentally choose to create a new workspace on the first wizard window and then enter a location that already has a workspace in it, you will see a message similar to this one.



You can open the workspace if you are already a member, or you can join the workspace and be prompted for the location to store your files. You can also choose to re-create the workspace. This last option only applies if you are the administrator of the workspace. If you are not the administrator, the system makes you start over.

Chapter 2

Working with Settings and Users

Use the Settings option on the Manage menu to work with INI options and tool settings. INI options let you specify default values and other user-defined parameters.

Tool settings let you define how your forms appear on your screen. For instance, you can choose the display units and colors for the rulers that border forms, images and logos. You can also define the grid settings and specify colors for different elements in DALscripts.

This chapter discusses...

- [Working With INI Options on page 34](#)
- [Defining Tool Settings on page 54](#)
- [Managing Users on page 63](#)

WORKING WITH INI OPTIONS

INI options tell the system how you want it to operate. These options are stored in INI files. An INI file is simply a text file consisting of control groups and options. A control group organizes the various options and is denoted by brackets (< >) or braces ([]). The individual INI options appear below each control group. The settings for each option appear after an equals sign (=). Here is an example:

```
< ControlGroup >
  Option1 = Parameters
  Option2 = Parameters
  ...
  OptionN = Parameters
```

Instead of editing the text file, Studio lets you modify your INI settings without leaving the system. Your changes are applied as soon as you click Ok.

How INI files are used

Each resource library uses two INI files: FSIUSER.INI and FSISYS.INI.

- FSIUSER.INI - controls settings which can vary between resource libraries, such as sorting options, archival mode, and import/export ability, as well as individual user options.

To work with these options in Studio, you click the Local tab.

- FSISYS.INI - controls information related to the entire system, such as system settings and program function calls.


To work with these options in Studio, you click the System tab.

The system loads the FSIUSER first, then finds the name and location of the FSISYS file from the ENVIRONMENT group, and loads it. Since the FSIUSER is loaded first, the options within this group usually override the FSISYS options.

In a multi-user environment, you may not want to let all users change system-level settings. In some cases, you may not want some users to change individual settings. The system lets you determine which configuration options are available to a specific user. This is done via security definitions which are assigned to these options by the system administrator. For instance, you may allow a user to change local settings (FSIUSER), but not change the system settings (FSISYS). Or, you may let a user review these settings (local and system, but not change them).

SETTING INI OPTIONS

When you choose the Manage, Settings option, the Settings window appears:

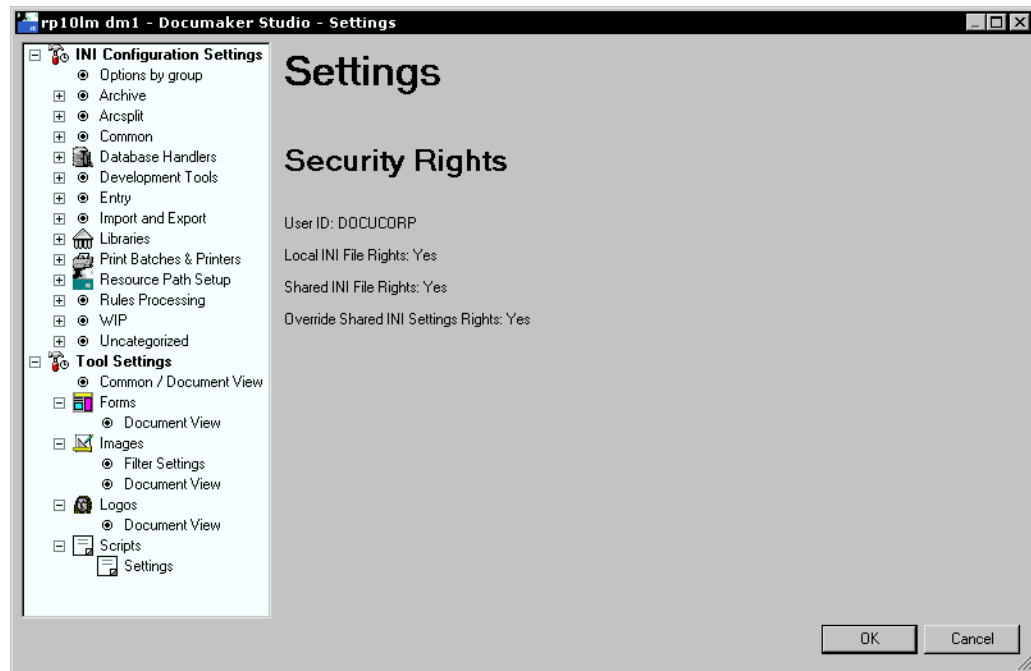


The initial view lists the groups of settings to the right and shows the security settings for the current user ID.

NOTE You can use the File, Log On As Different User option to change to another user ID.

You can find individual INI options a number of ways:

- By locating the control group. This way is useful if you already know the name of the control group.
- By clicking on the appropriate category

Click the plus sign (+) to expand the category.

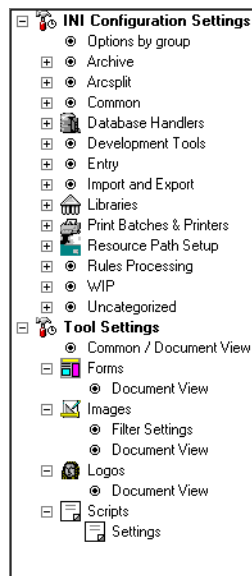


For instance, if you expand Import and Export, you see the following options:

The control groups are shown on a gray background.

Click the +/- symbol to show or hide the options in the control group.

The name of the option appears in the left column. Your entry goes in the right column.

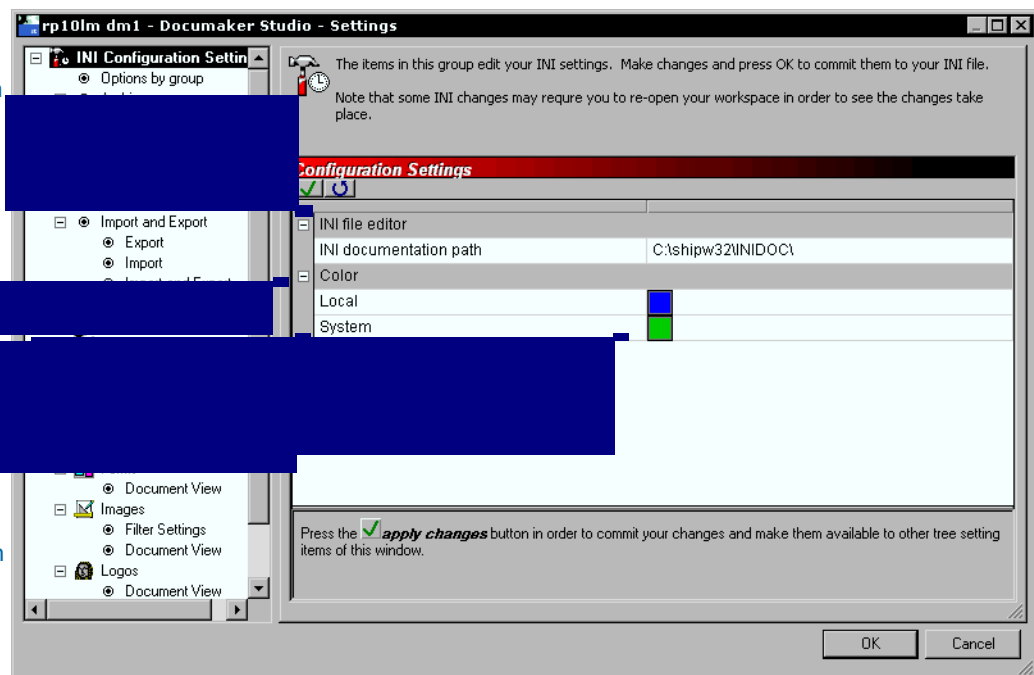


To make an entry for an INI option, click in the entry area beside the option. For some options, you simply enter text. For others, an icon appears to let you browse for a file, choose from a list of pre-set options, or to specify a parameter comprised of several elements.


Here are some examples:

Browsing for a file

[Click here to display the Browse for File window.](#)

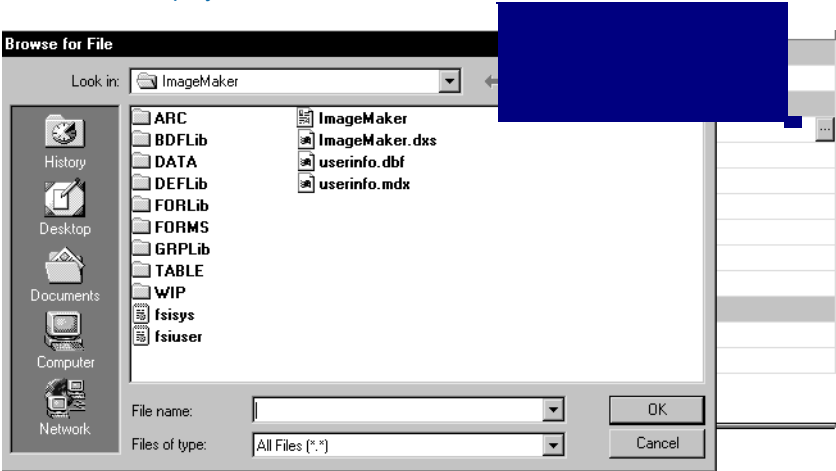

Choosing from a list of options



[Click here to display the list of pre-set options.](#)

Specifying a parameter comprised of several elements

[Click here to display the Option List window.](#)



NOTE You can find information about individual INI options on the DOSS site.

Studio groups the INI options into these categories:


To	See
Set archive/retrieval options	Defining Archive Options on page 39
Specify how to split an archive (CAR) file	Defining ArcSplit Options on page 40

To	See
Work with common system settings	Defining Common Options on page 41
Set up database options	Defining Database Handlers on page 42
Set development tool options	Setting Development Tool Options on page 43
Configure data entry	Defining Entry Options on page 44
Specify import and export settings	Defining Import and Export Options on page 45
Configure your libraries	Setting Up Resource Libraries on page 46
Set up printers and batches	Defining Print Batches and Printers on page 48
Specify where resources are stored	Defining Resource Paths on page 50
Set rules processing options	Defining Rules Processing Options on page 51
Set work-in-progress options	Defining WIP Options on page 52
Work with options not covered above	Defining Uncategorized Options on page 53

DEFINING ARCHIVE OPTIONS

Here you can define options common to...

- Archive-related utilities
- All archives
- The GenArc program
- Archiving via Documaker Workstation
- Archive/Retrieval vial Documaker Workstation

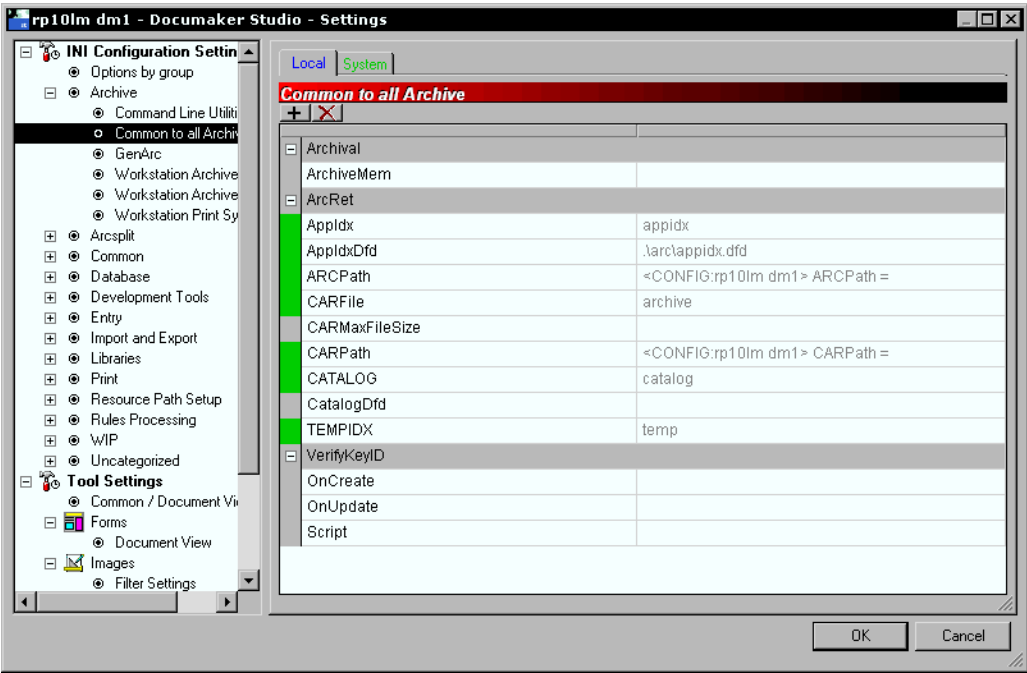


When you right-click on any field on this screen, you can choose from these options:

Option	Description
Print	Print a copy of the settings.
New	Tells Studio to add a new INI option. Studio asks for the name of the control group, the name of the option, and the value you want to assign to the option.
Remove	Tells Studio to remove this INI option.

DEFINING ARCSPLIT OPTIONS

Use these options to define what should happen when you split an archive (CAR) file. You can perform this task from within Documaker Workstation or using the ARCSPLIT utility. The INI options are grouped based on those two approaches.

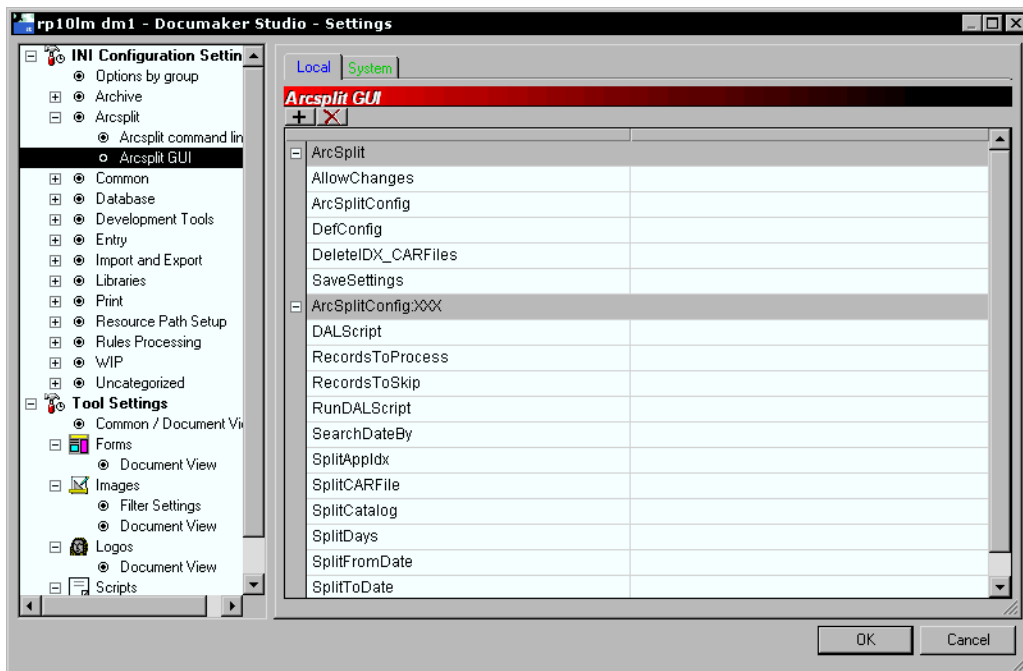

When you right-click on any field on this screen, you can choose from these options:

Option	Description
--------	-------------


Print	Print a copy of the settings.
-------	-------------------------------

New	Tells Studio to add a new INI option. Studio asks for the name of the control group, the name of the option, and the value you want to assign to the option.
-----	--

Remove	Tells Studio to remove this INI option.
--------	---

DEFINING COMMON OPTIONS

This is where you define settings common to all facets of Studio. This includes interface options, miscellaneous options, and print options.

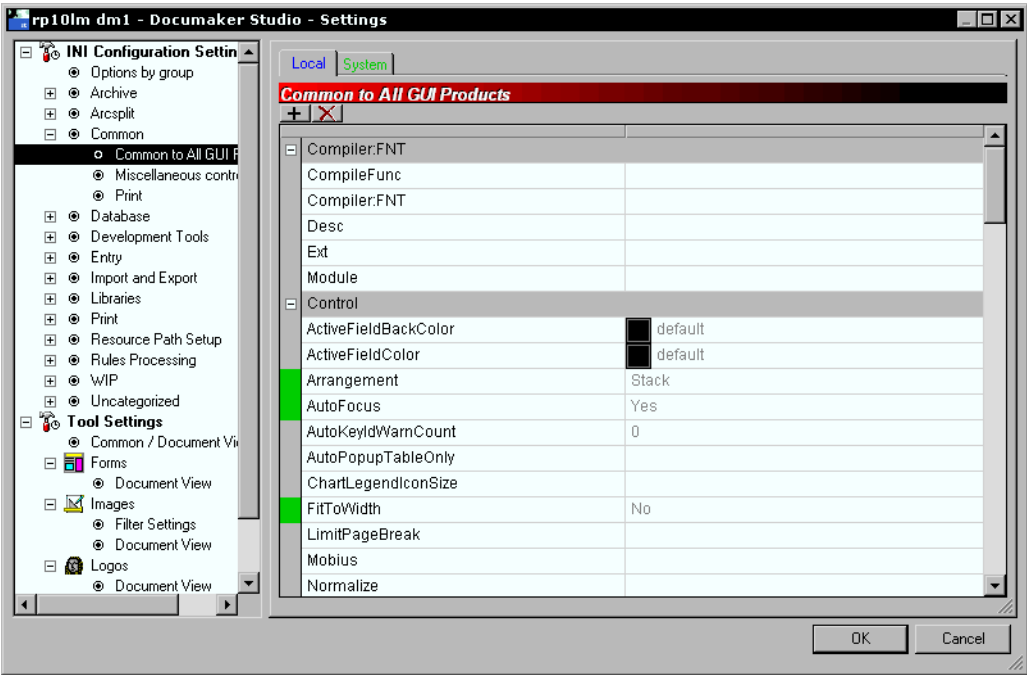


When you right-click on any field on this screen, you can choose from these options:

Option	Description
Print	Print a copy of the settings.
New	Tells Studio to add a new INI option. Studio asks for the name of the control group, the name of the option, and the value you want to assign to the option.
Remove	Tells Studio to remove this INI option.

DEFINING DATABASE HANDLERS

Some of the information you work with, such as archive information, must be stored in database tables. The system lets you use several types of databases, such as ODBC, DB2 and Oracle. To define the type of database tables you will use, click Database Handlers. The following window appears:

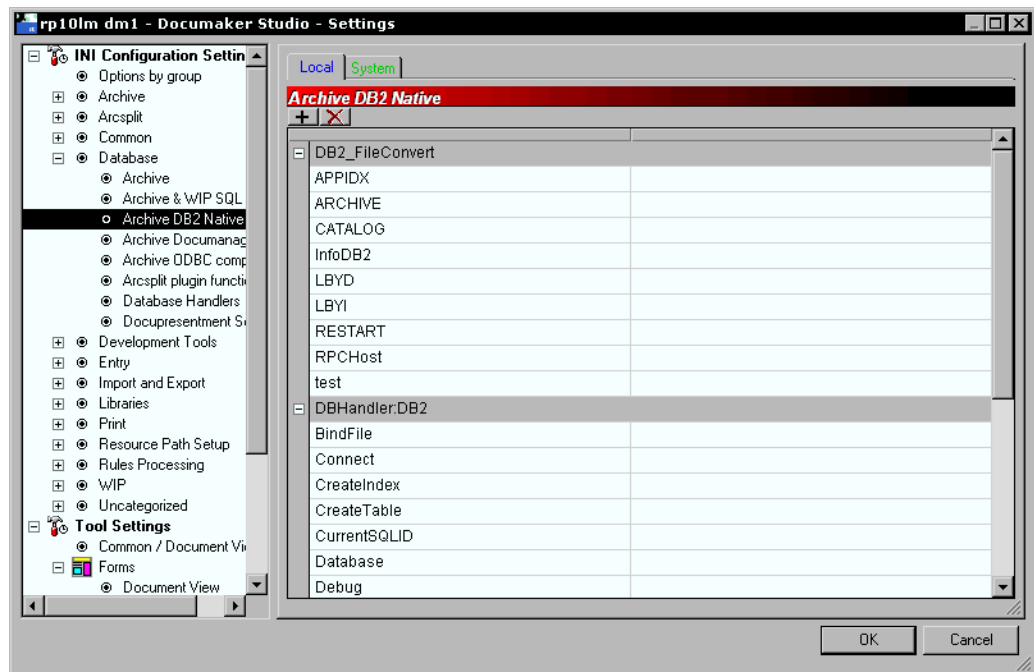

From this window you can add and delete database handlers. You can also customize the properties of these handlers. When adding a database handler, the system provides a wizard to guide you through the setup process.

When you right-click on any field on this screen, you can choose from these options:

Option	Description
--------	-------------


Print	Print a copy of the settings.
-------	-------------------------------

New	Tells Studio to add a new INI option. Studio asks for the name of the control group, the name of the option, and the value you want to assign to the option.
-----	--

Remove	Tells Studio to remove this INI option.
--------	---

SETTING DEVELOPMENT TOOL OPTIONS

These options let you control how you work with Studio. The following window appears:

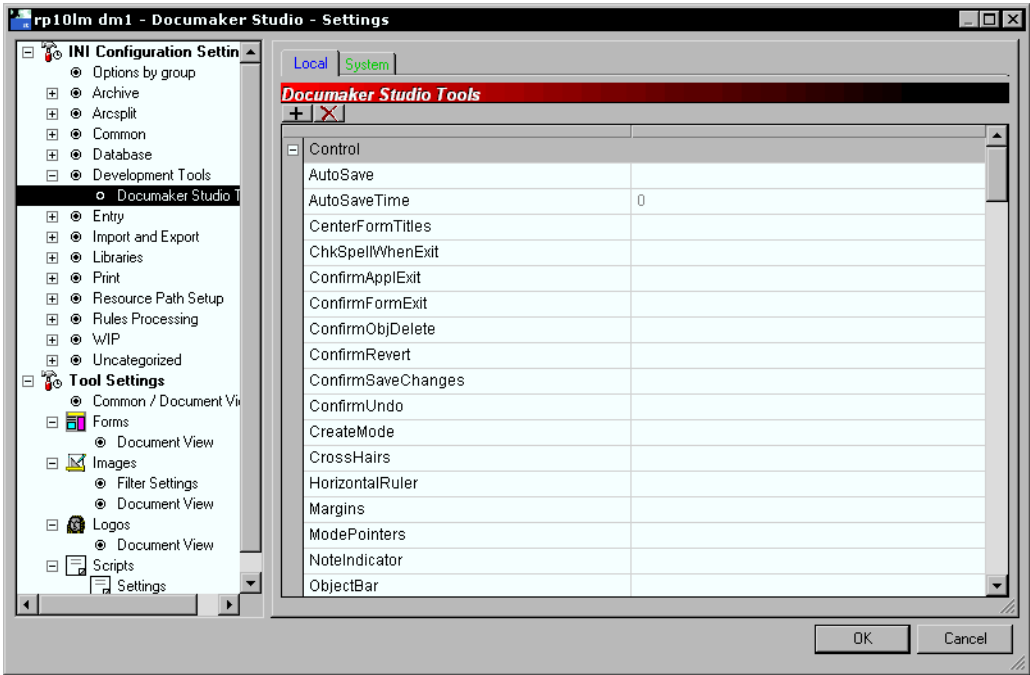

From this window you can set how often Studio should automatically save your work or if it should automatically run a spell check when you close an applicable object. You can also set the default colors for the objects you place on images, such as boxes and bar codes.


NOTE This is where you set the Locale option. The Locale options determines the default units of measure, date format, and so on.

When you right-click on any field on this screen, you can choose from these options:

Option	Description
Print	Print a copy of the settings.
New	Tells Studio to add a new INI option. Studio asks for the name of the control group, the name of the option, and the value you want to assign to the option.
Remove	Tells Studio to remove this INI option.

DEFINING ENTRY OPTIONS

This is where you define how the data entry facilities work.

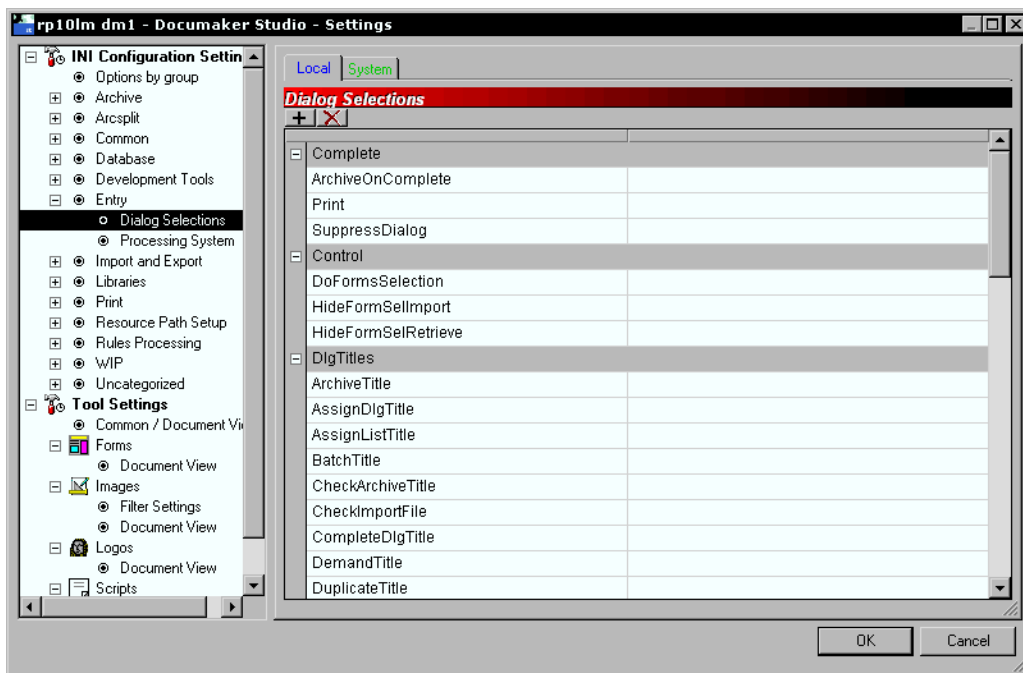

When you right-click on any field on this screen, you can choose from these options:

Option	Description
--------	-------------


Print	Print a copy of the settings.
-------	-------------------------------

New	Tells Studio to add a new INI option. Studio asks for the name of the control group, the name of the option, and the value you want to assign to the option.
-----	--

Remove	Tells Studio to remove this INI option.
--------	---

DEFINING IMPORT AND EXPORT OPTIONS

This is where you define importing and exporting options.

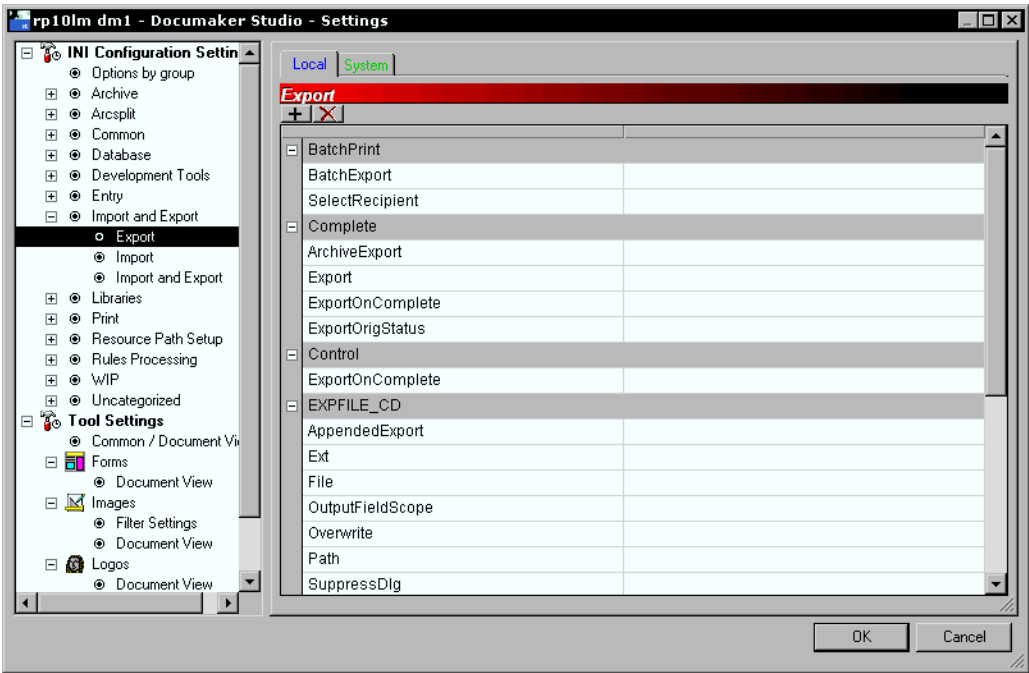


When you right-click on any field on this screen, you can choose from these options:

Option	Description
Print	Print a copy of the settings.
New	Tells Studio to add a new INI option. Studio asks for the name of the control group, the name of the option, and the value you want to assign to the option.
Remove	Tells Studio to remove this INI option.

SETTING UP RESOURCE LIBRARIES

Libraries store the resources you use as you build and process information on form sets. When you click Libraries, this window appears:

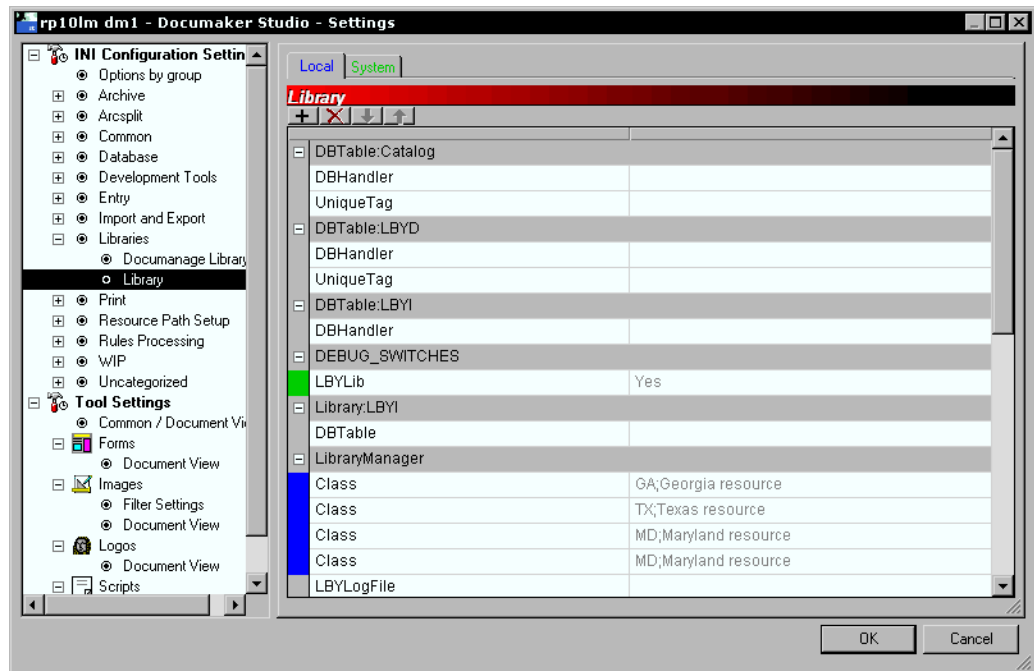

Here you can choose the library you want to work with. Libraries contain the resources you use to build form sets. These resources include images, logos, and forms. Other tabs on this window let you work with...

Tab	Description
Modes	Indicates what stage of development a resource is in, such as development, testing, or production mode.
Status Codes	Indicate the status of a resource, such as whether it needs testing, must be modified, or should be promoted.
Classes	Let you categorize resources based on your needs. For instance, resources used in a single line of business or geographical area could comprise a class.
Projects	Let you associate a resource with a particular job or task.
Library Logs	Track what happens to a resource. For instance, here you can see what resources have been added, modified, or deleted.


NOTE The descriptions for Modes, Status Codes, Classes, and Projects reflect a typical use of these tabs and the system defaults to settings that support that usage. You can, however, define these concepts differently if your needs differ.

When you right-click on any field on this screen, you can choose from these options:

Option	Description
Print	Print a copy of the settings.
New	Tells Studio to add a new INI option. Studio asks for the name of the control group, the name of the option, and the value you want to assign to the option.
Remove	Tells Studio to remove this INI option.

DEFINING PRINT BATCHES AND PRINTERS

Click the Print Batches & Printers options to set up the print batches and printer options you will use to publish your forms.

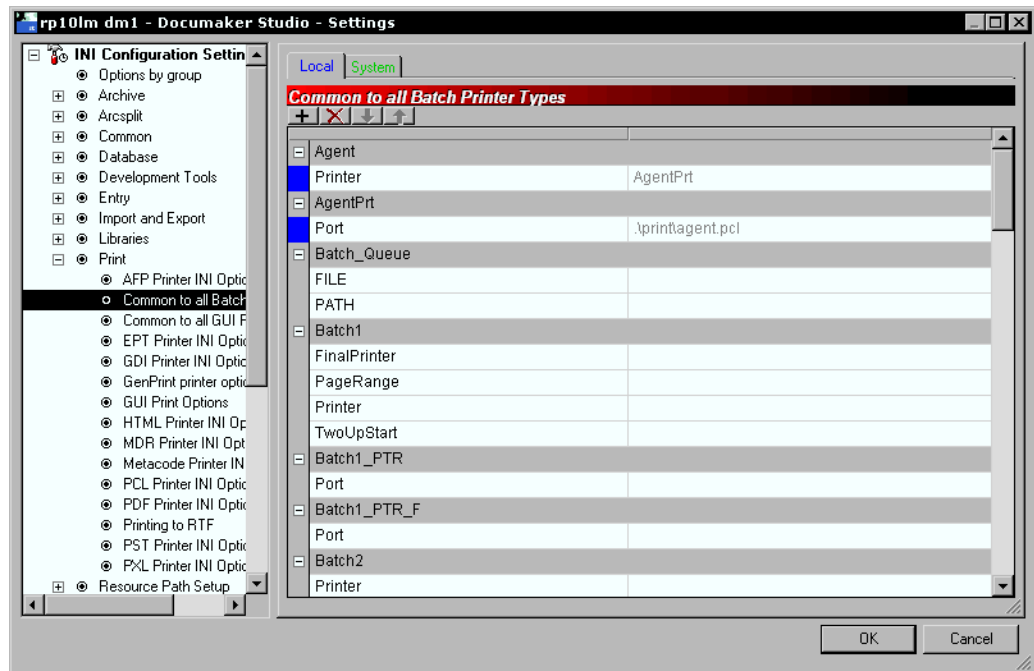

You have several categories of options:

Category	Description
Print Options	This is where you define the print type and if you will want to produce transaction or batch banner pages
Print Batches	Typically print batches are grouped by recipient, but you can set up print batches to meet your needs, such as by page count. Studio includes a wizard to guide through the process of creating a new print batch. To insert a print batch, right-click on Print Batches and choose Insert. To delete a print batch, right-click on the Print Batch item you want to delete and choose Delete.
BatchingByRecip Options	These options work with the BatchingByRecipINI and BatchingByPageCountINI rules. To insert an option, right-click on BatchingByRecip Options and choose Insert. To delete an option, right-click on the option you want to delete and choose Delete.
Logical Output Devices	Studio displays all logical output devices already defined. To insert an output device, right-click on Logical Output Devices and choose Insert. To delete an output device, right-click on the output device you want to delete and choose Delete.


Category	Description
Print Types	Print types refer to the printer language uses, such as PostScript, AFP, Metacode, or PCL. Studio displays all logical output devices already defined. To insert a print type, right-click on Print Types and choose Insert. To delete a print type, right-click on the print type you want to delete and choose Delete.

When you right-click on any field on this screen, you can choose from these options:

Option	Description
Print	Print a copy of the settings.
New	Tells Studio to add a new INI option. Studio asks for the name of the control group, the name of the option, and the value you want to assign to the option.
Remove	Tells Studio to remove this INI option.

DEFINING RESOURCE PATHS

This is where you tell Studio where to find the resources you will work with and it will use to build form sets.

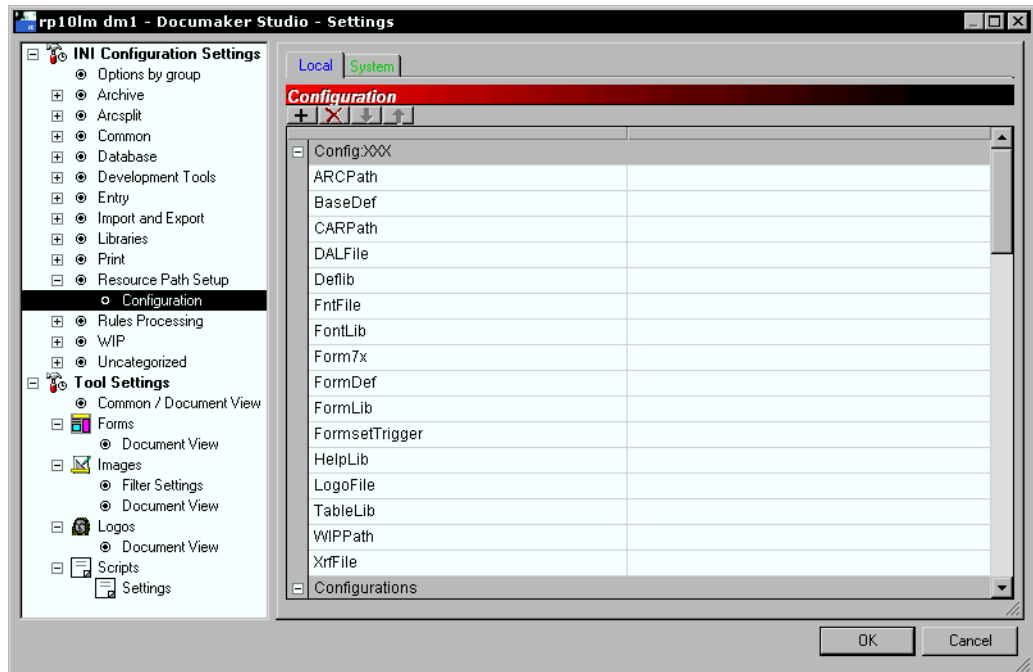

When you right-click on any field on this screen, you can choose from these options:

Option	Description
--------	-------------


Print	Print a copy of the settings.
-------	-------------------------------

New	Tells Studio to add a new INI option. Studio asks for the name of the control group, the name of the option, and the value you want to assign to the option.
-----	--

Remove	Tells Studio to remove this INI option.
--------	---

DEFINING RULES PROCESSING OPTIONS

This is where you define options that affect how rules are processed via the GenData and GenTrn programs.

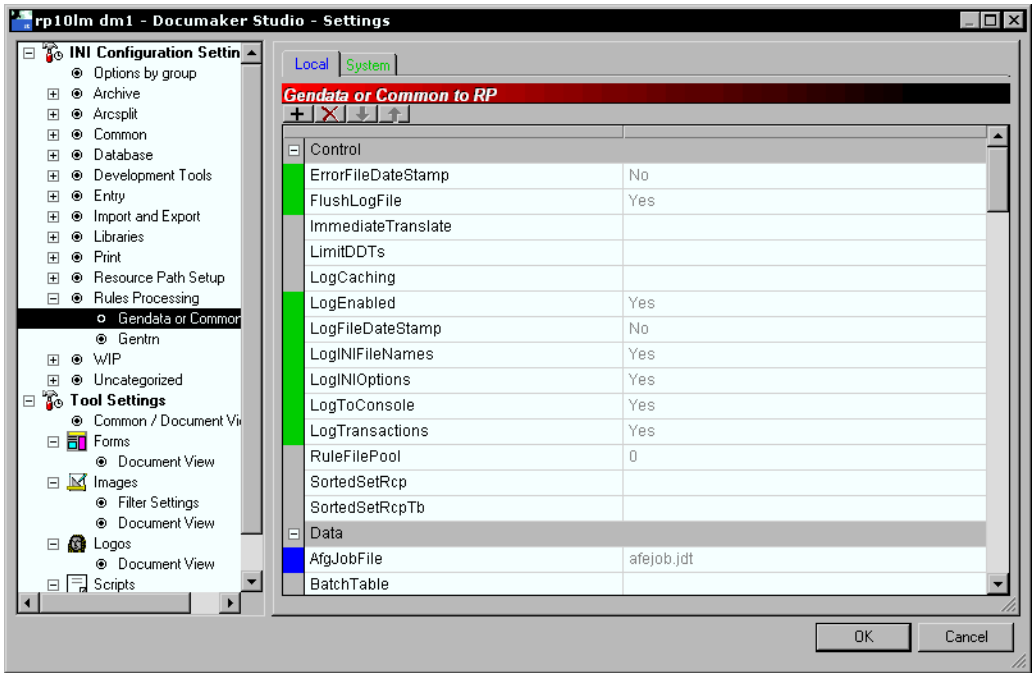


When you right-click on any field on this screen, you can choose from these options:

Option	Description
Print	Print a copy of the settings.
New	Tells Studio to add a new INI option. Studio asks for the name of the control group, the name of the option, and the value you want to assign to the option.
Remove	Tells Studio to remove this INI option.

DEFINING WIP OPTIONS

This is where you define options that affect work-in-progress. This includes options for the GenWIP program and options that affect how WIP is handled via a workstation.

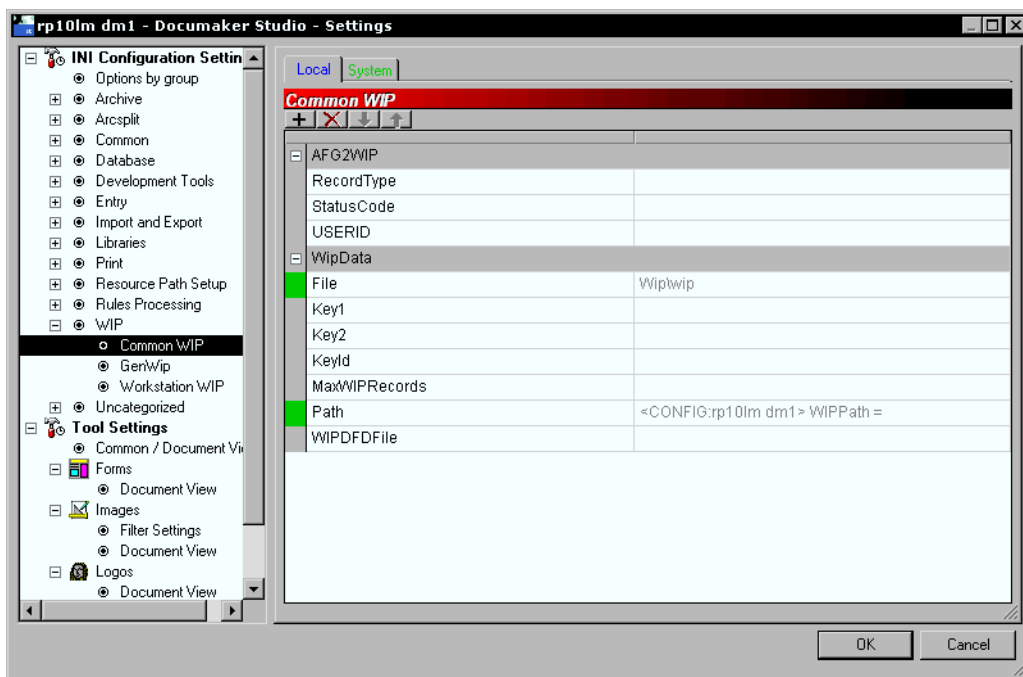

When you right-click on any field on this screen, you can choose from these options:

Option	Description
--------	-------------


Print	Print a copy of the settings.
-------	-------------------------------

New	Tells Studio to add a new INI option. Studio asks for the name of the control group, the name of the option, and the value you want to assign to the option.
-----	--

Remove	Tells Studio to remove this INI option.
--------	---

DEFINING UNCATEGORIZED OPTIONS

This is where you define miscellaneous options.

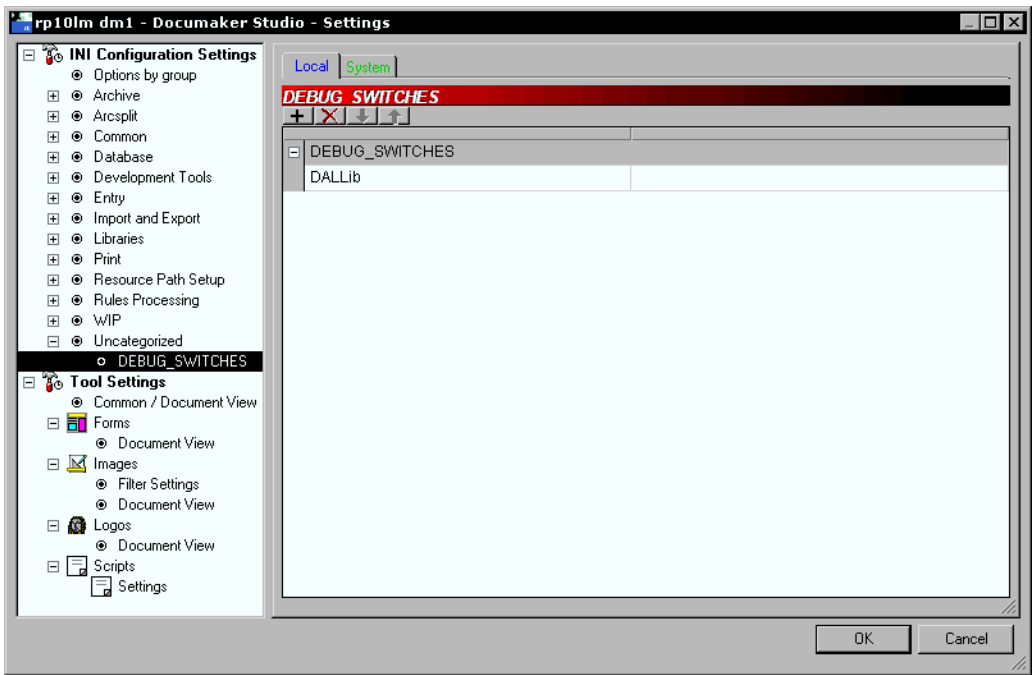


When you right-click on any field on this screen, you can choose from these options:

Option	Description
Print	Print a copy of the settings.
New	Tells Studio to add a new INI option. Studio asks for the name of the control group, the name of the option, and the value you want to assign to the option.
Remove	Tells Studio to remove this INI option.

DEFINING TOOL SETTINGS

Defining tool settings is often one of the first tasks you will do. These settings affect how all documents appear on your screen. You can define tool settings by choosing Settings from the Manage menu. Then choose Tool Settings.

To work with common document viewing settings, click Common/Document View. This window appears:

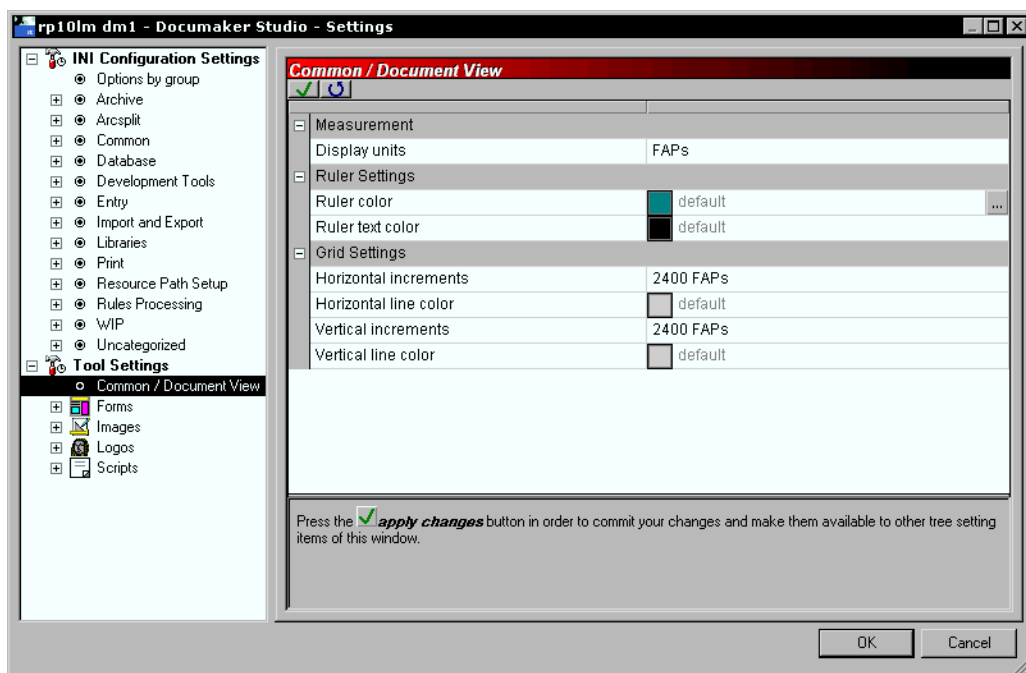

This table explains your options:

Option	Description
Measurement	
Display Units	Select unit of measurement in which display will be made - centimeters, FAP units (2400 per inch), inches, picas, points
Ruler Settings	
Ruler color	Click the icon in this field to display the Color Selection screen and select the color you want to use.
Ruler text color	Click the icon in this field to display the Color Selection screen and select the color you want to use.
Grid Settings	
Show Horizontal Grid	Check to display the horizontal grid.
Show Vertical Grid	Check to display the vertical grid

When you right-click on any field on this screen, you can choose from these options:


Option	Description
Print this Window	Prints the contents of the window.
Apply Changes	Lets you apply your changes.
Default Settings	Restores the default settings.

From Tool Settings you can also work with options that control the following:

To	See
Work with form options	Working with Form Options on page 56
Work with image options	Working with Image Options on page 57
Work with logo options	Working with Logo Options on page 60
Work with script options	Working with Script Options on page 61

WORKING WITH FORM OPTIONS

Choose this option to define how you view documents on your screens. This includes setting up the grid and rulers. This window appears:

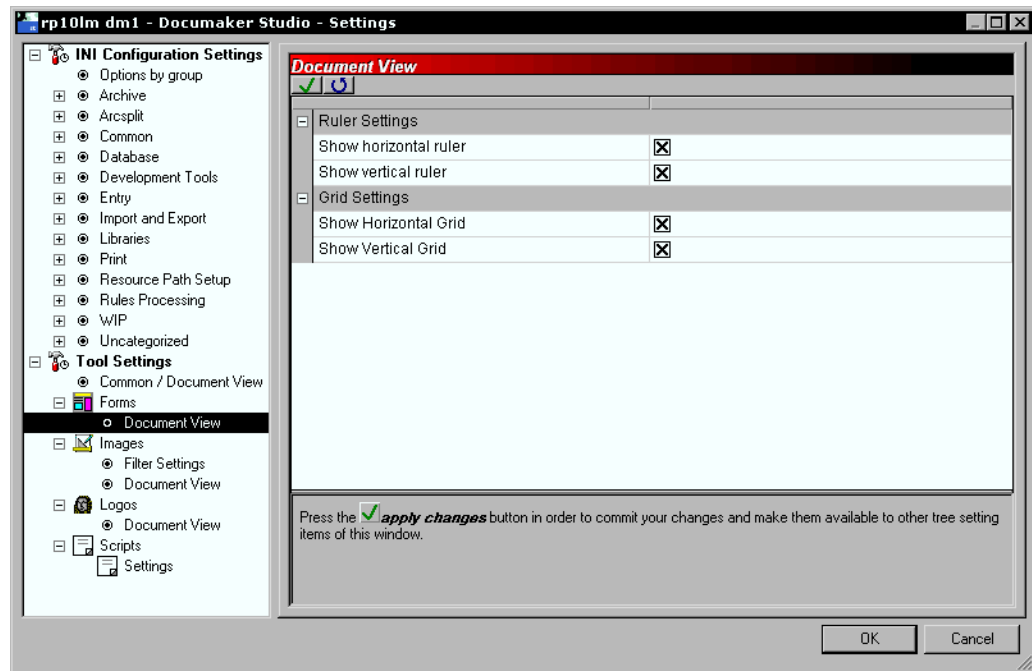

This table explains your options:

Option	Description
Ruler Settings	
Show horizontal ruler	Check to show the horizontal ruler.
Show vertical ruler	Check to show the vertical ruler.
Use a ruler in this tool	Check to use a ruler when working with forms.
Grid Settings	
Show Horizontal Grid	Check to display the horizontal grid.
Show Vertical Grid	Check to display the vertical grid

When you right-click on any field on this screen, you can choose from these options:

Option	Description
Print this Window	Prints the contents of the window.
Apply Changes	Lets you apply your changes.

Option	Description
Default Settings	Restores the default settings.

WORKING WITH IMAGE OPTIONS


The image options fall into two categories:

- Filter settings
- Document view options

The following topics discuss these options.

Setting Image Filter Options

Choose Filter Settings to define the filter settings that apply when you are working with images. This window appears:

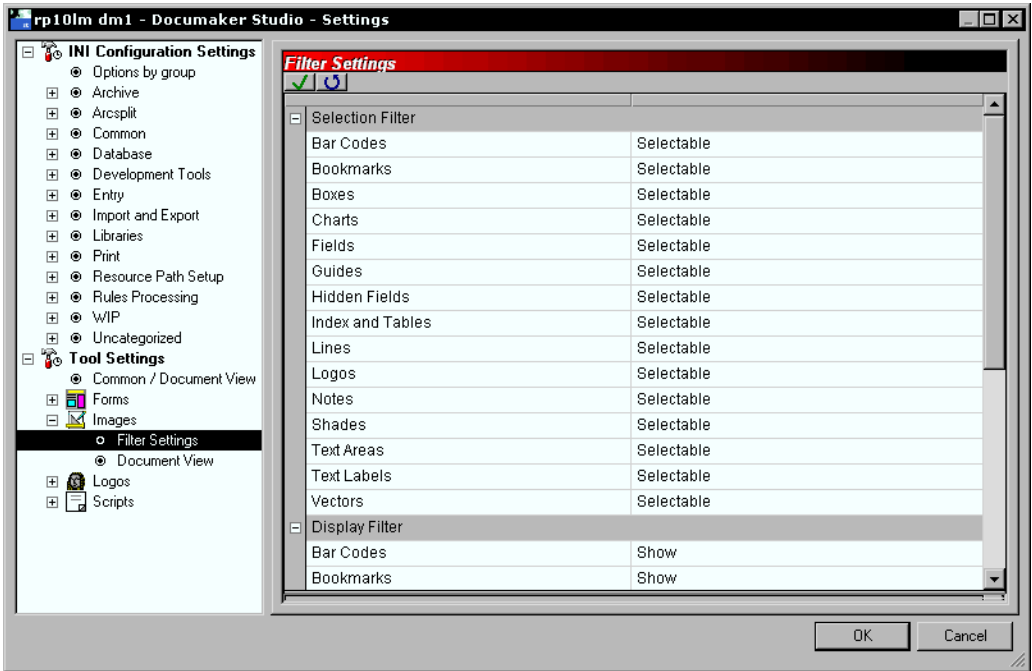

When you right click on any field on this screen, the following option is shown:

Option	Description
Print this Window	Print a copy of the settings.
Apply Changes	Tells Studio to record the changes you have made.
Default Settings	Tells Studio to restore the default settings.

The filter options are divided into these categories:

- Selection filters
- Display filters

Selection Filter For each type of object, you can choose from these filter settings:

Option	Description
Cannot move	Check this option if you do not want to allow anyone to move this kind of object.
Non-selectable	Check this option if you do not want to allow anyone to select this kind of object.
Selectable	Check this option to let people select this kind of object.


Display Filter For each type of object, you can choose from these filter settings:

Option	Description
Hide	Tells Studio to list the object in the object tree but hide it in the work area.
Show	Tells Studio to show the object as you create it.
Placeholder	Tells Studio to display a placeholder instead of the actual object.

Setting Document View Options

These options control how Studio displays documents. For instance, you use these options to turn on or off rulers, show or hide the grid, and turn on or off automatic spell and grammar checking.

When you click Document View, this window appears:

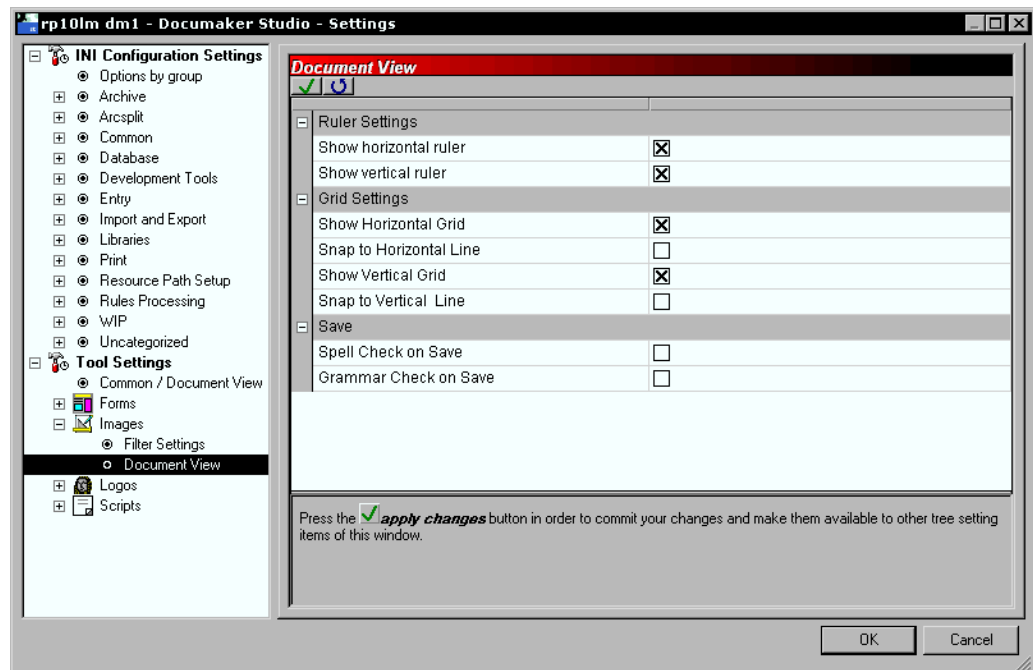

This table explains your options:


Option	Description
Ruler Settings	
Show horizontal ruler	Check to show the horizontal ruler.
Show vertical ruler	Check to show the vertical ruler.
Use a ruler in this tool	Check to use a ruler when working with images.
Grid Settings	
Show horizontal grid	Check to display the horizontal grid.
Snap to horizontal line	By checking, the object entered will snap (be placed) to the closest horizontal line below it.
Show vertical grid	Check to display the vertical grid.
Snap to vertical line	By checking, the object entered will snap (be placed) to the closest vertical line to the left of it.
Save	
Spell check on Save	Check this option to have Studio automatically check spelling when you save an image.
Grammar check on Save	Check this option to have Studio automatically check grammar when you save an image.

When you right-click on any field on this screen, you can choose from these options:

Option	Description
Print this Window	Print a copy of the settings.
Apply Changes	Tells Studio to record the changes you have made.
Default Settings	Tells Studio to restore the default settings.

WORKING WITH LOGO OPTIONS

These options control how Studio displays logos (bitmap graphics). For instance, you use these options to select the unit of measurement, turn on or off rulers, set ruler colors, and so on. When you click Document View, this window appears:

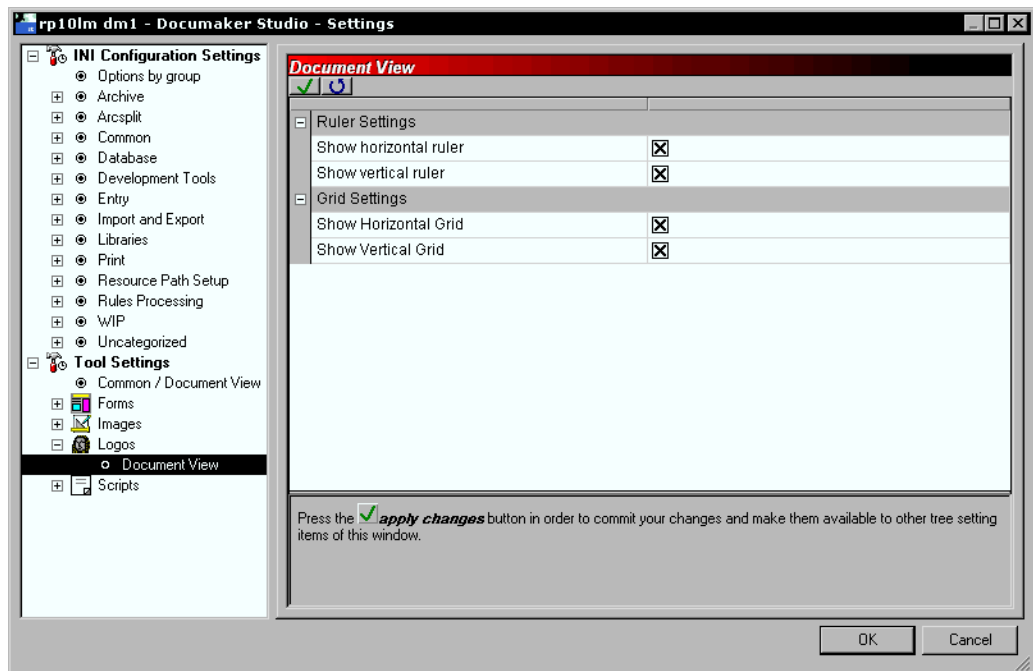

This table explains your options:

Option	Description
Ruler Settings	
Show horizontal ruler	Check to show the horizontal ruler.
Show vertical ruler	Check to show the vertical ruler.
Use a ruler in this tool	Check to use a ruler when working with logos.
Grid Settings	

Option	Description
--------	-------------

Show Horizontal Grid Check	to display the horizontal grid.
----------------------------	---------------------------------

Show Vertical Grid	Check to display the vertical grid.
--------------------	-------------------------------------

When you right-click on any field on this screen, you can choose from these options:

Option	Description
--------	-------------

Print this Window	Print a copy of the settings.
-------------------	-------------------------------

Apply Changes	Tells Studio to record the changes you have made.
---------------	---


Default Settings	Tells Studio to restore the default settings.
------------------	---

WORKING WITH SCRIPT OPTIONS

Use these options to set up the color for the various elements of a DAL script. For instance, for readability purposes you can define different colors for the following:

- Keywords and functions
- Numeric constants
- String constants
- Comments

When you choose Scripts, this window appears:

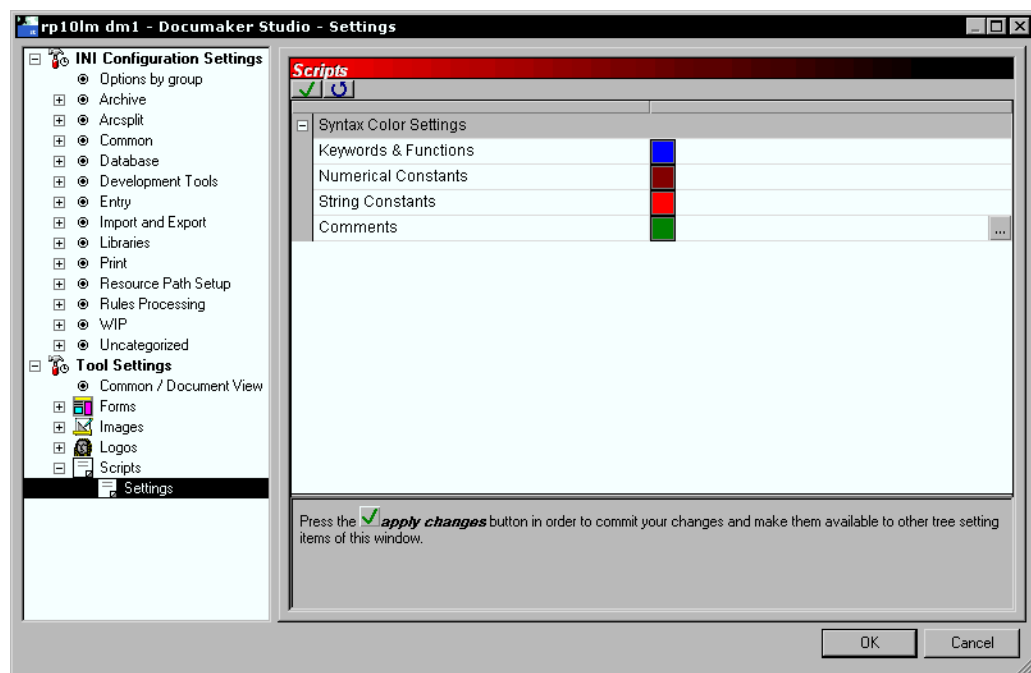

This table explains the syntax color options:

Option	Description
Keywords & Functions	Click the icon in this field to display the Color Selection screen and select the color you want to use.
Numerical Constants	Click the icon in this field to display the Color Selection screen and select the color you want to use.
String Constants	Click the icon in this field to display the Color Selection screen and select the color you want to use.
Comments	Click the icon in this field to display the Color Selection screen and select the color you want to use.


When you right-click on any field on this screen, you can choose from these options:

Option	Description
Print this Window	Print a copy of the settings.
Apply Changes	Tells Studio to record the changes you have made.
Default Settings	Tells Studio to restore the default settings.


MANAGING USERS

Choose the Manage, Users option to work with the user profiles you have set up. Here is an example of the window that appears if you are authorized to work with user profiles:

Click here to expand the list of users

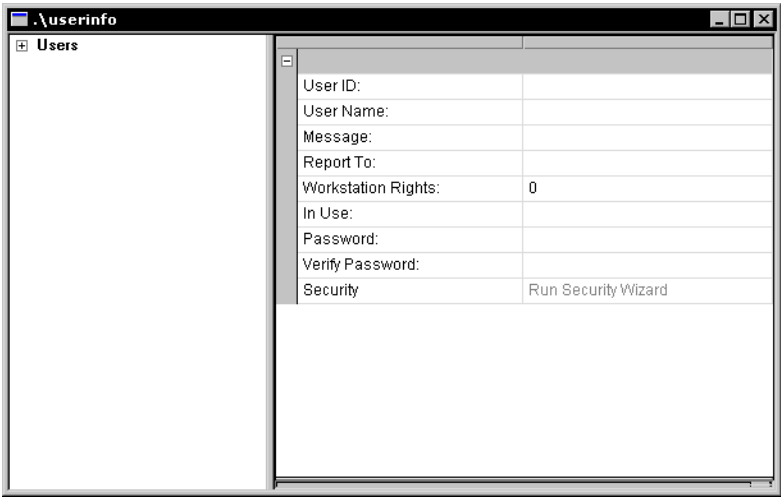

Expand Users to see a list of users currently set up to use Studio.

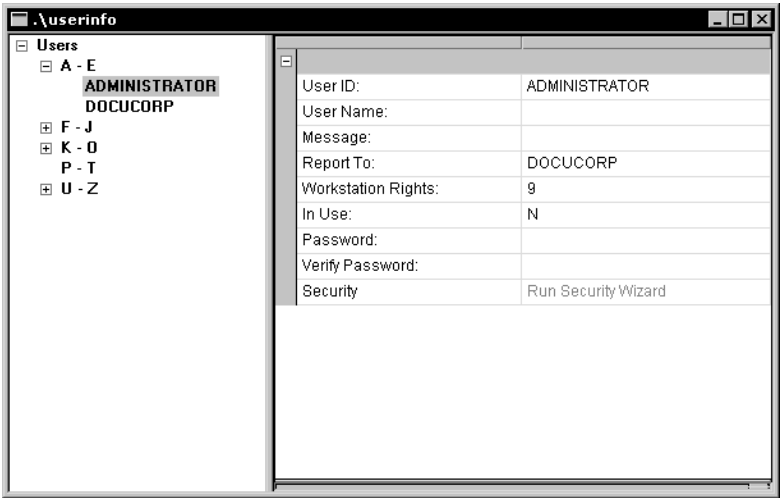


Studio shows you information about...

- The user's name and ID
- Who the user reports to
- Access rights and In Use status

It also tells you if there is a message set up to appear to the user when he or she logs in.

NOTE Your default user ID is the same as your Windows NT user ID.

To change a user's information, simply type into the appropriate field. Note these tools on the toolbar:

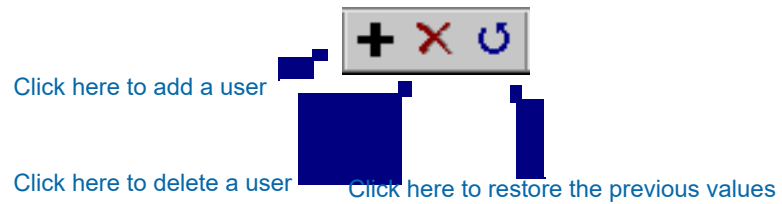

Here is an example of the login window:



Chapter 3

Working with Business Units

Click Business Unit to maintain lines of business or business units. For example, suppose you are creating forms for an insurance company which underwrites automobile and homeowner's insurance. Each different insurance type could be considered a separate line of business or business unit.


This chapter discusses the following topics:

- [Overview on page 66](#)
- [Defining a Business Unit on page 69](#)
- [Storing Recipient Information on page 72](#)
- [Defining Categories on page 73](#)
- [Defining Transaction Types on page 74](#)
- [Generating Reports on page 75](#)

OVERVIEW


The business unit file defines the key combinations used to locate a specific form set. These key combinations are comprised of a Key1 and Key2 (sometimes referred to as Unit1 and Unit2; or Group1 and Group2). To continue with the insurance analogy, these keys are typically called: Company and Line of Business (LOB).

To add a new line of business or business work unit to a set of resources, you first check this file out and then make the necessary changes to define a new business unit. Here is an example of the window you use to select a Business Unit from the library:

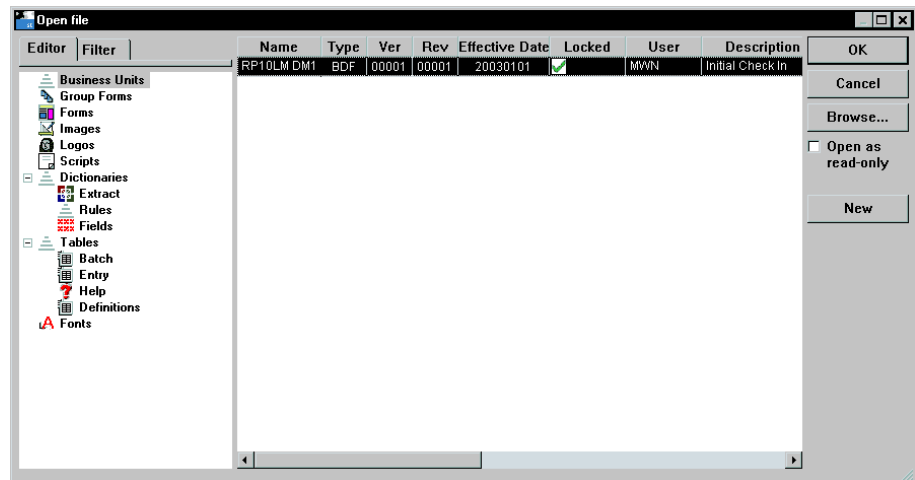

Once you select the business unit, the Business Units view appears:


A toolbar similar to this one appears above most property views.

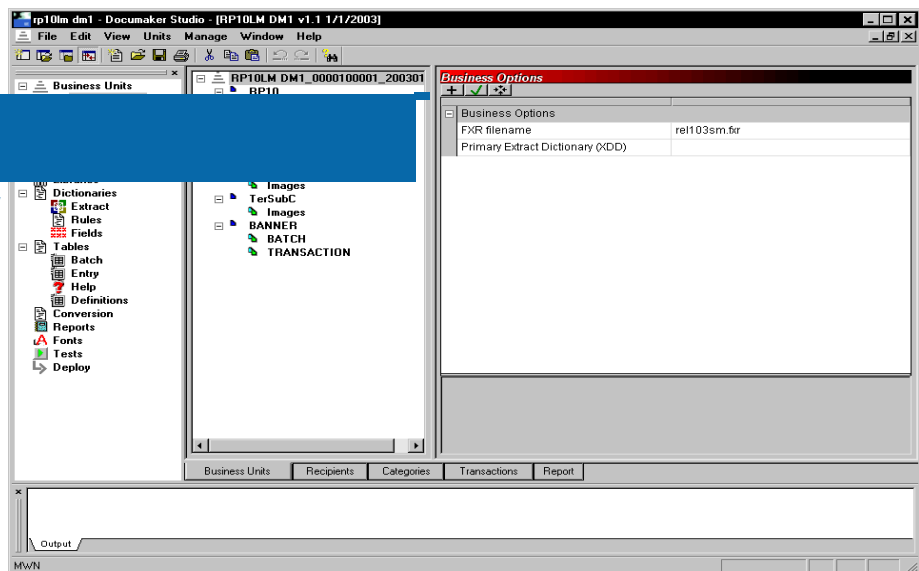

Notice the toolbar above the properties. You will see similar toolbars throughout Studio.

The plus sign lets you add an entry in the tree, list, or database. Here, it lets you add a new group name.

Click the green check mark to commit your changes to the properties options without leaving the item. If you click on another item or try to close the window, the property options are committed back to the tree or list automatically.

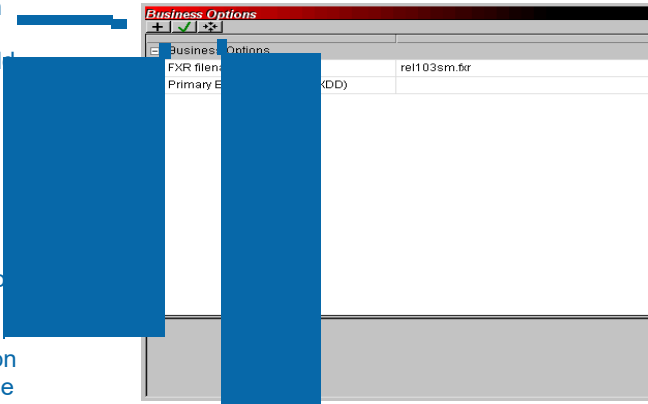

Click here to add library items into the design. For instance, from here you can select from group (GRP) files already defined in your library list.

Other global information is also stored in the Business Unit file.

THE BUSINESS UNIT FILE

The Business Unit file (BDF - Business Unit Definition File) defines the combinations of keys (groups) that represent the business units under which forms are assembled. These key combinations are comprised of Key1 and Key2. To continue with the insurance analogy, these keys are typically called Company (Key1) and LOB (Key2).

Other information stored in the BDF file includes the list of recipients, form categories (if used), and transaction type information. In addition, the business unit file identifies the primary extract dictionary (XDD) file (if used), as well as the font cross-reference (FXR) file preferred by this setup. Here is an example of a BDF file.


NOTE This example is included for illustrative purposes. You should always let Studio create and maintain BDF files. Do not manually edit this file.

```
<DOCUMENT TYPE="RPWIP" VERSION="11.0">
<DOCSET NAME="SAMPLE_0000100001_19800101">
<FXRFILE NAME="rel103sm"/>
<XDDFILE NAME="Symbol"/>
<RECIPIENT NAME="Client" COPYCOUNT="0" CODE="001" SEQUENCE="1">
<DESCRIPTION>Client Copy</DESCRIPTION>
</RECIPIENT>
<RECIPIENT NAME="Office" COPYCOUNT="0" CODE="002" SEQUENCE="2">
<DESCRIPTION>Office Copy</DESCRIPTION>
</RECIPIENT>
<GROUP NAME="Sample_Business" NAME1="Sample" NAME2="Business"/>
<TRANSACTION TRNCODE="NB" DESCRIPTION="New Business"
DLLFUNC="TRNW32-&gt;TRNNEW"/>
<TRANSACTION TRNCODE="EN" DESCRIPTION="Endorsement"
DLLFUNC="TRNW32-&gt;TRNEndorse"/>
<TRANSACTION TRNCODE="RN" DESCRIPTION="Renewal" DLLFUNC="TRNW32-
&gt;TRNRenew"/>
<TRANSACTION TRNCODE="QU" DESCRIPTION="Quote" DLLFUNC="TRNW32-
&gt;TRNRenew"/>
</DOCSET>
</DOCUMENT>
```

NOTE There is no category information in this example.

DEFINING A BUSINESS UNIT


The Business Unit tab shows you the properties defined for the business unit you have selected.

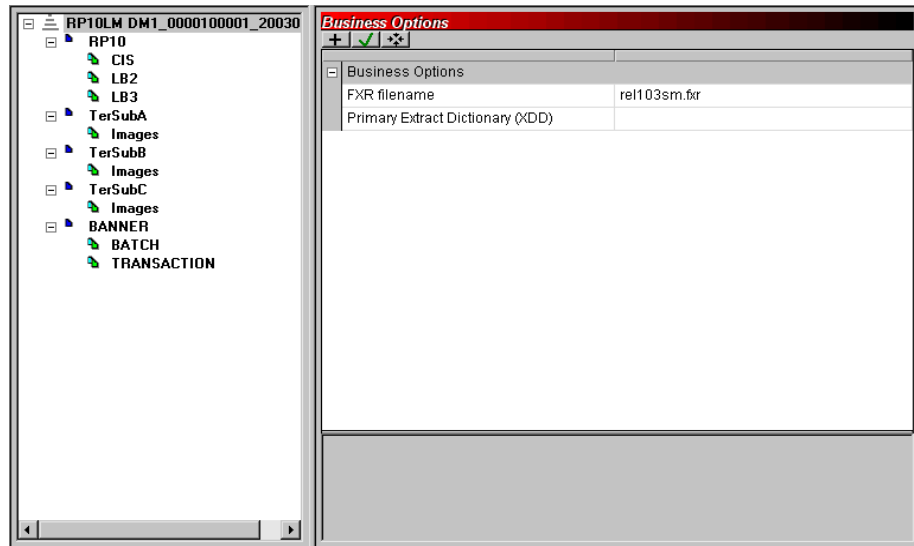

For each business unit you must define a font cross-reference (FXR) file and the primary extract dictionary (XDD) file.

Field	Description
FXR File Name	Enter the name of the font cross-reference file you want to use with this business unit definition. The font cross-reference file lets you organize the fonts you use for display and printing. The FXR provides all necessary font information. It does not contain the actual font files; rather, it contains information about the font attributes. Font attribute information includes formatting styles (bold, italic, and so on), point size (10 point, 14 point, and so on), and font stroke weight (heavy, light, and so on). When you click in this field, a browse icon appears which you can use to browse to the FXR file you want to select. Note: If an FXR file is specified in your INI files, Studio will use that file instead of the one you name in this field.
Primary Extract Dictionary (XDD)	Enter the name of the XDD file you want to use with this business unit definition. The XDD file contains information on how to transfer the data from external files (sometimes called extract files) into fields defined within your documents. If your setup is not a batch implementation, you would not normally need an XDD file. When you click in this field, a browse icon appears which you can use to browse to the XDD file you want to select.

If you click on a specific business unit definition, the view changes to show you the appropriate fields for that definition. Here is an example:

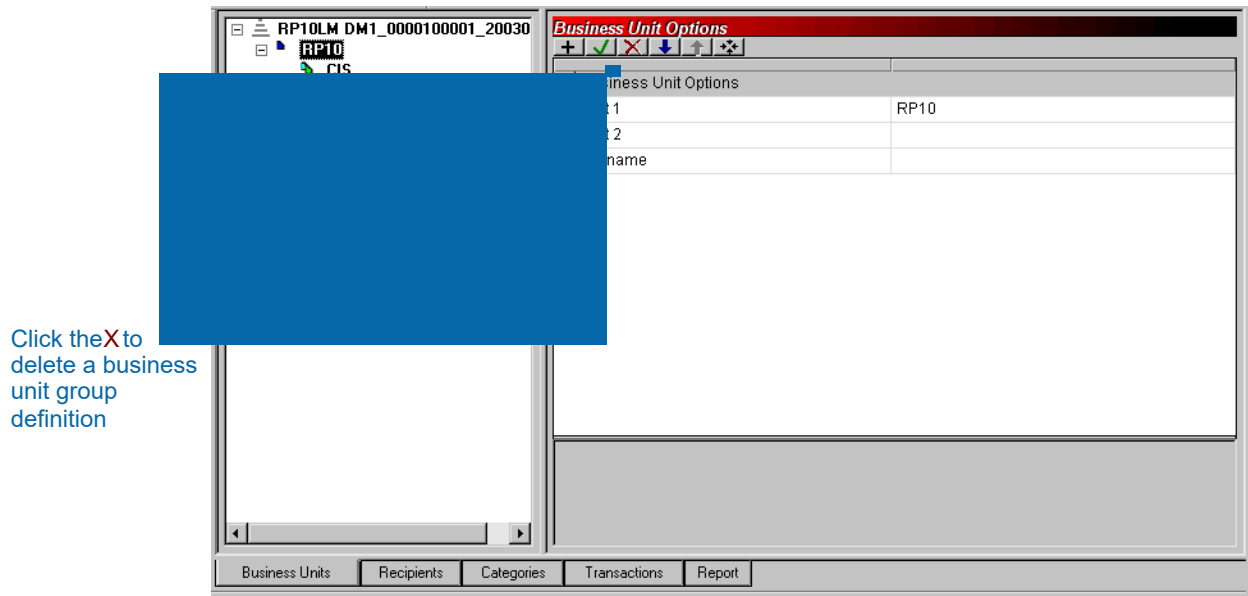

The toolbar changes to provide some additional options.

To

Click

Delete a business unit group definition


Change the order of an item (if the item can be ordered). Press the up arrow to move the item higher in the tree. Press the down arrow to move the item lower in the tree. The order of the groups defined within the BDF will be the same order used when form selection is shown within the Entry program. For batch processing, the order of the groups at the BDF level is not usually important, but you may experience a minor improvement in performance if the groups that are most often used are defined closer to the top of the tree.

If you click a top level item (under the root), you can define or modify a Unit 1 level name. Clicking on a second level item lets you define the Unit 2 name. This item is subordinate to the Unit 1 defined as its parent.

The property area lets you define the unit names, and for level two items, you also must define the external (library) file name that contains the available forms list for this particular combination. This file is referred to as a Group (GRP) Forms file.

In the Filename field you can enter a name or select the GRP file from the library by clicking on the associated button. Remember that certain platforms can have file naming requirements that are not automatically enforced by Studio. You must make sure the file names you assign are compatible with the platform you will eventually process on.

If you click on an item in the business unit group definition, Studio adds the Extract Dictionary Override field.

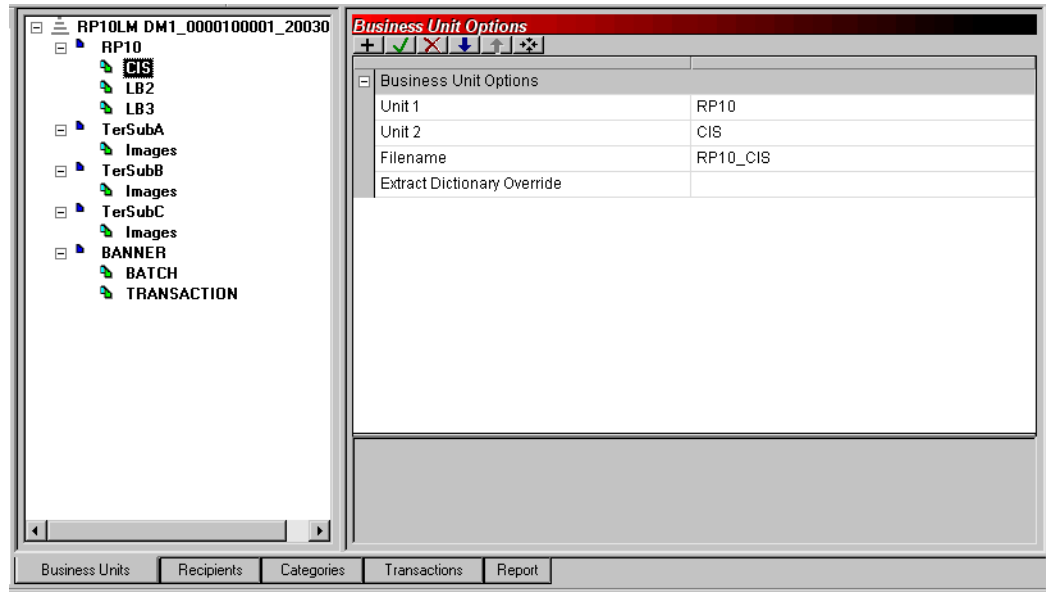

Use the Extract Dictionary Override field to define a different XDD than the primary XDD defined at the BDF (root) level. You can leave the name blank, if you want this business unit to use the primary XDD definition. Otherwise, you should enter the appropriate name or browse the library for the appropriate XDD file to use.

During batch processing, when the system maps fields it checks the associated group level for a defined symbol (XDD) file. If one is not defined, it queries the BDF (root) level for the primary XDD. If one is not defined there, it chooses the one specified in this INI option:

```
< MasterResource >
DictionaryFile =
```

STORING RECIPIENT INFORMATION

Click the Recipients tab to manage the list of recipients for your documents. Here is an example:

Recipient Options	
Name	CUSTOMER
Code	001
Description	Customer COPY

Enter the description for the recipient

Here you define the recipient type name, such as Insured or Customer; the sorting code, which is used by batch implementations; and a brief description that will display in Send Copy To fields defined in your document when you print that document for that recipient.

Understanding the System

There are two parts to the recipient definition in the Recip_Names control group. The first part is a code and the second is a description. The code is only used in batch processing (the GenData program) and is a unique value written to the batch files so the system will know which recipient to queue at print time.


The second part is the description field. This is used any time a SendCopyTo field is printed. This is where the text like *insured's Copy* comes from when you print. This is used by both entry systems like Documaker Workstation or iDocumaker and the GenPrint program.

When a batch cycle begins, the list of recipients defined in the Business Definition file is inserted into the Recip_Names control group used by several of the Documaker RP programs.

Field	Description
Name	Enter the name of the recipient you want to add.
Code	Assign a code to the recipient.
Description	Enter a description of the recipient.

DEFINING
CATEGORIES

Click the Categories tab to define form categories.

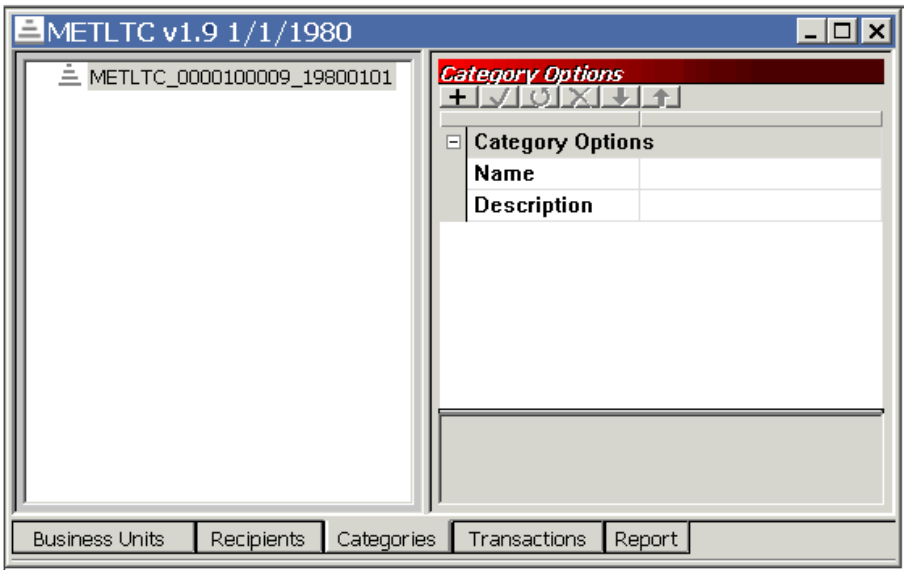

Form categories are optional. If you define them, the form categories appear when you edit a group (GRP) file. The category definitions can help you organize large sets of forms by letting you associate similar forms to make the list more manageable. Categories are not the same as the higher level key groups (Key1 and Key2) and are not used during form triggering or selection.

Field	Description
Name	Enter the name of the category you want to add.
Description	Enter a description of the category.

DEFINING TRANSACTION TYPES

Click the Transactions tab to define transaction types and optionally assign an Entry Workstation-affiliated hook function associated with form selection.

NOTE Batch implementations do not use the associated hook function.

Transaction Code Options	
Transaction Code	NB
Description	New Business
DLL	TRNOS2
Function	TRNNew

Transaction codes are sometimes used in batch processing as one level of form filtering. Transaction codes are also used in Entry/WIP situations to identify the type of transaction being created.

Also in Entry, the DLL and Function declarations define internal or external hook functionality that must be executed on that transaction type to validate the list of forms selected.

Field	Description
Transaction Code	Enter the transaction code you want to add.
Description	Enter a description of the transaction code.
DLL	Enter the name of the DLL you want the Entry system to execute to validate the list of forms.
Function	Enter the name of the function you want the Entry system to execute to validate the list of forms.

GENERATING REPORTS


To generate a report which shows the options defined for this business unit, click the Report tab and follow these steps:

- 1 This window appears when you click the Report tab. Click Generate Report.


Click here to generate a report



The Reports window appears

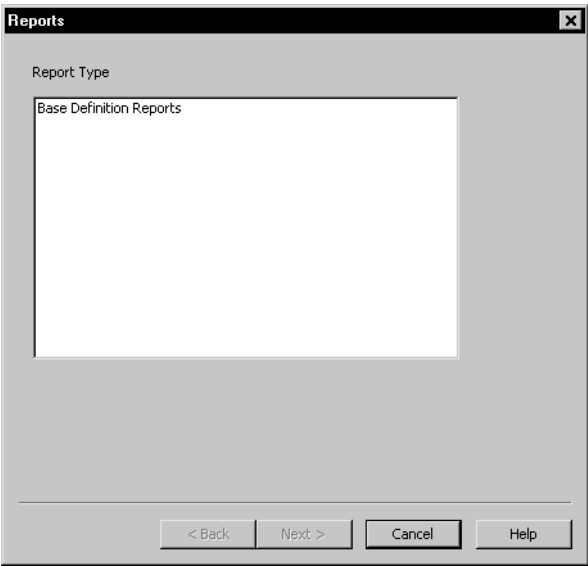

- 2 Highlight the report you want to generate, in this case a Base Definition Report, and Click Next. The Generate Report window appears.

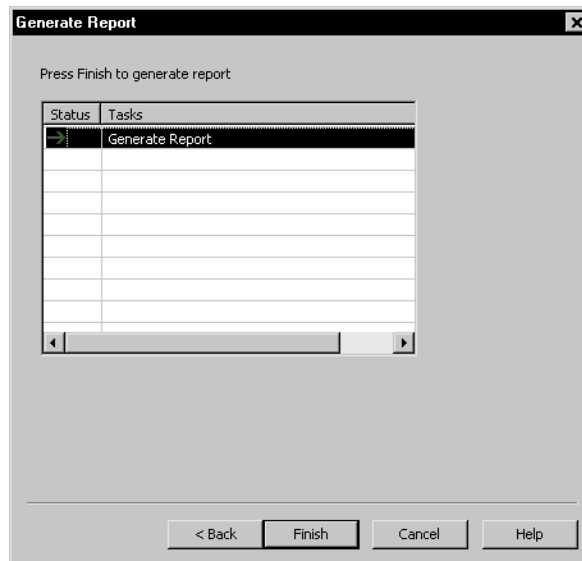

- 3 Click Finish to generate the report. A sample report appears below:

Click here to print the report.

Base Definition Reports

Business Unit Options

		Filename
	CIS	RP10_CIS
	Images	TerSubA_Images
	Images	TerSubB_Images
	Images	TerSubC_Images
RP10	LB2	RP10_LB2
RP10	LB3	RP10_LB3
BANNER	BATCH	BANNER_BATCH
BANNER	TRANSACTION	BANNER_TRANSACTION

Recipient Options

Name	Code	Description
AGENT	002	Agent COPY
BANNER		
CUSTOMER	001	Customer COPY

E:\SHIPW32\master\p10\m dm1\BDFLib\RP10LM DM1_0000100001_20030101.bdf

Chapter 4

Working with Group Forms

Click Group Forms to define a list of the forms that apply to each business unit and to maintain form-level triggering information. You can also define the order in which these forms should be provided.

Information about each group of forms is stored in a file with a *GRP* extension. For each group (Key1/Key2), you have a separate GRP file. Group name (Key1/Key2) information is stored in the BDF file, whereas specific information for each of the forms that make up the group is stored in a GRP file.

This topic discusses:

- [Creating a Group on page 78](#)
- [Opening a Group on page 81](#)
- [Setting Up Triggers on page 82](#)
- [SetRecip Options on page 84](#)


CREATING A GROUP

To begin the process of grouping forms, you must first create a group. Follow these steps:

- 1 To create the group, double click on Group Forms. Then click New on the Open File screen.


Double click on
Group Forms.

Then click New.

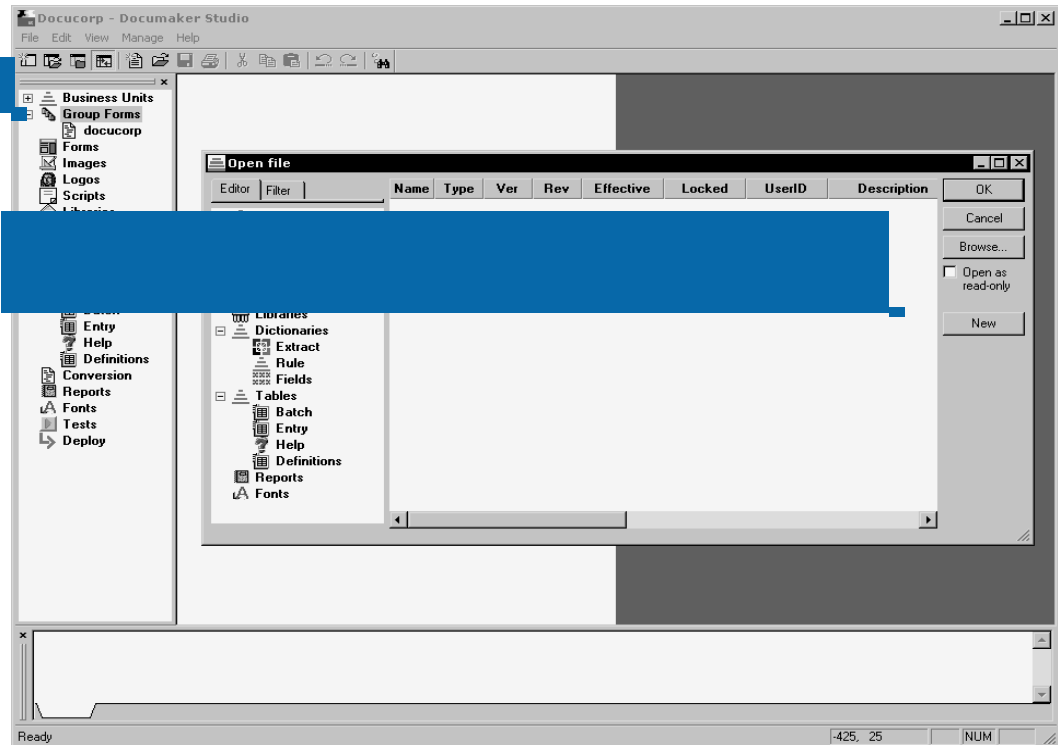

You can also right click on the Group Forms option and select New, leave Group Forms highlighted on the next screen and click Ok.

The screen below appears.

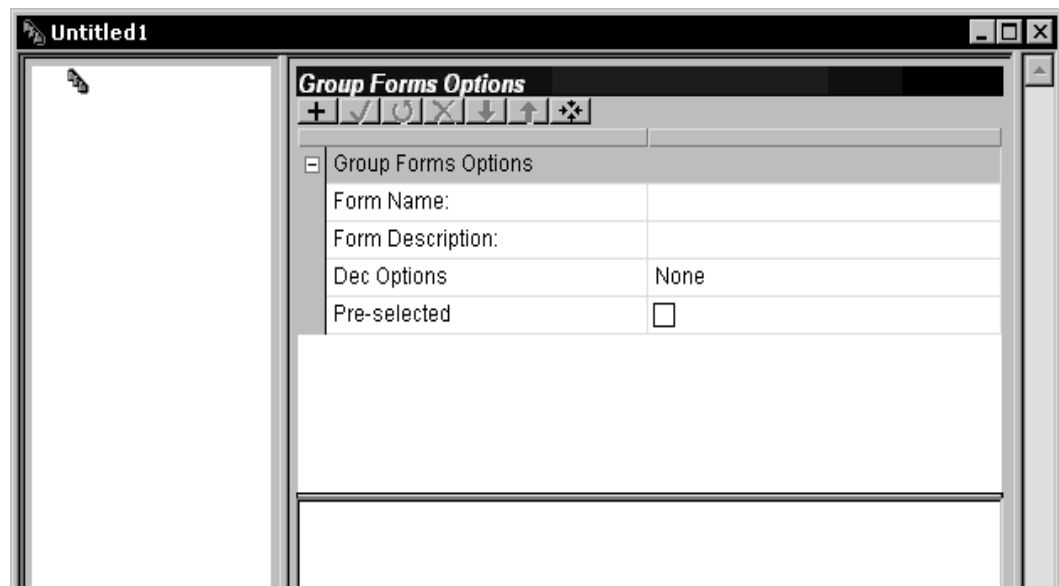

- 2 Enter the following information to set up the forms you want included in the group in the following fields on the Forms tab. Keep in mind that the forms do not have to exist at this point, you are merely creating a list of form names and defining some of the options that apply to those forms.

Field	Description
Form Name	Enter the name of the form you want to include in the group. You can enter up to 100 characters. This name appears on the Forms Selection window in Documaker Workstation
Form Description	Enter a description of the form. You can enter up to 100 characters. This description appears in the object tree beside the form name. This description can help a Documaker Workstation user select the correct form.
Dec Options	Choose the appropriate declaration page option. Your choices are: None - Any page other than a policy declaration page Dec Page - A policy declaration page Master Dec - A master declaration page for the form set (package policy) Sub Dec - A sub dec page for one group in the form set This option is only used by Documaker Workstation. What you select here determines the manner in which Documaker Workstation presents declaration pages during entry. This option is ignored during batch processing.
Pre-selected	Check this option if you want Documaker Workstation to automatically select this form during entry.
Filename	Enter a file name for this form. Usually, you would keep the form name and the file name the same, but some platforms will not let you use certain characters in file names.

NOTE Because Dec Options and the Pre-selected fields are stored at the group level, you can reuse the same form in different groups.

- 3 Choose File, Save to save your work. The Save As window appears.



Enter the name of the group in the Filename field.

Understanding the System

Another way to create a new group forms list is to select the Edit File option from the Key2 (LOB) level while working with business units. This option will create a new file if one does not exist.


OPENING A GROUP

To modify a group file, follow these steps:


- 1 Click the plus sign (+) to the left of Group Forms and then select the group you want to work with.

Click here.

Then select the group list you want to work with.

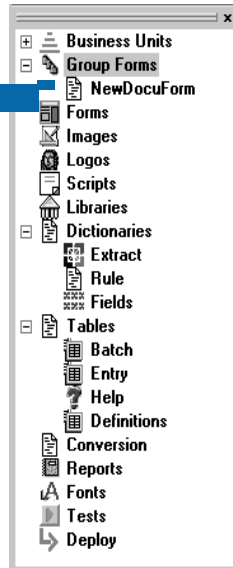

The following window appears.

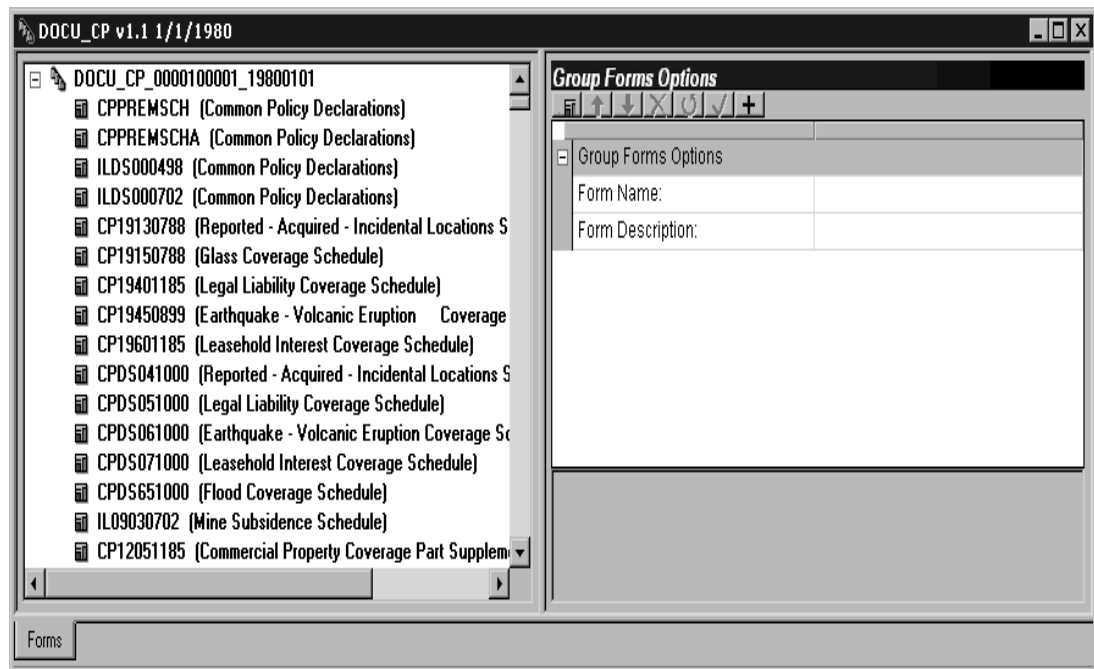

- 2 Make any necessary changes.

SETTING UP TRIGGERS

You can create triggers at both the form and image level. Form level triggers are stored at the group level and specify the condition that would cause a form to be included (or triggered) with a transaction. You should always specify a trigger for a form.

Understanding the System


Image level triggers are stored at the form level and specify the condition that would cause the image to be included on the form. Only set up image level triggers if the image's presence on the form is conditional.

Studio assumes you do not want to trigger any of the images that comprise a form if the form level trigger is false. Therefore, image level triggers are automatically ignored when the form level trigger for the transaction being processed is false. This makes the use of an *Occurrence* flag unnecessary if you want the system to only evaluate image level triggers when the form level trigger is true, as was the case in Docucreate's Image Editor.


If you omit a form level trigger, the system does not operate as efficiently since every image level trigger must then be evaluated by the system.

Follow these steps to add form level triggers.

- 1 Highlight Group Forms, right click and select Open.
- 2 Select the group file in which the form is located and click Open.
- 3 Click the Triggers tab.

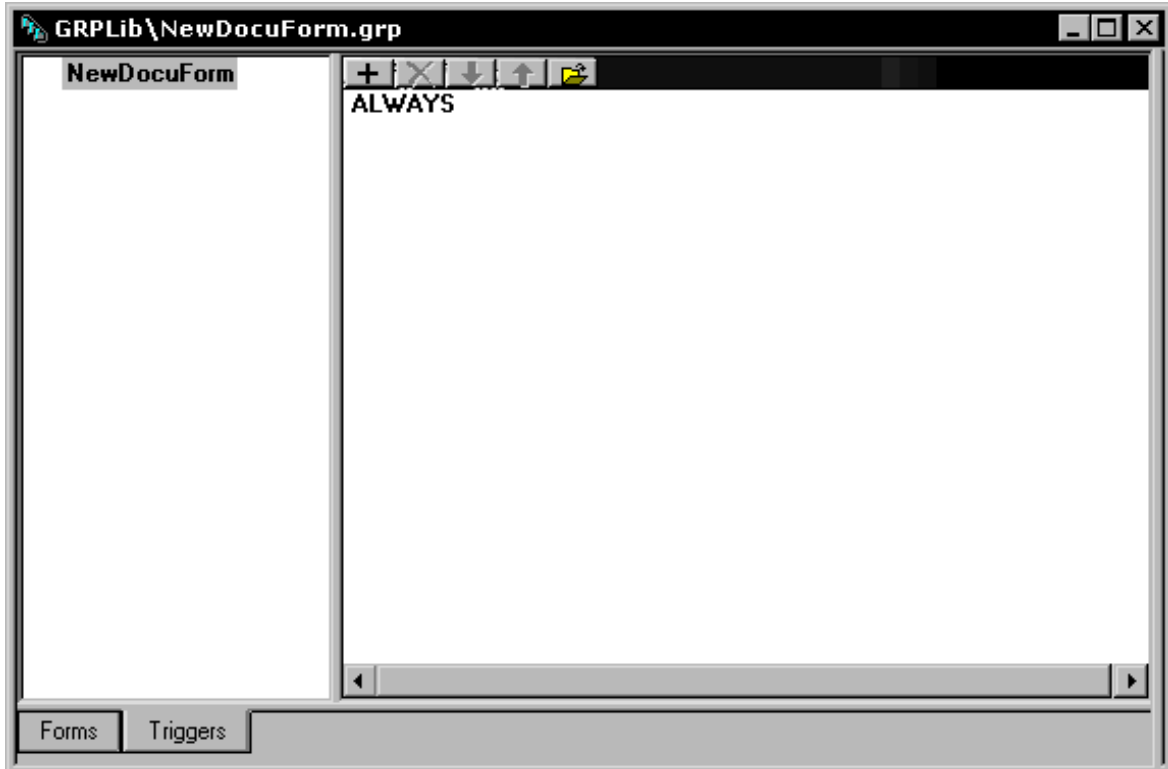

- 4 Highlight the form to which you wish to add a trigger and right click. Select Add. The SetRecip table appears.

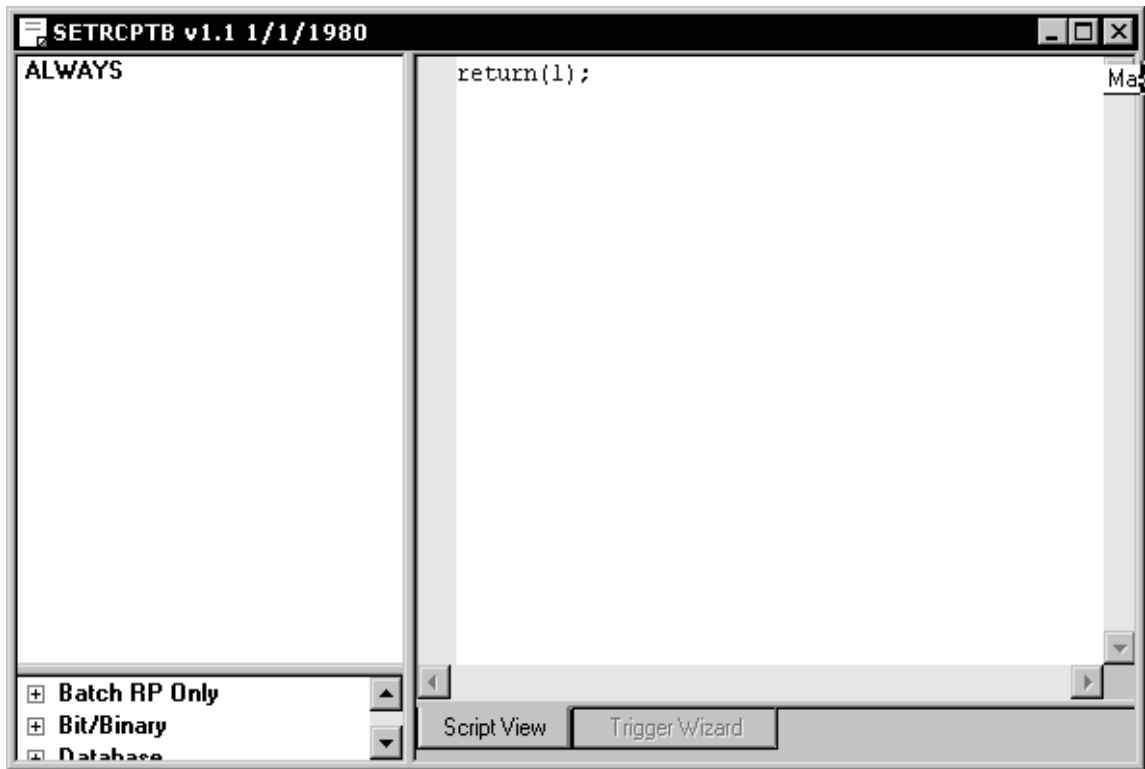


- 5 Use the Trigger Options fields to set up the triggers for your form.

Editing a trigger

If you need to modify a trigger, right click on the trigger and select Edit Trigger File. The SetRecip table appears.

You can also highlight the trigger and click on this icon:

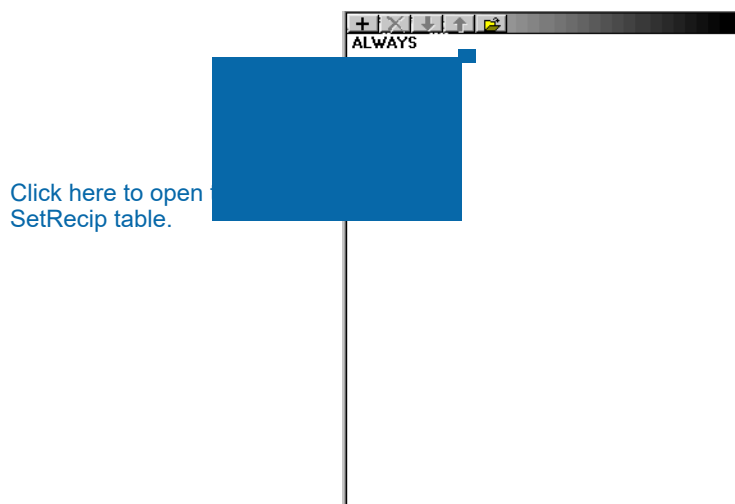

SETRECIP OPTIONS

The SetRecip Table lets you specify the conditions under which a form or an image will get triggered. Depending upon the requirement, not every field is completed. This table discusses each field:

Section	Field	Description
SetRecip Transaction Codes	<TRANSCDS	By including one or more Transaction codes in this field, you trigger a particular form (or image) only if the extract file record includes that particular Transaction Code.
	<RECIPS	
	Search Mask (Counter) <MASK1	Lets you set the criteria to determine whether or not a form (or image) belongs in the form set. The criteria allows the Rules Processor to get specific data from the extract file. Adds one form (or image) for every occurrence of the search mask per transaction. The Occurrence Flag must be set to one (1) for the search mask to act as a counter.
	Occurrence Flag <OCCURRENCE	To use the search mask as a counter, the Occurrence Flag (overflow) must be set to one (1). Use with the Search Mask Counter, Records on Different First Image, and Records Per Overflow Image fields. (0=no overflow and 1=overflow) Performance issue flags in this field include: - Master (M) form level trigger flag - Form (F) form level trigger flag - Subordinate (S) image level trigger flag
	Records on different first image <RECSPER1ST	Lets you indicate the number of records that appear on the first image before overflowing to a new image.
	Records per overflow image <RECSPERIMG	Lets you specify the number of records matching the search mask that will fit on the specified overflow image. If the value is zero (0) and the Occurrence Flag is set to one (1) with the Search Mask Counter set, the system automatically sets this flag to one (1) to perform the overflow calculations.
	Search Mask (True/False) <CONDITIONAL	Similar to Search Mask (Counter), but only one form (or image) is triggered, regardless of how many occurrences of the condition exists.
	Custom Rule Name <FUNCTIONNAME	Normally used for custom implementation requirements. Only exceptions are RECIPIF and RECIPCONDITION rules.

Section	Field	Description
	Custom Rule Parameters <DATA>	Specifies parameters for the custom rule used in the Custom Rule Name field.
Recipient Form Level Trigger	Recipient Copy Count <RECIPCPY@T	
Image Level Trigger	Recipient Copy Count <RECIPCPY@T	Defaults the recipient copy of each recipient defined at the form level
	Recipient names listed with no check or a check	If recipient was eligible in the form file, it is checked here.

Chapter 5

Managing Forms

Click Forms to work with the list of images that comprise the form and maintain image-level triggering information. The triggering information determines what criteria must exist for this form to be included in a form set.

This chapter discusses the following topics:

- [Overview on page 88](#)
- [Using the Screen on page 90](#)
- [Creating a Form on page 97](#)
- [Modifying Forms on page 100](#)
- [Setting Up Triggers on page 104](#)
- [SetRecip Options on page 107](#)

OVERVIEW

A form is a single document containing one or more pages or images. Most forms contain multiple pages that are usually printed on both sides of a single sheet (duplex). Some forms are printed only on one side (simplex). Typical forms include insurance policies, tax returns, and mortgage documents.


The information for a form is stored in a file with an FOR extension. For each form you create, you have a separate FOR file. A form is listed in a GRP file, whereas the specific information for each form is stored in a separate FOR file.

A form includes two types of data: *fixed* and *variable*.

- *Fixed* data is the same on every copy of the form. This includes items such as logos. This information remains constant regardless of the data entry.
- *Variable* data may differ from form to form. This includes items such as individuals' names, addresses and policy numbers. This information relates to the specific data processed on each form.

A single form consists of one or more images. Since multiple forms and images make up a form set, you can view and navigate through each form and image individually.

Forms consist of one or more images

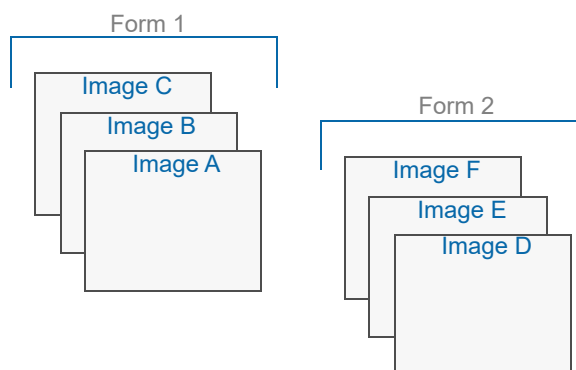

A form may consist of multiple images, and consequently you can view the varying images within a form by displaying different pages of the form.

An image can contain varying sections on one page. For example, an automobile insurance application form could consist of three images. The first image or page may contain three separate *sections*: a section for listing the automobiles you want to insure, a section for recording household driver information, and a section for selecting the type and amount of coverage you want for each vehicle. Using the page display options, you can zero in on and view the beginning of a particular section of the insurance application image.