

Document Production (C.0)

ODBC Guide

The Document Production *ODBC Guide* gives instructions on how to configure Document Production with an ODBC-compliant database.

Revision date - November 20, 2007



© 2008 Computer Sciences Corporation. El Segundo, California. All rights reserved. No part of this publication may be reproduced by any means without written permission from Computer Sciences Corporation. Printed in U.S.A. All questions regarding this documentation should be routed through customer assistance, Blythewood, SC, 803-333-6200 or email pcssupport@csc.com.

Table of Contents

Chapter 1: Introduction	3
Chapter 2: Interface with the Databases.....	4
Chapter 3: Configuring INI Files.....	6
Chapter 4: Creating the Databases.....	11
Microsoft SQL Server.....	11
MySQL	15
Chapter 5: Test the Database Connection	19
Chapter 6: Migrating Existing Data.....	21
Chapter 7: Document Change Log	22
Appendix A: Document Production Migration Utility	23
Appendix B: Using MySQL.....	25
Appendix C: Sample DFDs for Base Databases.....	26

Chapter 1: Introduction


Prior to the release of Document Production 9.0, Docucorp used dBase IV as the default DBMS for the Archive, WIP, and User Info tables. A flat file, called a Data File Definition (DFD), was used to specify the layout of the database records and index files. Docucorp also used these DFD files to specify the record layout of flat files (for example, batch files, the NewTrn file, and TrnFile). With the release of Document Production 9.0, Docucorp introduced support for an ODBC connection to other databases such as Microsoft SQL Server and MySQL. This document explains how to set up the INI files to use this newer database interface technology.

The steps to configure Document Production or Media View to use an ODBC database are:

- 1 Configure the INI files
- 2 Create the databases
- 3 Test the database connection
- 4 Migrate existing data

Chapter 2: Interface with the Databases

This diagram shows the relationship between the different CSC and Docucorp products and their database components.

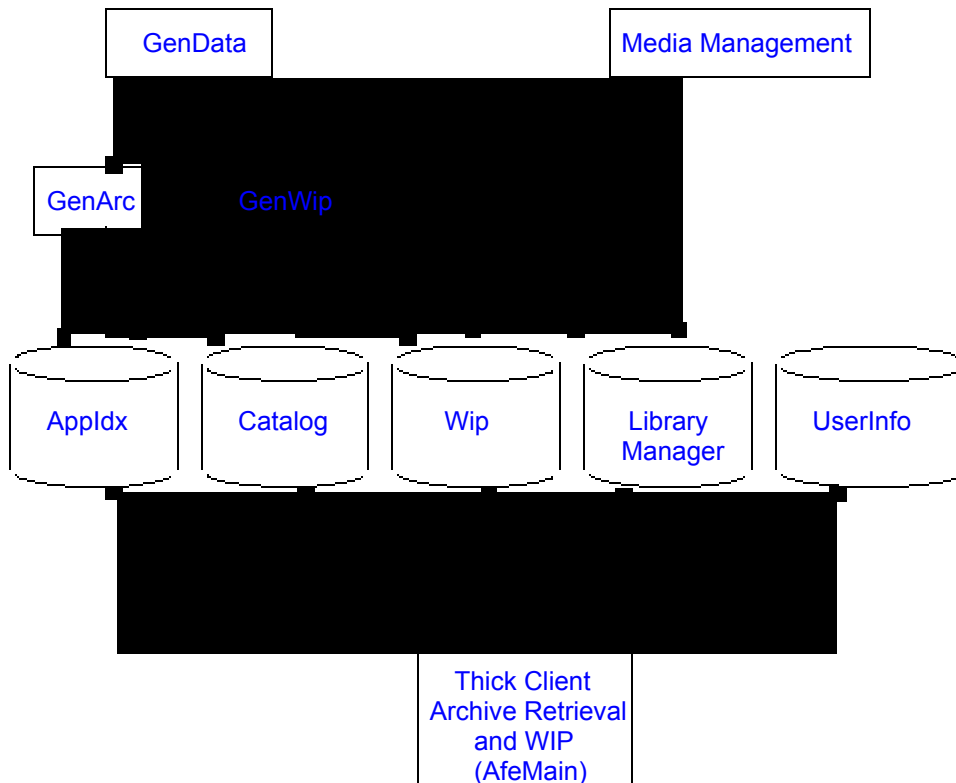

The purpose of each of these tables is as follows:

APPIDX – Contains an index of archived transactions and search keys to aid in locating an archived transaction.

CATALOG – Contains a reference to the Compressed Archive Data (CARFILE), which is referenced by the APPIDX once a user selects a transaction to retrieve.

WIP – Contains an index of transactions in WIP, with search keys to aid in locating a WIP transaction.

LIBRARY MANAGER – Contains forms, Data Definition Table (DDT), and logos referenced by effective date.

USERINFO – Contains a list of users and their access level to the WIP database.

***Note:** You can implement all or just some of these tables in an ODBC database. For example, you could use an ODBC database for archive but still use dBase IV for everything else.*

You can also store the CARFILE in an ODBC database as well. This document assumes that the CARFILE is stored in separate files, but there is information that shows how to set up the INI files to store them in an ODBC database.

Chapter 3: Configuring INI Files

Modify the FSIUSER.ini file that you use for your batch system, located in your Master Resource Library. If you do not have a batch system, use the one that you use for AFEMAIN.

Note: *Changes are in bold type.*

< ArcRet >

Arrangement = Stack

AppIdxDfd = **Arc\APPIDX.DFD**

Important: Normally the DFD name defaults to the same name as the table name. If renaming the APPIDX, you must include this option in the < ARCRET > group.

APPIDX = **APPIDX**

Corresponds to the name of a table that is created in SQL Server.

CATALOG = **CATALOG**

Corresponds to the name of a table that is created in SQL Server.

CARFILE = **~HEXTIME**

Set CARFILE to ~HEXTIME if you want to keep the CARFILES as separate files outside of SQL Server, or change to ARCHIVE to store them in SQL Server as a BLOB.

ARCPATH = <CONFIG:Batch Processing> ARCPATH =

CARPATH = <CONFIG:Batch Processing> CARPATH =

ExactMatch = No

Key1 = Company

Key2 = Lob

KeyId = PolicyNum

LBLIMIT = 500

TEMPIDX = ARC\Temp

You need the following option if you are storing the CARFILE in the database.

CARFILEDFD = .\deflib\odbc\carfile.dfd

You need the following two options if you are enabled Restart (see below).

RESTARTDFD = .\deflib\restart.dfd

RESTARTTABLE = RESTART

< *CONFIG:Batch Processing* >

No changes in this group

< *CONFIGURATIONS* >

No changes in this group

< *Control* >

No changes in this group

< *DefaultTextArea* >

No changes in this group

< *DefaultVarField* >

No changes in this group

< *Environment* >

No changes in this group

< *MasterResource* >

No changes in this group

< *SIGNON* >

No changes in this group

< *WipData* >

No changes in this group

<ODBC_FIELDCONVERT>

This group can be used to map SQL column names to local DFD field names.

DESC

= DESCRIPTION

This is required because the word DESC is a reserved word in SQL. This translates the DFD field name to a different table column name.

<DBTABLE:APPIDX>	This entry must match the “APPIDX” entry in the <ARCRET > Group above.
DBHANDLER	= ODBC The ODBC handler. This entry must match the name supplied in the <DBHANDLER> Group below.
<DBTABLE:CATALOG>	This entry must match the “CATALOG” entry in the <ARCRET > Group above.
DBHANDLER	= ODBC The ODBC handler.
UNIQUETAG	= CATALOGID

Important: This will allow proper updates to the SQL Server database records and will ensure that they are recorded.

<DBTABLE:ARCHIVE>	You only need this section if you are putting the CARFILES in SQL Server. This entry must match the “CARFILE” entry in the <ARCRET > Group above.
DBHANDLER	= ODBC The ODBC handler.
<DBTABLE:WIP>	You only need this entry if you want your WIP database stored in an SQL Server database.
DBHANDLER	= ODBC The ODBC handler.
<DBTABLE:RESTART>	You only need this section if you are using the <RESTART> function (see below).
DBHANDLER	= ODBC
UNIQUETAG	= JOB_ID
<DBTABLE:LBYMNGR>	You only need this entry if you want your Library Manager database stored in an SQL Server database.
DBHANDLER	= ODBC The ODBC handler
<DBTABLE:LBYFORMS>	You only need this entry if you want your Library Manager database stored in an SQL Server database.
DBHANDLER	= ODBC The ODBC handler
UNIQUETAG	= ARCKEY+SEQ_NUM The key used by the Library Manager to search on.
<DBHANDLER:ODBC>	

Server	= SQLODBC Name of the ODBC Data source from the Windows “Control Panel.”
Qualifier	= RPEX1 The name of the database in the ODBC Data Source. You name this whatever you want.
CreateTable	= Yes Yes will create tables automatically into the SQL Server. Specifying No will require you to create the tables manually in the SQL Server database.
CreateIndex	= Yes Yes will create indexes automatically into the SQL Server.
UserID	= sa The User ID required to access your SQL database. You will create the User ID when you create the ODBC connection.
Passwd	= If you have a password for your SQL Server database, enter it here.
<LIBRARY:LBYMNGR>	You only need this entry if you want your Library Manager database stored in an SQL Server database.
DBTABLE	= LBYFORMS The SQL secondary table required by Library Manager.

Modify the **FSISYS.INI** file that you use for your batch system, located in your Master Resource Library. If you do not have a batch system, use the one that you use for AFEMAIN.

Note: *Changes are in bold type.*

< Archival >	If you are storing the CARFILES in SQL Server, add the two new options ArchiveMem and UseRestartTable and remove the .CAR at the end of ARCHIVE
ArchiveMem	= Yes
UseRestartTable	= Yes
CARFILE	= ARCHIVE
If you use the restart function:	
< RESTART >	


CheckCount	= 100
RstFile	= RESTART

Chapter 4: Creating the Databases


You can create the database [manually using SQL commands](#) or with the [SQL Server GUI interface](#). The two methods are described in this chapter.

Microsoft SQL Server

- 1 To create the databases manually, open your Microsoft SQL Server Query Analyzer by going to Start > Programs > Microsoft SQL Server > Query Analyzer.

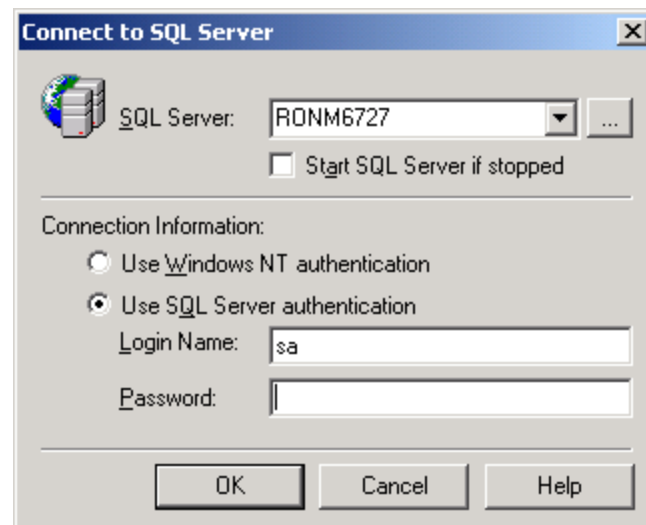

- 2 The SQL Server Name and User ID “sa” is defined during the Microsoft SQL Server installation. The Server Name defaults to the PC’s machine name. Make sure you log in to the correct server.
- 3 Click **OK**

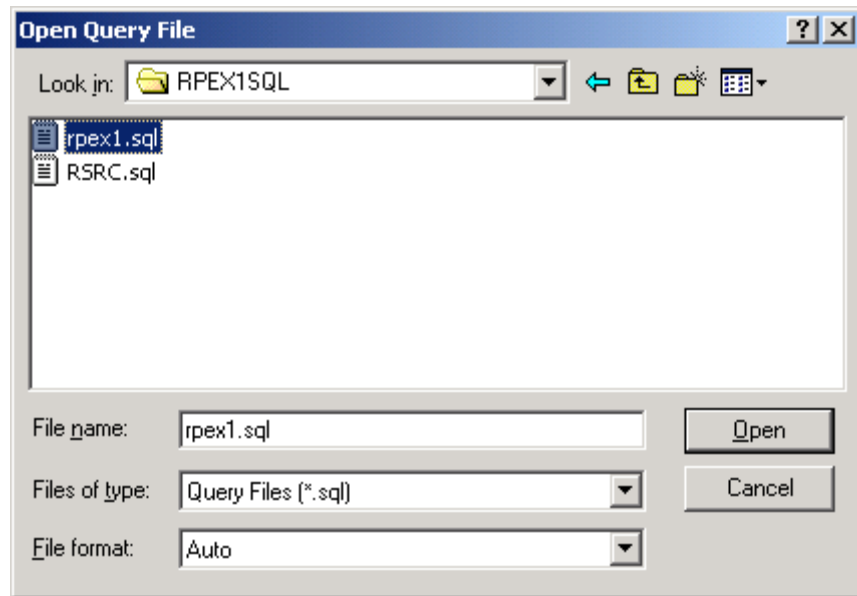

- 4 Create the SQL commands. Docucorp provides sample SQL, which you can modify for your environment, in the RPEX1SQL subdirectory of the RPEX1 Master Resource Library. Navigate to this directory, select the **rpex1.sql** file and click **Open**.

The SQL commands will appear as shown below:

This SQL creates the data-CREATE DATABASE RPEX1 base and the APPIDX table.

```

/***** Object: Table [dbo].[rpex1]      Script Date:
7/19/2001 11:34:31 AM *****/
if exists (select * from sysobjects where id =
object_id(N'[dbo].[rpex1]') and OBJECTPROPERTY(id,
N'IsUserTable') = 1)
drop table [dbo].[rpex1]
GO


/***** Object: Table [dbo].[rpex1]      Script Date:
7/19/2001 11:34:33 AM *****/
USE RPEX1
CREATE TABLE [dbo].[rpex1] (
    [UNIQUE_ID] [char] (26) NOT NULL ,
    [Company] [char] (6) NOT NULL ,
    [Lob] [char] (3) NOT NULL ,
    [PolicyNum] [char] (7) NOT NULL ,
    [RUNDATE] [char] (8) NOT NULL
) ON [PRIMARY]
GO

```

Note: The sample SQL calls the database RPEX1. The APPIDX table is also called RPEX1.

For simplicity, you are encouraged to use the Replace function (on the Edit menu) to change all references of **[dbo].[rpex1]** to **[dbo].[APPIDX]**.


If you have added extra columns or modified your APPIDX table, you will need to make corresponding changes to the APPIDX Create Table command. Refer to your APPIDX.DFD file for details. The names of the database and APPIDX table specified in the SQL commands must correspond to those in the FSIUSER.INI file.

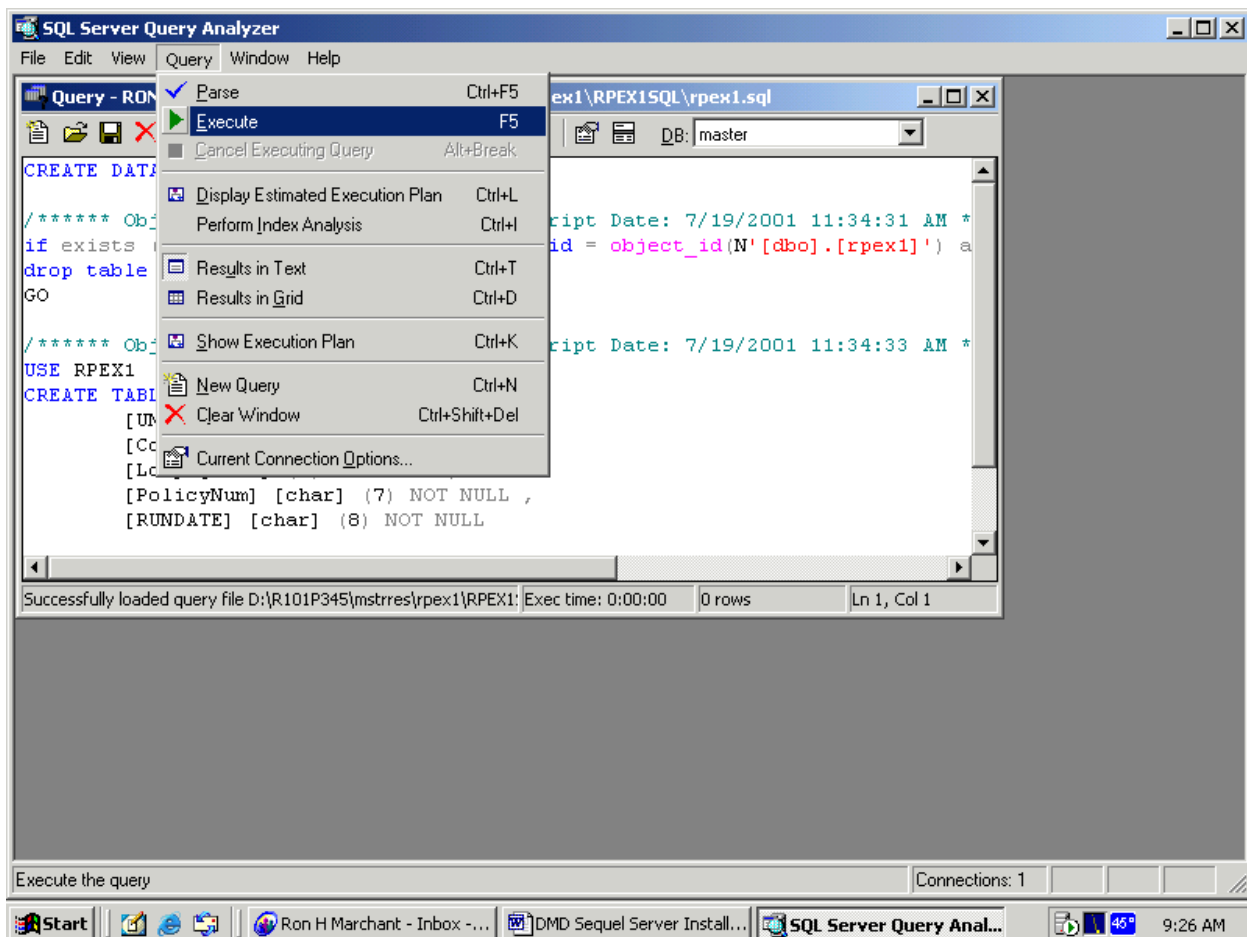

- 5 Select the **Execute** function on the Query drop-down box. This will execute your SQL commands. Your database and the APPIDX table should now be available.

Note: The CATALOG table is automatically created the first time you archive a transaction.

An alternative, and easier, method of creating the database and table is to use the SQL Server Enterprise Manager tool (available from the Start > Programs > Microsoft SQL Server menu).

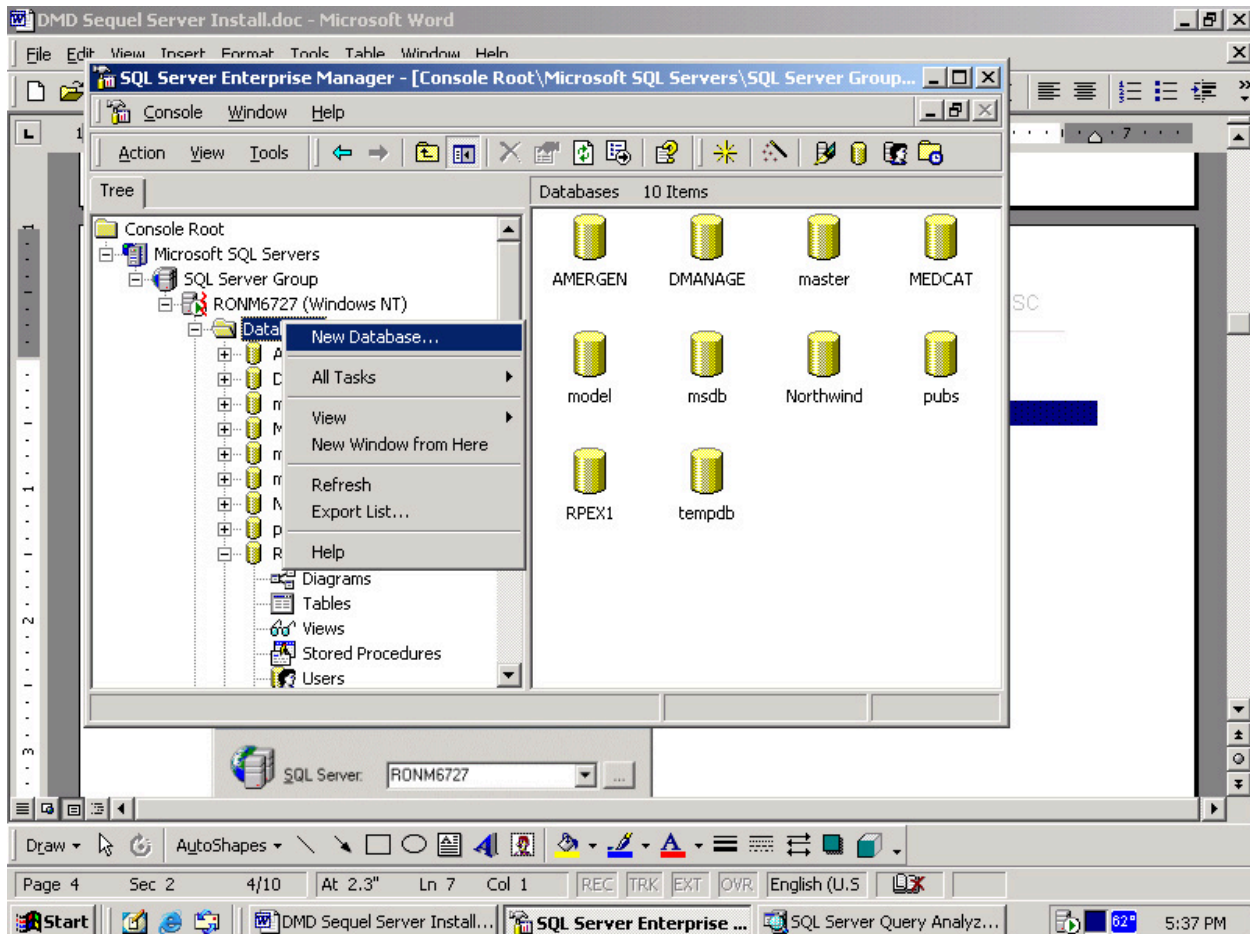


- 6 Open your SQL Server, as shown. Right click on the **Databases** folder. Select **New Databases**. Enter the name of the database you want to create (for example, RPEX1).

The APPIDX and CATALOG tables will be automatically created the first time you archive a transaction (assuming you have specified CreateTable=Yes and CreateIndex=Yes in the DBHANDLER group of your FSIUSER.INI).

MySQL

The following screen shows how to configure MyODBC to a specific database. In this example, the name of the database is DAPArchive. This is the name you will use when you create the database. After you create the database, click **Test Data Source**.

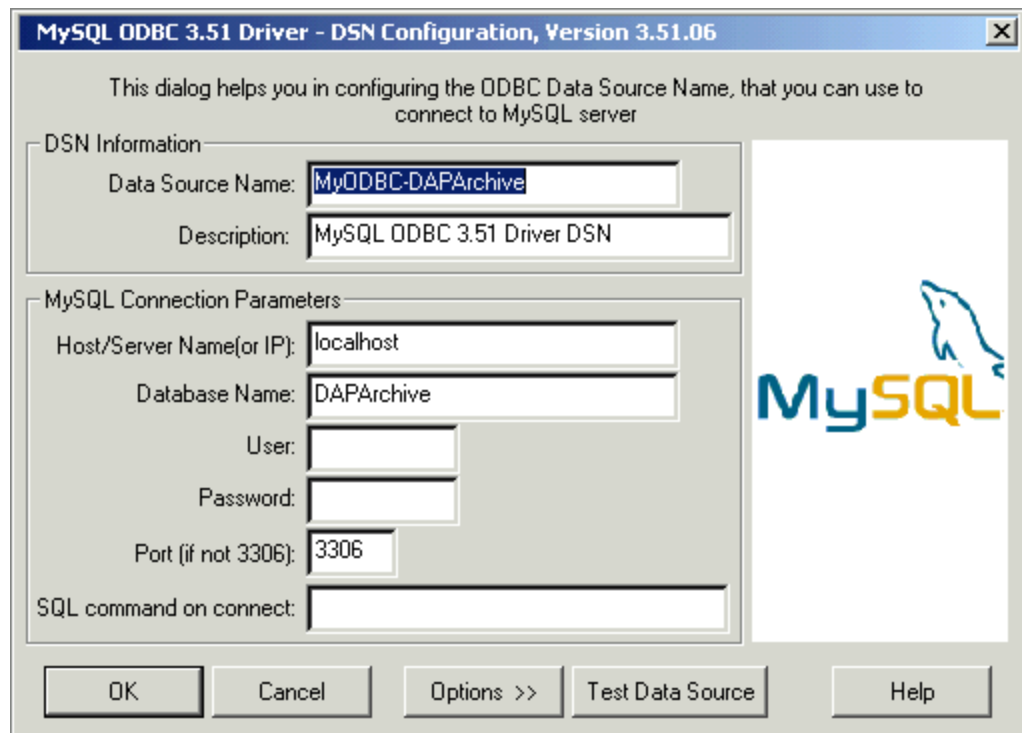

- 7 To create the database, go to the \MySQL\bin directory and enter the following command:

```
Mysqldadmin create daparchive
```

- 8 Manually create the tables as follows.

Create a text file and add these entries:

```

USE DAPARCHIVE;
CREATE TABLE ARCHIVE (
  ARCKEY VARCHAR(18) NOT NULL,
  SEQ_NUM VARCHAR(5) NOT NULL,
  CONT_FLAG VARCHAR(1),
  TOTAL_SIZE INT,
  CARDATA BLOB
);

CREATE TABLE APPIDX (
  UNIQUE_ID VARCHAR (26) NOT NULL,
  Company VARCHAR (6) NOT NULL,
  AgentNum VARCHAR (10),
  Lob VARCHAR(3) NOT NULL,
  symbol VARCHAR(3) NOT NULL,
  PolicyNum VARCHAR(15) NOT NULL,
  module VARCHAR(2) NOT NULL,
  RunDate VARCHAR(8) NOT NULL,
  ArcKey VARCHAR(18) NOT NULL,
  issuecode VARCHAR(1),
  lastname VARCHAR(30),
  FormsetId VARCHAR(8) NOT NULL,
  RECNUM INT NOT NULL,
  TrnType VARCHAR(2),
  EffDate VARCHAR(8),
  Policy VARCHAR(10),
  EmailAddr VARCHAR(50),
  EmailSent VARCHAR(8),
  PremChng VARCHAR(14),
  INDEX UNIQUE_ID (UNIQUE_ID),
  INDEX AgentNum (AgentNum),
  INDEX Lob (Lob),
  INDEX PolicyNum (PolicyNum)
);

CREATE TABLE CATALOG (
  CATALOGID VARCHAR (10),
  CARFILE VARCHAR (8),
  MEDIAID VARCHAR (11),
  LASTNUM VARCHAR (8),
  STATUS VARCHAR (1),
  RECNUM INT
);

CREATE TABLE RESTART (
  STATUS VARCHAR (2),
  JOB_ID VARCHAR (50),
  COMM_RECS INT,
  LASTREC VARCHAR (252)
);

```

The information for the APPIDX table is based on your APPIDX.DFD. All other tables should be encoded as identified above. If you want to use MySQL with WIP, add a section based on the WIP.DFD file.

If you want to store your Library Manager in MySQL, you must create this table. The LBYMNGR table will be automatically created by the Library Manager program.

```
CREATE TABLE LBYFORMS (  
  ARCKEY VARCHAR (18),  
  SEQ_NUM VARCHAR (5),  
  CONT_FLAG CHAR (1),  
  TOTAL_SIZE INT,  
  CARDATA BLOB  
);
```


- 9 Save this file as a text file, such as daparchive.sql, in the MySQL\bin directory. Then enter the following command:

```
Mysqldadmin mysql < daparchive.sql
```

This will create the tables needed for the archive process.

Verify Tables

Process the following commands, results are included, to verify your tables are correct:

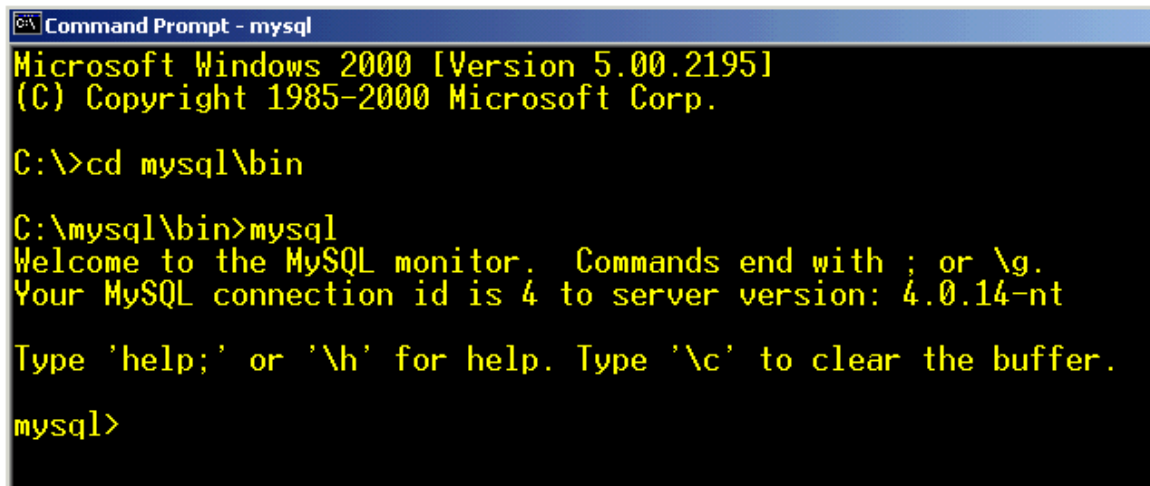

```
Command Prompt - mysql  
Microsoft Windows 2000 [Version 5.00.2195]  
(C) Copyright 1985-2000 Microsoft Corp.  
  
C:\>cd mysql\bin  
  
C:\mysql\bin>mysql  
Welcome to the MySQL monitor.  Commands end with ; or \g.  
Your MySQL connection id is 4 to server version: 4.0.14-nt  
  
Type 'help;' or '\h' for help. Type '\c' to clear the buffer.  
mysql>
```

This screen shows how to start MySQL in an interactive mode. To exit this mode, enter the **QUIT** command.

Note: All commands must end in a semicolon.

```
mysql> use daparchive;
Database changed
mysql> show tables;
+-----+
| Tables_in_daparchive |
+-----+
| appidx               |
| archive               |
| catalog               |
| restart               |
+-----+
4 rows in set (0.02 sec)

mysql>
```

This screen shows selecting the database in use, and then performing a query on the tables that are in this database.

```
mysql> show columns in archive;
+-----+-----+-----+-----+-----+-----+
| Field      | Type          | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+-----+
| ARCKEY     | varchar(18)   |      |      |          |       |
| SEQ_NUM    | varchar(5)    |      |      |          |       |
| CONT_FLAG  | char(1)       | YES  |      | NULL    |       |
| TOTAL_SIZE | int(11)       | YES  |      | NULL    |       |
| CARDDATA   | blob          | YES  |      | NULL    |       |
+-----+-----+-----+-----+-----+-----+
5 rows in set (0.17 sec)

mysql>
```

This screen shows the makeup of the archive table.

Chapter 5: Test the Database Connection

You are ready to test your environment after all the steps above have been completed.

- 1 Run GENACW32.EXE and verify that your database has been updated.
- 2 If you are storing your Library Manager in an SQL database, you should run the Library Manager program and Open the table. You will see this message:

“INI file indicates use of DBMS.
Open table: LBYMNGR ?”

If you do not see this, you may also have to make the same changes in FAPCOMP.ini as you made in FSIUSER.ini. You can now run your response file to populate the tables.
- 3 If you are using SQL Server, go to the Enterprise Manager and expand the “tree” for your database (for example, RPEX1).
- 4 Click on **Tables** and then right click on the **APPIDX** table, which should display in the right pane.
- 5 Select **Open Table > Return All Rows**. If successful, you should see the index entries in your APPIDX table.
- 6 If you are using MySQL, enter the **MySQL** command.
- 7 Enter the **USE DAPARCHIVE** command.
- 8 Enter the **SELECT ARCKEY FROM ARCHIVE** command. This should list all of the archive keys.

- 9 If you do not see these entries, or had trouble running GENACW32, go back and verify that the database, table, and ODBC names specified in the FSIUSER.INI file and SQL Server are all consistent.
- 10 If you do not have a batch system (meaning you do not normally run GENDATA, GENARC etc.), test the archival process by creating and completing a new transaction in AFEMAIN.
- 11 Try retrieving documents using the Archive Retrieval program (AFEMAIN). If you use a different FSIUSER for AFEMAIN than for batch processing, you will need to make similar changes to each FSIUSER file as you did for the batch system.

Chapter 6: Migrating Existing Data

If you have an existing archive in the traditional dBase IV format, you can easily convert it to SQL Server using a utility called ARCCVT32, which is documented in the *Document Production Archive Migration Utility Guide*.

Note: You need to convert both your APPIDX and CATALOG files using the ARCCVT32 utility. After you have run this utility for both tables, use the SQL Server Enterprise Manager or MySQL command line utility to verify that all of the rows were correctly loaded.

Chapter 7: Document Change Log

Date	Release for which change sub made	Heading and heading where change made	Description	Initials

Appendix A: Document Production Migration Utility

The following lines must be added to the end of FSIUSER.INI. Refer to the *Document Production Archive Migration Utility Guide* for details of these settings.

```
<ACVT_PARMS >
SRC_TABLE = D:\med\karen\old_index\APPIDX.dbf
SRC_DFD   = .\deflib\appidx.dfd
SRC_DBH   = CB5
DEST_TABLE = APPIDX
DEST_DFD  = .\deflib\appidx.dfd
DEST_DBH  = SQL

;*****
;* left side = Dest DFD field name
;* right side = Source DFD field name
;*          # - New Field
;*          $ - Default String Constant
;*              Use an underscore ' ' to represent a space
;*              These will be translated prior to data storage
;*          % - Use Part of Current SrcField
;*              SrcFldName,Offset,Length
;*          & - Concatenate data and Strings
;*              %FldName,0,3+SrcFldName+$xx+....
;*          ~ - User Function,SrcFieldName
;*
;* Sample entries
;* DestFldName = #
;* DestFldName = $00
;* DestFldName = $00_00 where ' ' represents a space
;* DestFldName = %SrcFldName,0,3
;* DestFldName = &%SrcFldName,0,3+SrcFldName+$00
;* DestFldName = ~UDF_UserDefinedFunction,SrcFldName
;*****
```

```
<ACVT_FIELDS >
UNIQUE_ID = UNIQUE_ID
TRNTYPE = TRNTYPE
STATE = STATE
AGENTNUM = AGENTNUM
LOCATION = LOCATION
LOB = LOB
SYMBOL = SYMBOL
POLICY = POLICY
MODULE = MODULE
```

POLICYNUM = POLICYNUM
ZIP = ZIP
RunDate = RunDate
ArcKey = ArcKey
lastname = lastname
EffDate = EffDate
FormsetId = FormsetId
RECNUM = RECNUM
EmailAddr = EmailAddr
EmailSent = EmailSent

Appendix B: Using MySQL

MySQL is an Open Source relational database management system. It runs on UNIX, Linux, and Microsoft Windows platforms.

MySQL is available for download from <http://www.mysql.com/downloads>. Click on the **production release**. Then find the appropriate platform, such as Linux or Windows.

MyODBC is available for download from <http://www.mysql.com/downloads>. Click on the **production release**. Then find the platform that you are installing to.

MySQL-Front is a Windows application that can be used instead of the command line routines. Available from <http://www.mysqlfront.de/>.

For additional information on MySQL, refer to <http://www.mysql.com/documentation>.

Note: *There are also many books available to help you learn about MySQL.*

Appendix C: Sample DFDs for Base Databases

This appendix lists the default Document Production DFD files for POINT IN and Exceed systems.

DFD files used in base POINT IN systems

APPENDIX

FIELD NAME	FIELD TYPE	FIELD LENGTH
UNIQUE_ID	CHAR_ARRAY	26
Company	CHAR_ARRAY	20
Lob	CHAR_ARRAY	20
PolicyNum	CHAR_ARRAY	15
RunDate	CHAR_ARRAY	8
TrnType	CHAR_ARRAY	2
LastName	CHAR_ARRAY	30
Issue	CHAR_ARRAY	1
ArcKey	CHAR_ARRAY	18
FormsetId	CHAR_ARRAY	8
RECNUM	LONG	4
MVKey	CHAR_ARRAY	14
mconum	CHAR_ARRAY	2
EffDate	CHAR_ARRAY	8
EmailAddr	CHAR_ARRAY	50
EmailSent	CHAR_ARRAY	8

WIP

FIELD NAME	FIELD TYPE	FIELD LENGTH
KEY1	CHAR_ARRAY	30
KEY2	CHAR_ARRAY	30
KEYID	CHAR_ARRAY	20
RECTYPE	CHAR_ARRAY	3
CREATETIME	CHAR_ARRAY	8
ORIGUSER	CHAR_ARRAY	8
CURRUSER	CHAR_ARRAY	8
MODIFYTIME	CHAR_ARRAY	8
FORMSETID	CHAR_ARRAY	8
TRANCODE	CHAR_ARRAY	2
STATUSCODE	CHAR_ARRAY	2
FROMUSER	CHAR_ARRAY	8
FROMTIME	CHAR_ARRAY	8
TOUSER	CHAR_ARRAY	8
TOTIME	CHAR_ARRAY	8
DESC	CHAR_ARRAY	30
INUSE	CHAR_ARRAY	1
ARCKEY	CHAR_ARRAY	18
APPDATA	CHAR_ARRAY	150

*DFD files used in base Exceed systems***APPID X**

FIELD NAME	FIELD TYPE	FIELD LENGTH
UNIQUE_ID	CHAR_ARRAY	26
Company	CHAR_ARRAY	10
BusTranTxt	CHAR_ARRAY	30
IDNbr	CHAR_ARRAY	30
RunDate	CHAR_ARRAY	10
Lob	CHAR_ARRAY	3
FORMSETID	CHAR_ARRAY	8
ArcKey	CHAR_ARRAY	18
RECNUM	LONG	4
TrnType	CHAR_ARRAY	30
ClientName	CHAR_ARRAY	30

WIP

FIELD NAME	FIELD TYPE	FIELD LENGTH
KEY1	CHAR_ARRAY	10
KEY2	CHAR_ARRAY	30
KEYID	CHAR_ARRAY	30
TRANCODE	CHAR_ARRAY	30
RECTYPE	CHAR_ARRAY	3
CREATETIME	CHAR_ARRAY	8
ORIGUSER	CHAR_ARRAY	8
CURRUSER	CHAR_ARRAY	8
MODIFYTIME	CHAR_ARRAY	8
FORMSETID	CHAR_ARRAY	8
STATUSCODE	CHAR_ARRAY	2
FROMUSER	CHAR_ARRAY	8
FROMTIME	CHAR_ARRAY	8
TOUSER	CHAR_ARRAY	8

FIELD NAME	FIELD TYPE	FIELD LENGTH
TOTIME	CHAR_ARRAY	8
DESC	CHAR_ARRAY	30
RECINUSE	CHAR_ARRAY	1
ARCKEY	CHAR_ARRAY	18
RECNUM	LONG	4
PrtReqId	CHAR_ARRAY	10
DtaNmTxt	CHAR_ARRAY	60
InsAppId	CHAR_ARRAY	60
FormId	CHAR_ARRAY	20
RunDate	CHAR_ARRAY	10
PrtReqTs	CHAR_ARRAY	26
AppDtaTs	CHAR_ARRAY	26
PlatForm	CHAR_ARRAY	1
UserId	CHAR_ARRAY	8
SentToManualBatch	CHAR_ARRAY	1
PrtErrCd	CHAR_ARRAY	10
PolicyEffDt	CHAR_ARRAY	10
PolicyExpDt	CHAR_ARRAY	10
Transaction_Code	CHAR_ARRAY	30
FIELD NAME	FIELD TYPE	FIELD LENGTH
Lob	CHAR_ARRAY	3
AgentNum	CHAR_ARRAY	8
AgentName	CHAR_ARRAY	30
EmailAddr	CHAR_ARRAY	50
MCO	CHAR_ARRAY	2
ClientName	CHAR_ARRAY	30
IDNbr	CHAR_ARRAY	30

DFD files used in base, common to both Exceed and POINT IN USER INFO

FIELD NAME	FIELD TYPE	FIELD LENGTH
ID	CHAR_ARRAY	8
NAME	CHAR_ARRAY	25
PASSWORD	CHAR_ARRAY	10
RIGHTS	CHAR_ARRAY	1
INUSE	CHAR_ARRAY	1
REPORTTO	CHAR_ARRAY	8
SECURITY	CHAR_ARRAY	64
MESSAGE	CHAR_ARRAY	128

CATALOG

FIELD NAME	FIELD TYPE	FIELD LENGTH
CATALOGID	CHAR_ARRAY	10
CARFILE	CHAR_ARRAY	8
MEDIAID	CHAR_ARRAY	11
LASTNUM	CHAR_ARRAY	8
STATUS	CHAR_ARRAY	1

RESTART

FIELD NAME	FIELD TYPE	FIELD LENGTH
STATUS	CHAR_ARRAY	2
JOB_ID	CHAR_ARRAY	50
COMM_RECS	LONG	4
LASTREC	VARCHAR	255