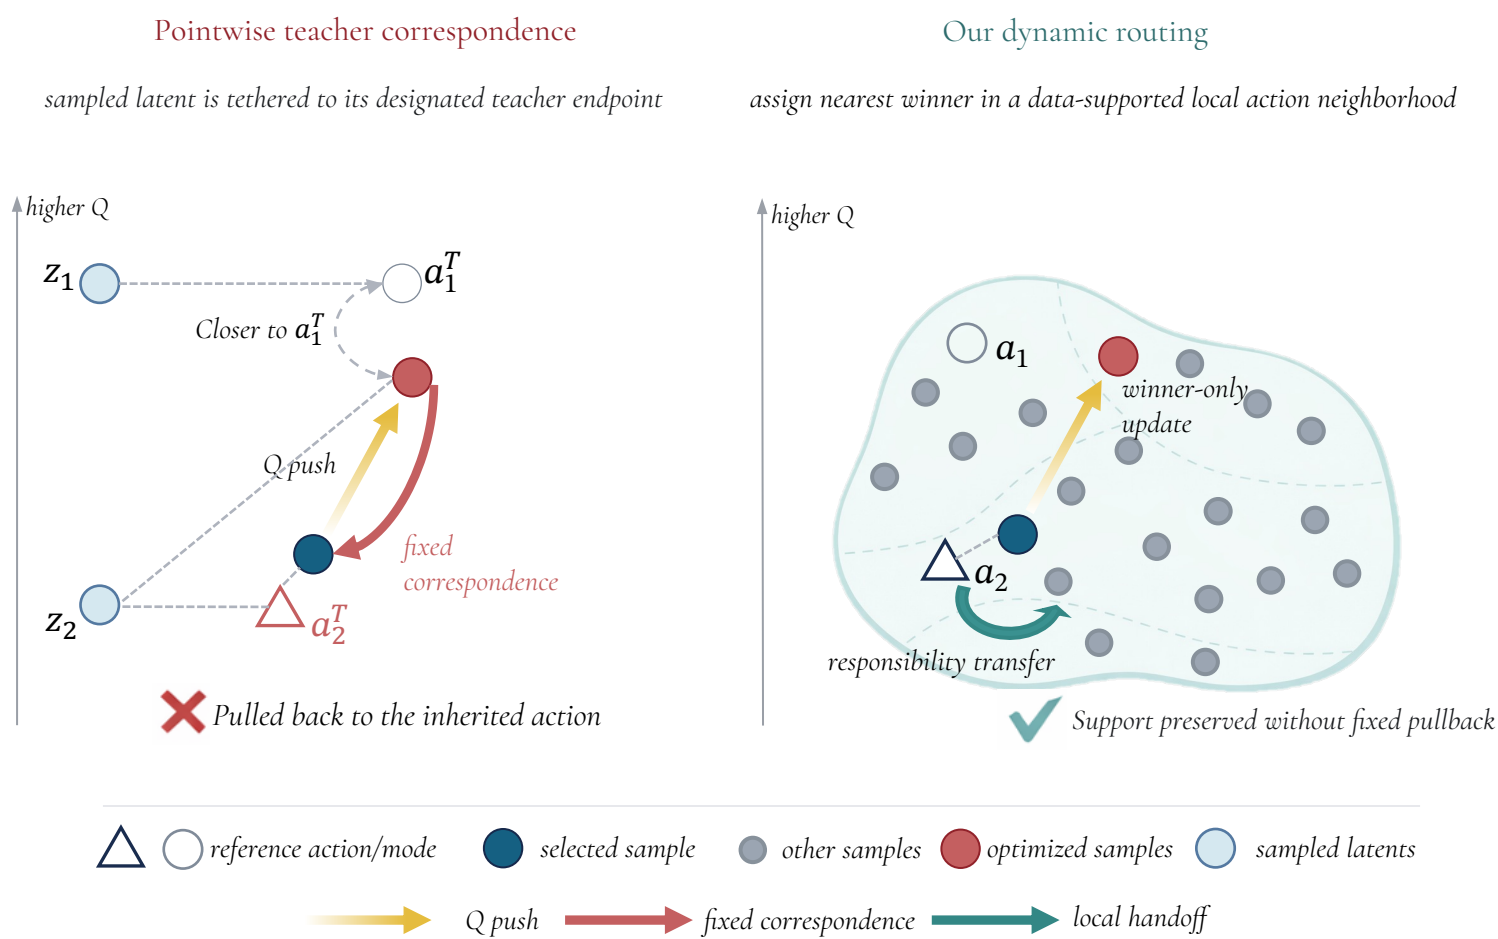
Pointwise teacher correspondence
sampled latent is tethered to its designated teacher endpoint
higher Q
z_1
a_1^T
Closer to a_1^T
Q push
fixed correspondence
z_2
a_2^T
Pulled back to the inherited action
Our dynamic routing
assign nearest winner in a data-supported local action neighborhood
higher Q
a_1
winner-only update
a_2
responsibility transfer
Support preserved without fixed pullback
reference action/mode
selected sample
other samples
optimized samples
sampled latents
Q push
fixed correspondence
local handoff