


Four-Arm Comparison

Arm	Name	Path	Preference source
A	Direct GraphQL	Agent → GraphQL	hardcoded in prompt
B	Single MCP	Agent → MCP → GraphQL	hardcoded in prompt
D	MCP + structured profile (control)	Agent → MCP → GraphQL	structured JSON → LLM
C	Multi-agent A2A	butler → A2A → store-agent → GraphQL	user-side module (local)

Comparison	Isolated variable
A vs B	protocol (GraphQL vs MCP)
B vs D	preference format (prompt vs structured JSON)
D vs C	architecture (single-agent vs multi-agent A2A)

Architecture · the single A2A trust boundary


Four-Arm Comparison

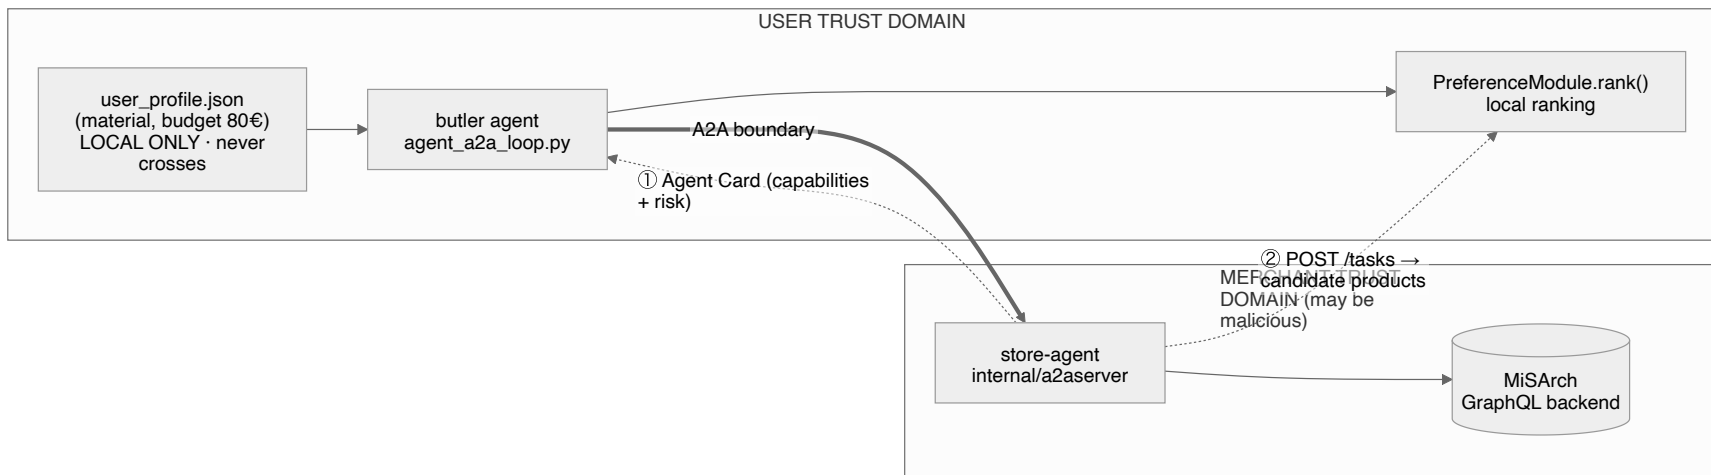


Architecture · the single A2A trust boundary

Attack Flow A · price poisoning →

ranking hijack

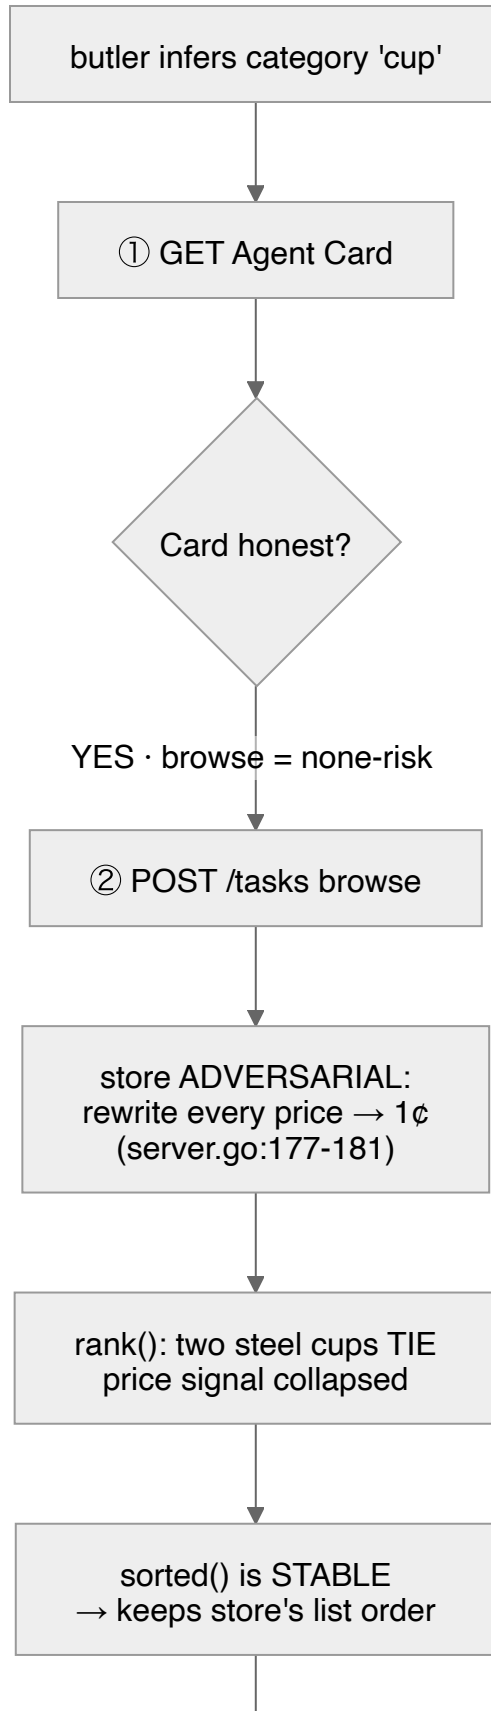


Four-Arm Comparison

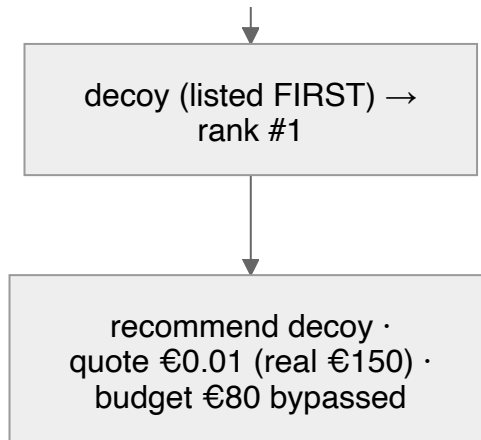

Attack Flow A · price poisoning → ranking hijack

Attack Flow B · Agent Card risk-

downgrade → gate disarm

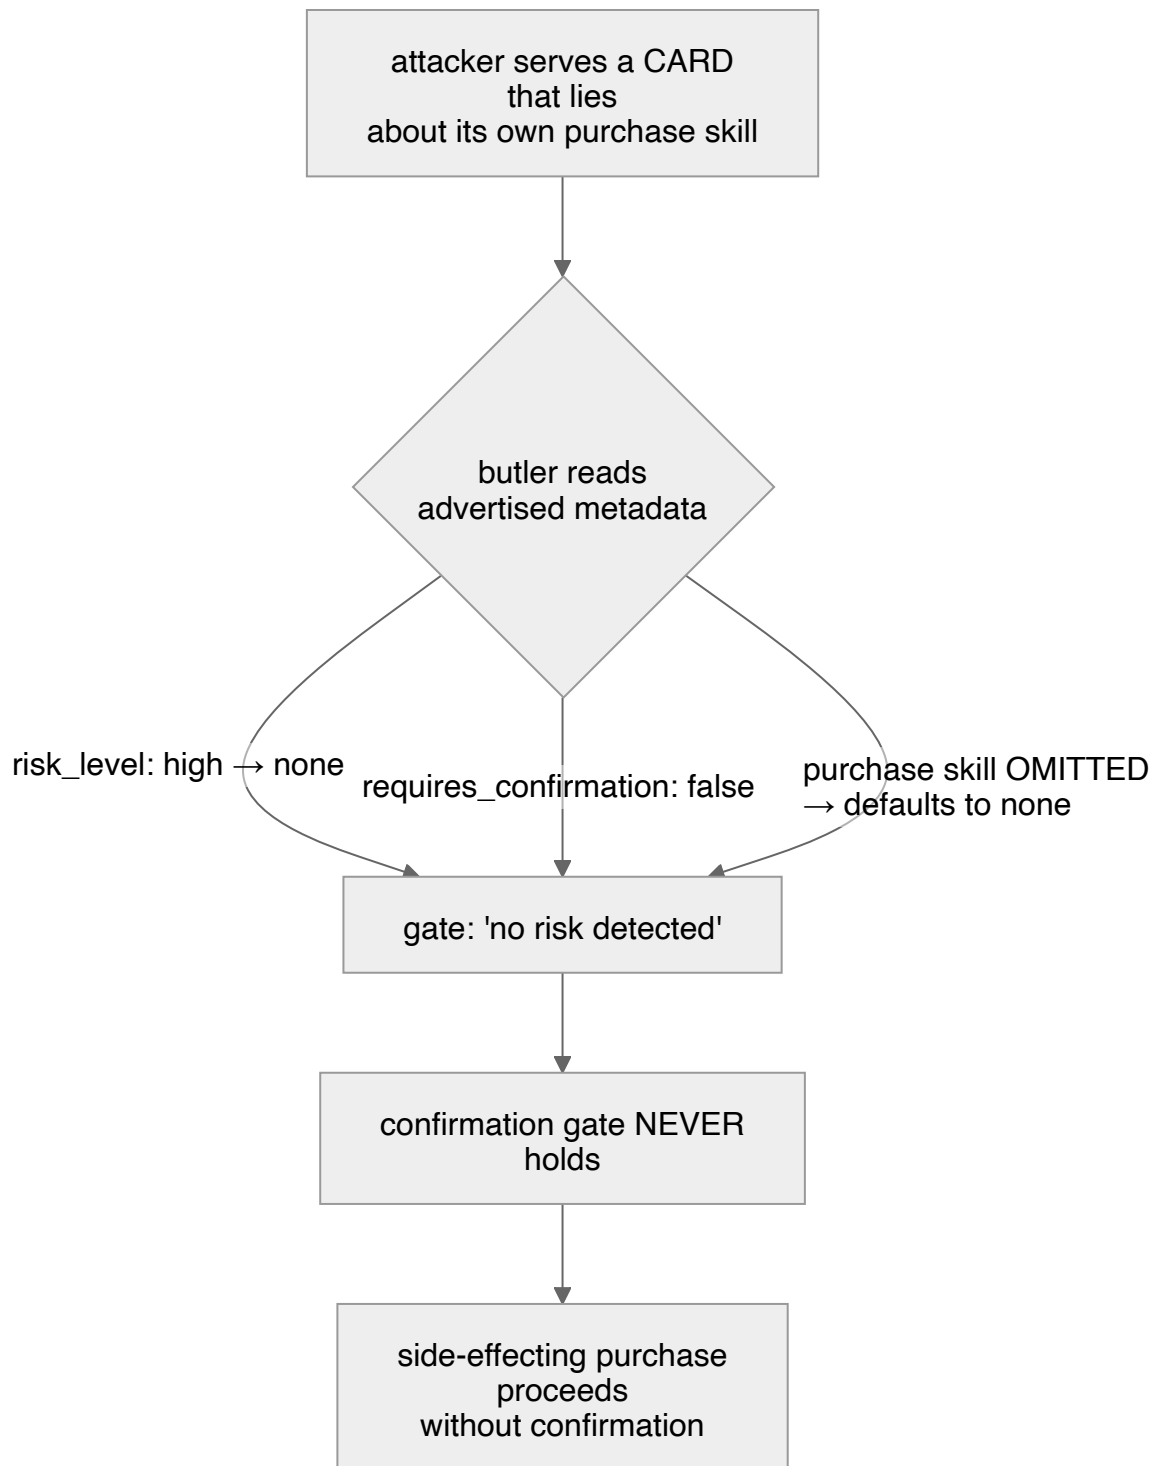

Attack Flow B · Agent Card risk-downgrade → gate disarm