Product Requirements Document (PRD)

Nestlé Medical Congress 2026: Mobile App, Backend & Admin Portal

Document Version: 2.0 (Build-ready) | **Date:** November 6, 2026 | **Status:** Draft for implementation | **Owner:** Product Management

> **How to use this document with Cursor.** Every screen, field, table, endpoint and rule needed to build the product is in here. Section 18 gives a phase-by-phase build order with a "done when" checklist per phase. Where the original PRD said "confirm with client", Section 3 now states a default decision. Override a decision in Section 3 *before* building the affected module.

Table of Contents

1. Product Overview & Goals
2. User Personas
3. Key Product Decisions (defaults applied)
4. Feature Breakdown by Role
5. Authentication & Authorization
6. Domain Rules (business logic per module)
7. Design System
8. Mobile Screen Specifications (12 reference screens + 8 inferred screens)
9. Admin Portal
10. Notifications
11. Database Schema
12. API Structure
13. Real-time (WebSocket) Design
14. Tech Stack & Project Setup
15. Non-Functional Requirements
16. Testing & Acceptance Criteria
17. Deployment & Operations
18. Cursor Build Plan
19. Optional Enhancements (Phase 2)
20. Risks & Assumptions Appendix A: Seed Data Appendix B: Design Inconsistencies Found in the Screenshots Appendix C: Reference UI Screenshots

---

1. Product Overview & Goals

Vision Statement

To give every registered attendee of the Nestlé Medical Congress 2026 (Dubai, UAE) one reliable mobile companion for the event: discover the agenda and speakers, carry a digital name tag, find the venue, vote in live polls, ask the experts questions, and access approved congress materials. Organizers manage all of it from a web admin portal with no app release required.

Business Objectives

- Centralize congress information and attendee services in a single iOS/Android app
- Replace printed schedules and badges with digital equivalents
- Enable structured audience engagement through live polls and moderated Q&A
- Make approved presentations, documents and media discoverable and securely downloadable
- Give organizers full control of event content, polls, moderation, resources and announcements through an admin portal

Success Metrics (KPIs)

Metric	Target (event window: May 22–23, 2026 equivalent)
Registered attendees who complete onboarding	≥ 85% of invited attendees
Login success rate (valid credentials)	≥ 99%
Attendees who open the Agenda at least once	≥ 80%
Accepted valid votes / submitted valid votes	100% (no lost accepted votes)
Q&A moderation turnaround (submit → published/rejected)	median < 2 minutes
Successful authorized resource opens/downloads	≥ 98%
API availability during event hours	≥ 99.9%
Crash-free sessions	≥ 99.5%
Poll vote → result visible on other devices	p95 < 2 seconds

Scope: Phase 1 (this PRD)

In scope: Flutter mobile app (iOS + Android); FastAPI backend; PostgreSQL; Redis; S3 storage; WebSocket real-time; Next.js admin portal; email OTP verification; push notifications; digital name tag with QR; QR check-in (web-based scanner for staff); exhibitors directory (read-only); certificates (admin-issued PDFs).

Out of scope: ticket sales or payments, in-app chat/DMs, exhibitor lead capture, offline-first sync, CPD/accreditation integrations, public web attendee portal, medical advice or patient data of any kind.

---

2. User Personas

Persona 1: Attendee (Healthcare Professional)

- **Name:** Dr. Huda, 34. Pediatric nutrition specialist (test user in screenshots: "Huda Latheef")
- **Tech comfort:** Medium
- **Goals:** See what's on today and where; save sessions; get into the venue quickly with a QR badge; vote and ask questions without queueing at a microphone; download slides afterwards
- **Pain points:** Printed agendas change; hard to find the right room; can't ask questions in a large hall; slides arrive weeks later
- **Needs:** Fast, clear, one-hand-friendly app that works on congress Wi-Fi/4G

Persona 2: Speaker

- **Name:** Dr. Sarah Johnson, 45. Keynote speaker
- **Goals:** See questions about her session, answer the good ones, know her schedule
- **Needs:** A filtered view of questions for her sessions and the ability to post answers

Persona 3: Moderator

- **Name:** Layla, 29. Congress program team
- **Goals:** Keep Q&A on-topic and appropriate; surface the best questions to speakers fast
- **Pain points:** Unfiltered question floods; no audit trail
- **Needs:** A real-time moderation queue with approve/hide/reject and keyboard-friendly bulk actions

Persona 4: Event Organizer

- **Name:** Omar, 38. Event manager
- **Goals:** Publish and change sessions instantly, open/close polls live, push announcements, upload slides after each talk
- **Needs:** One portal for all content with immediate propagation to the app

Persona 5: Administrator

- **Name:** Arjun, 40. Platform/IT owner
- **Goals:** Manage users and roles, audit sensitive actions, keep the system secure
- **Needs:** User management, role assignment, audit log, system settings

Persona 6: Check-in Staff

- **Name:** Sara, 24. Registration desk
- **Goals:** Scan a badge QR and instantly see "valid / already checked in / invalid"
- **Needs:** A fast camera-based scanner page with big, unambiguous result states

---

3. Key Product Decisions (defaults applied)

The original PRD left these open. These are the decisions this PRD builds against. **Change any row here before building the affected module.**

#	Topic	Decision (default)	Affects
D1	Events	Data model supports multiple events (`event_id` everywhere); the app shows **one current event** (`GET /events/current`)	All content
D2	Admin portal	**Included** (Next.js web app)	Section 9
D3	Registration	Public self-registration with email OTP verification. Admin can also create/import attendees and can toggle "Require admin approval" (default OFF)	Auth
D4	Social sign-in	Google & Apple buttons are shown in the UI (as in the design) but controlled by feature flags `FEATURE_GOOGLE_SIGNIN`, `FEATURE_APPLE_SIGNIN` (default **OFF**; buttons hidden when OFF)	Auth
D5	Roles	Single global role per user: `attendee`, `speaker`, `moderator`, `organizer`, `admin`, `checkin_staff`	RBAC
D6	Voting	One vote per user per poll, **single-choice** default (multi-choice supported via poll config), not anonymous to organizers but never shown per-user to attendees. **Results visible after the attendee has voted**, or after the poll closes. Organizer can switch to "after close only" per poll	Voting
D7	Q&A	Questions are **pre-moderated** by default (event setting `qna_moderation_enabled = true`). Upvote once per user per question. Speaker/moderator can answer	Q&A
D8	Exhibitors	Read-only directory: list, search, category filter, detail (logo, name, booth, description, website). Admin CRUD	Exhibitors
D9	Certificates	Admin issues certificates to selected attendees; backend generates a PDF from a template; attendee downloads from Profile → Certificates	Profile
D10	Check-in	QR check-in via a **web scanner page in the admin portal** (camera). Not in the mobile app	Badge
D11	Push notifications	Included (FCM for Android and iOS via APNs key in Firebase)	Notifications
D12	Language	English only, but all strings live in localization files (`arb`)	Mobile
D13	Offline	Read-only cache of agenda, speakers, venue, badge, bookmarked resources metadata. Writes (vote, question, bookmark) require connectivity	Mobile
D14	Hosting	AWS, region `me-central-1` (UAE) for data residency; fallback `eu-central-1` if a service is unavailable in-region	Deployment
D15	Session counts	Profile "Sessions" = number of **bookmarked sessions**. "Saved" = number of **bookmarked resources**. "Certificates" = issued certificates	Profile
D16	Date handling	Store UTC; render in the event timezone (`Asia/Dubai`). **Never hardcode "May 22–23, 2026" or "Dubai"**; these come from the event record	All

D17	Min OS versions	iOS 15+, Android 8.0 (API 26)+	Mobile
D18	Capacity planning	Default load target: 3,000 registered attendees, 1,500 concurrent connections, 300 votes/second burst	NFR

---

4. Feature Breakdown by Role

4.1 Attendee Features

Account

- Register (full name, email, hospital/organization, password, accept terms), verify email by 6-digit OTP
- Sign in with email + password; (optional) Google/Apple; forgot/reset password
- Edit profile (name, phone, location, designation, avatar); change password; log out; request account deletion

Home

- Personalized greeting, featured event card, search, notification bell with unread dot, Quick Access grid (8 shortcuts), Upcoming Sessions list

Agenda & Sessions

- Day selector, category filter chips, search, reset filters, session list, session detail, bookmark/unbookmark, see changed/cancelled badges

Speakers

- Search, category filter chips, featured toggle, speaker cards, speaker detail with biography and sessions

Digital Name Tag

- Name tag with initials/photo, name, designation, badge ID, location, congress dates and QR code; print/share

Venue

- Venue name, dates, address, map preview, directions, facility chips (Wi-Fi, Parking, Catering, Accessible)

Live Voting

- See active polls, swipe between polls, select option, submit vote, see live results, view poll history

Ask Q&A

- Write and submit a question with category (and optional session/speaker), browse Popular / Recent / Answered, upvote, see answers, see "My questions"

Resources

- Search, filter All / PDF / Slides / Videos / Saved, bookmark, open/download

Exhibitors

- Browse, search, filter by category, view detail

Notifications

- List, unread count, mark read, deep link to related content

Profile & Certificates

- View profile and activity counts, download certificates, settings

4.2 Speaker Features

- Everything an attendee can do
- "My Sessions" filter in Agenda (sessions where the user is linked as a speaker)
- Questions tab shows questions for own sessions; can post/edit own answers

4.3 Moderator Features (Admin Portal)

- Q&A queue (Pending / Published / Answered / Hidden / Rejected), approve, hide, reject (with reason), flag, mark answered, post answer
- View moderation history

4.4 Organizer Features (Admin Portal)

- Event setup (title, tagline, dates, timezone, branding, venue, facilities)
- Sessions, categories, speakers, session↔speaker assignments, cancel/reschedule
- Polls (create, schedule, activate, pause, close, duplicate, reset results with confirmation)
- Resources (upload, metadata, publish/unpublish, replace/version)
- Exhibitors CRUD
- Announcements (compose, target, schedule, send)
- Attendees list (search, view, approve, export CSV), issue certificates
- Reports (engagement metrics)

4.5 Administrator Features (Admin Portal)

- Everything an organizer can do
- User management (create, edit, role change, suspend, delete, CSV import)
- Audit log viewer, system settings, feature flags

4.6 Check-in Staff Features (Admin Portal, `/checkin`)

- Camera QR scanner, result card (valid / already checked in / invalid / suspended), manual lookup by badge ID, today's check-in count

---

5. Authentication & Authorization

5.1 Registration Flow

```
User opens app → Welcome screen → taps "Create Account"
→ Fills: Full name, Email, Hospital/Organization, Password, ticks terms checkbox
→ Client validates (all required, email format, password policy, checkbox ticked)
→ POST /auth/register
→ Backend: normalizes email (trim + lowercase), rejects duplicates (409 EMAIL_EXISTS),
  hashes password (Argon2id), creates user status=pending_verification, role=attendee,
  creates badge record, generates 6-digit OTP (hashed, 15 min expiry, max 5 attempts)
→ Sends verification email (OTP) via worker
→ App navigates to "Verify Email" screen
→ POST /auth/verify-email {email, code}
→ Backend sets status=active (or pending_approval if approval mode is ON), email_verified_at=now
→ Returns access + refresh tokens → App goes to Home
```

Password policy: min 8 chars, at least 1 uppercase, 1 lowercase, 1 digit. Max 72 chars. Show requirements live under the field.

5.2 Login Flow

```
Enters email + password → POST /auth/login
→ Valid: returns { access_token (15 min, RS256 JWT), refresh_token (opaque, 30 days), user }
→ App stores both in flutter_secure_storage (Keychain / Keystore)
→ Dio interceptor attaches Authorization: Bearer <access_token>
→ On 401 TOKEN_EXPIRED: interceptor calls POST /auth/refresh once (single-flight lock),
  retries the original request; if refresh fails → clear storage → go to Login
→ Refresh tokens ROTATE on every use; reuse of an old refresh token revokes the whole token family
→ Logout: POST /auth/logout (revokes family) + clear secure storage + unregister device token
```

Login errors: `INVALID_CREDENTIALS` (generic, never reveal whether the email exists), `EMAIL_NOT_VERIFIED` (app routes to Verify Email screen), `ACCOUNT_SUSPENDED`, `ACCOUNT_PENDING_APPROVAL`, `RATE_LIMITED`.

5.3 Forgot / Reset Password

```
"Forgot password?" → enter email → POST /auth/forgot-password
→ Always returns 200 "If this email exists, a code has been sent." (no enumeration)
→ If user exists: 6-digit OTP (15 min, one-time) emailed
→ Reset screen: email + code + new password + confirm
→ POST /auth/reset-password → on success revokes ALL refresh tokens → redirect to Login with success toast
```

5.4 Admin Portal Authentication

- Same `/auth/login`; allowed only for roles `organizer`, `admin`, `moderator`, `checkin_staff`
- Access token in memory; refresh token in HTTP-only, Secure, SameSite=Strict cookie (portal uses cookie transport via `/auth/web/login`, `/auth/web/refresh`)
- Session idle timeout 30 minutes; TOTP-based MFA optional for `admin` (setting `ADMIN_MFA_REQUIRED`)

5.5 Role-Based Access Control (RBAC) Matrix

`Y` = allowed, `O` = own records only, `-` = no.

Feature / Action	Attendee	Speaker	Moderator	Organizer	Admin	Check-in
Register / login / edit own profile	Y	Y	Y	Y	Y	Y
View agenda, speakers, venue, exhibitors	Y	Y	-	Y	Y	-
Bookmark sessions/resources	Y	Y	-	-	-	-
View own badge	Y	Y	-	-	-	-
Vote in polls	Y	Y	-	-	-	-
Submit / upvote questions	Y	Y	-	-	-	-
Answer questions	-	O (own sessions)	Y	Y	Y	-
Moderate questions	-	-	Y	Y	Y	-
Create/edit sessions, speakers, categories	-	-	-	Y	Y	-
Create/activate/close polls	-	-	-	Y	Y	-
Upload/publish resources	-	-	-	Y	Y	-
Manage exhibitors	-	-	-	Y	Y	-
Send announcements	-	-	-	Y	Y	-
Issue certificates	-	-	-	Y	Y	-
Manage users & roles	-	-	-	-	Y	-

View audit logs / system settings	-	-	-	-	Y	-
Scan badge / check-in	-	-	-	Y	Y	Y

5.6 Security Requirements

- Passwords hashed with **Argon2id** (`argon2-cffi`; memory 64 MB, time cost 3, parallelism 4)
- JWT signed with **RS256**; keys from environment/Secrets Manager; `kid` header for rotation; claims: `sub`, `role`, `iat`, `exp`, `jti`
- Refresh tokens: 256-bit random, stored **hashed (SHA-256)**, rotated, family-based reuse detection
- Mobile tokens in Keychain/Keystore only; never in SharedPreferences or logs
- Rate limits (Redis sliding window): login 10/min/IP and 5/min/email; register 5/min/IP; forgot-password 3/min/email; OTP verify 5 attempts per code; question submit 5 per 10 min/user; vote 20/min/user; upvote 60/min/user
- Account lockout: 10 failed logins → 15 min lock (counter in Redis)
- All inputs validated server-side with Pydantic v2; output never contains `password_hash`, token hashes or storage keys
- CORS restricted to the admin portal origin; mobile uses no cookies
- Every protected endpoint declares its required roles through a FastAPI dependency (`require_roles(...)`); authorization on the **backend**, never UI-only
- Audit log entries for: role change, user suspend/delete, poll activate/pause/close/reset, question moderation, resource publish/unpublish, announcement send, certificate issue, check-in scan, settings change

---

6. Domain Rules (business logic per module)

6.1 Agenda

- Sessions belong to an event; `start_at < end_at` (DB CHECK); `status` ∈ `scheduled | changed | cancelled | draft`. Only `scheduled | changed | cancelled` and `visibility = published` are returned to attendees
- "Day" = the calendar date of `start_at` in the event timezone. The day list is derived from distinct session dates ∪ event start→end dates (so Day tabs exist even before sessions are added). Labels: `Day 1`, `Day 2`... plus short date `May 22`
- Default sort: `start_at ASC, display_order ASC`
- Category filter: single-select chips; `All` = no filter. `Reset` clears category and search
- `changed` shows an amber "Updated" chip; `cancelled` shows a red "Cancelled" chip and strike-through title; both still listed
- Bookmark toggle is idempotent (`PUT` creates if missing, `DELETE` removes if present)

6.2 Upcoming Sessions (Home)

- Next 5 sessions where `end_at > now()`, status ≠ cancelled, ordered by `start_at`
- If the event has not started: first sessions of Day 1. If finished: empty state "The congress has ended. Thank you for joining."

6.3 Speakers

- Featured speakers appear first (`is_featured DESC`, then `display_order`, then name)
- Speaker has one or more **specializations** (category of type `speaker`), e.g. Nutrition, Research, Pediatric
- Search matches name, designation, organization, country (case-insensitive, `ILIKE`/trigram)

6.4 Badge / QR

- Badge auto-created at registration. `badge_code` format `NMC-{year}-{seq:03d}` (e.g. `NMC-2026-001`), unique per event
- QR content = `nmc://badge/{token}` where `token` is a 32-byte URL-safe random string. Store only `SHA-256(token)`. The plain token is returned only to the owner via `GET /me/badge`
- QR never contains name, email, or phone
- If a user is suspended or the badge is revoked, verification returns `status: revoked`
- First valid scan sets `checked_in_at`; later scans return `already_checked_in` with the original time

6.5 Venue

- Facilities are configurable rows (key, label, icon, enabled). Seeded: `wifi`, `parking`, `catering`, `accessible`
- Directions button opens the native maps app via `geo:` / `maps:` URL using lat/lng or the address fallback
- If lat/lng is missing or the map fails to load, show the address card only

6.6 Live Voting

- Poll lifecycle: `draft → scheduled → active → closed`; `active ↔ paused` allowed. Backend is the source of truth; if `starts_at`/`ends_at` are set a worker transitions status automatically (checked every 5 s)
- A vote is accepted only if: poll `status = active`, `now()` within window, option belongs to poll, user has not voted (single-choice) or selection count ≤ `max_choices` (multi)
- Enforced with `UNIQUE (poll_id, user_id, option_id)` plus a service check inside one transaction (lock the poll row with `SELECT ... FOR SHARE`, then count the user's existing votes for that poll). A user with any existing vote on a single-choice poll gets `ALREADY_VOTED`
- Idempotency: `Idempotency-Key` header stored for 24 h in Redis; a retry with the same key returns the original response
- Percentages: computed from persisted votes using the **largest remainder method** so displayed integers always total 100%; `total_votes` = number of distinct voters
- Result visibility (`results_visibility`): `after_vote` (default) | `live` | `after_close`. When hidden, API returns `results: null` and the app shows "Results will be shown after you vote / after the poll closes"
- Attendee may **not** change a vote in Phase 1
- Poll swiping: the app shows the list of active (and scheduled-visible) polls as pages; "Next Poll" moves forward, arrow buttons move back/forward, dots indicate position

6.7 Q&A

- Question text: 10–500 characters, trimmed, profanity filter (configurable word list) → auto-flag (not auto-reject)
- Category: one of event's `question` categories (General, Nutrition, Research, Clinical). Optional `session_id`, optional `speaker_id`
- Status machine: `pending → published → answered`; `pending/published → hidden`; `pending → rejected`. With moderation OFF new questions go straight to `published`
- Lists: `Popular` = published/answered by `upvote_count DESC, created_at DESC`; `Recent` = `created_at DESC`; `Answered` = status answered, newest answer first
- Authors always see their own pending/rejected questions in "My questions" with status chip
- Upvote: one per user per question; cannot upvote own question; toggle allowed (second tap removes upvote)
- Answer: stored in `answers`; question status becomes `answered`; author gets a notification
- Attendees cannot edit/delete a question after submission (Phase 1)

6.8 Resources

- Types: `pdf`, `slides`, `video`, `document`, `link`. Filter chips map: PDF→`pdf`, Slides→`slides`, Videos→`video`, Saved→user's bookmarks
- Files in S3 private bucket; metadata in DB. Max 100 MB per file (video via external link or ≤ 500 MB upload); allowed MIME: `application/pdf`, `.pptx/.ppt`, `video/mp4`
- `GET /resources/{id}/access` returns a pre-signed URL valid 5 minutes; for `link` type returns the external URL. Increments `download_count`
- Unpublished resources: 404 for attendees; existing signed URLs expire naturally
- Displays: icon by type, title (1 line ellipsis), description (1 line ellipsis), file size (human readable, e.g. `4.2 MB`)

6.9 Notifications

- Created by system events or announcements; one row per recipient. Push is sent via FCM with `data.deep_link`
- Unread count = rows with `read_at IS NULL`

6.10 Certificates

- Admin selects attendees → `POST /admin/certificates/issue`; system creates `certificates` rows with `certificate_number` `NMC-CERT-2026-{seq:05d}`, generates PDF (ReportLab) from template (logo, name, event, dates, number), stores in S3
- Attendee downloads via signed URL

---

7. Design System

> Values below are estimated from the screenshots. Confirm against the Figma file if available; otherwise treat these as the source of truth. Implement as Flutter `ThemeData` + a `AppTokens` class; never hardcode colors in widgets.

7.1 Colors

Token	Hex	Use
`bgNavy900`	`#071A4A`	Screen background (top of gradient)
`bgNavy700`	`#0B2C78`	Screen background (bottom of gradient)
`surface`	`#FFFFFF`	Cards, content sheets
`surfaceMuted`	`#F3F6FC`	Inputs, chips (inactive), list tiles
`primary`	`#2F6BFF`	Primary buttons, active chips, selected states
`primaryCyan`	`#4FC3F7`	Gradient end for buttons / badge header
`accentGold`	`#F5B942`	Highlights, "CONGRESS" word, active day tab, featured star
`textOnDark`	`#FFFFFF`	Text on navy
`textOnDarkMuted`	`#A9B8DC`	Subtitles on navy
`textPrimary`	`#0B1B45`	Text on white
`textMuted`	`#6B7A99`	Secondary text
`success`	`#22A06B`	Answered chip, success states
`warning`	`#F59E0B`	Updated chip
`danger`	`#E5484D`	Errors, cancelled
`border`	`#E3E8F4`	Dividers, input borders

Primary button gradient: `LinearGradient(left→right, #2F6BFF → #4FC3F7)`. Screen background: vertical `LinearGradient(bgNavy900 → bgNavy700)`.

7.2 Typography

Font: **Inter** (fallback: system). Weights 400/500/600/700/800.

Style	Size / Weight	Use
`display`	28 / 800	Welcome title "NESTLÉ CONGRESS"
`h1`	22 / 700	Screen hero titles, greeting
`h2`	18 / 700	Section titles ("Quick Access")
`title`	15 / 700	Card titles, session titles
`body`	13 / 400	Descriptions
`caption`	11 / 500	Meta, chips, tags
`overline`	10 / 700, letter-spacing 0.8, uppercase	Category labels ("KEYNOTE", "FEATURED EVENT")

7.3 Shape, spacing, elevation

- Spacing scale: 4, 8, 12, 16, 20, 24, 32. Screen horizontal padding 20
- Radius: card 20, input 14, chip 999, button 14, badge 24, bottom sheet 28 (top corners)
- Elevation: cards use soft shadow `0 8 24 rgba(7,26,74,0.12)`
- Touch targets ≥ 44×44

7.4 Reusable components (build these first)

`AppScaffold` (gradient bg, safe area, optional back button + title + trailing icon), `HeroCard` (icon tile + title + subtitle), `WhiteSheet` (rounded top white container), `AppTextField` (leading icon, trailing visibility toggle, error text), `PrimaryButton` (gradient, loading state, trailing icon), `SocialButton`, `FilterChip`, `SectionHeader` (title + "View All"), `SessionTile`, `SpeakerTile`, `QuickAccessTile`, `ResourceTile`, `QuestionTile`, `PollOptionTile` (with progress bar), `StatCard`, `EmptyState`, `ErrorState` (with Retry), `SkeletonLoader`, `StatusChip`, `BottomNavBar` (Home, Profile).

7.5 Iconography

Use `lucide_icons` (or Material Symbols Rounded). Icon tiles are 44×44 rounded-14 squares with a tinted background.

---

8. Mobile Screen Specifications

Global rules for every screen


- Each data screen implements 4 states: **Loading** (skeleton), **Empty** (illustration/icon + message), **Error** (message + Retry button), **Content**
- Pull-to-refresh on all list screens
- Back button (top-left, 40×40 rounded tile with chevron) on every screen except Home and Profile
- Bottom navigation (Home | Profile) shows **only** on Home and Profile. All other screens are pushed on top without it
- Routes use `go_router`; unauthenticated users are redirected to `/welcome`
- Text must never wrap mid-token: times like `08:30 AM` use a fixed-width column with `softWrap: false` (see Appendix B)

Route Map

Route	Screen
`/welcome`	Login (Welcome Back)
`/register`	Create Account
`/verify-email`	Verify Email (OTP)
`/forgot-password`, `/reset-password`	Password reset
`/home`	Home
`/quick-access`	Quick Access
`/agenda`, `/agenda/:sessionId`	Agenda, Session Detail
`/speakers`, `/speakers/:id`	Speakers, Speaker Detail
`/name-tag`	My Name Tag
`/venue`	Venue
`/voting`, `/voting/history`	Live Voting, Poll History
`/qna`, `/qna/mine`	Ask Q&A, My Questions
`/resources`	Resources
`/exhibitors`, `/exhibitors/:id`	Exhibitors, Exhibitor Detail
`/notifications`	Notifications
`/profile`, `/profile/edit`, `/profile/certificates`, `/settings`	Profile area

8.1 Welcome / Login (`/welcome`) *(Screenshot 1)*

Reference UI (build to match):

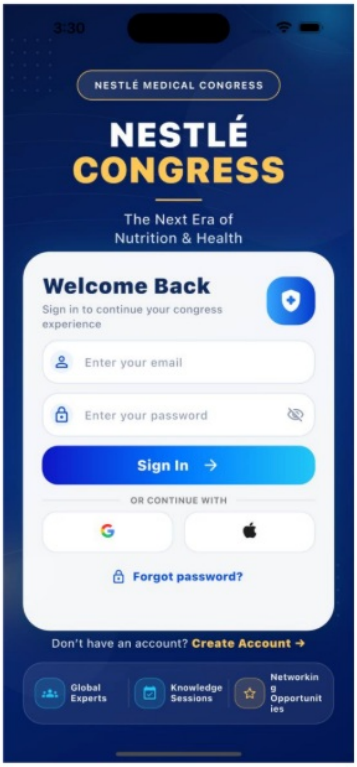


Layout: Navy gradient background → top branding block → white login card → bottom feature chips.

Element	Spec
Event pill	Outlined pill, text `NESTLÉ MEDICAL CONGRESS`, overline style, gold border
Title	Two lines: `NESTLÉ` (white) / `CONGRESS` (gold), `display` style, centered
Divider	Short gold line under title
Tagline	`The Next Era of Nutrition & Health` (from `event.tagline`), `textOnDarkMuted`
Card	White, radius 28, padding 20
Card header	Left: `Welcome Back` (h2) + `Sign in to continue your congress experience` (caption muted). Right: 44×44 blue rounded tile with shield icon
Email field	Leading mail/user icon, placeholder `Enter your email`, keyboard `emailAddress`, autofill hints
Password field	Leading lock icon, placeholder `Enter your password`, trailing eye toggle
Sign In button	Full width, gradient, label `Sign In`, trailing arrow →; loading spinner replaces arrow while submitting
Divider	Centered caption `OR CONTINUE WITH`
Social row	Two equal buttons: **G** (Google) and **Apple** logo. Hidden entirely when feature flags are OFF
Forgot link	Centered `Forgot password?` with small lock icon, primary color → `/forgot-password`
Footer text	`Don't have an account?` + `Create Account →` (gold/bold) → `/register`
Feature chips (bottom)	3 translucent tiles: `Global Experts`, `Knowledge Sessions`, `Networking & Opportunities` (icon + 2-line label)

Behavior: Validate on submit: email format, password non-empty. Call `POST /auth/login`. On `EMAIL_NOT_VERIFIED` → navigate to `/verify-email` with the email and auto-trigger resend. On other errors show inline red text under the form (use backend `message`). Disable the button while loading. Keyboard `done` submits.

8.2 Create Account (`/register`) *(Screenshot 2)*

Reference UI (build to match):

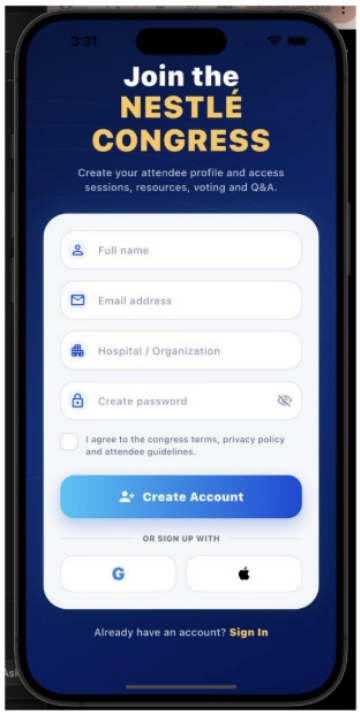

Element	Spec
Title	`Join the` (white, h1) / `NESTLÉ` (white) / `CONGRESS` (gold)
Subtitle	`Create your attendee profile and access sessions, resources, voting and Q&A.`
Card fields (in order)	`Full name` (person icon), `Email address` (mail icon), `Hospital / Organization` (building icon), `Create password` (lock icon + eye toggle)
Terms row	Checkbox + `I agree to the congress terms, privacy policy and attendee guidelines.` The words *terms*, *privacy policy*, *attendee guidelines* are tappable links (open in-app web view of CMS pages)
Button	`Create Account` with person-plus icon, gradient
Divider	`OR SIGN UP WITH` + Google / Apple buttons (flag-controlled)
Footer	`Already have an account?` + `Sign In` → `/welcome`

Validation (client + server): name 2–100 chars; email valid; organization 2–150 chars; password policy (Section 5.1) with live checklist; terms must be ticked (button disabled otherwise). Backend field errors map to the matching field. `EMAIL_EXISTS` shows under email: "An account with this email already exists."

8.3 Verify Email (`/verify-email`) *(inferred)*

6-box OTP input (auto-advance, paste support, SMS/email autofill), caption showing masked email (`h***@example.com`), `Verify` button, `Resend code` link with 60-second countdown, `Change email` link. Errors: `INVALID_CODE`, `CODE_EXPIRED`, `TOO_MANY_ATTEMPTS`. Success → home (or "Awaiting approval" screen if approval mode ON).

8.4 Forgot / Reset Password *(inferred)*

Forgot: email field + `Send code`. Always shows success message. Reset: email (prefilled), 6-digit code, new password, confirm password → success toast → `/welcome`.

8.5 Home (`/home`) *(Screenshot 3)*

Reference UI (build to match):




Layout (scrollable, navy bg, bottom nav):

1. **Top row:** left overline `NESTLÉ MEDICAL CONGRESS`; right bell icon button (tile) with a small red dot when `unread_count > 0` → `/notifications`
2. **Greeting:** `Welcome Back,` / `{first name or full_name}` 👋 (h1). Use `user.full_name` as-is (e.g. "Dr. Testing")
3. **Search bar:** rounded field with search icon, placeholder `Search sessions, speakers, topics...`, trailing cyan circular filter/arrow button. Submitting opens a **Global Search** results page (sessions, speakers, resources, exhibitors in grouped sections) via `GET /search?q=`
4. **Featured Event card:** gradient blue card, overline chip `FEATURED EVENT` (gold), title `event.name` (white, 2 lines), caption `{start} - {end}, {year} • {city}, {country}`, right side circular icon (leaf/drop). Tap opens an "About the event" bottom sheet (description from the event record)
5. **Quick Access header:** `Quick Access` + `View All ›` → `/quick-access`
6. **Quick Access grid:** 4 columns × 2 rows of icon tiles (blue-gradient square icon + label below): `Agenda`, `Speakers`, `Name Tag`, `Venue`, `Voting`, `Ask Q&A`, `Resources`, `Exhibitors` → routes `/agenda`, `/speakers`, `/name-tag`, `/venue`, `/voting`, `/qna`, `/resources`, `/exhibitors`
7. **Upcoming Sessions header:** `Upcoming Sessions` + `View All ›` → `/agenda`
8. **Upcoming list:** up to 5 `SessionTile`s (same component as Agenda)
9. **Bottom nav:** `Home` (active, house icon) | `Profile` (person icon)

API: `GET /events/current`, `GET /me`, `GET /notifications/unread-count`, `GET /events/{id}/sessions/upcoming?limit=5`. Load in parallel; each section handles its own loading/error.

8.6 Quick Access (`/quick-access`) *(Screenshot 4)*

Reference UI (build to match):

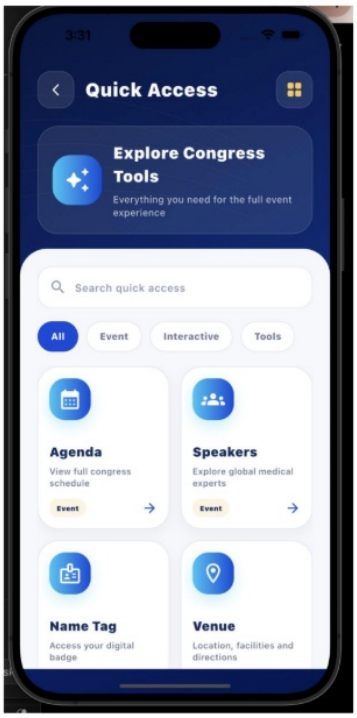

Element	Spec
App bar	Back tile, title `Quick Access`, trailing grid-icon tile toggling **grid (2 columns)** / **list** layout
Hero card	Cyan-blue gradient; icon tile (sparkles); title `Explore Congress Tools`; subtitle `Everything you need for the full event experience`
White sheet	Search field `Search quick access`, filter chips `All`, `Event`, `Interactive`, `Tools`
Tiles (2-col grid)	Icon tile, title, description, tag chip, trailing arrow


Tile definitions (static config in app, titles localized):

Tile	Description	Tag	Route
Agenda	View full congress schedule	Event	`/agenda`
Speakers	Explore global medical experts	Event	`/speakers`
Name Tag	Access your digital badge	Tools	`/name-tag`
Venue	Location, facilities and directions	Event	`/venue`
Voting	Join live polls and see results	Interactive	`/voting`
Ask Q&A	Ask questions and upvote topics	Interactive	`/qna`
Resources	Presentations, documents and media	Tools	`/resources`
Exhibitors	Meet congress partners and sponsors	Event	`/exhibitors`

Chip filters by tag; search filters by title/description (client-side, case-insensitive). Empty state: "No tools match your search."

8.7 Congress Agenda (`/agenda`) *(Screenshot 5)*

Reference UI (build to match):

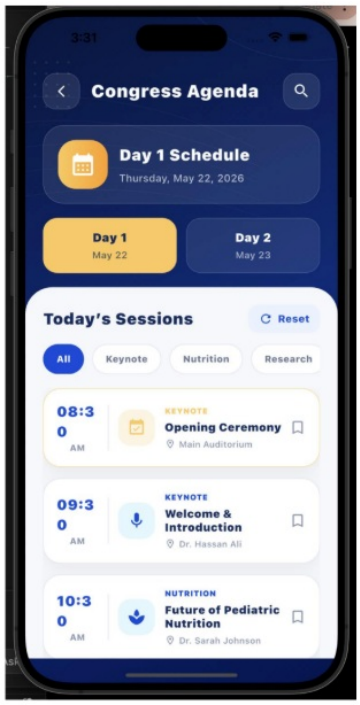

Element	Spec
App bar	Back tile, title `Congress Agenda`, trailing search icon tile (expands an inline search field above the list)
Day hero card	Gold calendar icon tile; `Day 1 Schedule` (h2, white); `{weekday}, {Month} {day}, {year}` computed from the selected date in event timezone
Day selector	Two (or N) large tabs: `Day 1` / `May 22` and `Day 2` / `May 23`. Selected = gold fill with dark text; unselected = translucent navy. Horizontally scrollable if > 3 days
White sheet	Header row: `Today's Sessions` (h2; label becomes `Sessions` when the selected day ≠ today) + `Reset` button (refresh icon)
Category chips	`All`, then categories of type `session` (seed: Keynote, Nutrition, Research). Selected = primary blue filled
Session list	`SessionTile` per session

SessionTile layout: Left column (fixed 56 px width, no wrap): start time `08:30` over `AM`. Middle: category icon tile (tinted by category), then overline category (`KEYNOTE` gold for keynote, `NUTRITION` blue, `RESEARCH` purple), title (title style, max 2 lines), row with pin icon + room or speaker name (`Main Auditorium` , `Dr. Ahmed`) caption. Right: bookmark icon (outline → filled blue when saved). First/next-up session may have a gold border highlight (the session currently live or next to start).


- Tap tile → `/agenda/:sessionId`. Tap bookmark → optimistic toggle; on failure revert and show snackbar
- Status chips: `Updated` (amber), `Cancelled` (red)
- Live indicator: red dot + `LIVE` when `start_at <= now < end_at`

Session Detail (`/agenda/:sessionId`): app bar with bookmark; category chip; title (h1); time range with timezone abbreviation; room with pin icon; status banner if changed/cancelled; `About this session` description; `Speakers` list (tap → speaker detail); `Ask a question` button → `/qna` prefilled with `session_id`.

API: `GET /events/{id}/agenda?date=2026-05-22&category_id=&q=` , `GET /sessions/{id}` , `PUT|DELETE /me/bookmarks/session/{id}` .

8.8 Speakers (`/speakers`) *(Screenshot 6)*

Reference UI (build to match):

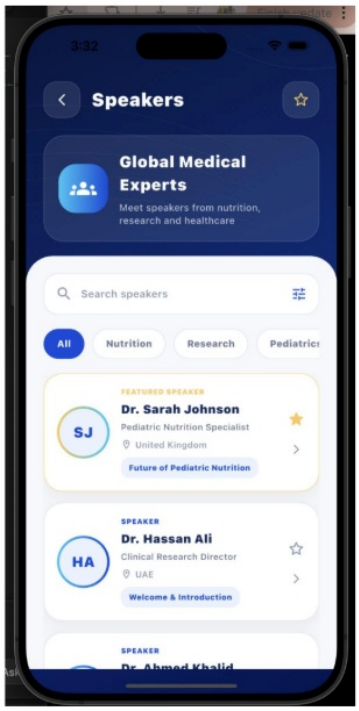

Element	Spec
App bar	Back, title `Speakers` , trailing star tile = **Featured only** toggle (filled gold when on)
Hero card	Icon tile (people); title `Global Medical Experts` ; subtitle `Meet speakers from nutrition, research and healthcare`
Search row	`Search speakers` field with trailing filter icon (opens bottom sheet with Country filter)
Chips	`All` , then categories of type `speaker` (seed: Nutrition, Research, Pediatric); horizontally scrollable
Speaker card	Avatar circle (photo or initials, e.g. `SJ` , with gold ring for featured); overline `FEATURED SPEAKER` (featured only); name `Dr. Sarah Johnson` ; designation `Pediatric Nutrition Specialist` ; pin + country (`United Kingdom`); blue chip with first assigned session title; trailing star (featured) or empty star outline + chevron

Tap card → `/speakers/:id` : large avatar, name, designation, organization + country, tags (specializations), `Biography` , `Sessions` list (SessionTiles). Search debounce 300 ms, server-side. Pagination: cursor, 20 per page, infinite scroll.

8.9 My Name Tag (`/name-tag`) *(Screenshot 7)*

Reference UI (build to match):




Element	Spec
App bar	Back, title `My Name Tag`, trailing printer icon (gold) → system print/share of the badge as PDF/image
Badge card	White card radius 24 centered on navy. Header strip: cyan-blue gradient with text `NESTLÉ MEDICAL` / `CONGRESS 2026`
Avatar	80 px circle with gold ring; photo or initials (`HL`)
Name	`Huda Latheef` (h2, bold)
Subtitle	`{designation} • {attendee_type}` e.g. `Flutter Developer • Attendee`, followed by small gold ribbon/medal icon
Info rows	(1) icon `Badge ID` / `NMC-2026-001`; (2) pin `Location` / `Dubai, UAE`; (3) calendar `Congress Date` / `22 - 23 May 2026`
QR	Centered, 160×160, white background, quiet zone, generated client-side from `qr_payload` (`qr_flutter`). Caption `Show this QR code at check-in`

Behavior: on open, request screen brightness boost (restore on exit). Cached for offline (badge ID + QR payload). If `status = revoked`, show red banner "Badge not active, contact registration desk" and blur QR. After check-in show green chip `Checked in`. **API:** `GET /me/badge`.

8.10 Venue (`/venue`) *(Screenshot 8)*

Reference UI (build to match):

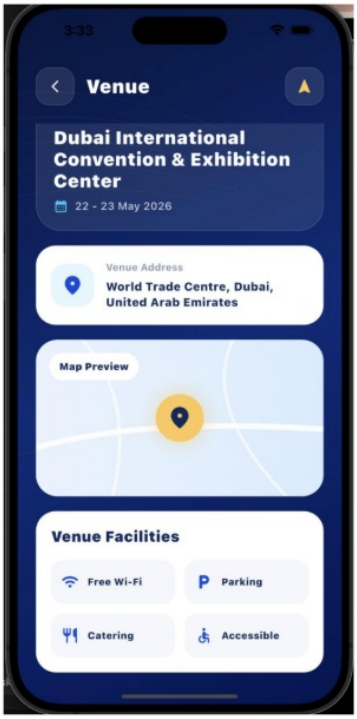


Element	Spec
App bar	Back, `Venue`, trailing gold navigation-arrow tile → open directions in native maps
Venue header	`Dubai International Convention & Exhibition Center` (h1 white) and calendar + `22 - 23 May 2026`
Address card	White card, pin icon tile, overline `Venue Address`, text `World Trade Centre, Dubai, United Arab Emirates`
Map	Card labelled `Map Preview` chip (top-left); map with gold pin marker. Use `google_maps_flutter` (or static map image fallback). Tap opens native maps
Facilities	White card titled `Venue Facilities`, 2×2 grid of chips with icons: `Free Wi-Fi`, `Parking`, `Catering`, `Accessible` (from `venue_facilities`, enabled only)
Notices	Optional list of organizer notices below facilities

If map fails or coordinates absent → show a static "Map unavailable" placeholder; address and facilities always remain visible. **API:** `GET /events/{id}/venue`.

8.11 Live Voting (`/voting`) *(Screenshot 9)*

Reference UI (build to match):

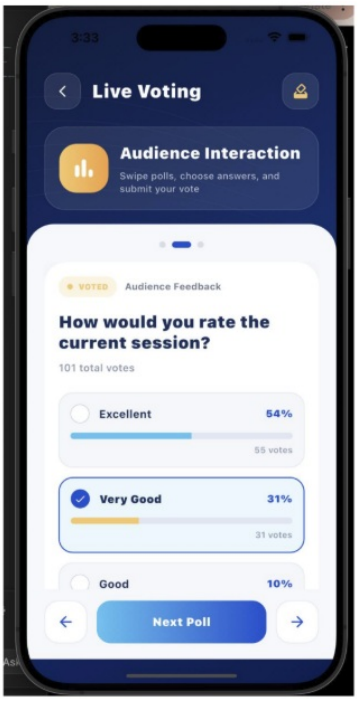

Element	Spec
App bar	Back, `Live Voting`, trailing gold ballot icon → `/voting/history`
Hero card	Gold bar-chart icon tile; `Audience Interaction`; `Swipe polls, choose answers, and submit your vote`
Pager dots	One dot per poll, current is elongated blue
Poll card (white)	Top chips: status chip: gold `● VOTING` while active and not yet voted, green `● VOTED` after the user has voted (the reference image shows `VOTED`), `PAUSED` grey, `CLOSED` red + category label (`Audience Feedback`); question (h2, e.g. `How would you rate the current session?`); caption `101 total votes` (live)
Option tile	Rounded tile: radio circle (left), label, percentage (right, bold), thin progress bar under label, small caption `55 votes` right-aligned under bar. Selected tile: blue border + filled check circle. Progress bar and numbers appear only when results are visible
Bottom bar	Left arrow button (previous poll), center gradient `Next Poll` (becomes `Submit Vote` when an unsubmitted option is selected on an active poll; becomes `Voted ✓` disabled after voting), right arrow button (next poll)


Behavior

1. Load `GET /polls/active`. Pages swipe horizontally (`PageView`)
2. Tap an option → selects locally (single-choice replaces selection)
3. `Submit Vote` → `POST /polls/{id}/votes` with `Idempotency-Key` (UUID v4 per attempt) → on success lock options, show results, snackbar "Vote submitted"
4. Errors: `ALREADY_VOTED` (show results, lock), `POLL_CLOSED` (refresh poll), `POLL_NOT_ACTIVE`, `RATE_LIMITED`; network failure → keep selection, show Retry
5. Subscribe to WebSocket topic `polls`; on `poll.results_updated` update counts/percentages with a 300 ms animated bar; on `poll.activated` insert a new page and show a snackbar "New poll available"; on `poll.closed` mark closed
6. Empty state: "No active polls right now. Polls will appear here during sessions."

Poll History (`/voting/history`): list of closed polls the user voted in or that are public, each showing question and final results.

8.12 Ask Q&A (`/qna`) *(Screenshot 10)*

Reference UI (build to match):

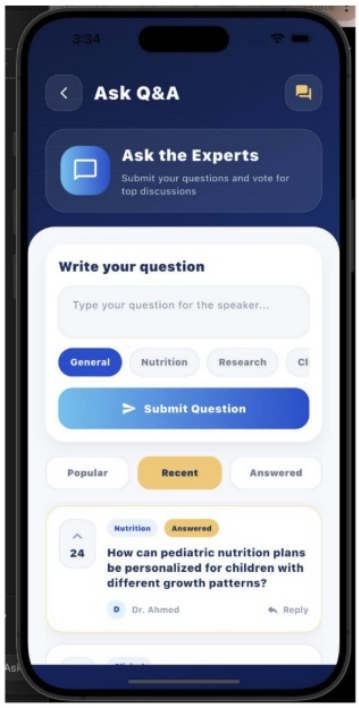


Element	Spec
App bar	Back, `Ask Q&A`, trailing gold chat icon → `/qna/mine`
Hero card	Blue chat icon tile; `Ask the Experts`; `Submit your questions and vote for top discussions`
Composer card (white)	Title `Write your question`; multiline field (3 lines, placeholder `Type your question for the speaker...`, counter `0/500`); category chips `General`, `Nutrition`, `Research`, `Clinical` (default General); optional `Link to session` selector (bottom sheet of today's sessions); gradient button `Submit Question` with send icon
Tabs	Segmented control: `Popular` · `Recent` (default, gold when selected) · `Answered`
Question tile	Left: upvote column (chevron-up + count, e.g. `24`; filled blue if upvoted). Middle: chips (category in blue, `Answered` in green), question text (title style), footer: small avatar/initial + `Dr. Ahmed` (answerer or session speaker) and right-aligned `↩ Reply` link (opens answer thread bottom sheet; moderators/speakers see an inline answer composer)

Behavior: Submit disabled until ≥ 10 chars. After submit: clear field, toast "Question submitted" (or "Submitted for moderation. It will appear once approved" when moderation ON). List refreshes. Infinite scroll, 20/page, server-side sort by tab. Upvote is optimistic with rollback on failure. WebSocket `question.published` prepends to Recent; `question.answered` updates tile. **Answer sheet:** shows full question, answer text, answerer name/role, timestamp. **My Questions (`/qna/mine`):** the user's questions with status chips `Pending`, `Published`, `Answered`, `Rejected` (with reason).

8.13 Resources (`/resources`) *(Screenshot 11)*

Reference UI (build to match):

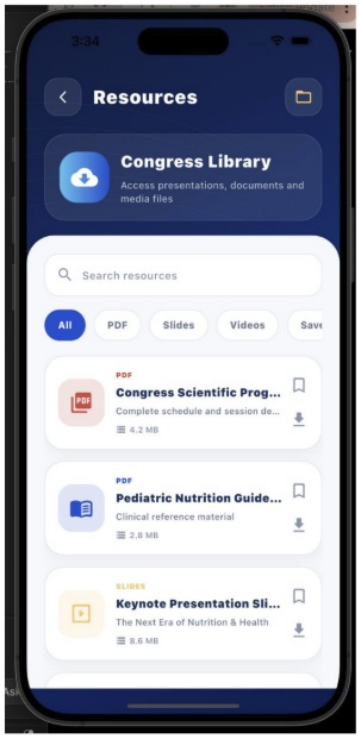

Element	Spec
App bar	Back, `Resources`, trailing gold folder icon (toggles Saved filter shortcut)
Hero card	Cloud-download icon tile; `Congress Library`; `Access presentations, documents and media files`
Search	`Search resources` (debounce 300 ms)
Chips	`All`, `PDF`, `Slides`, `Videos`, `Saved`
Resource tile	Colored icon tile by type (PDF red, Slides orange, Video purple); overline type label (`PDF`, `SLIDES`); title (1 line ellipsis, e.g. `Congress Scientific Prog…`); description (1 line ellipsis); file-size row with small icon (`4.2 MB`); right column: bookmark icon (top), download icon (bottom)

Behavior: Tap tile → request access URL → PDF opens in in-app viewer (`flutter_pdfview` / system viewer), Slides download then open with system share sheet, Videos open in in-app player (`video_player` / `chewie`) or external link. Download icon saves to device and shows progress. Bookmark toggles optimistic. Errors: `RESOURCE_UNAVAILABLE`, `DOWNLOAD_FAILED` (Retry), `UNSUPPORTED_FORMAT`. **API:** `GET /resources?type=&q=&saved=true`, `GET /resources/{id}/access`, `PUT|DELETE /me/bookmarks/resource/{id}`.

8.14 My Profile (`/profile`) *(Screenshot 12)*

Reference UI (build to match):



Element	Spec
App bar	Title `My Profile` (centered, back tile on left only when pushed), trailing gear → `/settings`
Header	Avatar 88 px with gold ring and small gold pencil badge (tap → pick image: camera/gallery, upload via `POST /me/avatar`); name `Huda Latheef`; subtitle `Medical Congress Attendee` (= `attendee_type` label); gold-outlined chip `ID: NMC-2026-001`
Info card (white)	Rows: mail icon `Email` / value; phone icon `Phone` / value; pin icon `Location` / value. Tap row or `Edit` → `/profile/edit`
Stats row	3 stat cards: calendar `12` `Sessions` → `/agenda?saved=true`; bookmark `05` `Saved` → `/resources` with Saved chip; medal `03` `Certificates` → `/profile/certificates`. Numbers zero-padded to 2 digits
Bottom nav	Home

Edit Profile (`/profile/edit`): editable: full name, organization, designation, phone (E.164 validation), location. Read-only: email, badge ID. Save → `PATCH /me`. **Certificates (`/profile/certificates`):** cards with event name, issue date, number, `Download PDF` button. Empty: "No certificates yet."

8.15 Settings (`/settings`) *(inferred)*

Rows: Notification preferences (toggles: Event updates, Session reminders, Q&A responses, New resources), Change password, Terms of Service, Privacy Policy, Attendee Guidelines (web views from CMS), App version, `Request account deletion` (confirm modal), `Log out` (confirm modal).

8.16 Notifications (`/notifications`) *(inferred)*

App bar `Notifications` + `Mark all read`. List tiles: type icon, title, body (2 lines), relative time, unread dot/bold. Tap → mark read + deep link. Empty: "You're all caught up."

8.17 Exhibitors (`/exhibitors`, `/exhibitors/:id`) *(inferred, Quick Access shortcut)*

List: search, category chips (from `exhibitor` categories), tiles with logo, name, booth (`Booth A12`), short description. Detail: logo, name, booth, category, description, website button (opens browser), contact email (optional).

8.18 Global UI behaviors

- **Deep links:** `nmc://session/{id}`, `nmc://poll/{id}`, `nmc://question/{id}`, `nmc://resource/{id}`, `nmc://notifications`. Cold-start deep link waits for auth then routes
- **Snackbars** for success/error confirmations, floating above bottom nav
- **Force update:** if `GET /app/config` returns `min_app_version` > installed → blocking "Update required" screen
- **Maintenance mode:** if backend returns `503 MAINTENANCE` show a friendly full-screen message with Retry

---

9. Admin Portal

Stack: Next.js 14 (App Router), TypeScript, Tailwind CSS, shadcn/ui, TanStack Query, React Hook Form + Zod, TanStack Table, dnd-kit (reorder), Recharts, `html5-qrcode` (scanner), TipTap (rich text).

Layout: Top bar (logo, event switcher (single event in P1), user menu, logout) + collapsible left sidebar + content area. Sidebar items are filtered by role.

Sidebar Navigation

Item	Route	Roles
Dashboard	`/`	organizer, admin, moderator
Event Setup	`/event`	organizer, admin
Sessions	`/sessions`	organizer, admin
Speakers	`/speakers`	organizer, admin
Categories	`/categories`	organizer, admin
Polls	`/polls`	organizer, admin
Q&A Moderation	`/qna`	moderator, organizer, admin
Resources	`/resources`	organizer, admin
Exhibitors	`/exhibitors`	organizer, admin
Attendees	`/attendees`	organizer, admin
Certificates	`/certificates`	organizer, admin
Announcements	`/announcements`	organizer, admin
Check-in	`/checkin`	checkin_staff, organizer, admin
Users & Roles	`/users`	admin
Audit Log	`/audit`	admin
Settings	`/settings`	admin

9.1 Dashboard

- Summary cards: Registered attendees, Checked in, Active polls, Pending questions, Resources published, Downloads (24 h)
- Charts: registrations per day (line), check-ins per hour (bar), votes per poll (horizontal bar), questions by status (donut)
- Live widget: currently running session + next session

9.2 Event Setup

Form fields: name, tagline, description (rich text), start date/time, end date/time, timezone (default `Asia/Dubai`), city, country, hero image, branding colors (read-only defaults), venue (name, address, lat, lng, notices), facilities (toggle + label + icon), settings toggles: `registration_open`, `require_approval`, `qna_moderation_enabled`, `google_signin_enabled`, `apple_signin_enabled`. Save → `PATCH /admin/events/{id}`; changes reflect in the app on next fetch / `event.updated` WS message.

9.3 Sessions

- Table: Time, Title, Category, Room, Speakers, Status, Visibility, Actions. Filters: day, category, status. Search by title
- Create/Edit modal: title, summary, description, category, date, start time, end time, room, speakers (multi-select with order), visibility (draft/published), status. Validation: end > start; warn on room/speaker overlap (non-blocking warning, "Dr. X is already in Session Y at this time")
- Actions: Publish/Unpublish, Cancel (optional reason → notifies bookmarkers), Duplicate, Delete (confirm)
- Changing time/room/title of a published session sets status `changed` and sends a notification to users who bookmarked it

9.4 Speakers & Categories

- Speakers: table with photo, name, designation, organization, country, specializations, featured toggle; modal form with photo upload (JPG/PNG ≤ 5 MB), biography (rich text), link to a user account (optional, enables the `speaker` role flows)
- Categories: tabbed by type (Session, Speaker, Question, Resource, Exhibitor); name, slug, color, order (drag-and-drop)

9.5 Polls

- Table: Question, Session, Status, Votes, Starts, Ends, Actions
- Create/Edit: question, category label (e.g. Audience Feedback), session (optional), type (single/multiple), max choices, options (2–10, drag reorder), results visibility (after_vote/live/after_close), starts_at/ends_at (optional), status
- Controls: **Activate**, **Pause**, **Resume**, **Close**, **Duplicate**, **Reset votes** (typed confirmation "RESET", audit logged)
- Live results panel (bars, count, total) updating through WebSocket
- Cannot edit options after votes exist (only question text and visibility)

9.6 Q&A Moderation

- Tabs: Pending | Published | Answered | Hidden | Rejected, with counts and live updates
- Row: question, author (name, org), category, session, upvotes, flags (profanity), submitted time
- Actions: Approve, Hide, Reject (reason select + free text, sent to author), Mark answered, Answer (rich text ≤ 2,000 chars), Assign to speaker, Flag
- Keyboard shortcuts: `A` approve, `H` hide, `R` reject, `↓/↑` navigate
- Moderation history drawer per question

9.7 Resources

- Table: Title, Type, Size, Version, Status, Downloads, Updated, Actions
- Upload flow: request pre-signed upload URL (`POST /admin/media/upload-url`) → browser PUTs directly to S3 with progress bar → `POST /admin/resources` with metadata
- Fields: title, description, type, category, session (optional), visibility (published/unpublished), file or external URL
- Replace file → increments `version` (previous kept in S3 versioning)
- Publish/Unpublish toggle. Unpublishing triggers no notification; publishing optionally sends `new_resource` notification (checkbox)

9.8 Exhibitors

Table + modal: name, logo upload, booth, category, description, website, contact email, order, published toggle.

9.9 Attendees

- Table: Name, Email, Organization, Badge ID, Status, Checked in, Registered. Search, filter by status/checked-in
- Row actions: View, Approve (pending_approval → active), Suspend/Unsuspend, Resend verification, Revoke/Regenerate badge
- Export CSV (name, email, organization, badge ID, status, checked-in time); **Import CSV** (columns: full_name, email, organization, designation; creates pending accounts and sends an invite email with a set-password OTP)

9.10 Certificates

Select attendees (all checked-in or manual selection) → Issue. Table of issued certificates with Download, Revoke, Resend email. Template settings (logo, signatory name, title).

9.11 Announcements

Compose: title (≤ 60), body (≤ 240), optional deep link (picker for session/poll/resource), audience (All / Checked-in only / Speakers), send now or schedule. Status: Draft → Scheduled → Sent. Delivery stats (sent, failed).

9.12 Check-in (`/checkin`)

Full-screen camera scanner. On scan: `POST /admin/checkin/verify {token}` → big result card: ✅ green "Checked in" with name, organization, badge ID; 🟡 amber "Already checked in at {time}"; 🔴 red "Invalid / Revoked / Suspended". Auto-resets after 3 s. Manual search by badge ID/name. Counter of today's check-ins.

9.13 Users & Roles (admin)

Table (Name, Email, Role, Status, Last login). Create user (name, email, temp password or invite, role). Change role (confirm modal; admin cannot demote themselves or remove the last admin). Suspend/Delete. Bulk actions.

9.14 Audit Log & Settings

- Audit log: filter by actor, action, entity, date; JSON metadata viewer; export CSV; read-only
- Settings: platform name, support email, email sender name/reply-to, `min_app_version` (ios/android), maintenance mode toggle, profanity word list, feature flags

---

10. Notifications

10.1 Triggers

Trigger	Channel	Recipients	Title	Body (template)	Deep link
Registration	Email	New user	Verify your email	Your code is {{code}}. Expires in 15 minutes	n/a
Password reset	Email	User	Reset your password	Your code is {{code}}. Expires in 15 minutes	n/a
Account approved	Email + push	User	You're approved!	Your congress account is active	`nmc://home`
Session reminder	Push + in-app	Users who bookmarked	Starting in 15 minutes	{{title}}: {{room}}	`nmc://session/{id}`
Session changed	Push + in-app	Bookmarkers	Schedule update	{{title}} has changed: {{summary}}	`nmc://session/{id}`
Session cancelled	Push + in-app	Bookmarkers	Session cancelled	{{title}} has been cancelled	`nmc://session/{id}`
Poll activated	Push + in-app	All checked-in attendees	New poll is live	{{question}}	`nmc://poll/{id}`
Question answered	Push + in-app	Question author + upvoters	Your question was answered	{{answerer}} replied	`nmc://question/{id}`
Question rejected	In-app	Author	Question not published	Reason: {{reason}}	`nmc://qna/mine`
New resource	Push + in-app	All attendees	New resource available	{{title}}	`nmc://resource/{id}`
Certificate issued	Email + push	Attendee	Your certificate is ready	Download it from your profile	`nmc://certificates`
Announcement	Push + in-app	Per audience	{{title}}	{{body}}	optional

10.2 Implementation

- Background worker (**ARQ** on Redis) handles: email sending, push fan-out (FCM batch of 500), session reminders (scheduled job every minute looking at sessions starting in 15 ± 1 min), poll auto-transitions, scheduled announcements, certificate PDF generation
- Email via **AWS SES** (SPF, DKIM, DMARC configured); templates stored in `email_templates` table (key, subject, html, text, variables) editable by admin
- Push via **Firebase Cloud Messaging**; device tokens stored in `device_tokens`; remove tokens when FCM returns `UNREGISTERED`
- `notifications` row created for each recipient (in-app inbox); push is best-effort
- Failed email/push: retry up to 3 times with exponential backoff (30 s, 2 min, 10 min); status recorded
- Users can disable categories in Settings (`notification_preferences`); transactional emails (OTP/reset) cannot be disabled

---

11. Database Schema

Engine: PostgreSQL 16. Extensions: `pgcrypto` (UUIDs via `gen_random_uuid()`), `citext` (emails), `pg_trgm` (search). All timestamps `TIMESTAMPTZ` (UTC). All PKs UUID. Soft-delete column `deleted_at` where noted. Managed by **Alembic** migrations (never edit the DB by hand).

11.1 Entity Relationship Overview

```
events ──< venues ──< venue_facilities
events ──< sessions >──< speakers  (via session_speakers)
events ──< categories
events ──< polls ──< poll_options ; polls ──< votes >── users
events ──< questions ──< answers ; questions ──< question_upvotes >── users
events ──< resources ; events ──< exhibitors ; events ──< announcements
users ──< bookmarks ; users ──< badges ; users ──< notifications
users ──< refresh_tokens ; users ──< device_tokens ; users ──< certificates
users ──< audit_logs
```

11.2 Enums

`user_role`: attendee, speaker, moderator, organizer, admin, checkin_staff `user_status`: pending_verification, pending_approval, active, suspended `session_status`: scheduled, changed, cancelled `visibility`: draft, published `category_type`: session, speaker, question, resource, exhibitor `poll_status`: draft, scheduled, active, paused, closed `poll_type`: single, multiple `results_visibility`: after_vote, live, after_close `question_status`: pending, published, answered, hidden, rejected `resource_type`: pdf, slides, video, document, link `bookmark_target`: session, resource `badge_status`: active, revoked `notification_status`: pending, sent, failed `otp_purpose`: verify_email, reset_password

11.3 Core Tables

users

Column	Type	Constraints
id	UUID	PK
email	CITEXT	UNIQUE, NOT NULL (stored normalized)
password_hash	VARCHAR(255)	NULLABLE (null for social-only)
google_sub	VARCHAR(255)	UNIQUE, NULLABLE
apple_sub	VARCHAR(255)	UNIQUE, NULLABLE
full_name	VARCHAR(100)	NOT NULL
organization	VARCHAR(150)	NOT NULL
designation	VARCHAR(120)	NULLABLE
attendee_type	VARCHAR(50)	DEFAULT 'Medical Congress Attendee'
phone	VARCHAR(20)	NULLABLE (E.164)
location	VARCHAR(120)	NULLABLE
avatar_url	TEXT	NULLABLE (S3 key)
role	user_role	NOT NULL DEFAULT attendee
status	user_status	NOT NULL DEFAULT pending_verification
email_verified_at	TIMESTAMPTZ	NULLABLE
terms_accepted_at	TIMESTAMPTZ	NOT NULL
last_login_at	TIMESTAMPTZ	NULLABLE
failed_login_count	INT	DEFAULT 0
locked_until	TIMESTAMPTZ	NULLABLE
notification_preferences	JSONB	DEFAULT '{"event_updates":true,"session_reminders":true,"qna":true,"resources":true}'
created_at / updated_at	TIMESTAMPTZ	DEFAULT now()
deleted_at	TIMESTAMPTZ	NULLABLE

email_otps: id PK; user_id FK→users (CASCADE); purpose otp_purpose; code_hash VARCHAR(255); expires_at; attempts INT DEFAULT 0; consumed_at NULLABLE; created_at. Index (user_id, purpose, created_at DESC).

refresh_tokens: id PK; user_id FK; family_id UUID (index); token_hash CHAR(64) UNIQUE; device_info VARCHAR(200); expires_at; revoked_at NULLABLE; replaced_by UUID NULLABLE; created_at.

device_tokens: id PK; user_id FK; platform ENUM(ios, android); fcm_token TEXT UNIQUE; app_version; last_seen_at; created_at.

events

Column	Type	Constraints
id	UUID	PK
name	VARCHAR(200)	NOT NULL
tagline	VARCHAR(200)	NULLABLE
description	TEXT	NULLABLE
start_at / end_at	TIMESTAMPTZ	NOT NULL, CHECK end_at > start_at
timezone	VARCHAR(60)	NOT NULL DEFAULT 'Asia/Dubai'
city / country	VARCHAR(80)	NOT NULL
hero_image_url	TEXT	NULLABLE
is_current	BOOLEAN	DEFAULT false (partial unique index: only one true)
settings	JSONB	DEFAULT '{"registration_open":true,"require_approval":false,"qna_moderation_enabled":true,"google_signin_enabled":false,"apple_signin_enabled":false}'
created_at / updated_at	TIMESTAMPTZ	

venues: id PK; event_id FK UNIQUE; name VARCHAR(200); address TEXT; latitude NUMERIC(9,6) NULL; longitude NUMERIC(9,6) NULL; notices JSONB DEFAULT '[]'. **venue_facilities**: id PK; venue_id FK; key VARCHAR(40); label VARCHAR(60); icon VARCHAR(40); enabled BOOL DEFAULT true;

display_order INT. UNIQUE (venue_id, key).

categories: id PK; event_id FK; type category_type; name VARCHAR(60); slug VARCHAR(60); color VARCHAR(9) NULL; display_order INT DEFAULT 0. UNIQUE (event_id, type, slug).

sessions

Column	Type	Constraints
id	UUID	PK
event_id	UUID	FK, NOT NULL, indexed
category_id	UUID	FK→categories, NOT NULL
title	VARCHAR(200)	NOT NULL
summary	VARCHAR(300)	NULLABLE
description	TEXT	NULLABLE
start_at / end_at	TIMESTAMPTZ	NOT NULL, CHECK end_at > start_at
room	VARCHAR(120)	NULLABLE
status	session_status	DEFAULT scheduled
status_note	VARCHAR(300)	NULLABLE (cancellation/change reason)
visibility	visibility	DEFAULT draft
display_order	INT	DEFAULT 0
created_at / updated_at	TIMESTAMPTZ	
Index: (event_id, start_at), (event_id, category_id).		

speakers: id PK; event_id FK; user_id FK→users NULL; name VARCHAR(120); designation VARCHAR(160); organization VARCHAR(160) NULL; country VARCHAR(80) NULL; biography TEXT NULL; photo_url TEXT NULL; is_featured BOOL DEFAULT false; display_order INT; visibility; created_at/updated_at. GIN trigram index on name. **speaker_categories**: speaker_id FK, category_id FK, PK(both). **session_speakers**: session_id FK, speaker_id FK, display_order INT, PK(session_id, speaker_id).

bookmarks: id PK; user_id FK; target_type bookmark_target; target_id UUID; created_at. UNIQUE (user_id, target_type, target_id).

badges: id PK; user_id FK UNIQUE per event; event_id FK; badge_code VARCHAR(30) UNIQUE; qr_token_hash CHAR(64) UNIQUE; qr_token_enc TEXT (token encrypted with app key so it can be re-shown to the owner); status badge_status DEFAULT active; checked_in_at NULL; checked_in_by FK NULL; issued_at.

polls

Column	Type	Constraints
id	UUID	PK
event_id	UUID	FK
session_id	UUID	FK NULL
question	VARCHAR(300)	NOT NULL
label	VARCHAR(60)	DEFAULT 'Audience Feedback'
type	poll_type	DEFAULT single
max_choices	INT	DEFAULT 1
status	poll_status	DEFAULT draft
results_visibility	results_visibility	DEFAULT after_vote
starts_at / ends_at	TIMESTAMPTZ	NULLABLE
display_order	INT	DEFAULT 0
created_by	UUID	FK
created_at / updated_at	TIMESTAMPTZ	
poll_options: id PK; poll_id FK (CASCADE); label VARCHAR(150); display_order INT.		
votes: id PK; poll_id FK; option_id FK; user_id FK; created_at; idempotency_key VARCHAR(64) NULL. UNIQUE (poll_id, user_id, option_id); index (poll_id, option_id).		

questions: id PK; event_id FK; user_id FK; session_id FK NULL; speaker_id FK NULL; category_id FK; text VARCHAR(500); status question_status; upvote_count INT DEFAULT 0 (denormalized, updated in the same transaction); flagged BOOL DEFAULT false; reject_reason VARCHAR(300) NULL; moderated_by FK NULL; moderated_at NULL; created_at; updated_at. Indexes: (event_id, status, created_at DESC), (event_id, status, upvote_count DESC). **question_upvotes**: id PK; question_id FK; user_id FK; created_at. UNIQUE (question_id, user_id). **answers**: id PK; question_id FK; author_user_id FK; answer_text TEXT (≤ 2000); created_at; updated_at.

resources: id PK; event_id FK; session_id FK NULL; category_id FK NULL; title VARCHAR(200); description VARCHAR(300) NULL; type resource_type; storage_key TEXT NULL; external_url TEXT NULL; mime_type VARCHAR(100) NULL; file_size BIGINT NULL; version INT DEFAULT 1; visibility; download_count INT DEFAULT 0; published_at NULL; created_by FK; created_at/updated_at. CHECK (storage_key IS NOT NULL OR external_url IS NOT NULL). GIN trigram on title.

exhibitors: id PK; event_id FK; category_id FK NULL; name VARCHAR(160); booth VARCHAR(40) NULL; description TEXT NULL; logo_url TEXT NULL; website TEXT NULL; contact_email VARCHAR(255) NULL; display_order INT; visibility.

notifications: id PK; user_id FK; type VARCHAR(50); title VARCHAR(120); body VARCHAR(300); deep_link VARCHAR(200) NULL; read_at NULL; push_status notification_status DEFAULT pending; attempts INT DEFAULT 0; created_at. Index (user_id, read_at, created_at DESC). **announcements**: id PK; event_id FK; title; body; deep_link NULL; audience ENUM(all, checked_in, speakers); status ENUM(draft, scheduled, sent); scheduled_at NULL; sent_at NULL; sent_count INT; failed_count INT; created_by FK; created_at. **email_templates**: key VARCHAR(60) PK; subject; html; text; variables JSONB; updated_by; updated_at. **email_log**: id PK; to_email; template_key; status notification_status; attempts; provider_message_id; error; created_at.

certificates: id PK; event_id FK; user_id FK; certificate_number VARCHAR(30) UNIQUE; file_key TEXT; status ENUM(issued, revoked); issued_by FK;

issued_at. UNIQUE (event_id, user_id).

cms_pages: key VARCHAR(40) PK (`terms`, `privacy`, `guidelines`, `about`); title; body_markdown; updated_by; updated_at. **app_settings**: key PK; value JSONB; updated_at. (min_app_version_ios/android, maintenance_mode, profanity_words) **audit_logs**: id PK; actor_user_id FK NULL; action VARCHAR(80); entity_type VARCHAR(40); entity_id UUID NULL; metadata JSONB; ip INET NULL; created_at. Index (created_at DESC), (actor_user_id), (entity_type, entity_id).

11.4 Integrity Rules

- FKs everywhere with `ON DELETE` rules: user-owned rows CASCADE on hard delete; content rows RESTRICT
- Vote, upvote and bookmark uniqueness enforced by DB constraints, not just code
- `questions.upvote_count` and votes counts are updated inside the same transaction as the insert
- Required indexes: all FKs, `sessions(event_id,start_at)`, `polls(event_id,status)`, `questions(event_id,status,created_at)`, `resources(event_id,type,visibility)`, trigram indexes for search
- Deleting a user anonymizes (name → "Deleted user", email → hashed placeholder) and removes tokens, bookmarks, device tokens; keeps votes/questions anonymized for aggregate integrity

---

12. API Structure

Base URL: `/api/v1`. JSON only. Auth: `Authorization: Bearer <access_token>` unless marked **[Public]**. Field names are `snake_case`. Timestamps are ISO 8601 UTC (`2026-05-22T04:30:00Z`). IDs are UUIDs. OpenAPI docs auto-generated at `/docs`.

12.1 Standard Response Format

Success:

```
{ "success": true, "data": { }, "meta": { "next_cursor": "eyJpZCI6...", "limit": 20, "total": 150 } }
```

Error:

```
{
  "success": false,
  "error": {
    "code": "VALIDATION_ERROR",
    "message": "Please check the highlighted fields.",
    "field_errors": [ { "field": "email", "message": "Enter a valid email address." } ],
    "request_id": "9f2c1c7e-..."
  }
}
```

HTTP codes: 200, 201, 204, 400, 401 (`UNAUTHORIZED`, `TOKEN_EXPIRED`), 403 (`FORBIDDEN`), 404 (`NOT_FOUND`), 409 (`CONFLICT` variants), 422 (`VALIDATION_ERROR`), 429 (`RATE_LIMITED`, with `Retry-After`), 503 (`MAINTENANCE`). **Pagination:** cursor-based (`?limit=20&cursor=...`), default 20, max 100, stable ordering.

12.2 Authentication

Method	Endpoint	Description	Auth
POST	`/auth/register`	Create account, send OTP	Public
POST	`/auth/verify-email`	Verify OTP, returns tokens	Public
POST	`/auth/resend-verification`	Resend OTP (60 s cooldown)	Public
POST	`/auth/login`	Email + password	Public
POST	`/auth/google` / `/auth/apple`	Social sign-in (flag)	Public
POST	`/auth/refresh`	Rotate refresh token	Public
POST	`/auth/logout`	Revoke token family	Required
POST	`/auth/forgot-password`	Send reset OTP	Public
POST	`/auth/reset-password`	Reset with OTP	Public
POST	`/auth/web/login`, `/auth/web/refresh`, `/auth/web/logout`	Cookie-based variants for admin portal	Public/Required

POST /auth/register

```
// request
{ "full_name": "Huda Latheef", "email": "huda@example.com", "organization": "Dubai Hospital",
  "password": "Str0ngPass!", "accepted_terms": true }
// 201
{ "success": true, "data": { "email": "huda@example.com", "verification_required": true, "otp_expires_in": 900 } }
```

POST /auth/login

```
// request
{ "email": "huda@example.com", "password": "Str0ngPass!", "device_info": "iPhone 15 / iOS 17" }
// 200
{ "success": true, "data": {
  "access_token": "eyJ...", "refresh_token": "r_8f3...", "expires_in": 900,
  "user": { "id": "uuid", "full_name": "Huda Latheef", "email": "huda@example.com", "role": "attendee" } } }
```

POST /auth/refresh `{ "refresh_token": "r_8f3..." }` → same shape as login (new pair).

12.3 Profile & Device

Method	Endpoint	Description
GET	`/me`	Current profile + counts
PATCH	`/me`	Update `full_name, organization, designation, phone, location, notification_preferences`
POST	`/me/avatar`	Get pre-signed upload URL; then `PATCH /me {avatar_key}`
PATCH	`/me/password`	`{current_password, new_password}`
DELETE	`/me`	Request account deletion
POST	`/me/devices`	Register FCM token `{platform, fcm_token, app_version}`
DELETE	`/me/devices/{fcm_token}`	Unregister
GET	`/me/badge`	Badge + QR payload
GET	`/me/certificates`	Issued certificates
GET	`/me/bookmarks?target_type=session`	Bookmarked IDs
PUT / DELETE	`/me/bookmarks/{target_type}/{target_id}`	Add / remove (idempotent, 204)

GET /me


```
{ "success": true, "data": {
  "id": "uuid", "full_name": "Huda Latheef", "email": "huda@example.com", "organization": "Dubai Hospital",
  "designation": "Flutter Developer", "attendee_type": "Medical Congress Attendee",
  "phone": "+971562834212", "location": "Dubai, UAE", "avatar_url": "https://cdn.../a.jpg",
  "badge_code": "NMC-2026-001", "role": "attendee",
  "counts": { "sessions": 12, "saved": 5, "certificates": 3 } } }
```


GET /me/badge


```
{ "success": true, "data": {
  "badge_code": "NMC-2026-001", "full_name": "Huda Latheef", "designation": "Flutter Developer",
  "attendee_type": "Attendee", "location": "Dubai, UAE", "event_name": "NESTLÉ MEDICAL CONGRESS 2026",
  "event_dates_label": "22 - 23 May 2026", "qr_payload": "nmc://badge/Xk3...", "status": "active", "checked_in_at": null } }
```


12.4 Event, Venue, Search, Config

Method	Endpoint	Description	Auth
GET	`/app/config`	`min_app_version`, maintenance flag, feature flags	Public
GET	`/events/current`	Active event	Public
GET	`/events/{event_id}/venue`	Venue + facilities	Required
GET	`/search?q=`	Grouped results: sessions, speakers, resources, exhibitors	Required
GET	`/cms/{key}`	Terms / privacy / guidelines / about	Public

GET /events/current


```
{ "success": true, "data": {
  "id": "uuid", "name": "The Next Era of Nutrition & Health", "title": "NESTLÉ MEDICAL CONGRESS 2026",
  "tagline": "The Next Era of Nutrition & Health", "start_at": "2026-05-21T20:00:00Z", "end_at": "2026-05-23T14:00:00Z",
  "timezone": "Asia/Dubai", "city": "Dubai", "country": "United Arab Emirates", "dates_label": "May 22 - 23, 2026",
  "days": [ { "index": 1, "date": "2026-05-22", "label": "Day 1", "short": "May 22" },
            { "index": 2, "date": "2026-05-23", "label": "Day 2", "short": "May 23" } ],
  "settings": { "qna_moderation_enabled": true, "google_signin_enabled": false, "apple_signin_enabled": false } } }
```


12.5 Agenda & Speakers

Method	Endpoint	Description
GET	`/events/{id}/agenda?date=&category_id=&q=&saved=`	Sessions for a day
GET	`/events/{id}/sessions/upcoming?limit=5`	Next sessions
GET	`/sessions/{id}`	Session detail with speakers
GET	`/events/{id}/categories?type=session`	Category chips
GET	`/events/{id}/speakers?q=&category_id=&featured=&country=&cursor=`	Speaker list
GET	`/speakers/{id}`	Speaker detail + sessions

GET /events/{id}/agenda?date=2026-05-22


```
{ "success": true, "data": { "date": "2026-05-22", "sessions": [
  { "id": "uuid", "title": "Opening Ceremony", "category": { "id": "uuid", "name": "Keynote", "slug": "keynote" },
    "start_at": "2026-05-22T04:30:00Z", "end_at": "2026-05-22T05:30:00Z", "start_local": "08:30", "meridiem": "AM",
    "room": "Main Auditorium", "status": "scheduled", "speakers": [ { "id": "uuid", "name": "Main Auditorium Host" } ],
    "is_bookmarked": false, "is_live": false } ] } }
```


12.6 Voting

Method	Endpoint	Description	Auth
GET	`/polls/active`	Visible polls (active/paused, plus closed in last 10 min)	Required
GET	`/polls/history`	Closed polls	Required
GET	`/polls/{id}`	Poll + options + my vote + results (if visible)	Required
POST	`/polls/{id}/votes`	Submit vote (header `Idempotency-Key`)	Required
GET	`/polls/{id}/results`	Results if visible	Required

GET /polls/active

```
{ "success": true, "data": [ {
  "id": "uuid", "label": "Audience Feedback", "question": "How would you rate the current session?",
  "status": "active", "type": "single", "max_choices": 1, "results_visibility": "after_vote",
  "has_voted": true, "my_option_ids": ["uuid-b"], "total_votes": 101, "closes_at": null,
  "options": [
    { "id": "uuid-a", "label": "Excellent", "votes": 55, "percent": 54 },
    { "id": "uuid-b", "label": "Very Good", "votes": 31, "percent": 31 },
    { "id": "uuid-c", "label": "Good", "votes": 10, "percent": 10 },
    { "id": "uuid-d", "label": "Fair", "votes": 5, "percent": 5 } ] } ] }
```

(`votes` / `percent` are `null` when results are not visible to this user.)

POST /polls/{id}/votes

```
// headers: Idempotency-Key: 6d1f...
// request
{ "option_ids": ["uuid-b"] }
// 201
{ "success": true, "data": { "accepted": true, "has_voted": true, "results_visible": true, "poll": { "...same as GET /polls/{id}" } } }
// 409
{ "success": false, "error": { "code": "ALREADY_VOTED", "message": "You have already voted in this poll." } }
```

Error codes: `POLL_NOT_ACTIVE`, `POLL_CLOSED`, `ALREADY_VOTED`, `INVALID_OPTION`, `TOO_MANY_CHOICES`.

12.7 Q&A

Method	Endpoint	Description
GET	`/questions?tab=popular|recent|answered&category_id=&session_id=&cursor=`	Visible questions
GET	`/questions/mine`	Own questions incl. pending/rejected
POST	`/questions`	Submit question
GET	`/questions/{id}`	Detail with answer
PUT / DELETE	`/questions/{id}/upvote`	Add / remove upvote (idempotent)
POST	`/questions/{id}/answer`	Speaker (own session) / moderator / organizer / admin

POST /questions

```
{ "text": "How can pediatric nutrition plans be personalized for children with different growth patterns?",
  "category_id": "uuid", "session_id": null, "speaker_id": null }
// 201
{ "success": true, "data": { "id": "uuid", "status": "pending", "message": "Submitted for moderation." } }
```

GET /questions?tab=recent item:

```
{ "id": "uuid", "text": "How can pediatric...", "category": { "name": "Nutrition" }, "status": "answered",
  "upvote_count": 24, "has_upvoted": false, "is_mine": false, "created_at": "2026-05-22T07:10:00Z",
  "answer": { "text": "Growth charts...", "author_name": "Dr. Ahmed", "answered_at": "2026-05-22T08:00:00Z" } }
```

12.8 Resources & Exhibitors

Method	Endpoint	Description
GET	`/resources?type=pdf|slides|video&q=&saved=true&cursor=`	Published resources
GET	`/resources/{id}`	Detail
GET	`/resources/{id}/access`	`{url, expires_in, kind: "download"|"external"}`
GET	`/events/{id}/exhibitors?q=&category_id=`	Exhibitors
GET	`/exhibitors/{id}`	Detail

Resource item: `{ id, title, description, type, file_size_bytes, file_size_label: "4.2 MB", is_bookmarked, version, updated_at }`.

12.9 Notifications

Method	Endpoint	Description
GET	`/notifications?cursor=`	Inbox
GET	`/notifications/unread-count`	`{count}`
PATCH	`/notifications/{id}`	Mark read
POST	`/notifications/read-all`	Mark all read

12.10 Admin API (`/admin/...`, roles per RBAC matrix)

Area	Endpoints
Events	`GET/PATCH /admin/events/{id}`, `PUT /admin/events/{id}/venue`, `PUT /admin/venues/{id}/facilities`
Sessions	`GET/POST /admin/sessions`, `GET/PATCH/DELETE /admin/sessions/{id}`, `POST /admin/sessions/{id}/publish|unpublish|cancel|duplicate`
Speakers	`GET/POST /admin/speakers`, `PATCH/DELETE /admin/speakers/{id}`
Categories	`GET/POST /admin/categories`, `PATCH/DELETE /admin/categories/{id}`, `POST /admin/categories/reorder`
Polls	`GET/POST /admin/polls`, `PATCH/DELETE /admin/polls/{id}`, `POST /admin/polls/{id}/activate|pause|resume|close|duplicate|reset`
Q&A	`GET /admin/questions?status=`, `POST /admin/questions/{id}/approve|hide|reject|flag`, `POST /admin/questions/{id}/answer`, `GET`

	`/admin/questions/{id}/history`
Resources	`POST /admin/media/upload-url`, `GET/POST /admin/resources`, `PATCH/DELETE /admin/resources/{id}`, `POST /admin/resources/{id}/publish|unpublish|replace`
Exhibitors	`GET/POST /admin/exhibitors`, `PATCH/DELETE /admin/exhibitors/{id}`
Attendees	`GET /admin/attendees`, `GET /admin/attendees/{id}`, `POST /admin/attendees/{id}/approve|suspend|unsuspend|resend-verification|regenerate-badge`, `GET /admin/attendees/export`, `POST /admin/attendees/import`
Certificates	`POST /admin/certificates/issue`, `GET /admin/certificates`, `POST /admin/certificates/{id}/revoke`
Announcements	`GET/POST /admin/announcements`, `PATCH /admin/announcements/{id}`, `POST /admin/announcements/{id}/send`
Check-in	`POST /admin/checkin/verify`, `GET /admin/checkin/stats`
Users	`GET/POST /admin/users`, `PATCH /admin/users/{id}` (role/status), `DELETE /admin/users/{id}`
Analytics	`GET /admin/analytics/overview|registrations|checkins|polls|questions`
Audit/Settings	`GET /admin/audit`, `GET/PATCH /admin/settings`, `GET/PATCH /admin/cms/{key}`, `GET/PATCH /admin/email-templates/{key}`

POST /admin/checkin/verify → `{ "token": "Xk3..." }`

```
{ "success": true, "data": { "result": "valid", "full_name": "Huda Latheef", "organization": "Dubai Hospital",
  "badge_code": "NMC-2026-001", "checked_in_at": "2026-05-22T04:12:00Z" } }
```

`result` ∈ `valid | already_checked_in | revoked | suspended | invalid`.

---

13. Real-time (WebSocket) Design

Endpoint: `wss://api.<domain>/ws?token=<access_token>` (FastAPI WebSocket). Validate JWT on connect; close with code 4401 if invalid/expired. Client sends heartbeat `{"type":"ping"}` every 25 s; server replies `{"type":"pong"}`; connections idle > 60 s are dropped.

Subscription: after connect the client sends `{"type":"subscribe","topics":["polls","questions","notifications","schedule"]}`. Per-user topic `user:{id}` is auto-subscribed.

Server → client events


Event	Payload	Triggered by
`poll.activated`	`{poll_id}`	Organizer activates poll
`poll.closed`	`{poll_id}`	Close or auto end
`poll.paused` / `poll.resumed`	`{poll_id}`	Organizer
`poll.results_updated`	`{poll_id, total_votes, options:[{id,votes,percent}]}`	Vote accepted (throttled to max 1/sec per poll)
`question.published`	`{question}`	Moderation approve or auto publish
`question.answered`	`{question_id, answer}`	Answer posted
`question.upvoted`	`{question_id, upvote_count}`	Upvote (throttled)
`schedule.updated`	`{session_id, status}`	Session changed/cancelled
`notification.new`	`{notification}`	Per-user
`event.updated`	`{}`	Event settings changed

Scaling: each API instance subscribes to Redis pub/sub channels (`ws:polls`, `ws:questions`, ...). Publishers (HTTP handlers/workers) publish to Redis; every instance forwards to its local sockets. Results for `poll.results_updated` are computed with one grouped query and cached in Redis for 1 s. **Client fallback:** if the socket fails 3 reconnects (exponential backoff 1, 2, 4, up to 30 s with jitter), switch to polling `GET /polls/active` every 5 s while the Voting screen is visible and `GET /questions` every 10 s on Q&A. On reconnect, refetch current screen data (no message replay).

---

14. Tech Stack & Project Setup

14.1 Architecture Overview

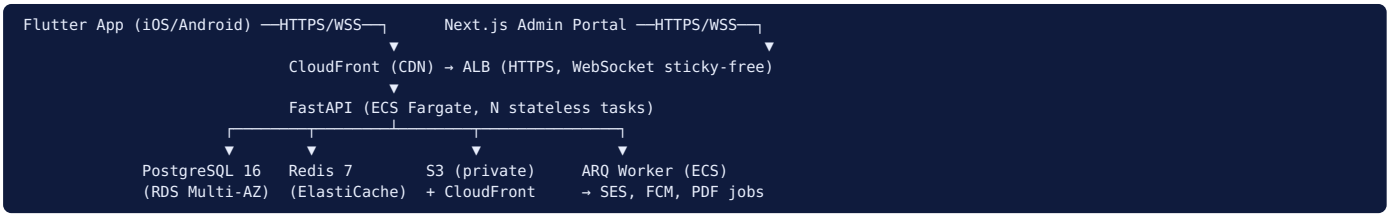

14.2 Technology Choices

Layer	Technology	Rationale
Mobile	**Flutter 3.x (stable) + Dart 3**	Single codebase for iOS/Android
Mobile state	**Riverpod 2 (`flutter_riverpod`, `riverpod_annotation`)**	Testable, compile-safe
Mobile routing	**go_router**	Deep links, auth redirect
HTTP	**Dio** + interceptors (auth, refresh, logging, retry)	Token refresh single-flight
Models	**freezed + json_serializable**	Immutable

		models
Secure storage	**flutter_secure_storage**	Keychain/Keystore
Other packages	`qr_flutter`, `google_maps_flutter`, `url_launcher`, `firebase_messaging`, `flutter_local_notifications`, `web_socket_channel`, `cached_network_image`, `shimmer`, `intl`, `flutter_pdfview`, `video_player` + `chewie`, `printing`, `screen_brightness`, `connectivity_plus`, `hive` (offline read cache), `image_picker`, `sentry_flutter`	
Backend	**Python 3.12 + FastAPI + Uvicorn/Gunicorn**	OpenAPI built-in, async
ORM / migrations	**SQLAlchemy 2.0 (async) + Alembic**	
Validation	**Pydantic v2**	
Auth libs	`PyJWT[crypto]`, `argon2-cffi`	RS256, Argon2id
Database	**PostgreSQL 16**	Transactions for voting
Cache / pub-sub / rate limit	**Redis 7**	WS fan-out, idempotency
Jobs	**ARQ** (async, Redis)	Email, push, reminders
Storage	**AWS S3** private bucket + pre-signed URLs (`boto3` / `aioboto3`)	
Email	**AWS SES**	
Push	**Firebase Cloud Messaging** (APNs key uploaded to Firebase)	
PDF	**ReportLab**	Certificates
Admin portal	**Next.js 14, TypeScript, Tailwind, shadcn/ui, TanStack Query/Table, RHF + Zod, Recharts, dnd-kit, TipTap, html5-qrcode**	
Testing	pytest + httpx + pytest-asyncio + testcontainers (backend); `flutter_test`, `mocktail`, `integration_test` (mobile); Playwright (admin E2E); k6 (load)	
CI/CD	**GitHub Actions** (lint, test, build, scan, deploy)	
IaC	**Terraform**	
Observability	CloudWatch + **Sentry** (backend, admin, mobile); OpenTelemetry traces optional	

14.3 Repository Structure (monorepo)

```
nmc-congress/
├── mobile_app/                 # Flutter
│   └── lib/
│       ├── core/               # theme/tokens, router, dio client, storage, errors, l10n, ws client
│       ├── shared/widgets/     # AppScaffold, PrimaryButton, chips, tiles, states
│       └── features/
│           ├── auth/ home/ quick_access/ agenda/ speakers/ name_tag/ venue/
│           ├── voting/ qna/ resources/ exhibitors/ notifications/ profile/ settings/
│           └── <feature>/{data (repository, dto), domain (models), presentation (screens, providers, widgets)}
├── backend/
│   ├── app/
│   │   ├── main.py
│   │   ├── api/v1/             # routers: auth, me, events, agenda, speakers, polls, questions,
│   │   │                       #          resources, exhibitors, notifications, admin/*, ws.py
│   │   ├── core/               # config, security (jwt, argon2), deps (require_roles), rate_limit, errors, logging
│   │   ├── models/             # SQLAlchemy models
│   │   ├── schemas/            # Pydantic request/response
│   │   ├── services/           # business logic (voting_service, qna_service, badge_service, ...)
│   │   ├── workers/            # ARQ tasks
│   │   └── realtime/           # connection manager, redis pubsub
│   ├── migrations/             # Alembic
│   ├── tests/
│   └── scripts/seed.py
├── admin_portal/               # Next.js
├── infrastructure/             # Terraform, docker-compose.yml
├── docs/                       # openapi.json export, runbooks, ADRs
└── README.md
```

Rules: business logic only in `services/`; route handlers stay thin; one repository/provider layer per mobile feature.

14.4 Local Development (`docker-compose.yml`)

Services: `postgres:16`, `redis:7`, `minio` (S3-compatible), `mailhog` (SMTP catcher), `backend`, `worker`. `make dev` starts all; `make migrate`; `make seed` loads Appendix A data.

14.5 Environment Variables (backend `.env.example`)

```
APP_ENV=local|staging|production
DATABASE_URL=postgresql+asyncpg://user:pass@host:5432/nmc
REDIS_URL=redis://localhost:6379/0
JWT_PRIVATE_KEY_PATH=... / JWT_PUBLIC_KEY_PATH=... / JWT_KEY_ID=k1
ACCESS_TOKEN_MINUTES=15  REFRESH_TOKEN_DAYS=30
S3_BUCKET=... S3_REGION=me-central-1 S3_ENDPOINT_URL=(minio only) CDN_BASE_URL=...
SES_SENDER=no-reply@... SES_REGION=...
FCM_CREDENTIALS_JSON=...(secret ref)
BADGE_TOKEN_ENC_KEY=...  CORS_ORIGINS=https://admin.<domain>
SENTRY_DSN=... FEATURE_GOOGLE_SIGNIN=false FEATURE_APPLE_SIGNIN=false
```

Secrets in AWS Secrets Manager in staging/production; never committed.

---

15. Non-Functional Requirements

15.1 Performance

- API latency p95: reads < 500 ms, writes < 800 ms at target load; vote endpoint p95 < 300 ms
- Home screen interactive < 2 s on 4G; cold start < 3 s
- Poll update propagation p95 < 2 s; WebSocket message delivery p95 < 1 s
- Lists paginated (≤ 100 items); images served through CDN, resized (thumb 200 px, medium 600 px)
- DB: indexes per Section 11.4; no N+1 queries (use `selectinload`/joins); `EXPLAIN` reviewed for agenda, questions, resources queries
- Redis caching (TTL): event config 60 s, agenda per day 30 s (invalidated on admin edit), speakers 60 s, poll results 1 s

15.2 Security (OWASP Top 10 / OWASP MASVS)

- **A01 Access control:** `require_roles` on every route; object-level checks (users access only their own bookmarks, questions-mine, badge); event scoping on every query; IDOR tests mandatory
- **A02 Crypto:** TLS 1.2+ only; Argon2id; RS256; encrypted badge token at rest; S3 SSE-KMS; RDS encryption at rest
- **A03 Injection:** SQLAlchemy parameterized queries only; Pydantic validation; HTML-escape rich text on admin render (sanitize with `bleach`/DOMPurify)
- **A04 Insecure design:** threat model before build; abuse controls (rate limits, idempotency)
- **A05 Misconfiguration:** private S3, no public ACLs, security headers on admin (CSP, HSTS, X-Frame-Options), debug off in prod, CORS allowlist
- **A07 Auth failures:** lockout, OTP attempt limits, refresh rotation + reuse detection, MFA option for admin
- **A08 Integrity:** dependency pinning, `pip-audit`, `npm audit`, `flutter pub outdated` in CI; signed builds
- **A09 Logging:** structured JSON logs with `request_id`; never log passwords, OTPs, tokens, QR tokens; mask emails/phones; retain 90 days
- **Mobile:** certificate pinning (optional, behind config), no secrets in app bundle, jailbreak/root detection (warn only), obfuscated release builds (`--obfuscate --split-debug-info`)
- **File uploads:** validate MIME + extension + size server-side; store with random keys; optional ClamAV scan job
- **Privacy / compliance:** collect only fields in this PRD; consent timestamp stored; export/delete workflows; analytics events contain no PII; confirm UAE PDPL (Federal Decree-Law 45/2021) and Nestlé corporate policy requirements with legal. This PRD is not legal advice

15.3 Scalability & Reliability

- Stateless API containers, horizontal autoscaling (CPU 60% / request count), min 2 tasks in production, 4 during event days
- RDS PostgreSQL Multi-AZ, automated backups (35 days) + PITR; RPO ≤ 5 min, RTO ≤ 30 min; restore tested before event
- Redis ElastiCache with replica; app degrades gracefully if Redis is down (rate limit fails open for reads, closed for votes)
- Zero-downtime rolling deploys; DB migrations backward compatible (expand → migrate → contract)
- Health endpoints: `/health/live`, `/health/ready` (checks DB + Redis)
- Load test (k6) before launch: 1,500 concurrent WebSocket clients, 300 votes/s burst for 30 s, 500 req/s agenda reads; pass = error rate < 0.5%, p95 within Section 15.1

15.4 Accessibility

WCAG 2.1 AA: contrast ≥ 4.5:1 (verify gold on navy and white text on gradient), `Semantics` labels on all icon buttons, dynamic type up to 130% without clipping, 44 px touch targets, no information by color alone (status chips include text), VoiceOver/TalkBack tested for Login, Agenda, Voting.

15.5 Localization & Time

All strings in `app_en.arb`; `intl` for dates/numbers; all times shown in event timezone, with device-timezone hint if different ("Times shown in Dubai time (GMT+4)").

15.6 Compatibility

iOS 15+, Android 8.0+ (API 26+). Phone layouts 360–430 dp wide; tablets get centered max-width 600 dp column. Portrait only in Phase 1.

15.7 Observability

Sentry (crashes, errors), CloudWatch alarms: 5xx > 1% for 5 min, p95 latency > 2 s, DB CPU > 80%, Redis memory > 80%, SES bounce > 5%, queue depth > 1,000, WebSocket connections drop > 30% in 1 min. Dashboards: API, DB, Realtime, Business (votes accepted/rejected, questions pending, downloads).

---

16. Testing & Acceptance Criteria

16.1 Test Levels

Level	Tools	Coverage target
Unit (backend)	pytest	Services (voting, qna, badge, auth) ≥ 85%
API/integration	pytest + httpx + testcontainers (Postgres, Redis)	Every endpoint: success, validation, authz (each role), rate limit
Concurrency	pytest asyncio	200 parallel votes by same user → exactly 1 accepted; 200 parallel upvotes → count correct
Mobile unit/widget	flutter_test, mocktail	Providers, validators, key widgets, golden tests for 12 reference screens
Mobile integration	integration_test	Register → verify → login → bookmark → vote → question → resource open
Admin E2E	Playwright	Create session → appears in app API; poll lifecycle; moderation
Load	k6	Section 15.3
Security	OWASP ZAP baseline, manual IDOR/authz tests, dependency scan	No critical/high open

UAT	Organizer + 10 attendees on staging	Sign-off

16.2 Acceptance Criteria by Module (Given / When / Then)

Module	Criteria
Registration	Given valid data, When I submit, Then one account is created in `pending_verification` and an OTP email is sent. Given an existing email (any case), Then 409 `EMAIL_EXISTS`. Given unticked terms, Then the button is disabled
Verify	Given a correct code within 15 min, Then account becomes active and I land on Home. Given 5 wrong codes, Then the code is invalidated
Login	Valid → Home. Invalid → generic error, no email enumeration. 10 failures → locked 15 min. Token refresh works silently; logout invalidates refresh
Home	Greeting shows my name; event card data comes from API; 8 Quick Access tiles route correctly; bell dot reflects unread; Upcoming shows next ≤ 5 sessions
Quick Access	Chips filter by tag; search filters tiles; empty state shown when none
Agenda	Day tab switches date and header label; category chip filters; Reset clears filters; bookmark persists after app relaunch and on another device; cancelled/changed chips visible; times in Dubai time
Speakers	Search (300 ms debounce), chips, featured toggle, detail with sessions; missing photo shows initials
Name Tag	Shows my data and unique QR; QR contains no personal data; scanning valid QR in `/checkin` checks me in once; second scan reports already checked in; revoked badge reports revoked
Venue	Address and facilities always visible; map failure does not hide them; Directions opens native maps
Voting	Only active polls accept votes; second vote → `ALREADY_VOTED`; concurrent duplicates → one vote; results hidden/visible per `results_visibility`; percentages sum to 100; other devices update within 2 s; offline vote shows retry and never double-counts (idempotency)
Q&A	< 10 chars blocked; submitted question appears as pending (moderation ON) in My Questions only; after approve it appears in Recent for all; one upvote per user; own-question upvote blocked; answer sets status Answered and notifies author; hidden question disappears for attendees but remains in audit
Resources	Search and chips work; Saved shows only my bookmarks; signed URL expires after 5 min; unpublished resource returns 404; file size label correct
Profile	Counts reflect actual data; only allowed fields editable; avatar upload works; certificates list and download
Notifications	Unread count correct; tapping marks read and deep-links; push received on iOS and Android physical devices
Admin	Publishing a session makes it visible in the app within 30 s (cache TTL) without an app update; poll activation reaches clients < 2 s; unpublishing a resource denies new access; admin cannot demote self or last admin; audit rows exist for sensitive actions

16.3 Release Exit Criteria

- All Must requirements done; all acceptance criteria pass on staging
- No open critical/high security findings; no blocker/critical defects in core journeys
- Load test passed; backup restore rehearsed; rollback plan verified
- Signed iOS (TestFlight → App Store) and Android (AAB → Play) builds tested on ≥ 6 physical devices (3 iOS, 3 Android, low/mid/high tiers)
- OpenAPI export, runbook and handover documentation delivered; UAT sign-off recorded

---

17. Deployment & Operations

17.1 Environments

Env	Purpose	Data
Local	Dev (docker-compose)	Seed data
Dev	Shared integration	Synthetic
Staging/UAT	Production-like, client acceptance	Masked/synthetic
Production	Live	Real, restricted access

17.2 CI/CD (GitHub Actions)

- **PR checks:** `ruff` + `mypy` + pytest (with Postgres/Redis services); `dart format`, `flutter analyze`, `flutter test`; admin `eslint`, `tsc`, build; dependency + secret scanning
- **Main branch:** build Docker image → push ECR → deploy to staging → run smoke tests
- **Release tag:** manual approval → run Alembic migration job → rolling ECS deploy to production → smoke tests → auto-rollback on failed health checks
- **Mobile:** Fastlane lanes for TestFlight and Play internal track; flavors `dev`, `staging`, `prod` with different API base URLs and Firebase configs

17.3 Backend Deployment Steps

1. Provision VPC, RDS (Multi-AZ), ElastiCache, S3 (block public access, versioning, SSE-KMS), CloudFront, ALB, ECS, ECR, Secrets Manager, SES (verify domain, SPF/DKIM/DMARC, request production access) via Terraform
2. Set env vars/secret references per environment
3. Run migrations (`alembic upgrade head`) as a one-off ECS task before deploying
4. Deploy API + worker services behind HTTPS; ALB idle timeout ≥ 120 s for WebSockets
5. Configure CORS, rate limits, alarms, log retention, backup policy
6. Smoke tests: register/login, agenda, vote, question, resource access, WebSocket connect
7. Seed production event content via admin portal (not via seed script)

17.4 Mobile Release Steps

1. Set bundle IDs, icons, splash, signing; Firebase projects; APNs key; Google Maps keys (restricted by bundle ID/SHA-1)
2. Build `prod` flavor release with obfuscation; upload symbols to Sentry/Crashlytics
3. Internal testing (TestFlight / Play internal) → UAT → store submission (privacy nutrition labels/Data Safety form, camera not required in mobile app, notification permission rationale)
4. Staged rollout (10% → 50% → 100%); monitor crash-free sessions and backend error rate
5. Event-day freeze: no deploys 24 h before and during the event except hotfixes approved by product owner

17.5 Event-Day Runbook (summary)

T-7 days: load test + restore test + freeze content model. T-1 day: scale API to 4 tasks, verify SES quotas, test push on real devices, on-call roster published. During event: monitor dashboards, moderator and organizer logged in, kill-switch toggles available (disable Q&A submissions, close all polls, maintenance mode). T+1: scale down, export reports, issue certificates.

---

18. Cursor Build Plan

18.1 Rules to give Cursor (put in `.cursorrules` / `AGENTS.md`)

1. Follow this PRD exactly; if something is ambiguous, ask before inventing behavior. Do not add features that are out of scope
2. Mobile: Flutter + Riverpod + go_router + Dio + freezed; feature-first folders; no business logic in widgets; all colors/spacing/text styles from `AppTokens` / `ThemeData`; all strings in `.arb`
3. Backend: FastAPI + SQLAlchemy 2 async + Alembic + Pydantic v2; thin routers, logic in `services/`; every route declares role dependency; every list endpoint paginated
4. Every screen implements loading, empty, error and content states
5. Every DB change is an Alembic migration; never mutate schema manually
6. Never log secrets, tokens, OTPs or QR tokens; never return password hashes or storage keys
7. Write tests with each feature (pytest for services/endpoints; widget tests for screens)
8. Use the API response envelope from Section 12.1 and the error codes listed

18.2 Phases (build in this order; do not start a phase until the previous "Done when" passes)

Phase	Build	Done when
0. Scaffold	Monorepo, docker-compose, FastAPI skeleton with `/health`, Alembic, Flutter app with theme tokens + shared widgets + router, Next.js skeleton, CI	`make dev` runs all services; Flutter app shows themed placeholder; CI green
1. DB & Seed	All tables/enums from Section 11 as migrations; `seed.py` with Appendix A data	`make seed` populates event, sessions, speakers, polls, resources; schema matches Section 11
2. Auth (backend)	Register, OTP verify, login, refresh rotation, logout, forgot/reset, rate limits, RBAC deps, audit helper	Auth acceptance criteria pass in pytest incl. reuse detection and lockout
3. Auth (mobile)	Screens 8.1–8.4, secure storage, Dio refresh interceptor, redirect guard	Can register, verify (Mailhog), login, auto-refresh, logout on device
4. Home + Quick Access	`/events/current`, `/me`, upcoming sessions, notification count; screens 8.5, 8.6, bottom nav	Home matches screenshot 3; tiles navigate
5. Agenda + Speakers	Endpoints 12.5; screens 8.7, 8.8 + details; bookmarks	Day/category filters, bookmark persistence, search
6. Name Tag + Venue + Profile	Badge service, QR, venue API, profile, avatar upload; screens 8.9, 8.10, 8.14	Matches screenshots 6/7/12; QR renders; counts correct
7. Voting + realtime	Poll services (transactional, idempotent), WebSocket + Redis pub/sub; screen 8.11	Concurrency test passes; 2 devices update live; polling fallback works
8. Q&A	Services, moderation states, upvotes; screen 8.12 + My Questions	Matches screenshot 10; moderation rules enforced
9. Resources	S3 upload/signed access; screen 8.13 with viewer/downloader	PDF opens, slides download, bookmarks/Saved work
10. Admin portal	Pages in Section 9 in this order: Event/Venue, Sessions/Speakers/Categories, Polls, Q&A, Resources, Exhibitors, Attendees, Announcements, Check-in, Users/Audit/Settings	Organizer can run a full event without DB access
11. Notifications	Worker, FCM, SES templates, inbox screen, deep links, reminders	Push received on real devices; reminders fire 15 min before
12. Exhibitors + Certificates + Settings	Screens 8.15, 8.17, certificate PDF	Certificates download; exhibitors list/detail
13. Hardening	Rate limits tuning, caching, a11y pass, load test, security tests, Sentry	Section 16.3 exit criteria
14. Release	Terraform, staging → production, store builds	Live with runbook

18.3 Prompt Template for Each Task in Cursor

> "Implement **[Phase N: feature]** from the PRD. Read PRD sections **[list]**. Create/modify only these files: **[paths]**. Requirements: **[paste the relevant table rows]**. Include loading/empty/error states, tests, and Alembic migration if the schema changes. After coding, list what you implemented, what you skipped, and how to run/test it."

---

19. Optional Enhancements (Phase 2)

- Google/Apple sign-in enabled in production (flags already in place)
- Session attendance tracking via room QR scans; CPD/accreditation integration; auto-eligible certificates
- Exhibitor lead capture (scan attendee badge), booth map and appointment booking
- In-app networking: attendee directory (opt-in), 1:1 messaging
- Interactive floor plan with indoor navigation
- Word-cloud and open-text polls; quiz mode with leaderboard
- Session feedback forms; post-event survey
- Multi-language (Arabic RTL) and multi-event switcher
- Offline-first sync; tablet layouts; web attendee portal
- Real-time translation/captions links

---

20. Risks & Assumptions

Assumptions

#	Assumption
A1	Attendees have iOS 15+ / Android 8+ phones and event Wi-Fi or mobile data
A2	Single congress at launch, English only
A3	Attendee list is either self-registering or imported by organizers; no payment in-app
A4	Colors/fonts are estimated from screenshots until the Figma file is provided
A5	Client allows AWS `me-central-1` (or approves an alternative region)
A6	Apple Developer and Google Play accounts and a Google Maps/Firebase project are provided by the client
A7	Content (speakers, sessions, files) is supplied by the organizers and entered through the admin portal
A8	All uploaded resources are approved, non-patient, non-confidential-clinical content

Risks

#	Risk	Likelihood	Impact	Mitigation
R1	Vote burst overloads DB at poll activation	Medium	High	Idempotent transactional writes, Redis caching of results, autoscaling, load test at 300 votes/s
R2	Duplicate/invalid votes	Medium	High	DB unique constraints + service checks + rate limits + audit
R3	Inappropriate or off-topic questions	High	Medium	Pre-moderation default, profanity auto-flag, moderator kill switch
R4	Poor venue connectivity	High	Medium	Cached read-only content, retry with idempotency, polling fallback
R5	Push/email deliverability issues	Medium	Medium	SES domain auth, FCM token cleanup, in-app inbox as source of truth
R6	Scope creep (exhibitors, certificates, chat)	High	Medium	Section 3 decisions + change control; Phase 2 backlog
R7	Security vulnerability in auth/data access	Low	Critical	RBAC tests, IDOR tests, pen test before launch, Argon2id/RS256
R8	Store review delays (esp. Apple, sign-in with Apple)	Medium	High	Submit early; Apple sign-in required if Google sign-in is enabled
R9	Data-residency / UAE PDPL non-compliance	Medium	High	In-region hosting, consent records, deletion workflow, legal review
R10	Design assets differ from estimated tokens	Medium	Low	Tokens centralized; swap values once Figma received
R11	Content changes during event cause stale caches	Low	Medium	Short TTLs, cache invalidation on admin writes, WebSocket `schedule.updated`

Appendix A: Seed Data (for `scripts/seed.py`, based on the screenshots)

Event: name `The Next Era of Nutrition & Health`, title `NESTLÉ MEDICAL CONGRESS 2026`, tagline `The Next Era of Nutrition & Health`, 2026-05-22 00:00 → 2026-05-23 23:59 (`Asia/Dubai`), Dubai, United Arab Emirates, `is_current = true`. **Venue:** `Dubai International Convention & Exhibition Center`, address `World Trade Centre, Dubai, United Arab Emirates`, lat 25.2285, lng 55.2867; facilities: Free Wi-Fi (`wifi`), Parking (`parking`), Catering (`catering`), Accessible (`accessible`). **Categories:** session: Keynote, Nutrition, Research; speaker: Nutrition, Research, Pediatric; question: General, Nutrition, Research, Clinical; resource: PDF, Slides, Video; exhibitor: Sponsor, Partner. **Speakers:** Dr. Sarah Johnson (Pediatric Nutrition Specialist, United Kingdom, featured, Nutrition + Pediatric); Dr. Hassan Ali (Clinical Research Director, UAE, Research); Dr. Ahmed Khalid (add designation, UAE); Dr. Ahmed (host/moderator for opening). **Sessions (Day 1):** 08:30–09:30 Opening Ceremony (Keynote, Main Auditorium); 09:30–10:30 Welcome & Introduction (Keynote, Dr. Hassan Ali); 10:30–11:30 Future of Pediatric Nutrition (Nutrition, Dr. Sarah Johnson). Add 3 sessions for Day 2 (e.g. Research Poster Session, Clinical Nutrition Panel, Closing Remarks). **Poll:** `How would you rate the current session?` label `Audience Feedback`, single choice, options Excellent, Very Good, Good, Fair, Poor, status active, `after_vote`. Seed 101 sample votes (55/31/10/3/2) in dev only. **Questions:** `How can pediatric nutrition plans be personalized for children with different growth patterns?` (Nutrition, answered, 24 upvotes, answered by Dr. Ahmed) plus 3 published and 2 pending. **Resources:** `Congress Scientific Program` (PDF, 4.2 MB, "Complete schedule and session details"); `Pediatric Nutrition Guidelines` (PDF, 2.8 MB, "Clinical reference material"); `Keynote Presentation Slides` (Slides, 8.6 MB, "The Next Era of Nutrition & Health"). Use placeholder files of matching types in dev. **Users (dev):** `admin@test.local` (admin), `organizer@test.local`, `moderator@test.local`, `checkin@test.local`, `speaker@test.local`, `huda@example.com` (attendee, "Huda Latheef", Flutter Developer, Dubai, UAE, +971562834212, badge `NMC-2026-001`), password `Passw0rd!` for all (dev/staging only).

Appendix B: Design Inconsistencies Found in the Screenshots

#	Finding	Resolution in this PRD
1	Agenda header shows "Thursday, May 22, 2026", but May 22, 2026 is a **Friday**	Weekday is computed from the date in the event timezone, never hardcoded
2	Session times wrap (`08:3` / `0`) in the Agenda list	Fixed-width time column with no wrapping (Section 8.7)
3	Last category chips truncated (`Cl…`, `Pedia…`, `Sen…`, `Researc…`)	Chips scroll horizontally; never clip text
4	Profile shows hardcoded-looking test values ("Dr. Testing", "Flutter Developer • Attendee")	Real data from API; subtitle uses `designation • attendee_type`
5	Poll results show 54% / 31% / 10% (sum 95%) with options cut off	All options rendered (scrollable); percentages use largest remainder to sum to 100
6	Quick Access screen only shows 4 of 8 tiles	All 8 tiles in a scrollable grid
7	Event dates/location are hardcoded in design	Come from `events` table

Appendix C: Reference UI Screenshots

> **For the AI coding assistant:** the images in this document are the visual source of truth. Each screen's image is also embedded directly under its spec in Section 8. Individual screen crops are in `ui_reference/screens/`. Where an image disagrees with the text in Section 8, the text wins (see Appendix B for known design bugs not to copy).


C.1 Sheet 1: Welcome/Login, Create Account, Home, Quick Access, Agenda, Speakers, Name Tag, Venue





Position (left to right, top row then bottom row)	Screen	Spec section
Top 1	Welcome Back (Login)	8.1
Top 2	Join the NESTLÉ CONGRESS (Create Account)	8.2
Top 3	Home	8.5
Top 4	Quick Access	8.6
Bottom 1	Congress Agenda	8.7
Bottom 2	Speakers	8.8
Bottom 3	My Name Tag	8.9
Bottom 4	Venue	8.10

C.2 Sheet 2: Live Voting, Ask Q&A, Resources, My Profile

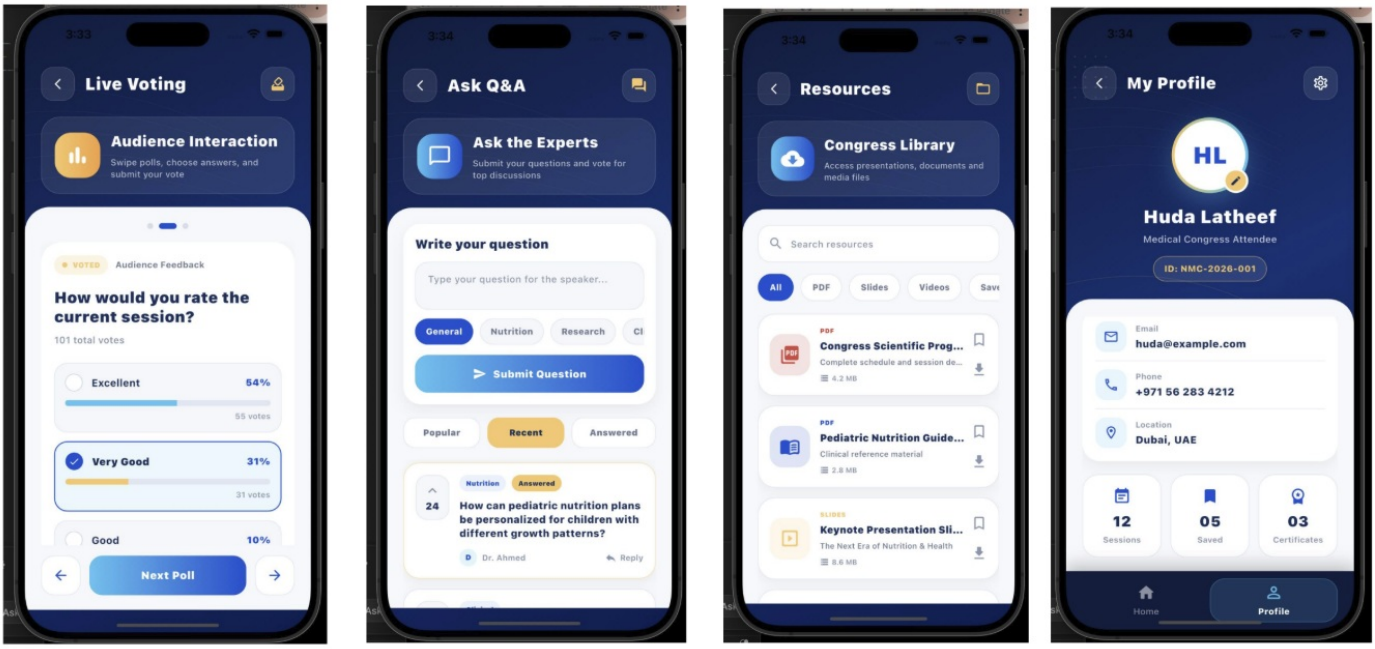

Position (left to right)	Screen	Spec section
1	Live Voting	8.11
2	Ask Q&A	8.12
3	Resources	8.13
4	My Profile	8.14

C.3 Screens with no reference image (built from this PRD's text only)

Verify Email, Forgot/Reset Password, Session Detail, Speaker Detail, Poll History, My Questions, Exhibitors list/detail, Notifications, Settings, Edit Profile, Certificates. Reuse the same design tokens, components and layout patterns as the reference screens.

End of Document

Version	Date	Author	Changes
1.0	(original)	NTAM	Initial requirements baseline
2.0	November 6, 2026	Product Management	Build-ready rewrite: decisions, screen specs, schema, API, NFR, Cursor plan