

R TINDALL FABRICATORS LTD • EST. ENGINEERING EXCELLENCE



FIRE PROTECTION PRODUCT CATALOGUE

Bespoke Pre-fabricated Sprinkler Pipework & Victaulic® Flow Control

2026 EDITION

50+ YEARS EXPERIENCE

ISO 9001 / ISO 14001

OFFICIAL VICTAULIC SUPPLIER

Oldham • Maidenhead • Serving the UK & Europe

rtindall.co.uk

WELCOME

Engineering Excellence in Every Pipe. Fabricating Fire Protection Across the UK & Europe.

R Tindall Fabricators Ltd is the UK's market-leading supplier of bespoke pre-fabricated fire sprinkler pipe and mechanical pipework, serving the commercial fire protection and mechanical services industry across the UK and Europe. With over **50 years of experience**, our facility combines world-class fabrication technology — plasma cutting, Victaulic® roll grooving and semi-automated welding robotics — with the meticulous craftsmanship of a fully-coded welding team.

This catalogue presents the breadth of fire protection products that R Tindall supplies and integrates into pre-fabricated assemblies — from finished **fire-rated pipework** in galvanised, powder-coated or hand-painted finishes, to a complete portfolio of **Victaulic® valves, sprinklers and devices** for which we are an officially appointed supplier. Each product is selected to meet the demands of commercial buildings, data centres, warehouses and industrial facilities, where reliability and certified performance are non-negotiable.

50+	ISO 9001	ISO 14001	Victaulic	UK + EU
Years of experience	Quality Management	Environmental Management	Official Supplier	Coverage zone

CONTENTS

Catalogue Sections


- 01 Pre-fabricated Fire Sprinkler Pipework**
Cut-to-length, threaded, grooved, finished pipework for wet, dry & preaction systems.
- 02 Sprinkler Heads — Victaulic® FireLock™ Series**
Pendent, upright, concealed, sidewall heads in standard & quick response.
- 03 Flow Control Valves**
Butterfly, ball and check valves for fire protection mains and risers.
- 04 System Devices — Wet, Dry & Preaction**
Alarm check valves, preaction valves, deluge & dry pipe assemblies.
- 05 Mechanical Couplings & Fittings**
Grooved couplings, IGS fittings and Universal Pipework components.
- 06 Pipe Supports & Accessories**
Hangers, brackets, gauges, switches and trim kits.

SECTION 01

Pre-fabricated Pipework

Cut, threaded, grooved & finished — ready for site installation.

R Tindall's core product is bespoke pre-fabricated fire sprinkler pipe — every length cut, threaded, grooved, finished and labelled in our Oldham facility before delivery. The four finishes below are available in any combination across a single project.

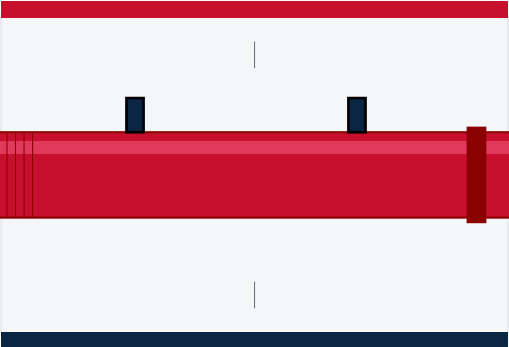

Pre-fabricated Fire Sprinkler Pipe — Black

RT-FSP-BLK

Cut-to-length carbon steel pipe, threaded or grooved per project drawings. Manufactured in-house to client take-off, ready for direct site installation. Ideal for wet sprinkler systems in commercial premises.

BESPOKE	WET SYSTEM	BS EN 10255
---------	------------	-------------

Diameter	25 mm – 200 mm
Length	Up to 6 m (custom)
Material	ASTM A53 / BS EN 10255 carbon steel
Ends	Threaded, grooved or plain
Standard	BS EN 10255 / ASTM A53

FROM

£14.50

per linear metre (DN50)

Volume discounts at 100 m+



Galvanised Sprinkler Pipe

RT-FSP-GAL

Hot-dip galvanised pipe, supplied with full external corrosion protection for exposed, damp or unconditioned environments. Galvanised to BS EN ISO 1461:2009 via ISO 9001 accredited suppliers. Available threaded or grooved.

GALVANISED	DRY/EXPOSED	ISO 1461
------------	-------------	----------


Diameter	25 mm – 200 mm
Length	Up to 10 m
Coating	Hot-dip galvanised, BS EN ISO 1461:2009
Application	Dry, preaction, exposed wet systems
Finish	Bright zinc, threaded ends

FROM

£21.80

per linear metre (DN50)

Larger diameters POA

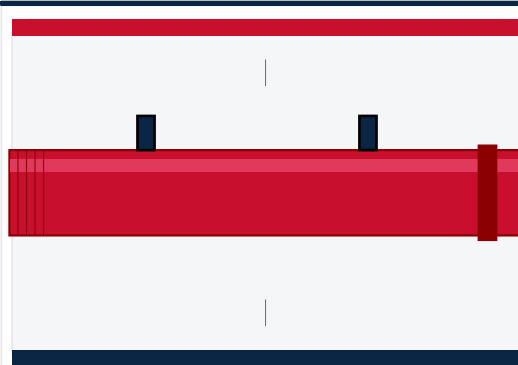

Powder-Coated Fire Pipe — Signal Red

RT-FSP-PC

Pre-fabricated pipework finished in our state-of-the-art in-house powder coating line. Non-toxic powders with 95%+ recovery for low environmental impact. Aesthetically uniform finish with enhanced corrosion protection. Inspected for cure and adhesion.

POWDER COAT	RAL 3000	ECO LINE
-------------	----------	----------


Diameter	25 mm – 200 mm
Finish	Polyester powder, RAL 3000 (default)
Coating colour	Signal red, white, custom RAL
Cure inspection	Industry standard adhesion + cure
Application	Exposed, architectural fire systems

FROM

£18.40

per linear metre (DN50)

+£3.50/m for custom RAL

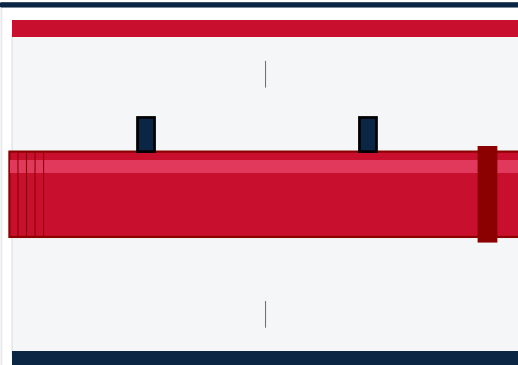

Hand-Painted Pipework

RT-FSP-HP

Where powder coating is not specified, dedicated operatives apply a full-coverage hand-painted finish to each pre-fabricated assembly. Ideal for one-off colour matches, retrofit projects and short-run bespoke work.

HAND PAINT	BESPOKE
------------	---------

Diameter	25 mm – 200 mm
Finish	Brush/spray, full external coverage
Colour	Per project specification
Use case	Heritage, retrofit, bespoke runs

FROM

£16.20

per linear metre (DN50)


Bespoke colour match POA

SECTION 02

Sprinkler Heads — Victaulic® FireLock™

Pendent, upright, concealed, sidewall & dry — globally certified.

As an officially appointed Victaulic supplier, R Tindall stocks and supplies the complete **FireLock™** sprinkler range. Available in standard response (SR) or quick response (QR), with K-factors from K2.8 to K25.2, multiple temperature ratings and a wide selection of architectural finishes.

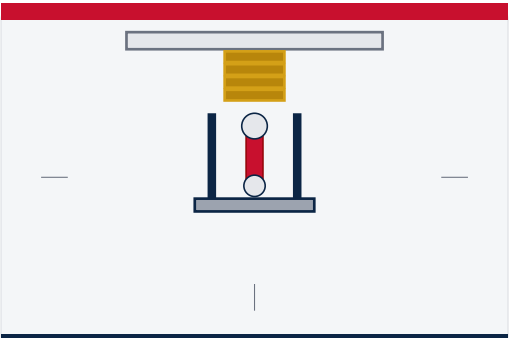

Victaulic® FireLock™ Pendent Sprinkler

FL-QR / FL-SR — Models V2708, V3406, V3801

Quick-response and standard-response pendent fire sprinklers for ceiling-mounted installations. Glass-bulb activation with multiple K-factors and temperature ratings. Globally certified — cULus, FM, LPCB, VdS, CCC.


FIRELOCK™	QR/SR	LPCB	VICTAULIC
Orientation Pendent / Recessed pendent			
Response type Quick (QR) or Standard (SR)			
K-factor K2.8, K4.2, K5.6, K8.0, K11.2			
Thread 1/2" or 3/4" NPT			
Temperature 57°C / 68°C / 79°C / 93°C / 141°C			
Approvals cULus, FM, LPCB, VdS, CCC			

FROM

£18.50

each (brass, K5.6)

Chrome / white +£4.20

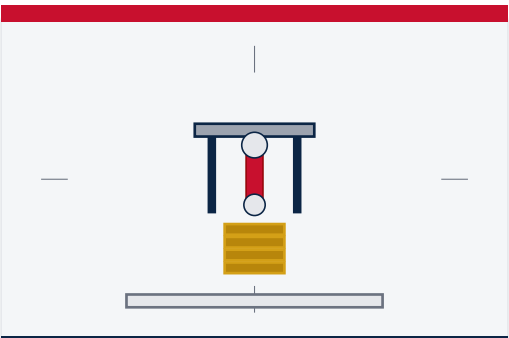

Victaulic® FireLock™ Upright Sprinkler

Models V2704, V3401, V3402

Upright sprinkler heads for installation on exposed sprinkler mains, warehouses and industrial occupancies. Robust die-cast frame with bulb or fusible link options. Available with the Style V9 FireLock™ IGS™ Sprinkler Coupling for installation-ready connection.


FIRELOCK™	UPRIGHT	IGS™	LPCB
Orientation Upright			
K-factor K5.6 (8.1 SI), K8.0 (11.5 SI)			
Thread 1/2" / 3/4" NPT			
Activation Glass bulb, frangible			
Coupling Compatible with Style V9 IGS™			
Approvals cULus, FM, LPCB			

FROM

£16.80

each (brass, K5.6)

Box of 50 at £14.20 each

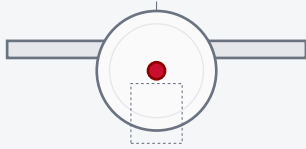

Victaulic® FireLock™ Concealed Pendent

Model V3801 / V3802 (concealed)

Architectural concealed pendent sprinkler with flat cover plate, ideal for prestige commercial interiors, hotels, retail and high-end residential. Cover plate releases at activation temperature, exposing the deflector. Standard response. White, brass, chrome and custom finishes available.

CONCEALED **ARCHITECTURAL** **VICTAULIC**


Orientation	Concealed pendent
Response type	Standard response
K-factor	K5.6 (8.1 SI)
Cover-plate temp	57°C / 68°C separation
Finish	White, chrome, brass, painted
Pressure	Up to 21 bar / 300 psi

FROM

£32.40

each (white cover plate)

Custom RAL cover +£8.00



Victaulic® FireLock™ Sidewall Sprinkler

Model V2710 — Horizontal Sidewall

Horizontal sidewall sprinkler designed to discharge water laterally — perfect for corridors, hotel rooms and small offices where ceiling pipework is impractical. Can be supplied with the chemical-resistant VC-250 coating for harsh environments.

SIDEWALL **VC-250** **FIRELOCK™**


Orientation	Horizontal sidewall
Response type	Quick / Standard
K-factor	K5.6 (8.1 SI), K8.0
Optional coating	VC-250 chemical resistant
Approvals	cULus, FM, LPCB

FROM

£21.60

each (brass)

VC-250 coated +£12.00

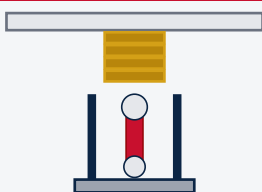

Victaulic® FireLock™ Dry Sprinkler

FL-QR/DRY — V3602 / V3614

Dry-barrel pendent and upright sprinklers for areas subject to freezing — loading bays, cold stores, unheated warehouses. Internal seal isolates water from the freezing zone until activation. Specify barrel length to suit.

DRY BARREL **FREEZE-RATED** **V3602**

Type	Dry pendent / dry upright
K-factor	K5.6, K8.0
Application	Cold stores, loading bays
Barrel	Custom length per drawing
Standard	NFPA 13 dry-system compliant

FROM

£94.00

each (300 mm barrel)


Per 25 mm of extra barrel +£3.40

SECTION 03

Flow Control Valves

Butterfly, ball & check valves for fire mains, risers & branches.

Isolation, regulation and non-return duties across the full range of fire protection systems. Every valve is supplied with the appropriate certification — UL/FM for North America, LPCB/VdS for Europe, CE marked and UKCA assessed.

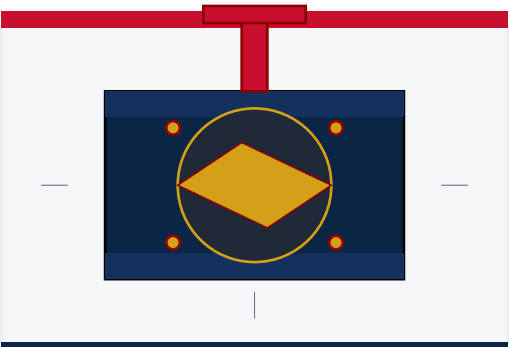

Victaulic® FireLock™ Series 705 Butterfly Valve

Series 705 — Grooved End


Compact, lightweight grooved-end butterfly valve, the industry standard for fire protection isolation duty. Tamper-switch ready supervisory handle, ductile iron body, EPDM-encapsulated disc for bubble-tight shut-off. Globally certified — UL, FM, LPCB, VdS, CE/UKCA.

UL/FM	LPCB	VICTAULIC	300 PSI
-------	------	-----------	---------

Sizes	DN50 – DN300 (2" – 12")
End connection	Grooved (Victaulic)
Body	Ductile iron, EPDM-coated disc
Pressure rating	Up to 21 bar / 300 psi
Operation	Gear / weatherproof actuator
Approvals	UL, FM, LPCB, VdS, CE/UKCA

FROM
£385.00
each (DN100 / 4")

DN50 from £215 / DN300 POA

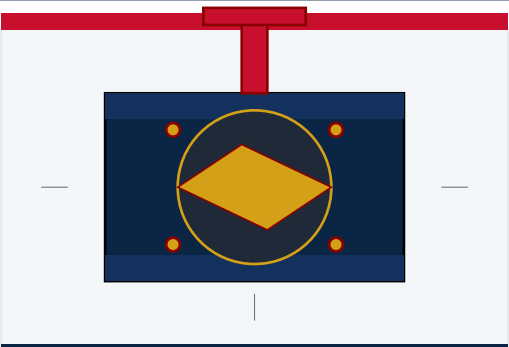

Victaulic® Series 7B2 Butterfly Valve

Series 7B2 — Combined Service


Weatherproof actuator-housing butterfly valve approved for combined domestic water and fire protection services, indoor or outdoor. NSF certified for potable water in addition to FM/UL fire-protection listing. Heat-fused PPS coating on disc.

NSF-61	UL/FM	OUTDOOR
--------	-------	---------

Sizes	DN50 – DN300
Body	Ductile iron, EPDM disc
Pressure rating	12 bar / 175 psi (fire)
Listings	cULus, FM, NSF-61-G
Service	Domestic / combined / fire

FROM
£445.00
each (DN100)

Outdoor-rated actuator inc.

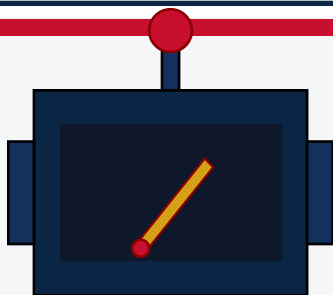

Victaulic® FireLock™ Series 717 Check Valve

Series 717 — Riser Check

Spring-loaded swing check valve engineered for fire protection risers. Prevents backflow and water hammer in wet systems. Optional pressure taps for routine system diagnostics. Easy seal replacement extends service life.

CHECK VALVE	300 PSI	LPCB
-------------	---------	------


Sizes	DN50 – DN300
End connection	Grooved
Pressure rating	Up to 21 bar / 300 psi
Body	Ductile iron, stainless trim
Approvals	UL, FM, LPCB

FROM

£295.00

each (DN100)

Pressure tap kit +£35

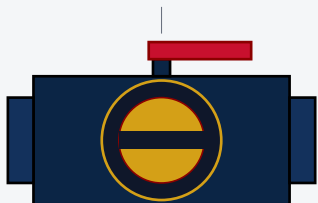

Victaulic® Series 728 Ball Valve

Series 728 — System Shut-Off

Compact two-way ball valve used as the system shut-off on smaller-diameter Vic-Quick Risers and trim assemblies. Quarter-turn lever operation with supervisory padlock provision.

1/4 TURN	LOCKABLE
----------	----------

Sizes	1½" – 2" (DN40 – DN50)
End connection	Threaded / grooved
Operation	Quarter-turn lever
Application	Riser trim, drain, gauge isolation

FROM

£78.00

each (DN50)


Padlock kit +£12.00

SECTION 04

System Devices

Wet, dry, preaction & deluge valves for every system architecture.

For data centres, archives, freezer plants and high-rise mains, R Tindall supplies the full Victaulic device portfolio — including the FireLock NXT™ diaphragm-actuated platform that powers preaction, dry and deluge systems.

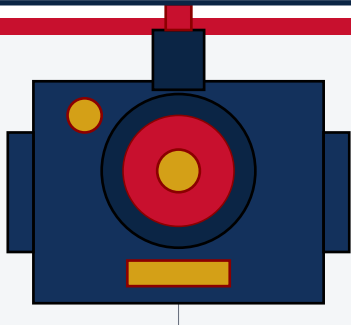

Victaulic® FireLock NXT™ Series 769N Preaction Valve

Series 769N — Preaction Check Valve

Diaphragm-style preaction valve for water-sensitive areas — data centres, archives, server rooms and museums. Configurable as non-interlock, single-interlock or double-interlock. Available bare, pre-trimmed, as a Vic-Quick Riser, or in a Series 745 FireLock Fire-Pac cabinet.


FROM

£2,450.00

bare valve (DN100)

Pre-trimmed kit +£1,150

FIRELOCK NXT™	PREACTION	DATA CENTRE	LPCB
Sizes	1½" – 8" (DN40 – DN200)		
Pressure rating	Up to 21 bar / 300 psi		
System types	Non/Single/Double interlock		
Trim options	Bare, pre-trimmed, Vic-Quick		
Cabinet option	Series 745 Fire-Pac		
Approvals	UL, FM, LPCB, VdS		

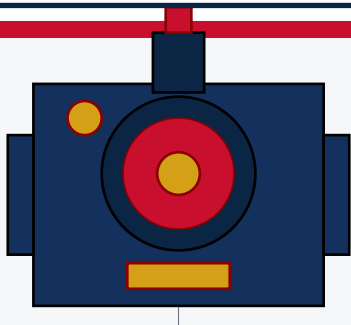

Victaulic® FireLock NXT™ Series 768N Dry Pipe Valve

Series 768N — Dry System Check Valve

Differential-style dry pipe valve, holding pressurised air or nitrogen in the system pipework against incoming water supply. Designed for areas exposed to freezing — car parks, loading docks, attics. Compact footprint with low air-trip pressure.


FROM

£1,895.00

bare valve (DN100)

Air maintenance kit +£420

DRY PIPE	FREEZE-RATED	FIRELOCK NXT™
Sizes	1½" – 8"	
Pressure rating	Up to 21 bar / 300 psi	
Air trip ratio	Low differential	
Trim	Pre-trimmed available	
Approvals	UL, FM, LPCB	

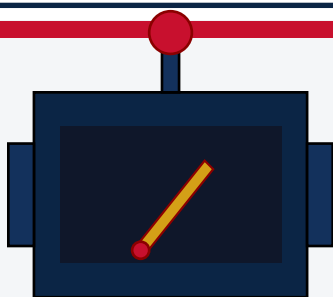

Victaulic® FireLock™ Series 751 Alarm Check Valve

Series 751 — Wet Alarm Check

Wet system alarm check valve. Allows water to flow into the sprinkler system on activation while preventing reverse flow into the supply main. Triggers waterflow alarms via the integral retard chamber.

WET ALARM **RETARD CHAMBER**

FROM

£725.00

bare valve (DN100)

Full trim kit +£385


Sizes DN50 – DN200

System type Wet pipe

Trim options Bare or pre-trimmed assembly

Alarm output Waterflow + retard chamber

Approvals UL, FM, LPCB

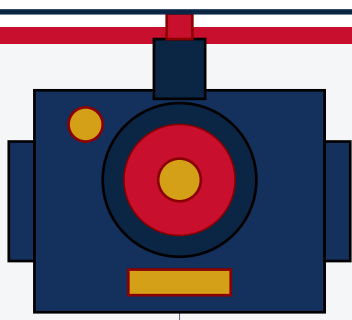

Victaulic® Series 869 Deluge Valve

Series 869Y-2D / 2DC — Deluge

Electrically operated deluge valve for total flooding fire protection — transformer rooms, aircraft hangars, fuel storage. Variants include downstream pressure control (2DC) for high-rise applications. Remote on/off operation from the fire alarm panel.

DELUGE **ELECTRIC** **REMOTE OP**

Sizes DN50 – DN200

Variants 869Y-2D / 869Y-2DC

Operation Electrically actuated, remote

Use case Deluge, foam, high-rise stand-pipe

Approvals UL, FM

FROM

£3,180.00

each (DN100, 2D variant)

2DC pressure-control variant +£640

SECTION 05

Mechanical Couplings & Fittings

Grooved, rigid, flexible & installation-ready joining solutions.

Victaulic grooved technology is the heart of every R Tindall pre-fabricated assembly. We hold stock of standard and Installation-Ready™ couplings, plus the complete fitting range from Jinan and Universal Pipework — selected to match your pipework finish.



Victaulic® FireLock™ Style 005 Rigid Coupling

Style 005 — Rigid Grooved Coupling

The industry-standard rigid grooved coupling for fire protection mains. Two-segment ductile iron housing with grade-E EPDM gasket, connecting grooved-end pipes in seconds. Provides a rigid joint suitable for branch-line and main pipework.

RIGID	STYLE 005	LPCB
Sizes	DN25 – DN300	
Joint type	Rigid	
Gasket	Grade E EPDM	
Pressure rating	Up to 35 bar / 500 psi	
Bolts	Track-head, oval-neck	
Approvals	UL, FM, LPCB, VdS	

FROM
£32.50
each (DN50)

Bulk pricing from 100 units



Victaulic® QuickVic™ SD Installation-Ready™ Coupling


Style 107V — Pre-assembled

Pre-assembled installation-ready coupling — slides directly onto grooved pipe ends without any disassembly. Halves the installation time on site and is ideally suited to pre-fabricated R Tindall risers and modules. Visual installation indicator confirms full pad engagement.

INSTALL-READY	QUICKVIC™	FAST-TRACK
Sizes	DN50 – DN200	
Joint type	Rigid (Installation-Ready™)	
Pressure rating	Up to 25 bar / 365 psi	
Time saving	~50% vs traditional couplings	
Use	Pre-fab assemblies, fast-track sites	

FROM
£48.20
each (DN50)

Premium ~+30% vs Style 005

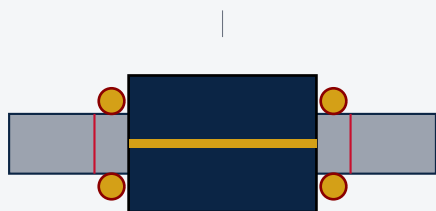

Universal Pipework / Jinan Grooved Fittings

RT-FIT — Elbows, Tees, Reducers

Full range of grooved-end fittings — 90° and 45° elbows, equal and reducing tees, concentric and eccentric reducers, caps and adapters — from key partners Jinan and Universal Pipework. Available galvanised or powder-coated to match the supplied pipework.

JINAN

UNIVERSAL

GROOVED

Range Elbow, tee, reducer, cap, adapter

Sizes DN25 – DN300

Material Ductile iron / cast steel

Finish Painted, galv, powder coated

Compliance UL, FM, LPCB (per item)

FROM

£24.50

from — 90° elbow, DN50


Equal tees from £38 / reducers from £21

SECTION 06

Pipe Supports & Accessories

Hangers, brackets, gauges, switches and trim — every project, complete.

R Tindall completes every kit with the supports, accessories and trim required for a one-delivery solution. Whether you need a riser trim kit, supervisory switches or simply the right hangers in matching finish, it ships with the pipe.

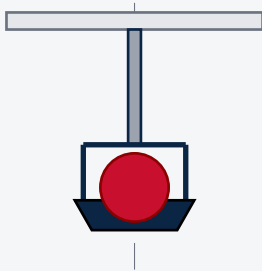

Clevis-Style Pipe Hanger

RT-HGR-CLV

Forged clevis hanger for suspending fire protection pipework from structural soffits via threaded rod. Sized to BS standards with matching colour finish to the supplied pipework. Bolt-on cradle for rapid site assembly.

BS 3974

**ELECTRO-GAL
V**

Pipe sizes DN25 – DN300

Material Carbon steel, electro-galvanised

Rod thread M8 / M10 / M12 / M16


Standard BS 3974 Pt 1

FROM

£4.85

each (DN50, M10)

Box of 50 at £3.95 each



Riser Trim Kit & Pressure Switches

RT-TRIM

Pre-assembled riser trim kit comprising pressure gauges, supervisory and alarm pressure switches, drain valves, test cocks and ball-valve isolators — supplied loose or pre-mounted to a Vic-Quick Riser. Compatible with all Victaulic preaction, dry and alarm valves.

TRIM KIT

VIC-QUICK

Components Gauges, switches, drain, test

Switch types Supervisory + alarm pressure

Pre-mount option Vic-Quick Riser ready

Approvals UL/FM listed components

FROM

£385.00

complete kit (DN100)

Pre-mounted assembly +£180

LET'S BUILD TOGETHER

Get in touch.

From take-off to delivery, on time and in full.

All products in this catalogue can be supplied loose, kit-form, or as part of a fully pre-fabricated R Tindall sprinkler riser or pipework module — galvanised, powder coated or hand painted. Get in touch with our sales team for a project take-off, technical advice or a quotation.

OLDHAM Head Office & Fabrication	Unit 1 West Point Industrial Estate Hargreaves St, Oldham OL9 9ND +44 (0)161 624 3961
MAIDENHEAD Southern Office	Unit 2, Cordwallis Industrial Estate Clivemont Road, Maidenhead SL6 7BU +44 (0)1628 566600
EMAIL Direct contacts	Sales@tindall-fabricators.co.uk Lee@tindall-fabricators.co.uk (Listings) Helen@tindall-fabricators.co.uk (Accounts) rtindall.co.uk

Important note: This catalogue has been produced as a curated overview of the fire protection products R Tindall Fabricators Ltd supplies and pre-fabricates. Product images are stylised technical illustrations, not photographs. **All prices shown are indicative trade-supply estimates in GBP, exclusive of VAT and delivery**, based on a representative size for each item — actual project pricing varies with diameter, finish, quantity, current material costs and lead-time. Pricing is subject to change without notice and a formal written quotation is required before order. All trademarks — including Victaulic®, FireLock™, FireLock NXT™, QuickVic™ and IGS™ — are the property of Victaulic Company and are referenced here in the context of R Tindall's appointed-supplier relationship. Specifications, model numbers and approvals are taken from publicly available manufacturer data; always confirm current specifications and pricing with R Tindall sales prior to specifying or ordering.