



## Actividad Agenda: Leonardo Serrano Zermeño - 177301

### -MODELO E-R

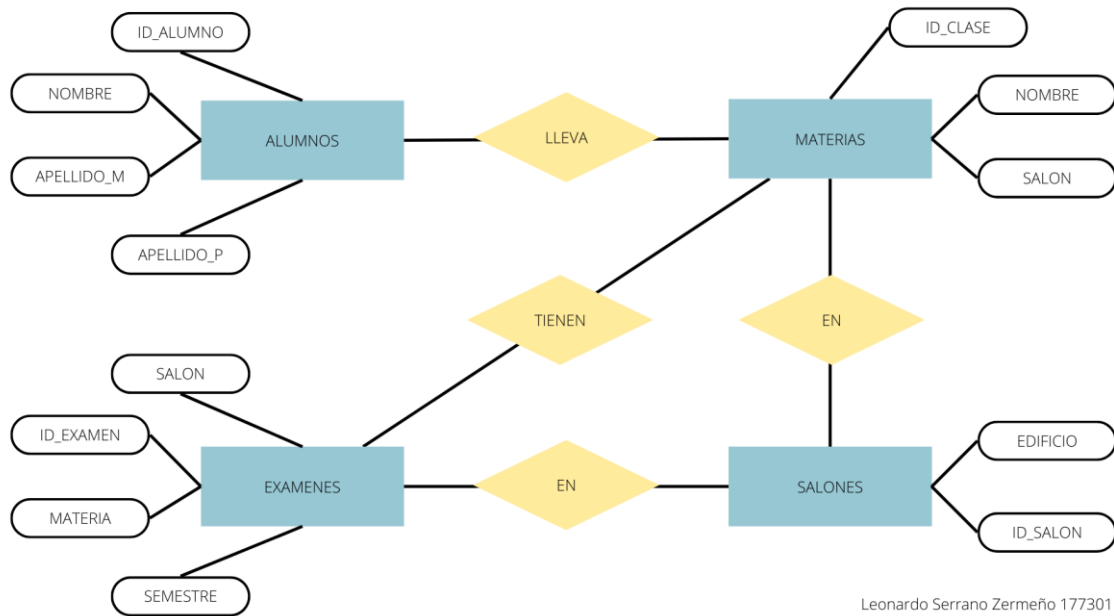

### -MODELO REL

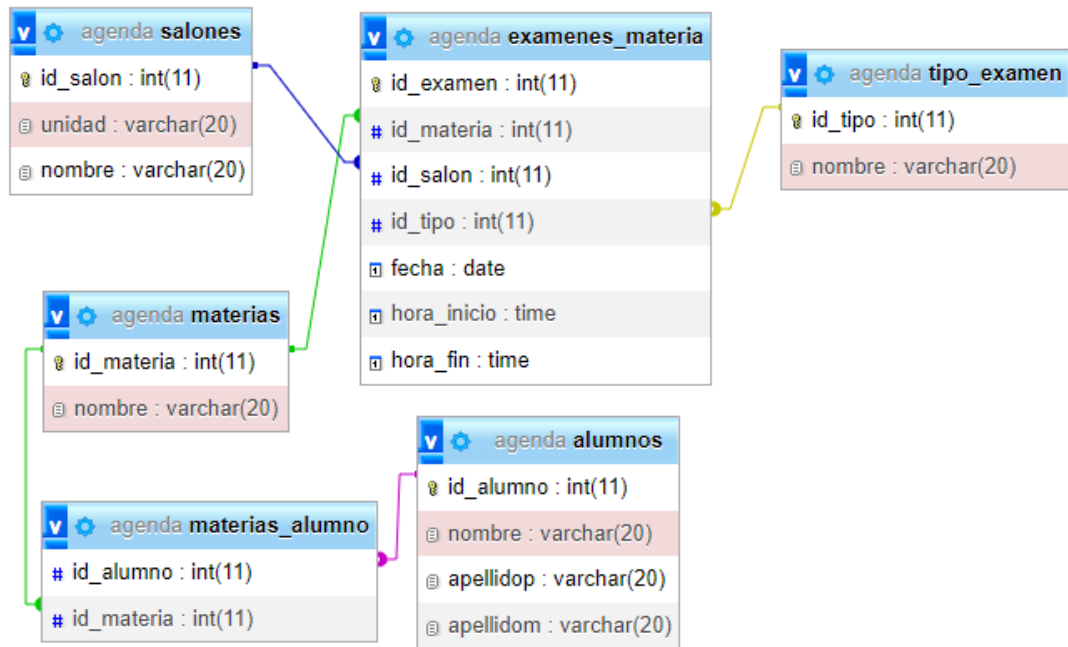

## **-CODIGO SQL**

-- phpMyAdmin SQL Dump

-- version 5.2.0

-- <https://www.phpmyadmin.net/>

--

-- Host: 127.0.0.1

-- Generation Time: Aug 28, 2022 at 05:03 AM

-- Server version: 10.4.24-MariaDB

-- PHP Version: 8.1.6

SET SQL\_MODE = "NO\_AUTO\_VALUE\_ON\_ZERO";

START TRANSACTION;

SET time\_zone = "+00:00";

/\*!40101 SET @OLD\_CHARACTER\_SET\_CLIENT=@@CHARACTER\_SET\_CLIENT \*/;

/\*!40101 SET @OLD\_CHARACTER\_SET\_RESULTS=@@CHARACTER\_SET\_RESULTS \*/;

/\*!40101 SET @OLD\_COLLATION\_CONNECTION=@@COLLATION\_CONNECTION \*/;

/\*!40101 SET NAMES utf8mb4 \*/;

--

-- Database: `agenda`

--

CREATE DATABASE IF NOT EXISTS `agenda` DEFAULT CHARACTER SET utf8mb4 COLLATE  
utf8mb4\_general\_ci;

USE `agenda`;

-----

```
--  
  
-- Table structure for table `alumnos`  
  
--  
  
CREATE TABLE `alumnos` (  
  `id_alumno` int(11) NOT NULL,  
  `nombre` varchar(20) NOT NULL,  
  `apellidop` varchar(20) NOT NULL,  
  `apellidom` varchar(20) NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--  
  
-- Dumping data for table `alumnos`  
  
--
```

```
INSERT INTO `alumnos` (`id_alumno`, `nombre`, `apellidop`, `apellidom`) VALUES  
(1, 'Vanessa', 'Soto', 'Hernandez'),  
(2, 'Daniel', 'Briones', 'Rios'),  
(3, 'Juan', 'Cruz', 'Centero');
```

```
-- -----
```

```
--  
  
-- Table structure for table `exámenes_materia`  
  
--
```

```
CREATE TABLE `exámenes_materia` (  
  `id_examen` int(11) NOT NULL,  
  `id_materia` int(11) NOT NULL,
```

```

`id_salon` int(11) NOT NULL,
`id_tipo` int(11) NOT NULL,
`fecha` date NOT NULL,
`hora_inicio` time NOT NULL,
`hora_fin` time NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;

--
-- Dumping data for table `examenenes_materia`
--

INSERT INTO `examenenes_materia` (`id_examen`, `id_materia`, `id_salon`, `id_tipo`, `fecha`,
`hora_inicio`, `hora_fin`) VALUES
(1, 1, 1, 3, '2017-11-20', '10:00:00', '11:00:00'),
(2, 1, 1, 4, '2017-12-01', '12:00:00', '14:00:00'),
(3, 2, 2, 1, '2017-08-11', '08:00:00', '09:00:00'),
(4, 2, 2, 2, '2017-08-17', '11:00:00', '12:00:00'),
(5, 3, 3, 3, '2017-11-18', '17:00:00', '18:00:00'),
(6, 3, 3, 4, '2017-12-02', '07:00:00', '09:00:00');

-----

--
-- Table structure for table `materias`
--

CREATE TABLE `materias` (
  `id_materia` int(11) NOT NULL,
  `nombre` varchar(20) NOT NULL

```

```

) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;

--

-- Dumping data for table `materias`
--

INSERT INTO `materias` (`id_materia`, `nombre`) VALUES
(1, 'Programacion Web 2'),
(2, 'Programacion 3'),
(3, 'Sistemas operativos');

-----

--

-- Table structure for table `materias_alumno`
--

CREATE TABLE `materias_alumno` (
  `id_alumno` int(11) DEFAULT NULL,
  `id_materia` int(11) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;

--

-- Dumping data for table `materias_alumno`
--

INSERT INTO `materias_alumno` (`id_alumno`, `id_materia`) VALUES
(1, 1),
(1, 2),

```

(2, 2),

(2, 3),

(3, 1),

(3, 3);

-----

--

-- Table structure for table `salones`

--

CREATE TABLE `salones` (

`id\_salon` int(11) NOT NULL,

`unidad` varchar(20) NOT NULL,

`nombre` varchar(20) NOT NULL

) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;

--

-- Dumping data for table `salones`

--

INSERT INTO `salones` (`id\_salon`, `unidad`, `nombre`) VALUES

(1, 'CC', 'SVC2'),

(2, 'CC', 'CC12'),

(3, 'CNT', 'CNT1');

-----

--

-- Table structure for table `tipo\_examen`

--

```
CREATE TABLE `tipo_examen` (  
  `id_tipo` int(11) NOT NULL,  
  `nombre` varchar(20) NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

--

-- Dumping data for table `tipo\_examen`

--

```
INSERT INTO `tipo_examen` (`id_tipo`, `nombre`) VALUES  
(1, 'Parcial 1'),  
(2, 'Parcial 2'),  
(3, 'Parcial 3'),  
(4, 'Final');
```

--

-- Indexes for dumped tables

--

--

-- Indexes for table `alumnos`

--

```
ALTER TABLE `alumnos`  
  ADD PRIMARY KEY (`id_alumno`);
```

--

```
-- Indexes for table `examenes_materia`
```

```
--
```

```
ALTER TABLE `examenes_materia`
```

```
  ADD PRIMARY KEY (`id_examen`),
```

```
  ADD KEY `id_materia` (`id_materia`),
```

```
  ADD KEY `id_salon` (`id_salon`),
```

```
  ADD KEY `id_tipo` (`id_tipo`);
```

```
--
```

```
-- Indexes for table `materias`
```

```
--
```

```
ALTER TABLE `materias`
```

```
  ADD PRIMARY KEY (`id_materia`);
```

```
--
```

```
-- Indexes for table `materias_alumno`
```

```
--
```

```
ALTER TABLE `materias_alumno`
```

```
  ADD KEY `id_materia` (`id_materia`),
```

```
  ADD KEY `id_alumno` (`id_alumno`);
```

```
--
```

```
-- Indexes for table `salones`
```

```
--
```

```
ALTER TABLE `salones`
```

```
  ADD PRIMARY KEY (`id_salon`);
```

```
--
```

```
-- Indexes for table `tipo_examen`
```



```
--  
  
ALTER TABLE `tipo_examen`  
  ADD PRIMARY KEY (`id_tipo`);  
  
--  
  
-- AUTO_INCREMENT for dumped tables  
  
--  
  
--  
  
-- AUTO_INCREMENT for table `alumnos`  
  
--  
  
ALTER TABLE `alumnos`  
  MODIFY `id_alumno` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=4;  
  
--  
  
-- AUTO_INCREMENT for table `exámenes_materia`  
  
--  
  
ALTER TABLE `exámenes_materia`  
  MODIFY `id_examen` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=7;  
  
--  
  
-- AUTO_INCREMENT for table `materias`  
  
--  
  
ALTER TABLE `materias`  
  MODIFY `id_materia` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=4;  
  
--  
  
-- AUTO_INCREMENT for table `salones`  
  
--
```

```

ALTER TABLE `salones`

  MODIFY `id_salon` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=4;

--

-- AUTO_INCREMENT for table `tipo_examen`
--

ALTER TABLE `tipo_examen`

  MODIFY `id_tipo` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=5;

--

-- Constraints for dumped tables
--

--

-- Constraints for table `examenes_materia`
--

ALTER TABLE `examenes_materia`

  ADD CONSTRAINT `examenes_materia_ibfk_1` FOREIGN KEY (`id_materia`) REFERENCES `materias` (`id_materia`),

  ADD CONSTRAINT `examenes_materia_ibfk_2` FOREIGN KEY (`id_salon`) REFERENCES `salones` (`id_salon`),

  ADD CONSTRAINT `examenes_materia_ibfk_3` FOREIGN KEY (`id_tipo`) REFERENCES `tipo_examen` (`id_tipo`);

--

-- Constraints for table `materias_alumno`
--

ALTER TABLE `materias_alumno`

  ADD CONSTRAINT `materias_alumno_ibfk_1` FOREIGN KEY (`id_materia`) REFERENCES `materias` (`id_materia`),

```

```
ADD CONSTRAINT `materias_alumno_ibfk_2` FOREIGN KEY (`id_alumno`) REFERENCES `alumnos`
(`id_alumno`);
```

```
--
```

```
-- Database: `phpmyadmin`
```

```
--
```

```
CREATE DATABASE IF NOT EXISTS `phpmyadmin` DEFAULT CHARACTER SET utf8 COLLATE utf8_bin;
USE `phpmyadmin`;
```

```
-----
```

```
--
```

```
-- Table structure for table `pma__bookmark`
```

```
--
```

```
CREATE TABLE `pma__bookmark` (
  `id` int(10) UNSIGNED NOT NULL,
  `dbase` varchar(255) COLLATE utf8_bin NOT NULL DEFAULT '',
  `user` varchar(255) COLLATE utf8_bin NOT NULL DEFAULT '',
  `label` varchar(255) CHARACTER SET utf8 NOT NULL DEFAULT '',
  `query` text COLLATE utf8_bin NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Bookmarks';
```

```
-----
```

```
--
```

```
-- Table structure for table `pma__central_columns`
```

```
--
```

```
CREATE TABLE `pma__central_columns` (
```

```

`db_name` varchar(64) COLLATE utf8_bin NOT NULL,
`col_name` varchar(64) COLLATE utf8_bin NOT NULL,
`col_type` varchar(64) COLLATE utf8_bin NOT NULL,
`col_length` text COLLATE utf8_bin DEFAULT NULL,
`col_collation` varchar(64) COLLATE utf8_bin NOT NULL,
`col_isNull` tinyint(1) NOT NULL,
`col_extra` varchar(255) COLLATE utf8_bin DEFAULT "",
`col_default` text COLLATE utf8_bin DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Central list of columns';

```

```

-----

```

```

--

```

```

-- Table structure for table `pma__column_info`

```

```

--

```

```

CREATE TABLE `pma__column_info` (
  `id` int(5) UNSIGNED NOT NULL,
  `db_name` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT "",
  `table_name` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT "",
  `column_name` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT "",
  `comment` varchar(255) CHARACTER SET utf8 NOT NULL DEFAULT "",
  `mimetype` varchar(255) CHARACTER SET utf8 NOT NULL DEFAULT "",
  `transformation` varchar(255) COLLATE utf8_bin NOT NULL DEFAULT "",
  `transformation_options` varchar(255) COLLATE utf8_bin NOT NULL DEFAULT "",
  `input_transformation` varchar(255) COLLATE utf8_bin NOT NULL DEFAULT "",
  `input_transformation_options` varchar(255) COLLATE utf8_bin NOT NULL DEFAULT ""
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Column information for phpMyAdmin';

```

-----

--

-- Table structure for table `pma\_\_designer\_settings`

--

```
CREATE TABLE `pma__designer_settings` (  
  `username` varchar(64) COLLATE utf8_bin NOT NULL,  
  `settings_data` text COLLATE utf8_bin NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Settings related to  
Designer';
```

--

-- Dumping data for table `pma\_\_designer\_settings`

--

```
INSERT INTO `pma__designer_settings` (`username`, `settings_data`) VALUES  
(  
'root', '{\"angular_direct\": \"direct\", \"snap_to_grid\": \"off\", \"relation_lines\": \"true\"}');
```

-----

--

-- Table structure for table `pma\_\_export\_templates`

--

```
CREATE TABLE `pma__export_templates` (  
  `id` int(5) UNSIGNED NOT NULL,  
  `username` varchar(64) COLLATE utf8_bin NOT NULL,
```

```
`export_type` varchar(10) COLLATE utf8_bin NOT NULL,  
`template_name` varchar(64) COLLATE utf8_bin NOT NULL,  
`template_data` text COLLATE utf8_bin NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Saved export  
templates';
```

-----

--

-- Table structure for table `pma\_\_favorite`

--

```
CREATE TABLE `pma__favorite` (  
  `username` varchar(64) COLLATE utf8_bin NOT NULL,  
  `tables` text COLLATE utf8_bin NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Favorite tables';
```

-----

--

-- Table structure for table `pma\_\_history`

--

```
CREATE TABLE `pma__history` (  
  `id` bigint(20) UNSIGNED NOT NULL,  
  `username` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT '',  
  `db` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT '',  
  `table` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT '',  
  `timevalue` timestamp NOT NULL DEFAULT current_timestamp(),
```

```
`sqlquery` text COLLATE utf8_bin NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='SQL history for
phpMyAdmin';
```

```
-----
```

```
--
--
-- Table structure for table `pma__navigationhiding`
--
```

```
CREATE TABLE `pma__navigationhiding` (
  `username` varchar(64) COLLATE utf8_bin NOT NULL,
  `item_name` varchar(64) COLLATE utf8_bin NOT NULL,
  `item_type` varchar(64) COLLATE utf8_bin NOT NULL,
  `db_name` varchar(64) COLLATE utf8_bin NOT NULL,
  `table_name` varchar(64) COLLATE utf8_bin NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Hidden items of
navigation tree';
```

```
-----
```

```
--
--
-- Table structure for table `pma__pdf_pages`
--
```

```
CREATE TABLE `pma__pdf_pages` (
  `db_name` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT '',
  `page_nr` int(10) UNSIGNED NOT NULL,
  `page_descr` varchar(50) CHARACTER SET utf8 NOT NULL DEFAULT ''
```

```
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='PDF relation pages for phpMyAdmin';
```

```
--
```

```
-- Dumping data for table `pma__pdf_pages`
```

```
--
```

```
INSERT INTO `pma__pdf_pages` (`db_name`, `page_nr`, `page_descr`) VALUES  
('agenda', 1, 'agenda');
```

```
-----
```

```
--
```

```
-- Table structure for table `pma__recent`
```

```
--
```

```
CREATE TABLE `pma__recent` (  
  `username` varchar(64) COLLATE utf8_bin NOT NULL,  
  `tables` text COLLATE utf8_bin NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Recently accessed tables';
```

```
--
```

```
-- Dumping data for table `pma__recent`
```

```
--
```

```
INSERT INTO `pma__recent` (`username`, `tables`) VALUES  
('root',  
'[{"db\\":\\"agenda\\",\\"table\\":\\"materias_alumno\\"},{\\"db\\":\\"\\",\\"table\\":\\"tipo_examen\\"},{\\"db\\":\\"\\",\\"table\\":\\"salones\\"},{\\"db\\":\\"\\",\\"table\\":\\"materias\\"},{\\"db\\":\\"\\",\\"table\\":\\"alumnos\\"}]');
```



-----

--

-- Table structure for table `pma\_\_relation`

--

```
CREATE TABLE `pma__relation` (  
  `master_db` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT "",  
  `master_table` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT "",  
  `master_field` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT "",  
  `foreign_db` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT "",  
  `foreign_table` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT "",  
  `foreign_field` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT ""  
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Relation table';
```

-----

--

-- Table structure for table `pma\_\_savedsearches`

--

```
CREATE TABLE `pma__savedsearches` (  
  `id` int(5) UNSIGNED NOT NULL,  
  `username` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT "",  
  `db_name` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT "",  
  `search_name` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT "",  
  `search_data` text COLLATE utf8_bin NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Saved searches';
```

-----

--

-- Table structure for table `pma\_\_table\_coords`

--

```
CREATE TABLE `pma__table_coords` (  
  `db_name` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT '',  
  `table_name` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT '',  
  `pdf_page_number` int(11) NOT NULL DEFAULT 0,  
  `x` float UNSIGNED NOT NULL DEFAULT 0,  
  `y` float UNSIGNED NOT NULL DEFAULT 0  
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Table coordinates for  
phpMyAdmin PDF output';
```

--

-- Dumping data for table `pma\_\_table\_coords`

--

```
INSERT INTO `pma__table_coords` (`db_name`, `table_name`, `pdf_page_number`, `x`, `y`)  
VALUES  
  
('agenda', 'alumnos', 1, 420, 313),  
('agenda', 'exámenes_materia', 1, 386, 71),  
('agenda', 'materias', 1, 196, 238),  
('agenda', 'materias_alumno', 1, 195, 364),  
('agenda', 'salones', 1, 176, 68),  
('agenda', 'tipo_examen', 1, 638, 93);
```

-----

--

-- Table structure for table `pma\_\_table\_info`

--

```
CREATE TABLE `pma__table_info` (  
  `db_name` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT '',  
  `table_name` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT '',  
  `display_field` varchar(64) COLLATE utf8_bin NOT NULL DEFAULT ''  
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Table information for  
phpMyAdmin';
```

-----

--

-- Table structure for table `pma\_\_table\_uiprefs`

--

```
CREATE TABLE `pma__table_uiprefs` (  
  `username` varchar(64) COLLATE utf8_bin NOT NULL,  
  `db_name` varchar(64) COLLATE utf8_bin NOT NULL,  
  `table_name` varchar(64) COLLATE utf8_bin NOT NULL,  
  `prefs` text COLLATE utf8_bin NOT NULL,  
  `last_update` timestamp NOT NULL DEFAULT current_timestamp() ON UPDATE  
current_timestamp()  
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Tables' UI preferences';
```

-----

--

-- Table structure for table `pma\_\_tracking`

--

```
CREATE TABLE `pma__tracking` (  
  `db_name` varchar(64) COLLATE utf8_bin NOT NULL,  
  `table_name` varchar(64) COLLATE utf8_bin NOT NULL,  
  `version` int(10) UNSIGNED NOT NULL,  
  `date_created` datetime NOT NULL,  
  `date_updated` datetime NOT NULL,  
  `schema_snapshot` text COLLATE utf8_bin NOT NULL,  
  `schema_sql` text COLLATE utf8_bin DEFAULT NULL,  
  `data_sql` longtext COLLATE utf8_bin DEFAULT NULL,  
  `tracking` set('UPDATE','REPLACE','INSERT','DELETE','TRUNCATE','CREATE DATABASE','ALTER  
DATABASE','DROP DATABASE','CREATE TABLE','ALTER TABLE','RENAME TABLE','DROP  
TABLE','CREATE INDEX','DROP INDEX','CREATE VIEW','ALTER VIEW','DROP VIEW') COLLATE  
utf8_bin DEFAULT NULL,  
  `tracking_active` int(1) UNSIGNED NOT NULL DEFAULT 1  
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Database changes  
tracking for phpMyAdmin';
```

-----

--

-- Table structure for table `pma\_\_userconfig`

--

```
CREATE TABLE `pma__userconfig` (  
  `username` varchar(64) COLLATE utf8_bin NOT NULL,  
  `timevalue` timestamp NOT NULL DEFAULT current_timestamp() ON UPDATE  
current_timestamp(),  
  `config_data` text COLLATE utf8_bin NOT NULL
```

```
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='User preferences
storage for phpMyAdmin';
```

—

```
-- Dumping data for table `pma__userconfig`
```

--

```
INSERT INTO `pma__userconfig` (`username`, `timevalue`, `config_data`) VALUES
```

```
('root', '2022-08-28 02:53:48', '{\"Console\\VMode\\\": \"collapse\"}');
```

=====

--

```
-- Table structure for table `pma__usergroups`
```

--

```
CREATE TABLE `pma__usergroups` (
```

```
`usergroup` varchar(64) COLLATE utf8_bin NOT NULL,
```

```
`tab` varchar(64) COLLATE utf8_bin NOT NULL,
```

```
`allowed` enum('Y','N') COLLATE utf8_bin NOT NULL DEFAULT 'N'
```

```
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='User groups with  
configured menu items';
```

-----

—

```
-- Table structure for table `pma__users`
```

--

```
CREATE TABLE `pma__users` (
```

```
`username` varchar(64) COLLATE utf8_bin NOT NULL,  
`usergroup` varchar(64) COLLATE utf8_bin NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin COMMENT='Users and their  
assignments to user groups';
```

```
--
```

```
-- Indexes for dumped tables
```

```
--
```

```
--
```

```
-- Indexes for table `pma__bookmark`
```

```
--
```

```
ALTER TABLE `pma__bookmark`  
  ADD PRIMARY KEY (`id`);
```

```
--
```

```
-- Indexes for table `pma__central_columns`
```

```
--
```

```
ALTER TABLE `pma__central_columns`  
  ADD PRIMARY KEY (`db_name`,`col_name`);
```

```
--
```

```
-- Indexes for table `pma__column_info`
```

```
--
```

```
ALTER TABLE `pma__column_info`  
  ADD PRIMARY KEY (`id`),  
  ADD UNIQUE KEY `db_name` (`db_name`,`table_name`,`column_name`);
```

```
--
```

```
-- Indexes for table `pma__designer_settings`
```

```
--
```

```
ALTER TABLE `pma__designer_settings`
```

```
ADD PRIMARY KEY (`username`);
```

```
--
```

```
-- Indexes for table `pma__export_templates`
```

```
--
```

```
ALTER TABLE `pma__export_templates`
```

```
ADD PRIMARY KEY (`id`),
```

```
ADD UNIQUE KEY `u_user_type_template` (`username`,`export_type`,`template_name`);
```

```
--
```

```
-- Indexes for table `pma__favorite`
```

```
--
```

```
ALTER TABLE `pma__favorite`
```

```
ADD PRIMARY KEY (`username`);
```

```
--
```

```
-- Indexes for table `pma__history`
```

```
--
```

```
ALTER TABLE `pma__history`
```

```
ADD PRIMARY KEY (`id`),
```

```
ADD KEY `username` (`username`,`db`,`table`,`timevalue`);
```

```
--
```

```
-- Indexes for table `pma__navigationhiding`
```

```
--
```

```
ALTER TABLE `pma__navigationhiding`
```

```

ADD PRIMARY KEY (`username`,`item_name`,`item_type`,`db_name`,`table_name`);

--

-- Indexes for table `pma__pdf_pages`
--

ALTER TABLE `pma__pdf_pages`
  ADD PRIMARY KEY (`page_nr`),
  ADD KEY `db_name` (`db_name`);

--

-- Indexes for table `pma__recent`
--

ALTER TABLE `pma__recent`
  ADD PRIMARY KEY (`username`);

--

-- Indexes for table `pma__relation`
--

ALTER TABLE `pma__relation`
  ADD PRIMARY KEY (`master_db`,`master_table`,`master_field`),
  ADD KEY `foreign_field` (`foreign_db`,`foreign_table`);

--

-- Indexes for table `pma__savedsearches`
--

ALTER TABLE `pma__savedsearches`
  ADD PRIMARY KEY (`id`),
  ADD UNIQUE KEY `u_savedsearches_username_dbname`
(`username`,`db_name`,`search_name`);

```



```
--  
  
-- Indexes for table `pma__table_coords`  
  
--  
  
ALTER TABLE `pma__table_coords`  
  ADD PRIMARY KEY (`db_name`,`table_name`,`pdf_page_number`);  
  
--  
  
-- Indexes for table `pma__table_info`  
  
--  
  
ALTER TABLE `pma__table_info`  
  ADD PRIMARY KEY (`db_name`,`table_name`);  
  
--  
  
-- Indexes for table `pma__table_uiprefs`  
  
--  
  
ALTER TABLE `pma__table_uiprefs`  
  ADD PRIMARY KEY (`username`,`db_name`,`table_name`);  
  
--  
  
-- Indexes for table `pma__tracking`  
  
--  
  
ALTER TABLE `pma__tracking`  
  ADD PRIMARY KEY (`db_name`,`table_name`,`version`);  
  
--  
  
-- Indexes for table `pma__userconfig`  
  
--  
  
ALTER TABLE `pma__userconfig`
```

```
ADD PRIMARY KEY (`username`);

--

-- Indexes for table `pma__usergroups`
--

ALTER TABLE `pma__usergroups`

ADD PRIMARY KEY (`usergroup`,`tab`,`allowed`);

--

-- Indexes for table `pma__users`
--

ALTER TABLE `pma__users`

ADD PRIMARY KEY (`username`,`usergroup`);

--

-- AUTO_INCREMENT for dumped tables
--

--

-- AUTO_INCREMENT for table `pma__bookmark`
--

ALTER TABLE `pma__bookmark`

MODIFY `id` int(10) UNSIGNED NOT NULL AUTO_INCREMENT;

--

-- AUTO_INCREMENT for table `pma__column_info`
--

ALTER TABLE `pma__column_info`

MODIFY `id` int(5) UNSIGNED NOT NULL AUTO_INCREMENT;
```

```
--  
  
-- AUTO_INCREMENT for table `pma__export_templates`  
  
--  
  
ALTER TABLE `pma__export_templates`  
  MODIFY `id` int(5) UNSIGNED NOT NULL AUTO_INCREMENT;  
  
--  
  
-- AUTO_INCREMENT for table `pma__history`  
  
--  
  
ALTER TABLE `pma__history`  
  MODIFY `id` bigint(20) UNSIGNED NOT NULL AUTO_INCREMENT;  
  
--  
  
-- AUTO_INCREMENT for table `pma__pdf_pages`  
  
--  
  
ALTER TABLE `pma__pdf_pages`  
  MODIFY `page_nr` int(10) UNSIGNED NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=2;  
  
--  
  
-- AUTO_INCREMENT for table `pma__savedsearches`  
  
--  
  
ALTER TABLE `pma__savedsearches`  
  MODIFY `id` int(5) UNSIGNED NOT NULL AUTO_INCREMENT;  
  
--  
  
-- Database: `test`  
  
--  
  
CREATE DATABASE IF NOT EXISTS `test` DEFAULT CHARACTER SET latin1 COLLATE  
latin1_swedish_ci;
```

```
USE `test`;
```

```
COMMIT;
```

```
/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
```

```
/*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
```

```
/*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
```