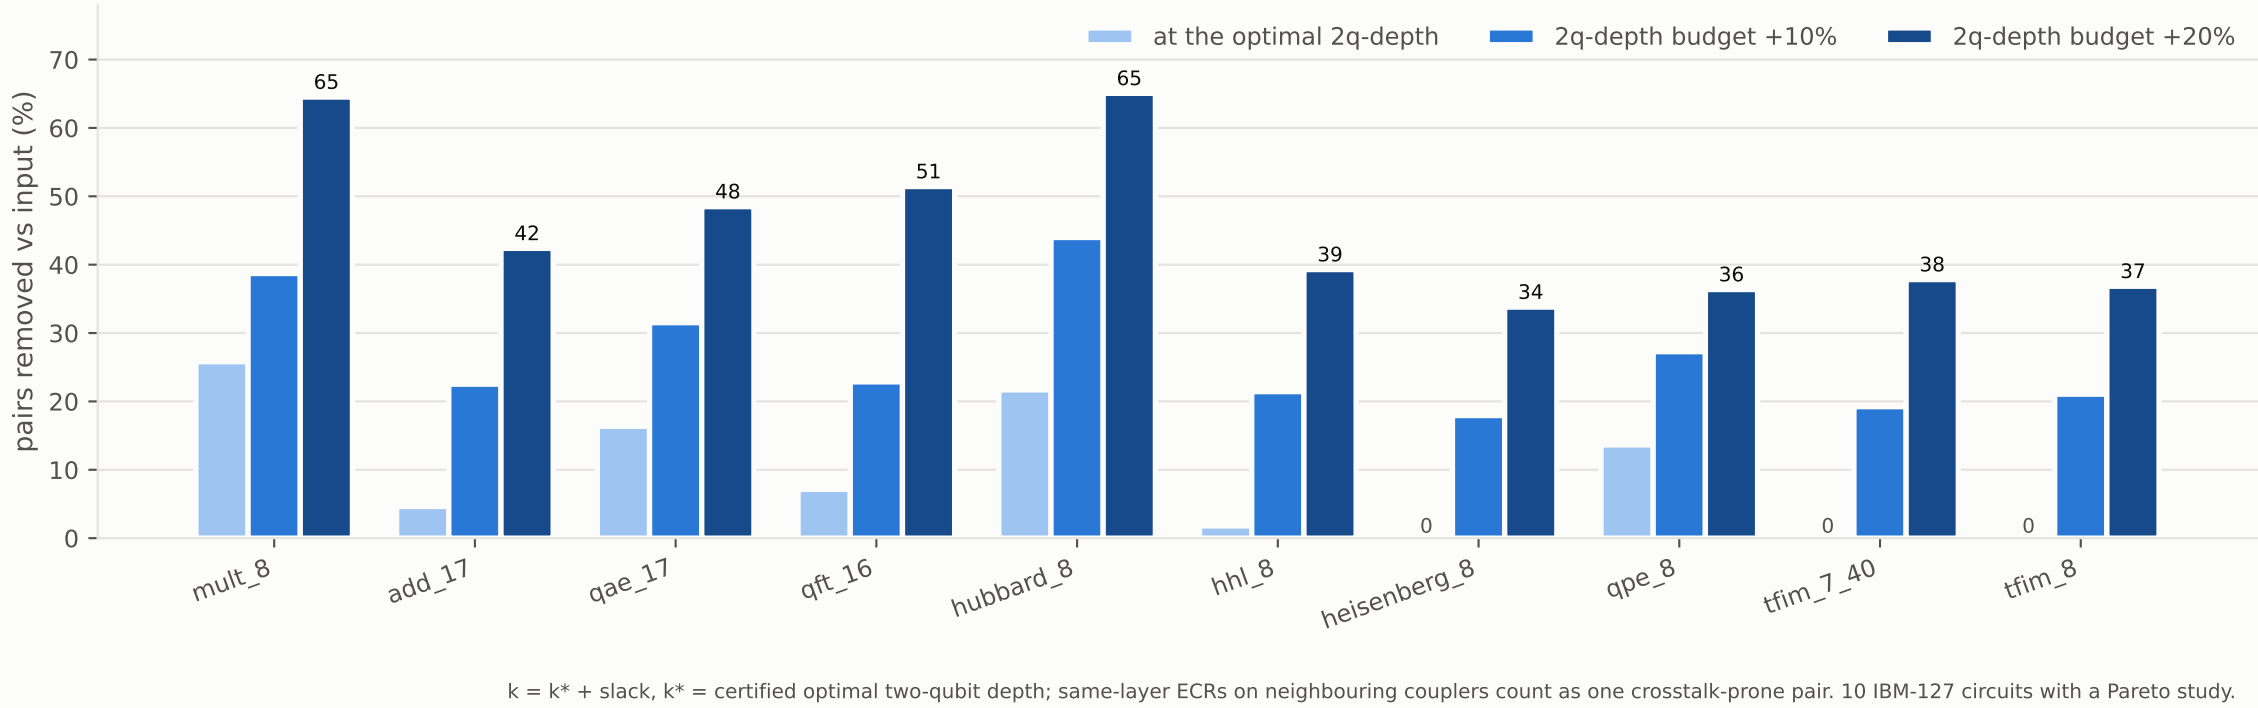
Crosstalk-prone ECR pairs removed by weighted Max-k-Cut under a depth budget (higher is better)
at the optimal 2q-depth
2q-depth budget +10%
2q-depth budget +20%
pairs removed vs input (%)
0
10
20
30
40
50
60
70
65
42
48
51
65
39
34
36
38
37
0
0
mult_8
add_17
qae_17
qft_16
hubbard_8
hhl_8
heisenberg_8
qpe_8
tfim_7_40
tfim_8
k = k* + slack, k* = certified optimal two-qubit depth; same-layer ECRs on neighbouring couplers count as one crosstalk-prone pair. 10 IBM-127 circuits with a Pareto study.