

Fast OpenGL Library

Generated by Doxygen 1.8.17

1 WIP: FastOGLib - Fast OpenGL Library	1
1.1 Instalation of Library	1
1.1.1 Linux/OSX	1
1.1.2 Windows	1
1.1.3 Developing the application	1
1.2 Contributors	1
2 Hierarchical Index	3
2.1 Class Hierarchy	3
3 Class Index	5
3.1 Class List	5
4 Class Documentation	7
4.1 INPUT::Adapter Class Reference	7
4.2 INPUT::AdapterHandler Class Reference	7
4.3 GPU::ArrayHandler Class Reference	8
4.3.1 Member Function Documentation	9
4.3.1.1 allocateBuffer()	9
4.3.1.2 areFreeBuffers()	9
4.3.1.3 areRepetitions()	10
4.3.1.4 getFirstAvailavleBuffer()	10
4.3.1.5 releaseBuffer()	10
4.4 Controller Class Reference	11
4.5 Lights::DirectLight Class Reference	11
4.6 OSDL::DualLink Class Reference	12
4.7 Lights::GlobalLight Class Reference	12
4.8 GPU::GPU_Ref Class Reference	13
4.9 Lights::LightManager Class Reference	14
4.10 Primitives::Line Class Reference	14
4.10.1 Constructor & Destructor Documentation	15
4.10.1.1 Line()	15
4.10.2 Member Function Documentation	15
4.10.2.1 Display()	16
4.10.2.2 isVisible()	16
4.11 Model Class Reference	16
4.12 OSDL::Observer Class Reference	17
4.13 Primitive Class Reference	17
4.14 Primitives::PrimitivesManager Class Reference	18
4.15 Lights::SphericalLight Class Reference	18
4.16 Primitives::Square Class Reference	19
4.16.1 Member Function Documentation	20
4.16.1.1 isNear()	20

4.16.1.2 isVisible()	21
4.16.1.3 Move()	21
4.16.1.4 rotate()	21
4.16.1.5 rotateVertices()	21
4.16.1.6 setAlpha()	22
4.16.1.7 setPosition()	22
4.16.1.8 setRotation()	22
4.16.1.9 setTexture()	23
4.17 OSDL::Subject Class Reference	23
4.18 AEG::Texture Class Reference	24
4.19 AEG::Textures Class Reference	24
4.20 vertexHandler Class Reference	25
4.21 View Class Reference	26
4.22 Global::WindowProperties Class Reference	26
4.22.1 Constructor & Destructor Documentation	26
4.22.1.1 WindowProperties()	26
Index	29

Chapter 1

WIP: FastOGLib - Fast OpenGL Library

Fast and scalable library, able to create OpenGL programs on osx/linux/windows machines.

1.1 Instalation of Library

Actually does not provide plug in solution. Saying that so it's needed to download all source codes of Lib and dependent libs.

```
git stash
git pull
git submodule sync && git submodule update --init
```

1.1.1 Linux/OSX

After checking out the desired version of library building is straight forward:

```
mkdir build
cd build
cmake ..
make
```

1.1.2 Windows

Unfortunately on Windows the GNU compiler with make is required (MVC option is not tested - Feel free to test it, I will try to help my best). In order to build the app it's needed to select correct compiler:

```
mkdir build
git stash
git pull
git submodule sync && git submodule update --init
cd build
cmake .. -G "MinGW Makefiles"
mingw32-make.exe -j 10 -l 10
```

1.1.3 Developing the application

Actually in order of development on this library the `main.cpp` file has to be modified. In future months I'll be adding more functionality, which can be monitored in issues, and after some time, I'll provide CMake style libraries.

1.2 Contributors

@mwawrzkow - Marcin Wawrzków - owner

Chapter 2

Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

GPU::ArrayHandler	8
Lights::DirectLight	11
Lights::GlobalLight	12
GPU::GPU_Ref	13
Lights::LightManager	14
OSDL::Observer	17
INPUT::Adapter	7
OSDL::DualLink	12
Controller	11
Model	16
View	26
Primitives::PrimitivesManager	18
Lights::SphericalLight	18
OSDL::Subject	23
INPUT::AdapterHandler	7
OSDL::DualLink	12
AEG::Texture	24
AEG::Textures	24
vertexHandler	25
Primitive	17
Primitives::Square	19
Primitives::Line	14
Global::WindowProperties	26

Chapter 3

Class Index

3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:


INPUT::Adapter	7
INPUT::AdapterHandler	7
GPU::ArrayHandler	8
Controller	11
Lights::DirectLight	11
OSDL::DualLink	12
Lights::GlobalLight	12
GPU::GPU_Ref	13
Lights::LightManager	14
Primitives::Line	14
Model	16
OSDL::Observer	17
Primitive	17
Primitives::PrimitivesManager	18
Lights::SphericalLight	18
Primitives::Square	19
OSDL::Subject	23
AEG::Texture	24
AEG::Textures	24
vertexHandler	25
View	26
Global::WindowProperties	26

Chapter 4

Class Documentation

4.1 INPUT::Adapter Class Reference

Inheritance diagram for INPUT::Adapter:



Public Member Functions

- void **Notify** (OSDL::Subject *)
- bool **isKeyPressed** (KeyBoardKey)
- bool **isKeyHold** (KeyBoardKey)

Private Attributes

- std::map< KeyBoardKey, bool > **keyPressed**
- std::map< KeyBoardKey, bool > **keyHold**

The documentation for this class was generated from the following files:

- Engine/Core/core/InputAdapter.hpp
- Engine/Core/core/InputAdapter.cpp

4.2 INPUT::AdapterHandler Class Reference

Inheritance diagram for INPUT::AdapterHandler:



Public Types

- enum **KeyActionType** { **Hold**, **Press_down**, **Press_Up** }

Public Member Functions

- AdapterHandler** ([AdapterHandler](#) &other)=delete
- void **operator=** (const [AdapterHandler](#) &)=delete
- [AdapterHandler](#) * **getInstance** ()
- KeyBoardKey **getKey** ()
- KeyActionType **getAction** ()

Static Public Member Functions

- static void **onKeyUpdate** (GLFWwindow *window, int key, int status, int action, int mods)

Private Member Functions

- void **UpdateKey** (int)

Private Attributes

- KeyBoardKey **key**
- KeyActionType **Action**

The documentation for this class was generated from the following files:

- Engine/Core/core/InputAdapter.hpp
- Engine/Core/core/InputAdapter.cpp

4.3 GPU::ArrayHandler Class Reference

Public Member Functions

- bool [areFreeBuffers](#) ()
Check if any buffers are available.
- bool [allocateBuffer](#) (int)
Allocates GPU space for x buffers.
- [GPU_Ref](#) * [getFirstAvailableBuffer](#) ()
Returns pointer to first Available Buffer.
- void [releaseBuffer](#) (int)
Releases the buffer, if buffer is not taken does nothing.

Private Member Functions

- bool [areRepetitions](#) (unsigned int[], int)
check if are repetitions in Array

Private Attributes

- `std::vector< GPU_Ref > GPUSpace`

4.3.1 Member Function Documentation

4.3.1.1 `allocateBuffer()`

```
bool GPU::ArrayHandler::allocateBuffer (
    int size )
```

Allocates GPU space for x buffers.

Parameters

<i>int</i>	size amount of buffers
------------	------------------------

Note

Return values

<i>bool</i>	if buffers were created
-------------	-------------------------

4.3.1.2 `areFreeBuffers()`

```
bool GPU::ArrayHandler::areFreeBuffers ( )
```

Check if any buffers are available.

Note

Return values

<i>bool</i>	are any buffers free
-------------	----------------------

4.3.1.3 areRepetitions()

```
bool GPU::ArrayHandler::areRepetitions (
    unsigned int array[],
    int size ) [private]
```

check if are repetitions in Array

Note

Parameters

<i>int[]</i>	array
<i>int</i>	size of array

Return values

<i>true</i>	If they're repetiotion
<i>false</i>	if there are no repetitions

4.3.1.4 getFirstAvailavleBuffer()

```
GPU_Ref * GPU::ArrayHandler::getFirstAvailavleBuffer ( )
```

Returns pointer to first Available Buffer.

Note

Return values

<i>GPU_Ref</i>	Pointer to buffer, in not buffers available return nullptr
--------------------------------	--

4.3.1.5 releaseBuffer()

```
void GPU::ArrayHandler::releaseBuffer (
    int idx )
```

Releases the buffer, if buffer is not taken does nothing.

Note

Exceptions

------	--

Return values


None	
------	--

The documentation for this class was generated from the following files:

- Engine/Core/core/OpenGLArrays/ArrayHandler.hpp
- Engine/Core/core/OpenGLArrays/ArrayHandler.cpp

4.4 Controller Class Reference

Inheritance diagram for Controller:



Additional Inherited Members

The documentation for this class was generated from the following file:

- Engine/Core/patterns/MVC/Controller.hpp

4.5 Lights::DirectLight Class Reference

Public Member Functions

- **DirectLight** (float, float, float, float, float, float, float, float, float)
- void **setPosition** (float, float)
- void **Move** (float, float)
- void **setColor** (float, float, float)
- void **setLumen** (float)
- void **setAlpha** (float)
- float **getX** ()
- float **getY** ()
- float **getLumen** ()
- float **getAlpha** ()
- float **getR** ()
- float **getG** ()
- float **getB** ()
- float **getConeAngle** ()
- float **getConeWidth** ()
- float **getConeLength** ()

Private Attributes


- float **x**
- float **y**
- float **lumen**
- float **alpha** = 1.0f
- float **r**
- float **g**
- float **b**
- float **coneAngle**
- float **coneWidth**
- float **coneLength**

The documentation for this class was generated from the following files:

- Engine/Core/core/primitives/Light/DirectLight.hpp
- Engine/Core/core/primitives/Light/DirectLight.cpp

4.6 OSDL::DualLink Class Reference

Inheritance diagram for OSDL::DualLink:

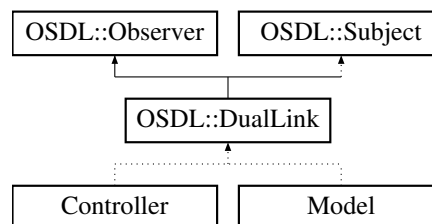

Additional Inherited Members

The documentation for this class was generated from the following file:

- Engine/Core/patterns/ObserverSubject/DualLink.hpp

4.7 Lights::GlobalLight Class Reference

Public Member Functions

- **GlobalLight** (float, float, float, float, float, float)
- void **setPosition** (float, float)
- void **Move** (float, float)
- void **setColor** (float, float, float)
- void **setLumen** (float)
- void **setAlpha** (float)
- float **getX** ()
- float **getY** ()
- float **getLumen** ()
- float **getAlpha** ()
- float **getR** ()
- float **getG** ()
- float **getB** ()

Private Attributes

- float **x**
- float **y**
- float **lumen**
- float **alpha** = 1.0f
- float **r**
- float **g**
- float **b**

The documentation for this class was generated from the following files:

- Engine/Core/core/primitives/Light/GlobalLight.hpp
- Engine/Core/core/primitives/Light/GlobalLight.cpp

4.8 GPU::GPU_Ref Class Reference

Public Member Functions

- **GPU_Ref** (int, int, int)
- const unsigned int & **getVAO** ()
- const unsigned int & **getVBO** ()
- const unsigned int & **getEBO** ()

Protected Member Functions

- void **Release** ()
- bool & **Taken** ()
- [GPU_Ref](#) * **Take** ()

Private Attributes

- unsigned int **VAO**
- unsigned int **VBO**
- unsigned int **EBO**
- bool **taken**

Friends

- class **ArrayHandler**

The documentation for this class was generated from the following files:

- Engine/Core/core/OpenGLArrays/ArrayHandler.hpp
- Engine/Core/core/OpenGLArrays/ArrayHandler.cpp

4.9 Lights::LightManager Class Reference

Public Member Functions

- void **addDirectLight** ([DirectLight](#) *)
- void **addSphericalLight** ([SphericalLight](#) *)
- void **addGlobalLight** ([GlobalLight](#) *)
- void **removeDirectLight** ([DirectLight](#) *)
- void **removeSphericalLight** ([SphericalLight](#) *)
- void **removeGlobalLight** ([GlobalLight](#) *)
- void **addDirectLight** (float, float, float, float, float, float, float, float, float)
- void **addSphericalLight** (float, float, float, float, float, float, float)
- void **addGlobalLight** (float, float, float, float, float, float, float)
- void **draw** ([Primitives::PrimitivesManager](#) primitives)

Private Member Functions

- void **drawDirectLights** ([Primitives::PrimitivesManager](#) primitives)
- void **drawSphericalLights** ([Primitives::PrimitivesManager](#) primitives)
- void **drawGlobalLights** ([Primitives::PrimitivesManager](#) primitives)

Private Attributes


- std::vector< [DirectLight](#) * > **directLights**
- std::vector< [SphericalLight](#) * > **sphericalLights**
- std::vector< [GlobalLight](#) * > **globalLights**

The documentation for this class was generated from the following files:

- Engine/Core/core/primitives/Lights.hpp
- Engine/Core/core/primitives/Lights.cpp

4.10 Primitives::Line Class Reference

Inheritance diagram for Primitives::Line:



Public Member Functions

- [Line](#) (int x0, int y0, int x1, int y1, int w, int r, int g, int b, float alpha)
Construct a new [Line](#) object.
- void [Display](#) ()
Display the [Line](#).
- bool [isVisible](#) () override
is the [Line](#) visible

Additional Inherited Members

4.10.1 Constructor & Destructor Documentation

4.10.1.1 Line()

```
Primitives::Line::Line (  
    int x0,  
    int y0,  
    int x1,  
    int y1,  
    int w,  
    int r,  
    int g,  
    int b,  
    float alpha )
```

Construct a new [Line](#) object.

Parameters

<i>x0</i>	- x coordinate of first point
<i>y0</i>	- y coordinate of first point
<i>x1</i>	- x coordinate of second point
<i>y1</i>	- y coordinate of second point
<i>w</i>	- width of line
<i>r</i>	- red color component
<i>g</i>	- green color component
<i>b</i>	- blue color component
<i>alpha</i>	- alpha value of line

4.10.2 Member Function Documentation

4.10.2.1 Display()

```
void Primitives::Line::Display ( )
```

Display the [Line](#).

4.10.2.2 isVisible()

```
bool Primitives::Line::isVisible ( ) [override], [virtual]
```

is the [Line](#) visible

Returns

true

false


Implements [Primitive](#).

The documentation for this class was generated from the following files:

- Engine/Core/core/primitives/Line.hpp
- Engine/Core/core/primitives/Line.cpp

4.11 Model Class Reference

Inheritance diagram for Model:




Additional Inherited Members

The documentation for this class was generated from the following file:

- Engine/Core/patterns/MVC/Model.hpp

4.12 OSDL::Observer Class Reference

Inheritance diagram for OSDL::Observer:

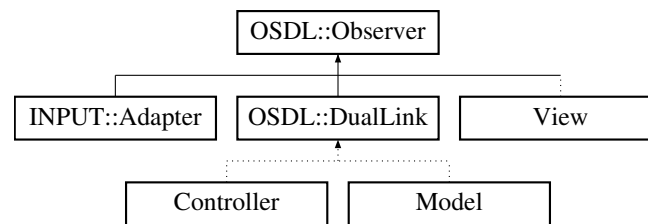

Public Member Functions


- virtual void **Notify** ([Subject](#) *)

The documentation for this class was generated from the following file:

- Engine/Core/patterns/ObserverSubject/Observer.hpp

4.13 Primitive Class Reference

Inheritance diagram for Primitive:



Public Member Functions

- float **sin** (float r)
- float **cos** (float r)
- **Primitive** (prim_type)
- virtual bool **isVisible** ()=0
- virtual bool **isNear** (float, float, float)=0

Protected Types

- enum **prim_type** { **RECTANAGLE**, **TRIANGLE**, **SQUARE** }

Protected Attributes

- enum Primitive::prim_type **TYPE**

The documentation for this class was generated from the following files:

- Engine/Core/core/base/Primitive.hpp
- Engine/Core/core/base/Primitive.cpp

4.14 Primitives::PrimitivesManager Class Reference

Public Member Functions

- void **addPrimitive** (Primitive *)
- void **removePrimitive** (Primitive *)
- void **removePrimitive** (int)
- void **removeAllPrimitives** ()
- void **DisplayAll** ()
- PrimitivesRef **getPrimitives** ()
- Primitives **getPrimitivesNear** (float, float, float)

Private Attributes

- Primitives **primitives**

The documentation for this class was generated from the following files:

- Engine/Core/core/primitives/PrimitivesManager.hpp
- Engine/Core/core/primitives/PrimitivesManager.cpp

4.15 Lights::SphericalLight Class Reference

Public Member Functions

- **SphericalLight** (float x, float y, float lumen, float r, float g, float b)
- void **setPosition** (float, float)
- void **Move** (float, float)
- void **setColor** (float, float, float)
- void **setLumen** (float)
- void **setAlpha** (float)
- float **getX** ()
- float **getY** ()
- float **getLumen** ()
- float **getAlpha** ()
- float **getR** ()
- float **getG** ()
- float **getB** ()

Private Attributes


- float **x**
- float **y**
- float **lumen**
- float **alpha** = 1.0f
- float **r**
- float **g**
- float **b**

The documentation for this class was generated from the following files:

- Engine/Core/core/primitives/Light/SphericalLight.hpp
- Engine/Core/core/primitives/Light/SphericalLight.cpp

4.16 Primitives::Square Class Reference

Inheritance diagram for Primitives::Square:



Public Member Functions

- **Square** (float, float, float, float)
- void **setPosition** (float, float)
Set the Position object.
- void **Move** (float, float)
move the square relative to the current position
- void **setTexture** (std::string)
Set the Texture object.
- bool **isVisible** () override
is Object on the screen
- void **Display** ()
Draw the square.
- float **getX** ()
- float **getY** ()
- void **setAlpha** (float)
Set the Alpha value.
- bool **isNear** (float, float, float) override
is the Object int the radius
- void **setRotation** (float)
Set the rotation of the square.
- float **getRotation** ()
- void **rotate** (float)
rotate the square relative to the current rotation

Private Member Functions

- void **calculateMatrixes** ()
- void **rotateVertices** (std::vector< float > &vertices)

Rotate the vertices of the square.

Private Attributes

- [Global::WindowProperties](#) * **window**
- float **x**
- float **y**
- float **size**
- float **r**
- float **g**
- float **b**
- float **alpha** = 1.0f
- float **angle** = 0.0f

Additional Inherited Members

4.16.1 Member Function Documentation

4.16.1.1 isNear()

```
bool Primitives::Square::isNear (
    float x,
    float y,
    float radius ) [override], [virtual]
```

is the Object int the radius

Parameters

<i>float</i>	x - x coordinate of the center of the circle
<i>float</i>	y - y coordinate of the center of the circle
<i>float</i>	radius - radius of the circle

Returns

true - if object is in the radius
false - if object is not in the radius

Implements [Primitive](#).

4.16.1.2 isVisible()

```
bool Primitives::Square::isVisible ( ) [override], [virtual]
```

is Object on the screen

Returns

true - if object is on the screen

false - if object is not on the screen

Implements [Primitive](#).

4.16.1.3 Move()

```
void Primitives::Square::Move (
    float x,
    float y )
```

move the square relative to the current position

Parameters

<i>float</i>	x - offset in x direction
<i>float</i>	y - offset in y direction

4.16.1.4 rotate()

```
void Primitives::Square::rotate (
    float angle )
```

rotate the square relative to the current rotation

Parameters

<i>float</i>	angle - angle in radians
--------------	--------------------------

4.16.1.5 rotateVertices()

```
void Primitives::Square::rotateVertices (
    std::vector< float > & vertices ) [private]
```

Rotate the vertices of the square.

Parameters

<i>vertices</i>	- vertices of the square
<i>rot</i>	- rotation matrix

4.16.1.6 setAlpha()

```
void Primitives::Square::setAlpha (
    float alpha )
```

Set the Alpha value.

Parameters

<i>float</i>	alpha - alpha value
--------------	---------------------

4.16.1.7 setPosition()

```
void Primitives::Square::setPosition (
    float x,
    float y )
```

Set the Position object.

Parameters

<i>float</i>	x - x coordinate of the center of the square
<i>float</i>	y - y coordinate of the center of the square

4.16.1.8 setRotation()

```
void Primitives::Square::setRotation (
    float angle )
```

Set the rotation of the square.

Parameters

<i>float</i>	angle - angle in radians of the square
--------------	--

4.16.1.9 setTexture()

```
void Primitives::Square::setTexture (
    std::string data )
```

Set the Texture object.

Parameters


<code>std::string</code>	data - path to the texture
--------------------------	----------------------------

The documentation for this class was generated from the following files:

- Engine/Core/core/primitives/Square.hpp
- Engine/Core/core/primitives/Square.cpp

4.17 OSDL::Subject Class Reference

Inheritance diagram for OSDL::Subject:

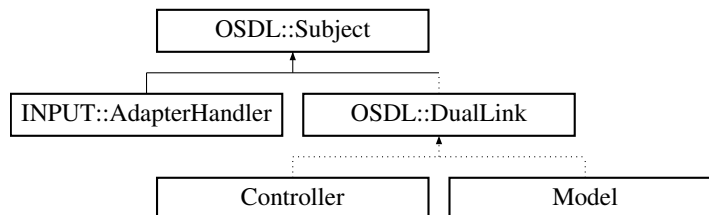

Public Member Functions

- void **addObserver** ([Observer](#) &)
- void **Notify** ()
- void **NotifyObserver** ([Observer](#) &)
- void **removeObserver** ([Observer](#) &)

Private Attributes

- std::vector< [Observer](#) * > **observers**

The documentation for this class was generated from the following files:

- Engine/Core/patterns/ObserverSubject/Subject.hpp
- Engine/Core/patterns/ObserverSubject/Subject.cpp

4.18 AEG::Texture Class Reference

Public Member Functions

- **Texture** (std::string, unsigned int)
- const unsigned int & **getTextureID** ()

Protected Member Functions

- const std::string & **getLocation** ()
- void **setTextureLocation** (std::string)
- void **setTextureID** (unsigned int)
- void **Clear** ()

Private Attributes

- unsigned int **ID**
- std::string **location**

Friends

- class **Textures**

The documentation for this class was generated from the following files:

- Engine/Core/core/base/Texture.hpp
- Engine/Core/core/base/Texture.cpp

4.19 AEG::Textures Class Reference

Public Member Functions

- void **allocateTextureSpace** (unsigned int)
- const unsigned int & **getTextureIndex** (const std::string &)
- void **loadTexture** (const std::string &)
- void **unloadTexture** (const std::string &)
- void **unloadTexture** (unsigned int)

Private Member Functions

- void **LoadTexture** (int, const std::string &)

Private Attributes


- `std::vector< Texture > TextureMap`

The documentation for this class was generated from the following files:

- `Engine/Core/core/base/Texture.hpp`
- `Engine/Core/core/base/Texture.cpp`

4.20 vertexHandler Class Reference

Inheritance diagram for vertexHandler:



Public Member Functions

- `void setVertexHandler (float vertices[], int VerticesSize, unsigned int indices[], int indicesSize)`
- `void setTextureData (const std::string)`
- `int getTexture ()`
- `int getVBO ()`
- `int getEBO ()`
- `int getVAO ()`

Private Attributes


- unsigned int **VBO**
- unsigned int **VAO**
- unsigned int **EBO**
- unsigned int **texture**

The documentation for this class was generated from the following files:

- `Engine/Core/core/base/vertexHandler.hpp`
- `Engine/Core/core/base/vertexHandler.cpp`

4.21 View Class Reference

Inheritance diagram for View:



Additional Inherited Members

The documentation for this class was generated from the following file:

- Engine/Core/patterns/MVC/View.hpp

4.22 Global::WindowProperties Class Reference

Public Member Functions

- [WindowProperties](#) ([WindowProperties](#) &other)=delete
ArrayHandler for All GPU bindings.
- void **operator=** (const [WindowProperties](#) &)=delete
- [GPU::ArrayHandler](#) * **getAH** ()
- [AEG::Textures](#) * **getTextures** ()
- const int & **getWindowHeight** ()
- const int & **getWindowWidth** ()
- void **setWindowWidth** (int)
- void **setWindowHeight** (int)

Static Public Member Functions

- static [WindowProperties](#) & **getInstance** ()

Private Attributes

- int **windowHeight**
- int **windowWidth**

4.22.1 Constructor & Destructor Documentation

4.22.1.1 WindowProperties()

```
Global::WindowProperties::WindowProperties (
    WindowProperties & other ) [delete]
```

ArrayHandler for All GPU bindings.

Note

Return values

<i>None</i>	
-------------	--

The documentation for this class was generated from the following files:

- Engine/Core/core/WindowProperties.hpp
- Engine/Core/core/WindowProperties.cpp

Index

- AEG::Texture, [24](#)
- AEG::Textures, [24](#)
- allocateBuffer
 - GPU::ArrayHandler, [9](#)
- areFreeBuffers
 - GPU::ArrayHandler, [9](#)
- areRepetitions
 - GPU::ArrayHandler, [9](#)
- Controller, [11](#)
- Display
 - Primitives::Line, [15](#)
- getFirstAvailavleBuffer
 - GPU::ArrayHandler, [10](#)
- Global::WindowProperties, [26](#)
 - WindowProperties, [26](#)
- GPU::ArrayHandler, [8](#)
 - allocateBuffer, [9](#)
 - areFreeBuffers, [9](#)
 - areRepetitions, [9](#)
 - getFirstAvailavleBuffer, [10](#)
 - releaseBuffer, [10](#)
- GPU::GPU_Ref, [13](#)
- INPUT::Adapter, [7](#)
- INPUT::AdapterHandler, [7](#)
- isNear
 - Primitives::Square, [20](#)
- isVisible
 - Primitives::Line, [16](#)
 - Primitives::Square, [20](#)
- Lights::DirectLight, [11](#)
- Lights::GlobalLight, [12](#)
- Lights::LightManager, [14](#)
- Lights::SphericalLight, [18](#)
- Line
 - Primitives::Line, [15](#)
- Model, [16](#)
- Move
 - Primitives::Square, [21](#)
- OSDL::DualLink, [12](#)
- OSDL::Observer, [17](#)
- OSDL::Subject, [23](#)
- Primitive, [17](#)
- Primitives::Line, [14](#)
 - Display, [15](#)
 - isVisible, [16](#)
 - Line, [15](#)
 - Primitives::PrimitivesManager, [18](#)
 - Primitives::Square, [19](#)
 - isNear, [20](#)
 - isVisible, [20](#)
 - Move, [21](#)
 - rotate, [21](#)
 - rotateVertices, [21](#)
 - setAlpha, [22](#)
 - setPosition, [22](#)
 - setRotation, [22](#)
 - setTexture, [22](#)
- releaseBuffer
 - GPU::ArrayHandler, [10](#)
- rotate
 - Primitives::Square, [21](#)
- rotateVertices
 - Primitives::Square, [21](#)
- setAlpha
 - Primitives::Square, [22](#)
- setPosition
 - Primitives::Square, [22](#)
- setRotation
 - Primitives::Square, [22](#)
- setTexture
 - Primitives::Square, [22](#)
- vertexHandler, [25](#)
- View, [26](#)
- WindowProperties
 - Global::WindowProperties, [26](#)