Code Review 5: Midterm Review

CS51 Melissa Kwan

1 Midterm strategies

- To review, redo labs on your own! The exam will be much more like the labs than the problem sets.
- Have utop and OCaml open as you take the midterm. Write your functions in the OCaml file, then copy and paste them into Gradescope. I recommend prepping your OCaml file with some reference syntax, such as an example module/functor and recursive function that uses match statements.

2 Recursion and higher-order functions

Question 2.1. Write a function map_drop that takes in three inputs: a list, a function, and an element. Thus function will behave as a standard map with one caveat — if the element is in the list, it will drop that element from the list.

Question 2.2. Write a function replicate that takes in a list of strings and an integer and returns a new list with the elements replicated a given number of times. For example replicate ["a"; "b"; "c"] 3 would yield ["a"; "a"; "a"; "b"; "b"; "b"; "c"; "c"].

3 Modules, Functors, Sharing Constraints

TL; DR on Modules / Functors / Signatures:

- A module is a package of types and values. (Remember that functions are values, too.)
- A **signature** is a type of a module. It defines what the outside user can see, and it helps us set up an *abstraction barrier* between the "interface" (i.e. how the user interacts with your module) and the underlying implementation.
- A **functor** is a function from modules to modules.
- A sharing constraint allows us to reveal information that is not accessible from the signature.

3.1 The Recombobulator (Adapted from Albert Zheng)

The world's leading discombobulation scientist Dr. Shuart Stieber has made an incredible breakthrough! He has figured out how to convert any cow into a dragon (or any dragon into a cow) using his newly patented invention: the Recombobulator. Now, Dr. Stieber wants to use his new device on a cow to convert it into a dragon, then use his device on the dragon to convert it back in to a cow (and so on). He plans to keep track of whether the cow is currently a cow or a dragon using modules (I mean, how else would you keep track of it?). Below we have defined a module signature for the module CowOrDragon which will be our initial representation of the cow that Dr. Stieber will be Recombobulating.

```
module type CowOrDragonSig =
  sig
    type animal
    val numWings : int
    val hasLongNeck : bool
    val hasScales : bool
    val startedOutAs : animal
    val currentForm : animal
    val convert : animal -> animal
  end
module CowOrDragon : CowOrDragonSig =
  struct
    type animal = | Cow | Dragon
    let numWings = 0
    let hasLongNeck = false
    let hasScales = false
    let startedOutAs = Cow
    let currentForm = Cow
   let convert x = if x = Cow then Dragon else Cow
  end
```

Question 3.1. Define a functor, Recombobulate, which takes in a module of type CowOrDragonSig and returns a new module of the same type, but: if the original module had the attributes of a Cow, the new module must have the attributes of a Dragon, and vice versa.

```
module Recombobulate (C : ______) : ____ =
struct
    type animal =

let numWings =

let hasLongNeck =

let startedOutAs =

let currentForm =

let convert =
end
```

3.2 Students and majors

Suppose you've been hired by SEAS to implement a student directory application. You know that you'll need a way to represent students, and a data structure that you can use to store information about students and look them up.

Question 3.2. Suppose that the only majors in SEAS are CS, EE, and ME. Define a type major to represent this.

Question 3.3. Suppose that a student is defined by an string name and a major of type major. Define a type student to represent a student.


Conveniently, your friend tells you that they have implemented a dictionary data structure! (Recall that a dictionary, also called a hash table or a map, lets you look up values according to some input keys.) Your friend tells you that the dictionary is incredibly efficient – it uses machine learning or block chain or something, you think. In any case, your friend hasn't shown you the implementation and quite honestly, you're not sure you want to see it. You do, however, know the following module signatures.

```
module type Dict =
    sig
        type dict
        type key
        type v
        val empty : dict
        val add : (key * v) -> dict -> dict
        val lookup : key -> dict -> v option
    end

module type DictArg =
    sig
        type key
        type v
    end
```

Question 3.4. Define a functor called MakeDict that takes in a DictArg and and outputs a dictionary. Under the hood, implement your dictionary as a list of tuples (which is probably what your friend is doing under all that smoke and mirrors).

end

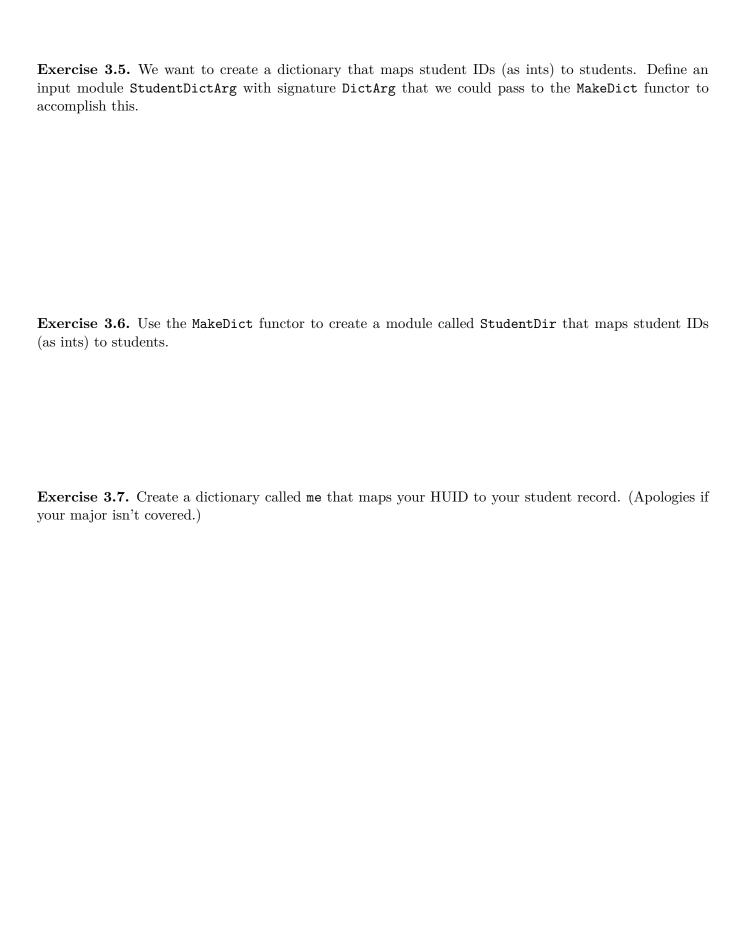

4 Data Structures Review

Recall again our binary tree data structure:

```
type 'a bintree =
    | Leaf
    | Node of 'a * 'a bintree * 'a bintree ;;

let rec leaf_count (tree : 'a bintree) : int =
    match tree with
    | Leaf -> 1
    | Node (_, left, right) -> leaf_count left + leaf_count right ;;
```

Exercise 4.1. Write a function flatten_tree that takes in a binary tree and returns a list of the same elements in the binary tree. The order of elements in the list is the Depth-First-Search order of the tree (i.e. go as far down as you can before exploring horizontally.)