

# Action Archive

## for BigFix Platform

---

### Installation Guide

|                          |                                 |
|--------------------------|---------------------------------|
| <b>Version</b>           | 1.2.0                           |
| <b>Document Revision</b> | May 26, 2026                    |
| <b>Archive Server</b>    | Ubuntu Server 24.04 / 26.04 LTS |
| <b>Audit Agent</b>       | BigFix Root Server (Windows)    |
| <b>Author</b>            | Mike Consuegra                  |

# Legal Notices and Trademarks

## Third-Party Trademarks and Proprietary Rights

This document references products, product names, brand names, and trademarks that are the property of their respective owners. References are made solely for descriptive and identification purposes, to accurately describe the systems and environments with which Action Archive for BigFix Platform is designed to operate. No sponsorship, affiliation, endorsement, or approval by any third-party trademark holder is implied or should be inferred.

| Product / Mark                         | Owner                                       | Nature of Reference in This Document                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| HCL BigFix®, BigFix®, BigFix Platform™ | HCLSoftware                                 | Action Archive is designed to integrate with HCL BigFix via its published REST API and Session Relevance interface. All references to BigFix, BigFix Platform, and related product names are made solely to identify the platform with which this software operates. No claim of ownership, partnership, or endorsement by HCL Software is made or implied. |
| IBM®                                   | International Business Machines Corporation | Any references to IBM pertain to the historical evolution of the BigFix platform while owned by IBM and do not imply any current relationship with IBM.                                                                                                                                                                                                     |
| PostgreSQL®                            | The PostgreSQL Global Development Group     | PostgreSQL is an open-source relational database management system. No affiliation with or endorsement by the PostgreSQL Global Development Group is implied.                                                                                                                                                                                               |
| Ubuntu®, Canonical®                    | Canonical Ltd.                              | Referenced as the operating system platform on which Action Archive is deployed. No affiliation with or endorsement by Canonical Ltd. is implied.                                                                                                                                                                                                           |
| Nginx™                                 | F5, Inc.                                    | Referenced as the reverse proxy component in the Action Archive deployment architecture. No affiliation with or endorsement by F5, Inc. is implied.                                                                                                                                                                                                         |
| Python™                                | Python Software Foundation                  | Referenced as the programming language and runtime used to build the Action Archive application. No affiliation with or endorsement by the Python Software Foundation is implied.                                                                                                                                                                           |
| Windows®, Microsoft®                   | Microsoft Corporation                       | Referenced in the context of the Audit Agent component, which runs as a Windows Scheduled Task on the BigFix Root Server host. No affiliation with or endorsement by Microsoft Corporation is implied.                                                                                                                                                      |

## General Disclaimer

All trademarks, registered trademarks, service marks, and product names referenced in this document are the property of their respective owners and are used herein for identification purposes only. The use of any such mark does not imply any relationship between the author of this document or the Action Archive software and the holder of the respective mark, nor does it constitute an endorsement of this document or software by any trademark holder.

Action Archive for BigFix Platform is an independent tool and is not an official product of HCLSoftware, IBM, or any other third party named in this document. It is not affiliated with, certified by, or supported by HCLSoftware or any other referenced vendor. Use of HCL BigFix requires a valid license from HCLSoftware, obtained independently of this software.

---

® indicates a registered trademark. ™ indicates a trademark. All other product names and company names mentioned in this document may be trademarks or registered trademarks of their respective holders.

# Table of Contents

|                                                                          |    |
|--------------------------------------------------------------------------|----|
| 1. What's Included.....                                                  | 5  |
| 2. Architecture Overview.....                                            | 6  |
| Data Flow.....                                                           | 6  |
| 3. Prerequisites.....                                                    | 7  |
| Archive Server (Ubuntu).....                                             | 7  |
| BigFix Root Server (Windows): Audit Agent.....                           | 7  |
| BigFix Operator Account.....                                             | 7  |
| 4. Part 1: Archive Server Installation (Ubuntu).....                     | 8  |
| Step 1: Copy the Archive Package.....                                    | 8  |
| Step 2: Extract the Package.....                                         | 8  |
| Step 3: Run the Installer.....                                           | 9  |
| Step 4: Enter Admin Account Details.....                                 | 11 |
| Step 5: Enter BigFix Connection Details.....                             | 11 |
| Step 6: SSL Certificate Configuration.....                               | 12 |
| Step 7: Performance Tuning.....                                          | 12 |
| Step 7: Installation Completes.....                                      | 13 |
| 5. Part 2: First Login and Configuration.....                            | 14 |
| Step 1: Open the Archive Server's Web UI.....                            | 14 |
| Step 2: Log In.....                                                      | 14 |
| Step 3: Configure/Verify BigFix Connection.....                          | 15 |
| Step 4: Run Your First Collection.....                                   | 16 |
| Step 5: Browse Archived Actions.....                                     | 16 |
| Step 6: Generate an API Key and Download the Audit Agent (Optional)..... | 18 |
| 6. Part 3: Audit Agent Installation (Windows).....                       | 19 |
| Step 1: Install Python (if not already installed).....                   | 19 |
| Step 2: Transfer the Audit Agent Package.....                            | 19 |
| Step 3: Run the Installer.....                                           | 19 |
| Step 4: Enter Configuration.....                                         | 20 |
| Step 5: Test the Connection.....                                         | 20 |
| Step 6: Install.....                                                     | 21 |
| Step 7: Confirm the Scheduled Task.....                                  | 21 |
| 7. Verification.....                                                     | 22 |
| Archive Server.....                                                      | 22 |
| 1. Verify the service is running:.....                                   | 22 |
| 2. Check the health endpoint:.....                                       | 22 |
| 3. Web UI and data:.....                                                 | 22 |
| Audit Agent (Windows).....                                               | 22 |
| 8. Troubleshooting.....                                                  | 23 |
| Archive Server.....                                                      | 23 |
| Audit Agent (Windows).....                                               | 23 |
| Log File Locations.....                                                  | 24 |
| 9. Managing the Application.....                                         | 25 |
| Service Management (Ubuntu).....                                         | 25 |
| Database Backup (from Web UI).....                                       | 25 |
| Audit Agent Management (Windows).....                                    | 26 |

|                                   |    |
|-----------------------------------|----|
| Uninstalling the Audit Agent..... | 26 |
|-----------------------------------|----|

## 1. What's Included

The installation package includes a single file:

| File                         | Size  | Purpose                                | Install On    |
|------------------------------|-------|----------------------------------------|---------------|
| action-archive-latest.tar.gz | ~8 MB | Archive Server application + installer | Ubuntu Server |

**Note:** The single installation file also contains the audit agent installer. The Audit Agent is optional but recommended. Without it, actions deleted from BigFix before they are collected will not be visible in the archive.

## 2. Architecture Overview

The diagram below illustrates how the components interact across your environment.

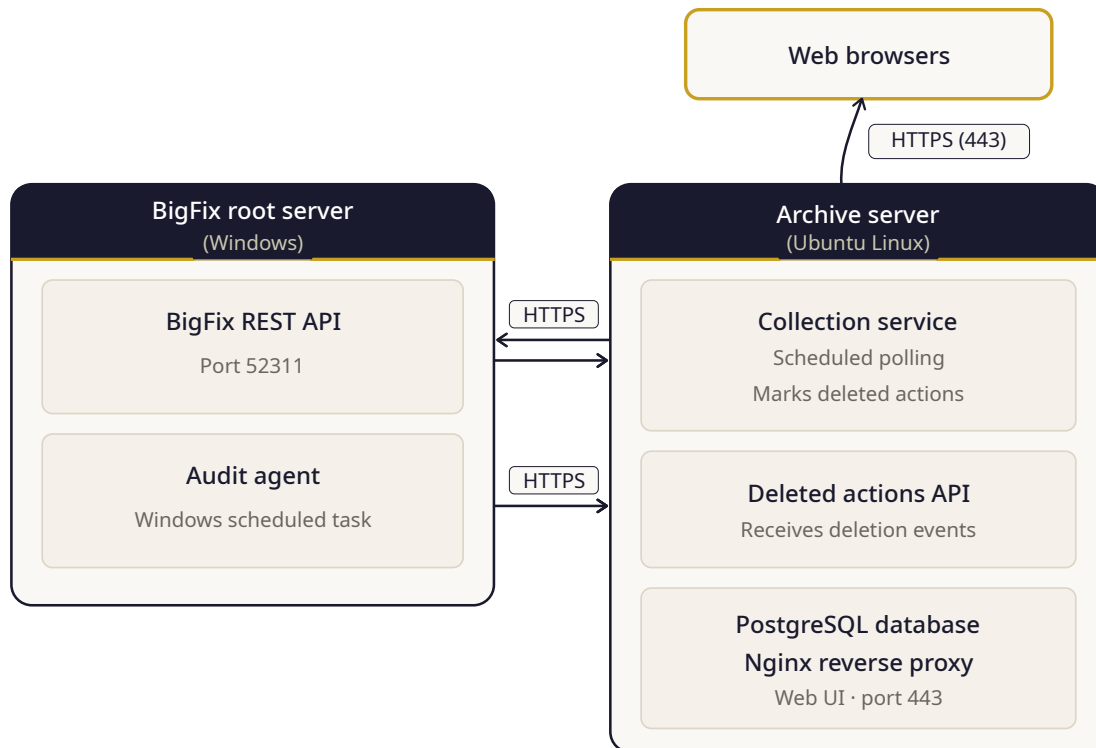


Figure 1: Action Archive System Architecture

### Data Flow

- **Collection Service:** The Archive Server polls the BigFix REST API on a schedule to collect expired and stopped actions. It can also be configured to mark collected actions as 'deleted' in the console for BigFix's cleanup process to remove from the database during a cleanup run.
- **Audit Agent:** Monitors server\_audit.log on the BigFix Root Server and reports any action deletions to the Archive API via HTTPS.
- **Web UI:** Users access the archive through any web browser over HTTPS (port 443).

### 3. Prerequisites

#### Archive Server (Ubuntu)

| Requirement      | Details                                                |
|------------------|--------------------------------------------------------|
| Operating System | Ubuntu Server 24.04 LTS or 26.04 LTS (amd64)           |
| Access           | Root or sudo access                                    |
| CPU              | 2 vCPU minimum, 4 vCPU recommended (x86-64 / amd64)    |
| RAM              | Minimum 4 GB                                           |
| Disk             | Minimum 20 GB free                                     |
| Network          | Internet access during installation (for apt packages) |
| Network          | Must be able to reach the BigFix Root Server REST API  |
| Ports            | 443 (HTTPS) must be accessible to users                |

Note: The installer will automatically install and configure PostgreSQL, Nginx, Python, and all dependencies. You do not need to pre-install anything beyond the base Ubuntu Server. The same installer package works on both supported Ubuntu releases; it detects the host's Python version and selects the matching compiled modules automatically.

#### BigFix Root Server (Windows): Audit Agent

| Requirement      | Details                                             |
|------------------|-----------------------------------------------------|
| Operating System | Windows Server 2016+                                |
| Python           | Python 3.8 or later (download from python.org)      |
| PowerShell       | 5.1+ (included with Windows)                        |
| Network          | Must be able to reach the Archive Server over HTTPS |

#### BigFix Operator Account

The Archive Server requires a BigFix operator account to collect actions. This account must be a Master Operator (MO) to retrieve complete action data including targets and status.

**Important:** Master Operator is the only role that provides complete access to all action data via the BigFix REST API. A non-MO operator will result in incomplete collections. It is recommended to create a dedicated service account for this purpose. The same requirement applies whether the installer is configured for Password or API Token authentication.

## 4. Part 1: Archive Server Installation (Ubuntu)

### Step 1: Copy the Archive Package

Copy action-archive-latest.tar.gz to your Ubuntu server (e.g., /tmp folder):

### Step 2: Extract the Package

```
ssh user@your-server
cd /tmp
tar -xzf action-archive-latest.tar.gz
cd action-archive
```

You should see the following files after extraction:

```
action-archive/
  app/                # Application code
  static/             # Web frontend files
  agent/              # Bundled Audit Agent installer (Windows)
  install.sh          # Automated installer
  schema.sql          # Database schema
  requirements.txt
  README.md
  LICENSE
```



### Step 3: Run the Installer

```
sudo bash install.sh
```

The installer will display a banner and perform a pre-flight check to ensure all packages it needs for a successful installation are present. If any are not present, it will offer to install via apt install.

```
=====
Action Archive for BigFix Platform - Installer
Version 1.1.4
=====

[20:33:42] === Pre-flight Checks ===
Detected: Ubuntu 24.04 (noble)

[20:33:42] === Prerequisite Check ===
Found: curl
Found: python3
Found: openssl
Found: free
Found: lsblk
Found: nproc
Found: useradd
All prerequisites satisfied.
Memory: 7942MB available
Disk: 11146MB free on /opt
```

If an existing Action Archive installation is detected on this server, the installer presents an Upgrade / Reinstall / Cancel prompt. Upgrade (the default) preserves all configuration, credentials, and archived data and only refreshes the application files. Reinstall performs a fresh install and wipes existing data. Use with caution. This prompt does not appear on a first-time install.

```
=====
Action Archive for BigFix Platform - Installer
Version 1.1.3
=====

[20:44:15] === Pre-flight Checks ===
Detected: Ubuntu 24.04 (noble)
Memory: 7942MB available
Disk: 10380MB free on /opt

WARNING: Action Archive for BigFix Platform is already installed (version: 1.1.2). This installer is version 1.1.3.

1) Upgrade -- Replace application code only. Preserves the .env
file (BigFix credentials, encryption keys, all
in-app settings), the SSL certificate, the admin
password, and the database. Recommended.

2) Reinstall -- Start fresh. Prompts for new BigFix and admin
credentials, regenerates .env, regenerates the
self-signed SSL cert, and resets the admin
password. The database itself (archived actions,
users, audit log) is preserved either way.

3) Cancel

Choose [1, 2, or 3, default 1]:
```

Note: If you are moving an existing Action Archive deployment to a different host or migrating from Ubuntu 22.04 to 24.04 or 26.04), do not copy the .env file or database backups manually. Instead, use the Server Migration feature. It produces a single passphrase-encrypted bundle that carries the database, BigFix and SMTP credentials, and configuration across hosts safely.

The screenshot shows the 'ADMINISTRATION' tab in the Action Archive interface. The left sidebar lists various system components, with 'BACKUP & RESTORE' highlighted and a red arrow pointing to it. The main content area is divided into two sections: 'DATABASE BACKUP & RESTORE' and 'SERVER MIGRATION'. The 'DATABASE BACKUP & RESTORE' section includes a 'CREATE BACKUP NOW' button and a table with columns for FILENAME, SIZE, CREATED, and ACTIONS. The 'SERVER MIGRATION' section includes an 'EXPORT FOR MIGRATION' button, which is the focus of the red arrow.

**ACTION ARCHIVE**  
FOR BIGFIX PLATFORM v1.2.0

Welcome, Administrator [MY ACCOUNT](#) [LOGOUT](#)

**ADMINISTRATION**

**SYSTEM SETTINGS**

**DATABASE BACKUP & RESTORE** [REFRESH](#) [CREATE BACKUP NOW](#)

Create, download, and restore full database backups. Restoring a backup will replace all current data.

| FILENAME                                                                 | SIZE | CREATED | ACTIONS |
|--------------------------------------------------------------------------|------|---------|---------|
| No backups found. Click "Create Backup Now" to create your first backup. |      |         |         |

**SERVER MIGRATION**

Move this deployment to another server in one passphrase-protected file (database, BigFix and SMTP credentials, and collection settings). Credentials are decrypted on this server, encrypted with your passphrase for transport, and re-encrypted with the target server's key on import. The master encryption key itself never leaves either server.

[EXPORT FOR MIGRATION](#) [IMPORT MIGRATION](#)

The 'EXPORT FOR MIGRATION' dialog box provides instructions and input fields for creating a migration bundle. It includes a warning about the passphrase, a description of the output file, and fields for entering and confirming a passphrase. The 'EXPORT MIGRATION' button is at the bottom right.

**EXPORT FOR MIGRATION**

Treat this file like a password. The passphrase you choose is the only thing protecting your BigFix and SMTP credentials in transit. If you lose the passphrase, the file cannot be recovered.

A single file (.aa-mig) will be produced containing the database and credentials, encrypted with your passphrase. Use it once on the target server, then delete it.

**PASSPHRASE**

At least 12 characters, mixed case, with a digit

**CONFIRM PASSPHRASE**

Re-enter the same passphrase

[EXPORT MIGRATION](#) [CANCEL](#)

## Step 4: Enter Admin Account Details

The installer will prompt you for the initial administrator account:

- **Admin username:** The username you will use to log into the web UI (e.g., admin)
- **Admin password:** Must meet complexity requirements (minimum 8 characters, uppercase, lowercase, number, special character)
- **Admin email:** Email address for notifications and password resets. This value is optional during the install, but should be set later in the Web interface to enable admin self-service password reset and email notifications.

## Step 5: Enter BigFix Connection Details

Next, the installer prompts for BigFix server connection information:

- **BigFix Server URL:** The hostname or IP of your BigFix Root Server (e.g., https://bigfix-server)
- **BigFix Server Port:** REST API port (default: 52311)
- **BigFix Authentication Method:** Choose Password (default) or API Token. API Token is new in v1.1.0 and uses BigFix's native REST API token authentication (Authorization: Bearer header).
- **If Password:** enter the BigFix Operator Username (a Master Operator service account) and Password when prompted. **If API Token:** paste the token value when prompted (paste carefully; the token is encrypted at rest and cannot be retrieved later).

Tip: To mint a BigFix API token, sign in to the BigFix Console as the operator, open Tools → Manage Tokens, and create a new token. The operator must retain the REST API permission. See the Administrator Guide for details.

```
BigFix server URL (e.g., https://bigfix.company.com): https://bfrootsvr
BigFix server port [52311]:

BigFix authentication method:
  password - Operator username and password (works on all BigFix versions)
  token    - API token (BigFix 11.0.6+ only)
Authentication method (password/token) [password]:
BigFix operator username: admin
BigFix operator password: *****
Confirm BigFix operator password: *****

Testing BigFix connection to https://bfrootsvr:52311 ...
BigFix connection verified (HTTP 200).
```

**Note:** The installer will test the connection and display an error if it's unable to connect to the Root Server.

## Step 6: SSL Certificate Configuration

The installer will ask about SSL certificates:

- **Option 1:** Generate a self-signed certificate (recommended for testing/internal use)
- **Option 2:** Provide paths to an existing certificate and key

For most installations, choose the self-signed option.

### --- SSL Certificate ---

A self-signed certificate will be generated by default.  
Use existing certificate? (y/N) [N]:

## Step 7: Performance Tuning

The installer will auto detect the host's hardware specs and make a recommendation about tuning the database and kernel :

- **PostgreSQL:** The installer will make recommendations about tuning PostgreSQL for performance
- **Kernel Virtual Memory:** The installer will recommend a memory management setting

It is recommended to accept the tuning parameters for better application performance.

```
[20:38:33] === PostgreSQL Performance Tuning ===  
  
Detected hardware:  
Total RAM:    7942 MB (~8 GB)  
CPU cores:    1  
PG storage:   SSD  
  
Recommended PostgreSQL settings for this server:  
shared_buffers      = 1985MB  
effective_cache_size = 4765MB  
work_mem            = 16MB  
maintenance_work_mem = 256MB  
random_page_cost    = 1.1  
effective_io_concurrency = 200  
max_worker_processes = 1  
max_parallel_workers = 1  
max_parallel_workers_per_gather = 1  
max_parallel_maintenance_workers = 1  
wal_buffers          = 16MB  
checkpoint_completion_target = 0.9  
  
Plus kernel: vm.swappiness = 10  
  
Apply these PostgreSQL tuning settings now? [Y/n]: y
```

## Step 7: Installation Completes

The installer will perform the following steps automatically:

- Install system packages (PostgreSQL, Nginx, Python, Node.js)
- Create the application user and directories
- Set up the Python virtual environment and install dependencies
- Initialize the database with the schema
- Configure Nginx as a reverse proxy with SSL
- Create and start the systemd service

When complete, you will see a success message with the URL to access the application.

```
=====
Installation Complete! (v1.1.4)
=====

Access the application:
URL:      https://192.168.0.42
Username: admin
Password: (as configured during install)

Service management:
Start:    sudo systemctl start bigfix-archive
Stop:     sudo systemctl stop bigfix-archive
Restart:  sudo systemctl restart bigfix-archive
Status:   sudo systemctl status bigfix-archive
Logs:     sudo journalctl -u bigfix-archive -f

Important paths:
App:      /opt/bigfix-archive/
Config:   /opt/bigfix-archive/config/.env
Backups:  /opt/bigfix-archive/backups/
Logs:     journalctl -u bigfix-archive

Note: You are using a self-signed SSL certificate.
Your browser will show a security warning on first visit.
You can replace it via System Settings > Certificates in the web UI.
```

## 5. Part 2: First Login and Configuration

### Step 1: Open the Archive Server's Web UI


Open a web browser and navigate to the Archive Server URL:


```
https://your-server-ip
```

**Note:** If using a self-signed certificate, your browser will show a security warning.

### Step 2: Log In

Enter the admin username and password you created during installation.

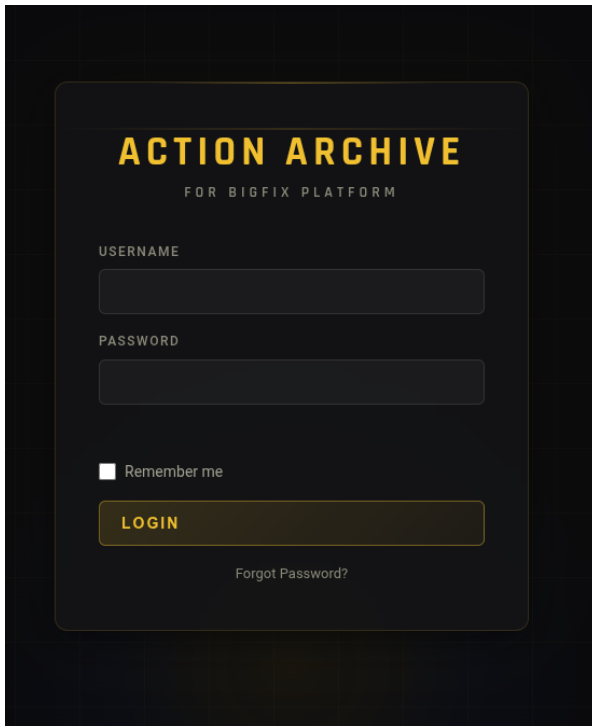
The image shows a dark-themed login interface for 'ACTION ARCHIVE FOR BIGFIX PLATFORM'. It features a central light gray box containing the title 'ACTION ARCHIVE' in large yellow letters, with 'FOR BIGFIX PLATFORM' in smaller white letters below it. There are two input fields: 'USERNAME' and 'PASSWORD', both with light gray borders. Below the password field is a checkbox labeled 'Remember me'. A yellow 'LOGIN' button is positioned below the checkbox. At the bottom of the light gray box is a link that says 'Forgot Password?'. The entire interface is set against a dark background with a subtle grid pattern.

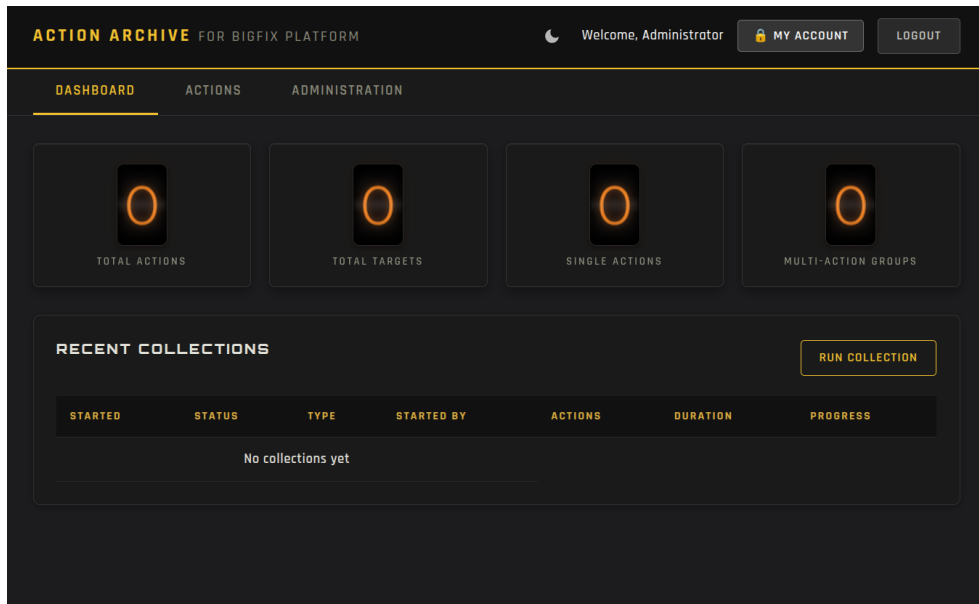

The dashboard should display the counters showing “0” for all statistics

### Step 3: Configure/Verify BigFix Connection

Navigate to Administration > System Settings > Connections to verify the BigFix server connection is correct. Click Test Connection to confirm the Archive can reach your BigFix REST API.

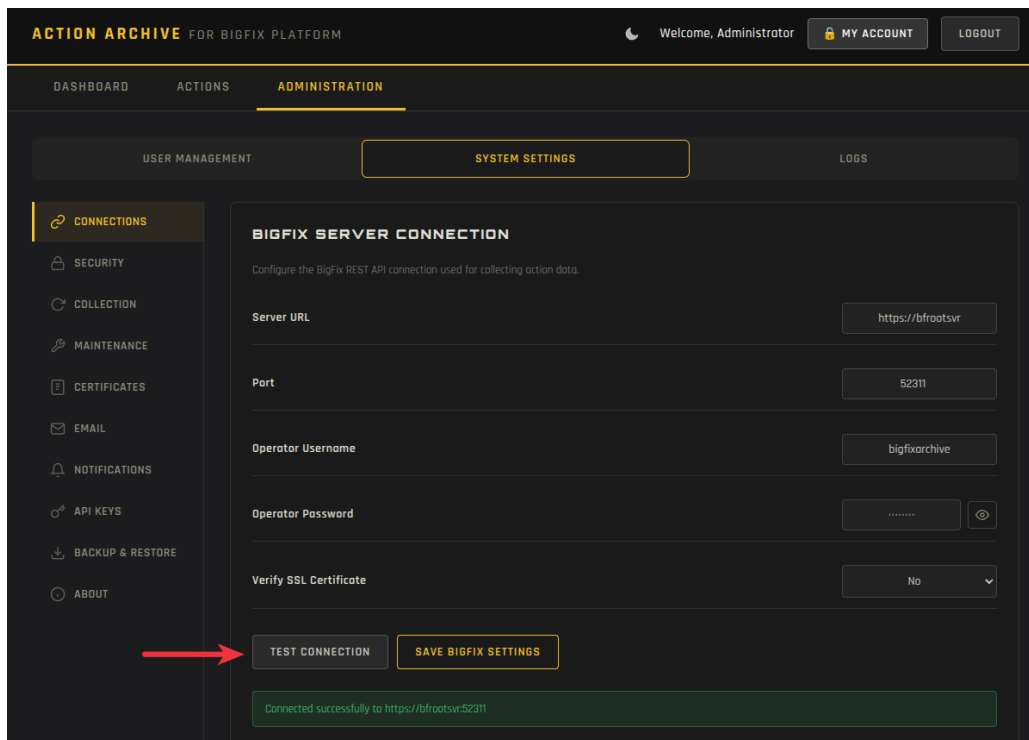

## Step 4: Run Your First Collection

- Go to the Dashboard and click the **Run Collection** button to run an immediate collection

The screenshot shows the 'ACTION ARCHIVE FOR BIGFIX PLATFORM' dashboard. At the top, it says 'Welcome, Administrator' with 'MY ACCOUNT' and 'LOGOUT' buttons. The 'DASHBOARD' tab is selected. Four large digital displays show: '1,796 TOTAL ACTIONS', '457 TOTAL TARGETS', '1,740 SINGLE ACTIONS', and '56 MULTI-ACTION GROUPS'. Below these is the 'RECENT COLLECTIONS' section. A red arrow points to a yellow 'RUN COLLECTION' button. Below the button is a table with one row of data:

| STARTED           | STATUS    | TYPE   | STARTED BY | ACTIONS | DURATION | PROGRESS |
|-------------------|-----------|--------|------------|---------|----------|----------|
| 4/5/2026, 3:59 PM | COMPLETED | MANUAL | admin      | 1796    | 45s      | -        |

## Step 5: Browse Archived Actions

After the first collection completes, navigate to the Actions tab to see your archived actions.

The screenshot shows the 'ACTION ARCHIVE FOR BIGFIX PLATFORM' interface with the 'ACTIONS' tab selected. It displays 'ARCHIVED ACTIONS' and 'DELETED BEFORE ARCHIVED' sections. A search bar and filters are at the top. Below is a table of archived actions:

| ID   | NAME                                                  | SITE                                           | ISSUER | TYPE   | STATUS  | ISSUED              | ARCHIVED          | TARGETS | ACTIONS              |
|------|-------------------------------------------------------|------------------------------------------------|--------|--------|---------|---------------------|-------------------|---------|----------------------|
| 2319 | POLICY - Deploy and Run Security Checklist RedHat ... | Master Operator Site                           | admin  | SINGLE | STOPPED | 1/14/2019, 1:06 PM  | 4/5/2026, 4:00 PM | 2       | <a href="#">VIEW</a> |
| 2969 | Configure File Checksums Collection (MD5/SHA-256)     | IBM Endpoint Manager for Software Use Analysis | admin  | SINGLE | STOPPED | 2/1/2019, 10:47 AM  | 4/5/2026, 4:00 PM | Dynamic | <a href="#">VIEW</a> |
| 4411 | Deploy ComplianceWhitelist File                       | Manage_Windows_Admin                           | admin  | SINGLE | STOPPED | 3/19/2019, 10:47 AM | 4/5/2026, 4:00 PM | Dynamic | <a href="#">VIEW</a> |
| 4478 | Deploy: 7-Zip                                         | Corporate Utilities                            | admin  | SINGLE | STOPPED | 4/1/2019, 12:31 PM  | 4/5/2026, 4:00 PM | 1       | <a href="#">VIEW</a> |
| 4479 | Deploy Speccy v1.32                                   | Corporate Utilities                            | admin  | SINGLE | STOPPED | 4/1/2019, 12:33 PM  | 4/5/2026, 4:00 PM | 1       | <a href="#">VIEW</a> |
| 4480 | Slack Desktop                                         | Corporate Utilities                            | admin  | SINGLE | STOPPED | 4/1/2019, 12:35 PM  | 4/5/2026, 4:00 PM | 1       | <a href="#">VIEW</a> |
| 4483 | TightVNC v2.8                                         | ActionSite                                     | admin  | SINGLE | STOPPED | 4/1/2019, 12:50 PM  | 4/5/2026, 4:00 PM | 1       | <a href="#">VIEW</a> |
| 4494 | MobaXterm v11.1                                       | ActionSite                                     | admin  | SINGLE | STOPPED | 4/1/2019, 2:53 PM   | 4/5/2026, 4:00 PM | 1       | <a href="#">VIEW</a> |
| 4811 | Change '...RelaySelect_Automatic' Setting             | Master Operator Site                           | admin  | SINGLE | STOPPED | 6/3/2019, 10:16 AM  | 4/5/2026, 4:00 PM | 3       | <a href="#">VIEW</a> |



Click the 'View' button on an action to view the action's details.

DEPLOY: 7-ZIP

ACTION INFORMATION

ACTION ID

18927

TYPE

SINGLE

STATUS

EXPIRED

SITE

Corporate Utilities

ISSUER

mconsuegra

ARCHIVED

4/5/2026, 4:00 PM

ACTION TIMELINE

ISSUED

4/1/2026, 6:04 PM

TARGET SUMMARY

1 TOTAL

1 COMPLETED

0 FAILED

0 PENDING

0 NOT RELEVANT

0 NOT REPORTED

RELEVANCE

((if(name of operating system starts with "Win") then free space of drive of client > 2876172 else if ((mac of it) of operating system) then free space of filesystem of folder (pathname of client) > 2876172 else free space of filesystem of client > 2876172)) AND (version of client >= "8.2")) AND (windows of operating system AND (if( name of operating system starts with "Win" ) then platform id of operating system != 3 else true))

ACTION SCRIPT

//Download all specified files  
begin prefetch block  
  add prefetch item name=A2183901F65B6789494AB712C54B6202A56CA5A0 size=1438086  
  sha1=a2183901f65b6789494ab712c54b6202a56ca5a0 size=1438086  
  url=SWDProtocol://127.0.0.1:52311/uploads/A2183901F65B6789494AB712C54B6202A56CA5A0/7z1805-x64.exe.bfswd sha256=c1e42d8b76a80ea1890ad080e69a04c75a5f2c0484bdcd838dc8fa008dd4a84c  
end prefetch block  
  
parameter "baseFolder" = "\_\_Download/"  
  
//Move files into subfolders and unescape file names  
move "\_\_Download/A2183901F65B6789494AB712C54B6202A56CA5A0" "{parameter "baseFolder"}7z1805-x64.exe"  
  
// Log setup

TARGET COMPUTERS (1)

Export Targets

| COMPUTER   | STATUS    | STARTED           | COMPLETED         |
|------------|-----------|-------------------|-------------------|
| ADR00T2016 | COMPLETED | 4/1/2026, 6:08 PM | 4/1/2026, 6:08 PM |

BIGFIX CONSOLE ACTIONS

Delete from BigFix Console

Marks this action as deleted in BigFix (does not remove from this archive)

## Step 6: Generate an API Key and Download the Audit Agent (Optional)

If you plan to install the Audit Agent (Part 3), both the API key and the agent installer package are obtained from the same panel of the web UI. No internet access is required. The agent installer is served from local disk on the Archive Server.

- Navigate to Administration > System Settings > API Keys
- Click Generate New Key
- Enter a name (e.g., "BigFix Audit Agent")
- Click Generate Key

Copy the generated key value immediately (it will not be shown again) and save it somewhere safe; you will paste it into the agent's installer in Part 3.

On the same API Keys panel, click Download Audit Agent to save action-archive-audit-agent-latest.zip to your local machine. You will transfer this file to the BigFix Root Server in Part 3.

The screenshot shows the 'ACTION ARCHIVE FOR BIGFIX PLATFORM' web interface. The top navigation bar includes 'DASHBOARD', 'ACTIONS', and 'ADMINISTRATION'. The 'ADMINISTRATION' section is active, showing 'USER MANAGEMENT', 'SYSTEM SETTINGS', and 'LOGS'. The 'SYSTEM SETTINGS' panel is expanded, displaying the 'API KEYS' section. A 'GENERATE NEW KEY' button is visible. Below it, a card for 'BigFix Audit Agent' shows a 'DOWNLOAD AUDIT AGENT' button. A table lists existing API keys with columns for NAME, KEY PREFIX, CREATED, LAST USED, STATUS, and ACTIONS.

| NAME                       | KEY PREFIX    | CREATED  | LAST USED             | STATUS  | ACTIONS    |
|----------------------------|---------------|----------|-----------------------|---------|------------|
| BigFixAuditAgent-April2026 | aa-8b5f317... | 4/7/2026 | 4/13/2026, 4:30:35 PM | ACTIVE  | REVOKE     |
| BigFix Audit Agent         | aa-235358c... | 4/5/2026 | 4/5/2026, 5:25:16 PM  | REVOKED | REACTIVATE |

**Important:** Copy the displayed key immediately. It will only be shown once and cannot be retrieved later.

## 6. Part 3: Audit Agent Installation (Windows)

The Audit Agent is installed on the BigFix Root Server (Windows). It monitors the BigFix server\_audit.log file for action deletions and reports them to the Archive Server.

### Step 1: Install Python (if not already installed)

- Download Python 3.8 or later from [python.org](https://python.org)
- Run the installer

**IMPORTANT:** Check the box "Add python.exe to PATH" on the first installer screen.

### Step 2: Transfer the Audit Agent Package


Transfer action-archive-audit-agent-latest.zip (downloaded in Part 2, Step 6) to the BigFix Root Server and extract it. You can place it anywhere (e.g., C:\Temp\ or the Desktop). If you did not download the agent in Part 2, sign in to the Archive web UI now and download it from Administration → System Settings → API Keys → Download Audit Agent.

### Step 3: Run the Installer

- Navigate to the extracted folder
- **Double-click** Install.bat

**Note:** If prompted by Windows SmartScreen or UAC, click "Run Anyway" / "Yes" to allow the installer to run. The installer requires Administrator privileges to create the scheduled task.

The installer GUI will appear:

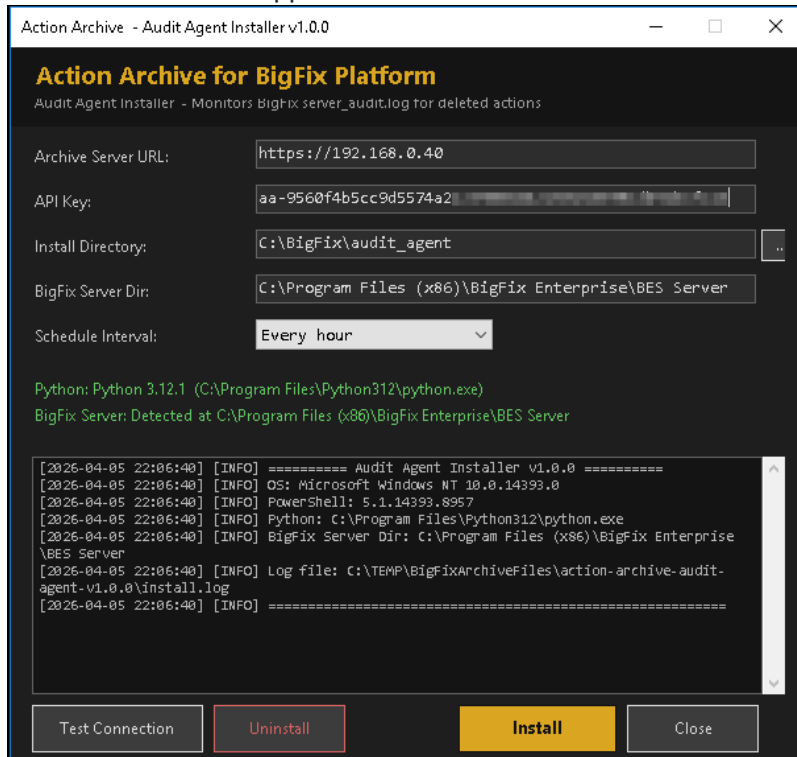

## Step 4: Enter Configuration

Fill in the following fields in the installer:

| Field              | Value                                       | Notes                                                        |
|--------------------|---------------------------------------------|--------------------------------------------------------------|
| Archive Server URL | <code>https://your-archive-server-ip</code> | Must include <code>https://</code>                           |
| API Key            | The key generated in Part 2, Step 6         | Paste the full key starting with <code>aa-</code>            |
| Install Directory  | <code>C:\BigFix\audit_agent</code>          | Default is fine for most environments                        |
| BigFix Server Dir  | Auto-detected                               | Only change if BigFix is installed to a non-default location |
| Schedule Interval  | Every hour                                  | Configurable                                                 |

## Step 5: Test the Connection

Click Test Connection to verify the Archive Server URL and API Key are correct.

If the connection fails, verify:

- The Archive Server URL is correct and reachable from this server
- The API key was copied correctly (starts with `aa-`)
- The API key was generated on the Archive Server you are connecting to (keys are server-specific)


## Step 6: Install

Click the Install button. The installer will perform the following steps:

- Create the install directory
- Copy agent scripts
- Generate config.ini with your settings
- Install the Python requests library
- Test the API connection
- Create a Windows Scheduled Task
- Run a historical scan of ALL server\_audit.log files to catch past deletions
- Set the position marker for ongoing monitoring

## Step 7: Confirm the Scheduled Task

Open Windows Task Scheduler and verify the task BigFix-ActionArchive-AuditAgent exists and is enabled.

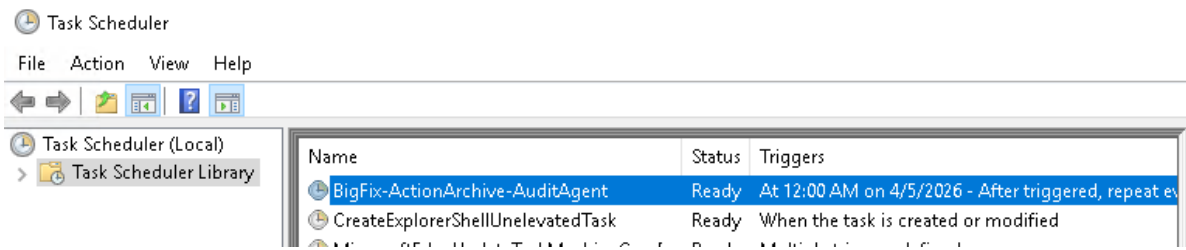

## 7. Verification

After completing both installations, verify everything is working correctly.

### Archive Server

#### 1. Verify the service is running:

```
sudo systemctl status bigfix-archive
```

Should show active (running).

#### 2. Check the health endpoint:

```
curl -sk https://localhost/api/health | python3 -m json.tool
```

Should return "status": "healthy" with all checks passing.

#### 3. Web UI and data:

- Open <https://your-server-ip> in a browser and confirm you can log in
- Navigate to the Actions tab; it should show archived actions after a collection run

### Audit Agent (Windows)

- **Scheduled task:** Open Task Scheduler and confirm BigFix-ActionArchive-AuditAgent is present
- **Agent log:** Check C:\BigFix\audit\_agent\agent.log for successful runs
- **API Key activity:** In the Archive web UI, go to Settings > API Keys and verify the "Last Used" timestamp has updated
- **Deleted actions:** If any actions have been deleted from BigFix, they should appear in the Archive. You can test by deleting a test action from the BigFix Console, waiting for the next agent run, and checking the Archive.

## 8. Troubleshooting

### Archive Server

| Symptom                      | Likely Cause                               | Solution                                                          |
|------------------------------|--------------------------------------------|-------------------------------------------------------------------|
| Service fails to start       | Configuration error                        | <code>sudo journalctl -u bigfix-archive -n 50</code>              |
| "502 Bad Gateway" in browser | App not running or Nginx misconfigured     | Verify service: <code>sudo systemctl status bigfix-archive</code> |
| Collection returns 0 actions | Operator is probably not a Master Operator | Verify MO status in BigFix Console                                |
| SSL certificate warning      | Self-signed certificate in use             | Expected for self-signed certs; proceed past the warning          |
| Cannot reach BigFix server   | Network or firewall issue                  | Verify: <code>curl -sk https://bigfix-server:52311</code>         |
| Database connection error    | PostgreSQL not running                     | <code>sudo systemctl status postgresql</code>                     |

### Audit Agent (Windows)

| Symptom                           | Likely Cause                 | Solution                                                   |
|-----------------------------------|------------------------------|------------------------------------------------------------|
| requests library not installed    | pip failed during install    | Run: <code>pip install requests</code> manually            |
| Connection test fails             | SSL or network issue         | Verify Archive URL is reachable by opening it in a browser |
| API key rejected                  | Key mismatch or wrong server | Generate a new key on the correct Archive server           |
| Agent runs but finds nothing      | No deletions since last scan | Normal behavior: agent only reports new deletions          |
| "Access denied" on scheduled task | Not running as Administrator | Right-click Install.bat > Run as Administrator             |
| Historical scan found 0 deletions | No actions have been deleted | Normal if no one has deleted actions from BigFix           |

## Log File Locations

| Component                  | Log Location                            |
|----------------------------|-----------------------------------------|
| Archive Server application | sudo journalctl -u bigfix-archive       |
| Archive Server Nginx       | /var/log/nginx/bigfix-archive-error.log |
| Audit Agent installer      | install.log (in the extracted folder)   |
| Audit Agent runtime        | C:\BigFix\audit_agent\agent.log         |



## 9. Managing the Application

### Service Management (Ubuntu)

```
# Check status
sudo systemctl status bigfix-archive

# Restart the service
sudo systemctl restart bigfix-archive


# Stop the service
sudo systemctl stop bigfix-archive

# View recent logs
sudo journalctl -u bigfix-archive -n 100


# Follow logs in real-time
sudo journalctl -u bigfix-archive -f
```

### Database Backup (from Web UI)

- Navigate to Administration > System Settings > Backup & Restore
- Click Create Backup

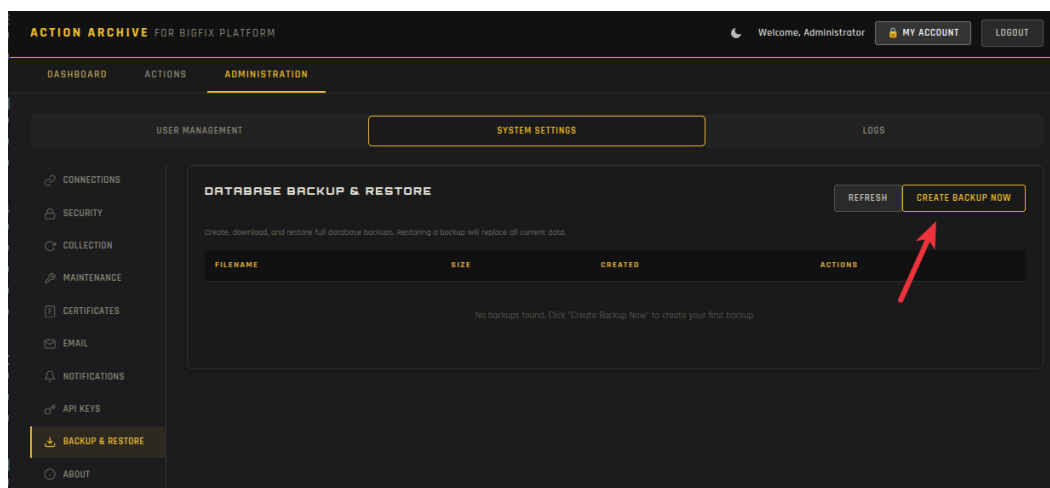

- Download the backup file for off-site storage

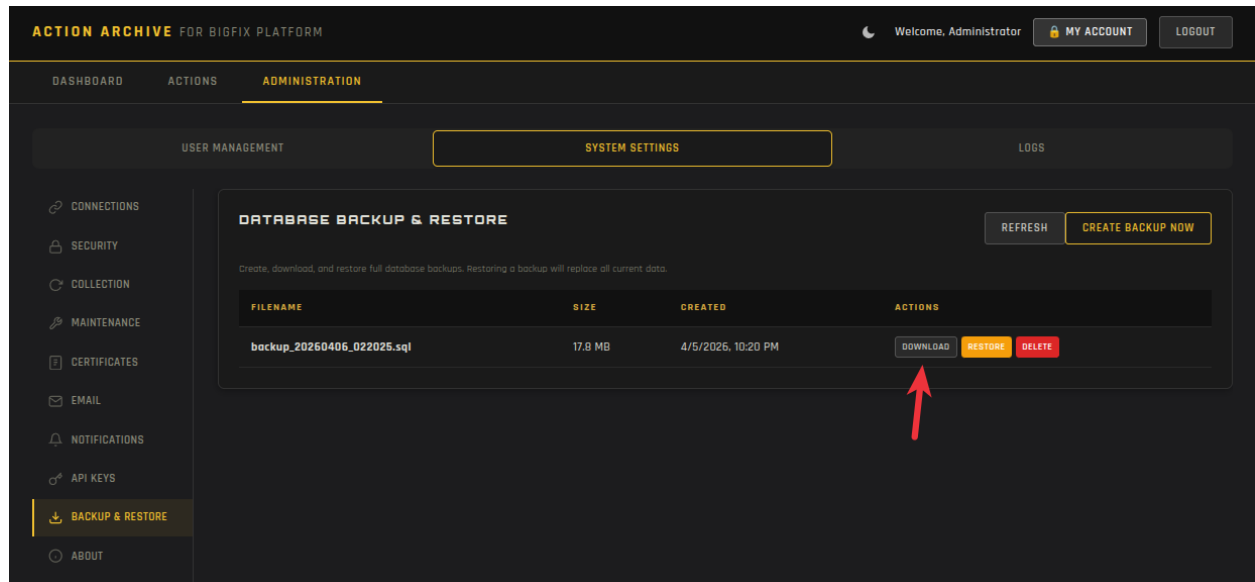

## Audit Agent Management (Windows)

```
# View task status
Get-ScheduledTask -TaskName "BigFix-ActionArchive-AuditAgent"

# Run manually
Start-ScheduledTask -TaskName "BigFix-ActionArchive-AuditAgent"

# Disable temporarily
Disable-ScheduledTask -TaskName "BigFix-ActionArchive-AuditAgent"

# Re-enable
Enable-ScheduledTask -TaskName "BigFix-ActionArchive-AuditAgent"
```

## Uninstalling the Audit Agent

Use the installer GUI: double-click Install.bat, then click the Uninstall button. This removes the scheduled task and all agent files.