

JavaScript for Form Design

JavaScript Dom Objects

getElement(); Gets the info from a field on a form

getElementFromXML(formXML,); Gets the info from a field on a form- works with event_log fields before form is saved

getDataValue(); Gets the info from the database (can be used to get the info about the staff who is accessing the form)

setFormElement(); Sets the value of a field

setElementFromXML(formXML,); Sets the XML layer- used for field that are marked not-modifiable/not-visible

getParentFormElement(); grabs the value from a parent form

getDataValue are upper case in NX, Lower case in classic if using the actual guid

getFormElement are lower case in NX, upper case in classic if using the actual guid

JavaScript Operators:

|| “OR”

&& or && “And”

^ is a (bitwise) exclusive or operator- This will disable if the either (one) box is checked, but not if both are checked

Default Program/Site providing Service to Currently Chosen Program

programPS

sitePS

Keep form open after save

window.closeAfterSave = false

Disable using checkbox

Is not checked: !isChecked('udf_is_pregnant')

Is checked: isChecked('udf_is_pregnant')

Default Look-Up Table Value

Select the **Activity Type id** field. We want to have the default value from that look-up table to be 02 – Face to Face

Enter **getDataValue('activity_type', 'sc_code', '02', 'description')** in the **Default Value** field.

Note: The format for this is:

getDataValue('LUT name', 'field to match on', 'value to match', 'value to return')

Skip directly to the description of a LUT

getFormElementLUTDescription

getFormElementLUTDescription("udf_yes_no") !== 'Yes '

Disable using other elements

Enable when not null: getFormElement('nameoffield') == ''

Disable when something is attached

getFormElement('attached_document') !== '';

Disable Field based on a form field selection

getFormElement('staff_id') != 'BF77D269-A599-4526-B941-49417BF604B6'

getFormElement('program_providing_service') !== 'A8ADE21B-D9BC-4F47-B74B-261B9594EE49'

Enable/Disable a field based off of a picklist

```
getFormElement('udf_refcl') === 'A1B03084-BC60-4867-98A4-2AF7F2D3879F'  
or  
getFormElement('udf_refcl') !== 'A1B03084-BC60-4867-98A4-2AF7F2D3879F'
```

Make another field required based on other info in the client's chart

```
getDataValue('client_personal_view', 'people_id', parentValue, 'age') > 18  
getDataValue('people', 'people_id', parentValue, 'email_address') sometimes "keyValue"
```

```
getDataValue('table_or_view_name', 'join_field', joinValue, 'form_field', 'null/is not null/ = parameter', 'order by' )
```

ex:

```
getDataValue('primary_worker_assignment_view', 'people_id', parentValue, 'staff_id', ' and program_info_id =  
"programPS"')
```

```
getDataValue('current_program_enrollment_view', 'people_id', parentValue, 'actual_date', 'program_info_id = ' +  
programPS)
```

Order by ex:

```
'program_name ASC' (Ascending)  
'program_name DESC' (Descending)
```

To skip the parameter and go straight to order by, type in null with no quotes:

```
getDataValue('primary_worker_assignment_view', 'people_id', parentValue, 'staff_id', null, 'actual_date DESC')
```

Default a value by referencing the database

Youth's current FH placement name:

```
getDataValue('enrollment_info_expanded_view', 'people_id', parentValue, 'profile_name', 'pe_end_date is NULL and  
program_type_info_id = 26326C28-D9C3-46C2-A294-9902797F43A4');
```

Get the Applicant Group Profile ID (group_v is a variable pulling in the groups_id)

```
getDataValue('profile_view', 'groups_id', getFormElement('group_v'), 'group_profile_id', 'profile_descript =  
"Applicant"');
```

Get the FH Group Profile ID

```
getDataValue('profile_view', 'groups_id', getFormElement('group_v'), 'group_profile_id', 'profile_descript = "Foster  
Home"');
```

Get the referral contact name identified on the referral made for a client that is linked to the program

```
getDataValue('referrals_made_view', 'program_info_id',  
getElementFromXML(formXML, 'program_providing_service'), 'referral_source_desc');
```

Grab the people ID from the referral contact and use that to get their phone number

```
var pplid = getDataValue('referrals_made_view', 'program_enrollment_id',  
getElementFromXML(formXML, 'program_enrollment_event_id'), 'referral_contact');  
getDataValue('all_people_view', 'people_id', pplid, 'phone_day');
```

Enable when a UDF picklist field is on "yes"

```
getDataValue('user_defined_lut', 'user_defined_lut_id', getFormElement('udf_modality'), 'description') !== 'Yes';
```

Clear out a field if a certain option on a LUT is selected

```
var ref = getDataValue('user_defined_lut', 'user_defined_lut_id', getFormElement('udf_modality'), 'description');  
if(ref == 'N/A- Youth is over 18'){setElementFromXML(formXML, 'expiration_date', '')}
```

Copy a LUT field to generic remarks to show on reports (Before Save on form)

```
var newState = getElementFromXML(formXML, 'udf_state');
var newDescription = getDataValue('state', 'state_id', newState, 'description');
setFormElement('generic_remarks', newDescription);
setElementFromXML(formXML, 'generic_remarks', newDescription);
```

Alert on checkbox

On Click field-

Unchecked: if(!this.checked){alert2('NOTE: By unchecking this box, you are indicating that the client was not present for this session.')} }

Checked: alert2('WARNING: This field has a direct impact on billing')

Subforms

```
window.parent.window.alert('Alert Message');
```

Current Date/Time

Enter **today'sDateTime()** in the **Default Value** field. This will default the actual date/time to now.

Note: You can also use **today'sDate()**

Change staff name on forms to the person who edits/completes-

put into 'After Load Code'

```
if (formAction == 'EDIT'){setFormElement('staff_id', workerID);} ;
if (formAction == 'COMPLETE'){setFormElement('staff_id', workerID);}
```

Have actual_date come up blank for scheduled tasks-

```
if (formMode == 'ADD' ) {{setFormElement('actual_date','');}}
```

Disable code to put in a field that will unlock if actual date/time is more than 48 hours over the current date/time:

```
var actualDate = new Date(getFormElement('actual_date'));
var nowDate = new Date();
var hoursBetween = (nowDate - actualDate) / (60 * 60 * 1000);
if (hoursBetween >= 48){
    false;
} else {
    true;
}
```

Disable based on formMode

```
if ( formMode == 'ADD') { Form.setDisabled('program_enrollment_event_id',true); }
```

Make an alert that pops up if AD is 48 hours from current date

```
var actualDate = new Date(getFormElement('actual_date'));
var nowDate = new Date();
var hoursBetween = (nowDate - actualDate) / (60 * 60 * 1000);
if (hoursBetween >= 48){
    alert2('WARNING: This date is over 48 hours old);
}
```

Make a field required based off another field

```
if (getFormElement('udf_boolean')) {{
    Form.makeRequiredByColumn('expiration_date');
}} else {{
```

```
Form.makeUnRequiredByColumn('expiration_date');
}}
```

Spit out a Text template into a memo field automatically

On change:

```
var text = getDataValue('text_template', 'description', 'FY initial goals', 'template_text');
setFormElement('UDF_FormallyCharged', text);
```

Just set Default Value:

```
getDataValue('text_template', 'description', 'FY initial goals', 'template_text');
```

Default a Boolean to check on an On Change code for another field

```
setFormElement('is_telehealth', 'on')
```

Toggle a Boolean field based off a LUT selection

```
var selectedOption = getDataValue('user_defined_lut', 'user_defined_lut_id', getFormElement('udf_picklist'),
'description');
if(selectedOption == 'Yes'){
setFormElement('udf_boolean', 'on');
}
else {{
setFormElement('udf_boolean', 'off');
}}
```

Hide the upload option on signature fields (add to before or after load on form)

```
function sleep(ms) { return new Promise(res => setTimeout(res, ms)); }
```

```
let myAsyncFunc = async function() { await sleep(200); $('[id="form-upload-menu-id"] [data-
action="upload"]').attr('style','display: none;'); }
```

```
$("body").on('DOMSubtreeModified', '[id="form-upload-menu-id"]', function(e) { myAsyncFunc(); })
```

Use this if there are also attached document fields on the form

```
function sleep(ms) { return new Promise(res => setTimeout(res, ms)); }
```

```
let myAsyncFunc = async function() {
await sleep(200);
var src = document.getElementById("form-upload-menu-id").dataset.srcElem;
var target = document.getElementById(src);
var typeCode = target.getAttribute('type-code');
if ( typeCode == 'ESIGN' ) { $('[id="form-upload-menu-id"] [data-action="upload"]').attr('style','display: none;'); }
}
```

```
$("body").on('DOMSubtreeModified', '[id="form-upload-menu-id"]', function(e) { myAsyncFunc(); })
```

Remove buttons from form

```
$("[button-id='saveform']").remove()
```

Reference people_id in Treatment Plan components

```
window.getPeopleIDFromParent()
```

```
getParentValue()
```

Auto-update fields in treatment plan

In the onChange field for the actual date in treatment plan(This is the plan information form) add...
updateChildComponentColumns(this, "actual_date", "service_plan_status_date");

In the onChange field for actual date on Treatment plan components (such as goalcomponent), add
updateChildComponentColumns(this, "service_plan_status_date", "service_plan_status_date");

Carry over form fields on a treatment plan form

```
(window.parent.event_log_id != 'null')? getDataValue('service_plan_header', 'service_plan_header_id',  
window.parent.event_log_id, 'name_of_the_field') : "
```

User Defined Field

```
(window.parent.event_log_id != 'null') ? getDataValue('service_plan_header_x', 'service_plan_header_id',  
window.parent.event_log_id, 'udf_name_of_the_field') : "
```

List Condition on Sub Form to keep items from crossing that are in same formset

```
event_log.event_definition_id in (select event_definition_id from event_definition where event_name =  
'Micromedex/Truven Allergy')
```

Can be from Main Table of Form Family of the form set or from event_log

Using user defined fields from other tables:

```
gp_requirements_id in (select x.gp_requirements_id from gp_requirements_x x where x.udf_is_medical=1)
```

Conditionals in the depends on other can be done like:

```
programPS=="guid"? "Prog1": "Prog2"
```

the ? and : operators work as "if/else" logic

Change a date field to be 1 year out from another date field

Put On Change field for actual_date, will populate expiration_date with date 1 year out

```
var date = new Date(getFormElement('actual_date'));  
date.setDate(date.getDate() + 365);  
var mm = date.getMonth() + 1;  
var dd = date.getDate();  
var yyyy = date.getFullYear();  
var formatted_date = mm + '/' + dd + '/' + yyyy;  
setFormElement('expiration_date', formatted_date);
```

Alert for a certain option on a LUT (On Change)

```
if(getDataValue('user_defined_lut', 'user_defined_lut_id', getFormElement('udf_picklist'), 'description') == 'Yes'){  
alert('For each state a State Central Registry check must be completed')}
```

Disable if today's date is before a date on the form/if the form is a newly added form (Disable Rule)

```
var adate = new Date(getFormElement('actual_date'));  
var today = new Date();  
(adate >= today) || formAction=='ADD';
```

Setting another worker to the staff field on a form by who is working on it

```
var staff = getFormElement('staff_id');  
var staff1 = getDataValue('staff_view', 'staff_id', workerID, 'staff_id');
```

```
if (staff !== staff1){setFormElement('udf_otherstaff', workerID);
setElementFromXML(formXML, 'udf_otherstaff', workerID)}
```

Get Client ID and stick it in a form

```
var clientID = getElementFromXML(formXML, 'people_id');
var idNO = getDataValue('all_clients_view', 'people_id', clientID, 'people_id');
setFormElement('twitter_account', idNO);
setElementFromXML(formXML, 'twitter_account', idNO);
```

Use HTML it javascript to create formatting:

```
var adj = getFormElement('UDF_FormallyCharged');
var hea = getFormElement('UDF_Adjudication');
var mh = getFormElement('UDF_Alleged_Crime');
var edu = getFormElement('udf_memo1');
var earl = getFormElement('udf_memo2');
var saf = getFormElement('udf_memo3');
var oth = getFormElement('udf_memo4');
setFormElement('referral_reason_other', '<b>1. Adjustment Goal:</b>' + adj + '<br><br><b>2. Health Goal:</b>' + hea +
'<br><br><b>3. Mental Health Goal:</b>' + mh + '<br><br><b>4. Educational Goal:</b>' + edu + '<br><br><b>5. Early
Intervention Goal:</b>' + earl + '<br><br><b>6. Safety Goal:</b>' + saf + '<br><br><b>7. Other Goal:</b>' + oth)
```

Add another link to standalone form

New Database Field/Default value: "parentValue"

Column	Link to Person[Foreign Key ID]	...
Caption	Link to Person	
Order In Group	0	
Instructions		...
Display Type Code	FK Foreign Key ID	...
Display Size		
Max Size Allowed		
Is Add Only	☐	
Is Visible	☒	
Is Visible on Subform	☐	
Is Listed	☐	
Used for Filter	☐	
Is Modifiable	☐	
Use for Order By	☐	
Is Order Descending	☐	
Required	☐	
Look-up Table Used	All People Table	...
Formset to call	Client Information Screen	...

Create a Custom Formset Member that Shows Only Active Diagnoses

Under List Conditions: event_log.end_date is null and event_log.is_deleted = 0

to show items with future end dates: (event_log.end_date IS NULL OR event_log.end_date > GETDATE()) AND event_log.is_deleted = 0

Hiding formlines on a form and from printing

```
let noticeLine = Form.getFormLineByCaption('NOTICE'); //declares variable, pick the field you want to manipulate
```

```
const $notice = $('form_line_id="{noticeLine.formLinesId}");
```

```
if(getFormElement('is_sensitive') === false){
  noticeLine.supressFromPrint = true;
  $notice.hide();
} else {
  noticeLine.supressFromPrint = false;
  $notice.hide();
}
```

Hide from print:

```
Form.getFormLineByCaption('Tasks/Schedules').suppressFromPrint = true
```

Alternative to set default Program and facility to services not in Service Entry (Will only work if client is only enrolled in one program)

```
getDataValue('current_program_enrollment_view', 'people_id', parentValue, 'program_info_id');
```

Look up use 'Program list by agency and worker', depend on 'agency_id, depend on other 'workerID'

For site_provide_service default value

```
getDataValue('facility_placement_current_view', 'people_id', parentValue, 'group_profile_id');
```

Look up use 'Facility Listing by program', depend on 'program_providing_service'

Add Program Enrollment field to a form

Required	☐
Look-up Table Used	Program Enrollments by Enrollment ID Table
Formset to call	
Depends On	Person
Depends On (other)	getFormElement('prog...

```
getFormElement('program_providing_service')
```

Program_providing_service LUT

Program Listing By Agency and Service-Groups

Re-create the program enrollment tab using a user defined form:

yes	10	Enrollment Information	Client - Enrollment Information	Critical Information	Critical Information	yes
no	12	Discharge Plan	Program Enrollment	Program Enrollments	NRFS Discharge Plan	yes
no	20	Attachments	Attachments	Requirements for People	People Generic	Attachments

Save
Cancel
Print
Form Info

Tab Info

Defran Supplied	Order in Set*	Tab Caption*	Tab Description
☐	#		
Event Category	Form Family*	Default Form*	Event Group
PROGR- Program Enrollment	PROGR- Program Enrollments	NRFS_D- NRFS Discharge Plan	
Use Belongs To Parent	Force Default Form	Is Active	
☐	☒	☒	
Parameters			

JavaScript for Sub forms

Disable fields on subforms:

Disabled when not checked

```
SubDisableRule('name_of_field')
!SubDisableRule('is_noshow', 'checked')
```

Disable a field if another is checked/Value is entered

```
SubDisableRule('field_name', 'value', 'equal or not equal')
SubDisableRule('is_noshow', 'checked')
SubDisableRule('activity_type_id', '42012A26-DD40-4CAB-891F-1E824395B2C0')
SubDisableRule('program_id', '8BB5C5A4-4CA0-4F5E-B46C-01C2FF835F4E', '!=')
```

Set a subform field value from another subform field

```
var reason = self.getElementFromXML(currentRowXML, 'udf_collpicklist');
var desc = getDataValue('user_defined_lut', 'user_defined_lut_id', reason, 'description');
setSubFormElement(this.form, 'local_worker_supervisor', desc);
setElementFromXML(currentRowXML, 'local_worker_supervisor', desc);
```

Using Modals for messages

// Util.DisplayModal(message, isConfirm, okCallBack, cancelCallBack)

```
Util.DisplayModal(
'Checking this box will make this note non-billable. Click <b>OK</b> to proceed and <b>Cancel</b> leave the box
unchecked', //Message that shows
true, //adds a cancel option, must be true for callbacks to work.
() => setFormElement('do_not_bill', true), //if they click OK leave box checked
() => setFormElement('do_not_bill', false)); //if they click cancel uncheck box
```

jQuery

```
// Change the color of a label.
const formLine = Form.getFormLineByColumnName('program_info_id');
$(`[form_line_id="${formLine.formLinesId}"]`)
    .find('label')
    .css('color', 'magenta');

// Change the color of a label.
const formLine = Form.getFormLineByColumnName('program_info_id');
$(`[form_line_id="58AE31E3-70B5-47F4-E97D-1E150531C96A"]`)
    .find('label')
    .css('color', 'magenta');
```

SWITCH for conditional statements:

```
let act = getFormElement('activity_type_id').toUpperCase();


switch(act)
{
    //telehealth
    case '66197298-A34F-4B97-A99D-05CC4A3B62C6':
        setFormElement('is_telehealth', true);
        setFormElement('is_off_site', false);
        setFormElement('udf_Location_of_Contact', 'b2b39dc9-f37c-412d-a262-e8cf3bfe6a77');
```

```

break;
//In-person
case '50C8BD-0151-40BE-8A6F-33B14A090A96':
setFormElement('is_telehealth', false);
setFormElement('udf_Location_of_Contact', '');
break;
default:
setFormElement('is_telehealth', false);
setFormElement('is_off_site', false);
setFormElement('udf_Location_of_Contact', '');
}

```

Disable Codes for Test/Assessments

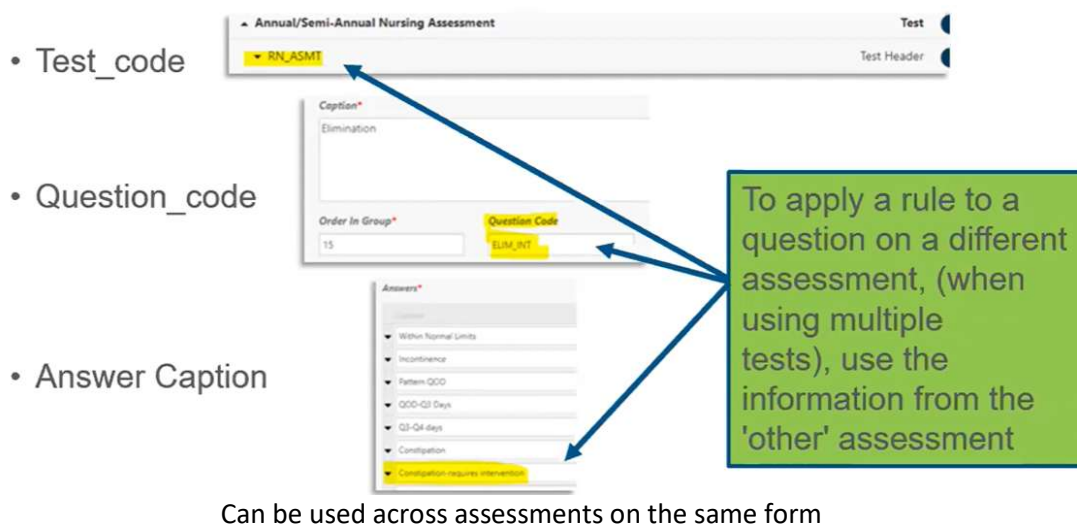

Single or Mutiple Select

```

true
getTestAnswerValue("dr1", "rb1", "radio2")==true //disable if true

```

```

getTestAnswerValue("dr1", "rb1", "radio2")!=true //disable until marked true

```

Note: For radio button and pick list questions, 'true' indicates the item is selected.

Narrative, numeric, pick list, and date/time questions- does not apply to multi or single select questions

```

!Util.isNullOrEmpty(getTestAnswerValue("TEST_CODE_HERE", "QUESTION_CODE_HERE")) //disable if there is a value

```

```

Util.isNullOrEmpty (getTestAnswerValue("TEST_CODE_HERE", "QUESTION_CODE_HERE")) //disable if blank

```

Picklist Items

The PICKLIST DESCRIPTION comes from the lookup table (LUT) Description column.

```

!Util.isNullOrEmpty(getTestAnswerValue("TEST_CODE_HERE", "QUESTION_CODE_HERE"))=="PICKLIST_DESCRIPTION"

```

To remove the answer to a question if the question becomes disabled, click the Erase on Disable check box.

One of the answers contains a certain string:

```
getTestAnswerValue("TEST_CODE_HERE ", " QUESTION_CODE_HERE ") .indexOf('string') !== -1
```

ex:

```
getTestAnswerValue("MIPS_134_2_2026", "reason_not_screened") .indexOf('PROMS') !== -1
```

Test and Assessment Disable Rules

Disable an entire assessment

- When multiple tests are used in a form, users can apply a disable rule on the test line in the parent form to disable an entire test based on an answer

- This form includes two assessments

- MH Assessment and Substance Use assessment

- Disable rule indicates that if the answer to 'History of Substance' use is 'No' on the 'MH assessment', disable the Substance Use Assessment.



NetSm


Disable a whole test/assessment based on the answer from another test/assessment

Disabled a nested subform based on the answer of a test/assessment.

Test and Assessment Disable Rules

Disable an entire assessment

- Prefer to only have one assessment but, require another be completed?
- Consider using Nested test and assessment sub-form on the parent event to be required based on an answer

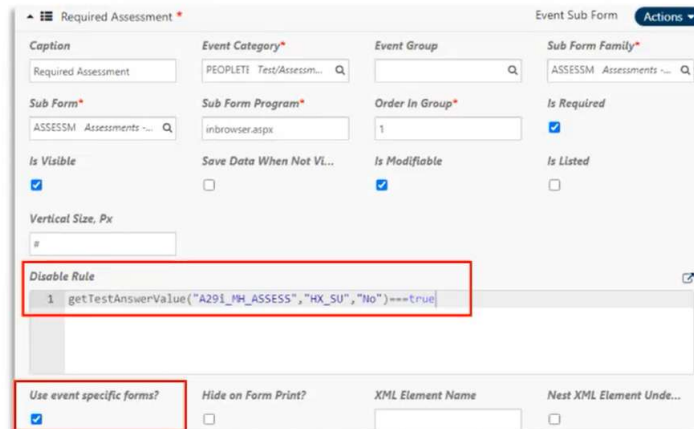

MSC Form Designer Tips

Filter out inactive items in a formset

In List Condition: event_log.end_date is null and event_log.is_deleted = 0

Future Dates: (event_log.end_date IS NULL OR event_log.end_date > GETDATE()) AND event_log.is_deleted = 0

Make it so that the person looking at a formset can only see the documents they entered:

event_log.staff_id = 'workerID'

You can use the extension tables in list conditions:

test_header.test_header_id IN (select x.test_header_id from test_header_x x where x.UDF_SD_Adjudication = 'workerID')

Refresh a sub report after a field is filled in

Put in On Change box of the field

Form.RefreshSubreport('form_lines_id', 'sub_report_header_id');

Make a subreport refresh once actual_date is entered:

Put into 'on change code for 'actual_date'

var formLine = Form.getFormLineByCaption('caption for the subreport you want to refresh');

var reportheaderid = \$('"[subreportlinesid="' + formLine.formLinesId + "]"").attr('subreportheaderid');

Form.RefreshSubreport(formLine.formLinesId, reportheaderid);

Hide submit/esign button if certain fields are not filled in

1. Before or After Load code
2. On change code for the one you try to use.

```
if ( Util.isNullOrEmpty(getFormElement('column_name')) ) { $(''[button-id="submit"]').hide(); }  
else { $(''[button-id="submit"]').show(); }
```

the following code is for esign

```
if ( Util.isNullOrEmpty(getFormElement('column_name')) ) { $(''[button-id="esign"]').hide(); }  
else { $(''[button-id="esign"]').show(); }
```

Hide form lines

\$('#[form_line_id=358D2DD8-8311-4A86-9808-019779A576CE]').hide();

Way to format using *Form.getFormLineByColumnName('duration').defaultValue*

```
if ( isChecked('is_noshow') ) { setFormElement('duration', '0'); }
```

```
else { setFormElement('duration', Form.getFormLineByColumnName('duration').defaultValue); }
```

Make text in a label field disappear

<div id = "ph_instructions">

Please also enter a placement disruption for this psychiatric hospitalization

</div>

In the form's After Load code, you could then use JQuery to hide the marked block of text with something like:

```
if ( /*some code to check whether the incident is or is not a psychiatric hospitalization, e.g.,  
getFormElement('event_definition_id') != 'some GUID'*/ ) {  
    $('#ph_instructions').hide()  
}
```

Form_line_id for progress notes added via the event setup:

BFE6BE66-7983-4C3B-8374-1606E7D909A5

SQL things

myEvolv database functions

dbo.stripHTML(narrative_field_name) –removes html from a field

dbo.LUT_Used_On_Forms('B760ACE5-D181-4EF4-8E65-3484F4A95E9C') – tells you what forms a LUT is on. Use the scrnval_id

Attached documents on NX custom reports

, ' Click to Display Document' as attachment

Stuff data from a subquery into one column

```
STUFF(
    (SELECT ', ' + name FROM table FOR XML PATH ('')), 1, 1, ''
)
```

Example:

```
, STUFF(
    (SELECT ', ' + program_name
     FROM agency_program_service_link apsl
     Join agency_program_link apl on apsl.agency_program_link = apl.agency_program_link_id
     join program_info pri on apl.program_info_id = pri.program_info_id
     where ed.event_definition_id = apsl.event_definition_id
     FOR XML PATH ('')), 1, 1, ''
    ) as programs
from
event_definition ed
```

string aggregate

```
...
, STRING_AGG(ec.program_name, ',') as program
...
Group by everything but the string_agg
```

Add Row number

```
ROW_NUMBER() OVER(
    PARTITION BY el.people_id
    ORDER BY el.actual_date desc
) as row_num
```

Dense Rank (gives a whole grouping a number)

```
DENSE_RANK() OVER (
    PARTITION BY el.people_id
    ORDER by el.actual_date desc, el.event_log_id
) AS number
```

LAG and LEAD

- *LAG(): Retrieves a value from a row that comes before the current row in the defined order.*
- *LEAD(): Retrieves a value from a row that comes after the current row in the defined order.*

```
LAG(crv.remittance_date)
OVER(
PARTITION BY
claim_submission_id
ORDER BY remittance_date desc)
```

Pivot table

```
WITH enrolled_services as (
SELECT
mp.event_log_id
, case when mx.udf_boolean1 = 1 then 'Yes'
      when mx.udf_boolean2 = 1 then 'No'
      when mx.udf_boolean3 = 1 then 'Not Obtained'
      end as answer
, ROW_NUMBER()
  OVER( PARTITION BY event_log_id
        ORDER BY lut.std_code
        ) as number
from
materials_provided mp
join materials_provided_x mx on mp.materials_provided_id = mx.materials_provided_id
JOIN user_defined_lut lut on mx.udf_Danger_To = lut.user_defined_lut_id
where mp.description = 'HBCI Follow Up'
)
, pivot_table as (
SELECT
*
FROM
enrolled_services
PIVOT (
  MAX(answer)
  FOR number IN (
    [1],[2],[3],[4],[5],[6],[7],[8],[9],[10],[11])
  ) AS pivot_table )
SELECT
pt.event_log_id
, pt.[1] as mental_health_clinic
, pt.[2] as community_residence
, pt.[3] as hi_fi_wraparound
, pt.[4] as care_coord
, pt.[5] as youth_act
, pt.[6] as day_treatment
, pt.[7] as residential_treatment
, pt.[8] as medical_hospital
, pt.[9] as FPSS_CTSS
, pt.[10] as YPSS_CTSS
, pt.[11] as DOHMH_FYPS
From pivot_table
```

Helpful SQL for Sub reports

Beginning/End of day

Startdate: DATEADD(DAY, DATEDIFF(DAY, '19000101', GETDATE()), '19000101')

EndDate: DATEADD(DAY, DATEDIFF(DAY, '18991231', GETDATE()), '19000101')

Ex: scheduled_date > DATEADD(DAY, DATEDIFF(DAY, '19000101', GETDATE()), '19000101')

Last week not anchored

actual_date > DATEADD(WEEK, DATEDIFF(WEEK, 0, GETDATE())-1, 0)

Last Month not anchored

actual_date > DATEADD(MONTH, DATEDIFF(MONTH, 0, GETDATE())-1, 0)

Last 3 Months not anchored

actual_date > DATEADD(MONTH, -3, GETDATE())

or

datediff(day, to_date, getdate()-1) <= 90

Last 6 months

AND actual_date >= DATEADD(Month, DATEDIFF(Month, 0, GETDATE())-6, 0)

or

datediff(mm, end_date, getdate()) <= 6

Last 30 Days not anchored

actual_date > GetDate() - 30

Last 30 Days Anchored

actual_date >= DATEADD(day, -30, actualDate)

Click the **Join Field?** button in the report set up to actual_date and set operator as “**Less than or equal to**”

actual_date	Date Only(datetime)	Date	2	0	☒	☐	☒	☒	actual_date	Less Than or Equal To
-------------	---------------------	------	---	---	-------------------------------------	--------------------------	-------------------------------------	-------------------------------------	-------------	-----------------------

Latest item

actual_date = (select MAX(a.actual_date) from event_view a where a.people_id = wt.people_id and event_code = 'democont') and wt.event_code = 'democont'

using a different view

actual_date = (select MAX(a.actual_date) from service_plan_details_view a where a.people_id = wt.people_id and event_name = 'Treatment Plan Review Credo')

Exclude No/shows if that field is not in the view

event_name = (select a.event_name from event_view a where a.event_log_id = wt.event_log_id and is_noshow = '0')

Nulls and items with a future end date anchored (Classic)

(end_date is NULL OR end_date >= @actual_date)

Nulls and items with a future end date anchored (NX)

(end_date is NULL OR end_date >= actualDate)

Click the **Join Field?** button in the report set up to actual_date and set operator as “Less than or equal to”

actual_date	...	Date Only(datetime)	...	Enrollment Start	4	0	☒	☐	☒	☒	actual_date	Less Than or Equal To	...
-------------	-----	---------------------	-----	------------------	---	---	-------------------------------------	--------------------------	-------------------------------------	-------------------------------------	-------------	-----------------------	-----

List of items in a Sub report

event_code IN ('CredoAM', 'LOC3')

Single Item

event_code = 'CredoAM'

Use the code to filter

is_noshow= '0'

priority= '1'

“AND” for more than one item

drug_information = 'Methadone' and is_noshow= '0'

Override an ID field on a sub report to link to a differently-named field on the main form

program_info_id	...	Foreign Key ID(uniqueIdentifier)	...	program_info_id	2	☒	☐	☐	☒	program_providing_servi
-----------------	-----	----------------------------------	-----	-----------------	---	-------------------------------------	--------------------------	--------------------------	-------------------------------------	-------------------------