

Day 1: React Basics & Component Fundamentals

BookCard.js

```
import React from "react";
import "../BookCard.css";

const BookCard = ({ title, author, price, view }) => {
  return (
    <div className={`book-card ${view}`}>
      <h3>{title}</h3>
      <p>Author: {author}</p>
      <p>Price: ₹{price}</p>
    </div>
  );
};

export default BookCard;
```

BookCard.css

```
.book-card {
  border-radius: 10px;
  padding: 20px;
  background-color: white;
  box-shadow: 0 4px 10px rgba(0, 0, 0, 0.08);
  transition: transform 0.2s ease, box-shadow 0.2s ease;
}

.book-card:hover {
  transform: translateY(-4px);
  box-shadow: 0 6px 16px rgba(0, 0, 0, 0.12);
}

.book-card h3 {
  margin-top: 0;
  color: #2c3e50;
}

.book-card p {
  margin: 6px 0;
  color: #555;
}
```

BookList.js

```
import React, { useState } from "react";
import BookCard from "../BookCard";
import "../BookList.css";

const BookList = () => {
  const [view, setView] = useState("list");
  const [search, setSearch] = useState("");

  const books = [
    { id: 1, title: "Atomic Habits", author: "James Clear", price: 399 },
    { id: 2, title: "The Alchemist", author: "Paulo Coelho", price: 299 },
    { id: 3, title: "Deep Work", author: "Cal Newport", price: 450 },
    { id: 4, title: "Clean Code", author: "Robert C. Martin", price: 550 }
  ];

  const filteredBooks = books.filter(book =>
    book.title.toLowerCase().includes(search.toLowerCase())
  );

  return (
    <div>
      <h2>Featured Books</h2>

      <div className="booklist-header">
        <input
          className="search-box"
          type="text"
          placeholder="Search books..."
          value={search}
          onChange={(e) => setSearch(e.target.value)}
        />

        <div className="buttons">
          <button onClick={() => setView("list")}>List View</button>
          <button onClick={() => setView("grid")}>Grid View</button>
        </div>
      </div>

      <div className={`book-container ${view}`}>
        {filteredBooks.map(book => (
          <BookCard
            key={book.id}
            title={book.title}
            author={book.author}
            price={book.price}
          />
        ))}
      </div>
    </div>
  );
}
```

```
);  
};  
  
export default BookList;
```

BookList.css

```
.booklist-header {  
  display: flex;  
  justify-content: space-between;  
  align-items: center;  
  flex-wrap: wrap;  
  margin-bottom: 15px;  
}  
  
.search-box {  
  padding: 8px 12px;  
  width: 220px;  
  border-radius: 6px;  
  border: 1px solid #ccc;  
}  
  
.buttons {  
  margin-top: 10px;  
}  
  
.buttons button {  
  padding: 8px 14px;  
  margin-right: 8px;  
  border: none;  
  border-radius: 6px;  
  cursor: pointer;  
  background-color: #3498db;  
  color: white;  
  font-weight: 500;  
}  
  
.buttons button:hover {  
  background-color: #2980b9;  
}  
  
.book-container.list {  
  display: flex;  
  flex-direction: column;  
  gap: 16px; /* ✅ THIS adds space between books */  
}  
  
.book-container.grid {  
  display: grid;  
  grid-template-columns: repeat(auto-fill, minmax(220px, 1fr));
```

```
gap: 20px;
}
```

App.js


```
import React from "react";
import BookList from "../components/BookList";
import "../App.css";

function App() {
  return (
    <div className="app-container">
      <h1>📖 BookVerse</h1>
      <p className="subtitle">
        Welcome to BookVerse – discover popular books
      </p>
      <BookList />
    </div>
  );
}

export default App;
```

UI Output:

List View

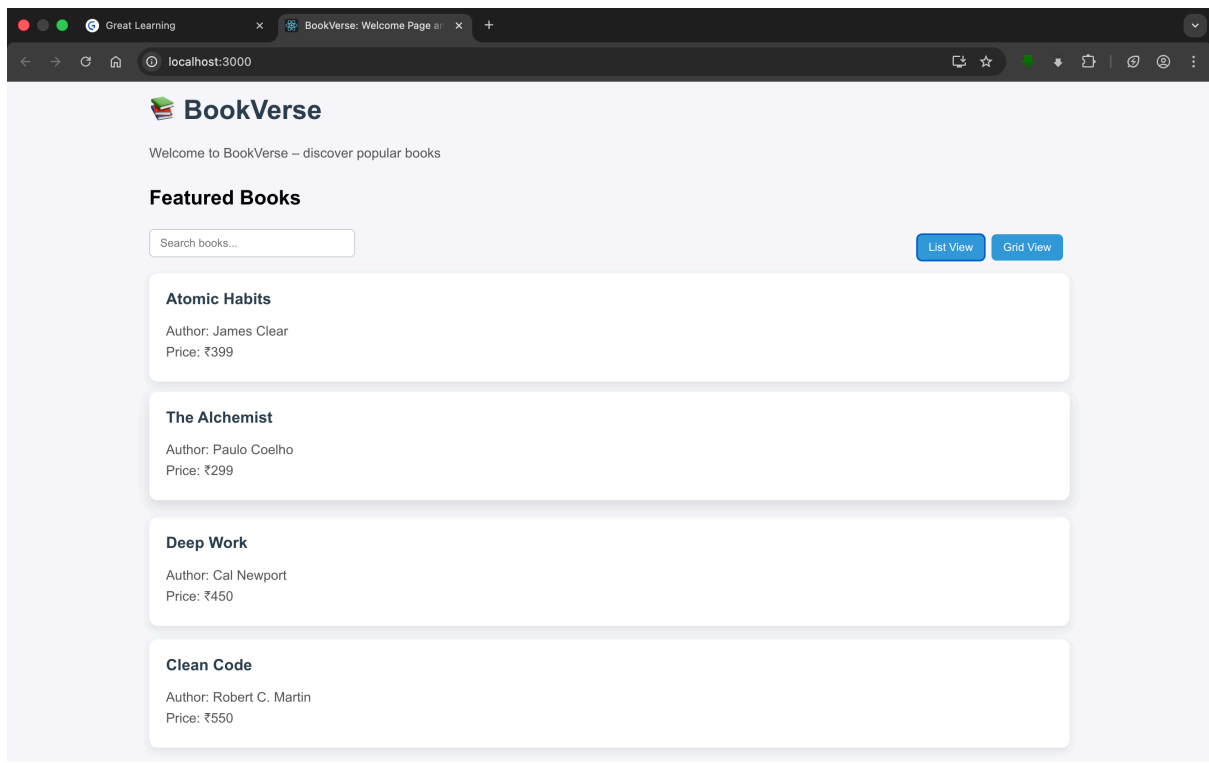

Grid View

