Masked reconstruction on held-out athletes — A · speed against recorded distance

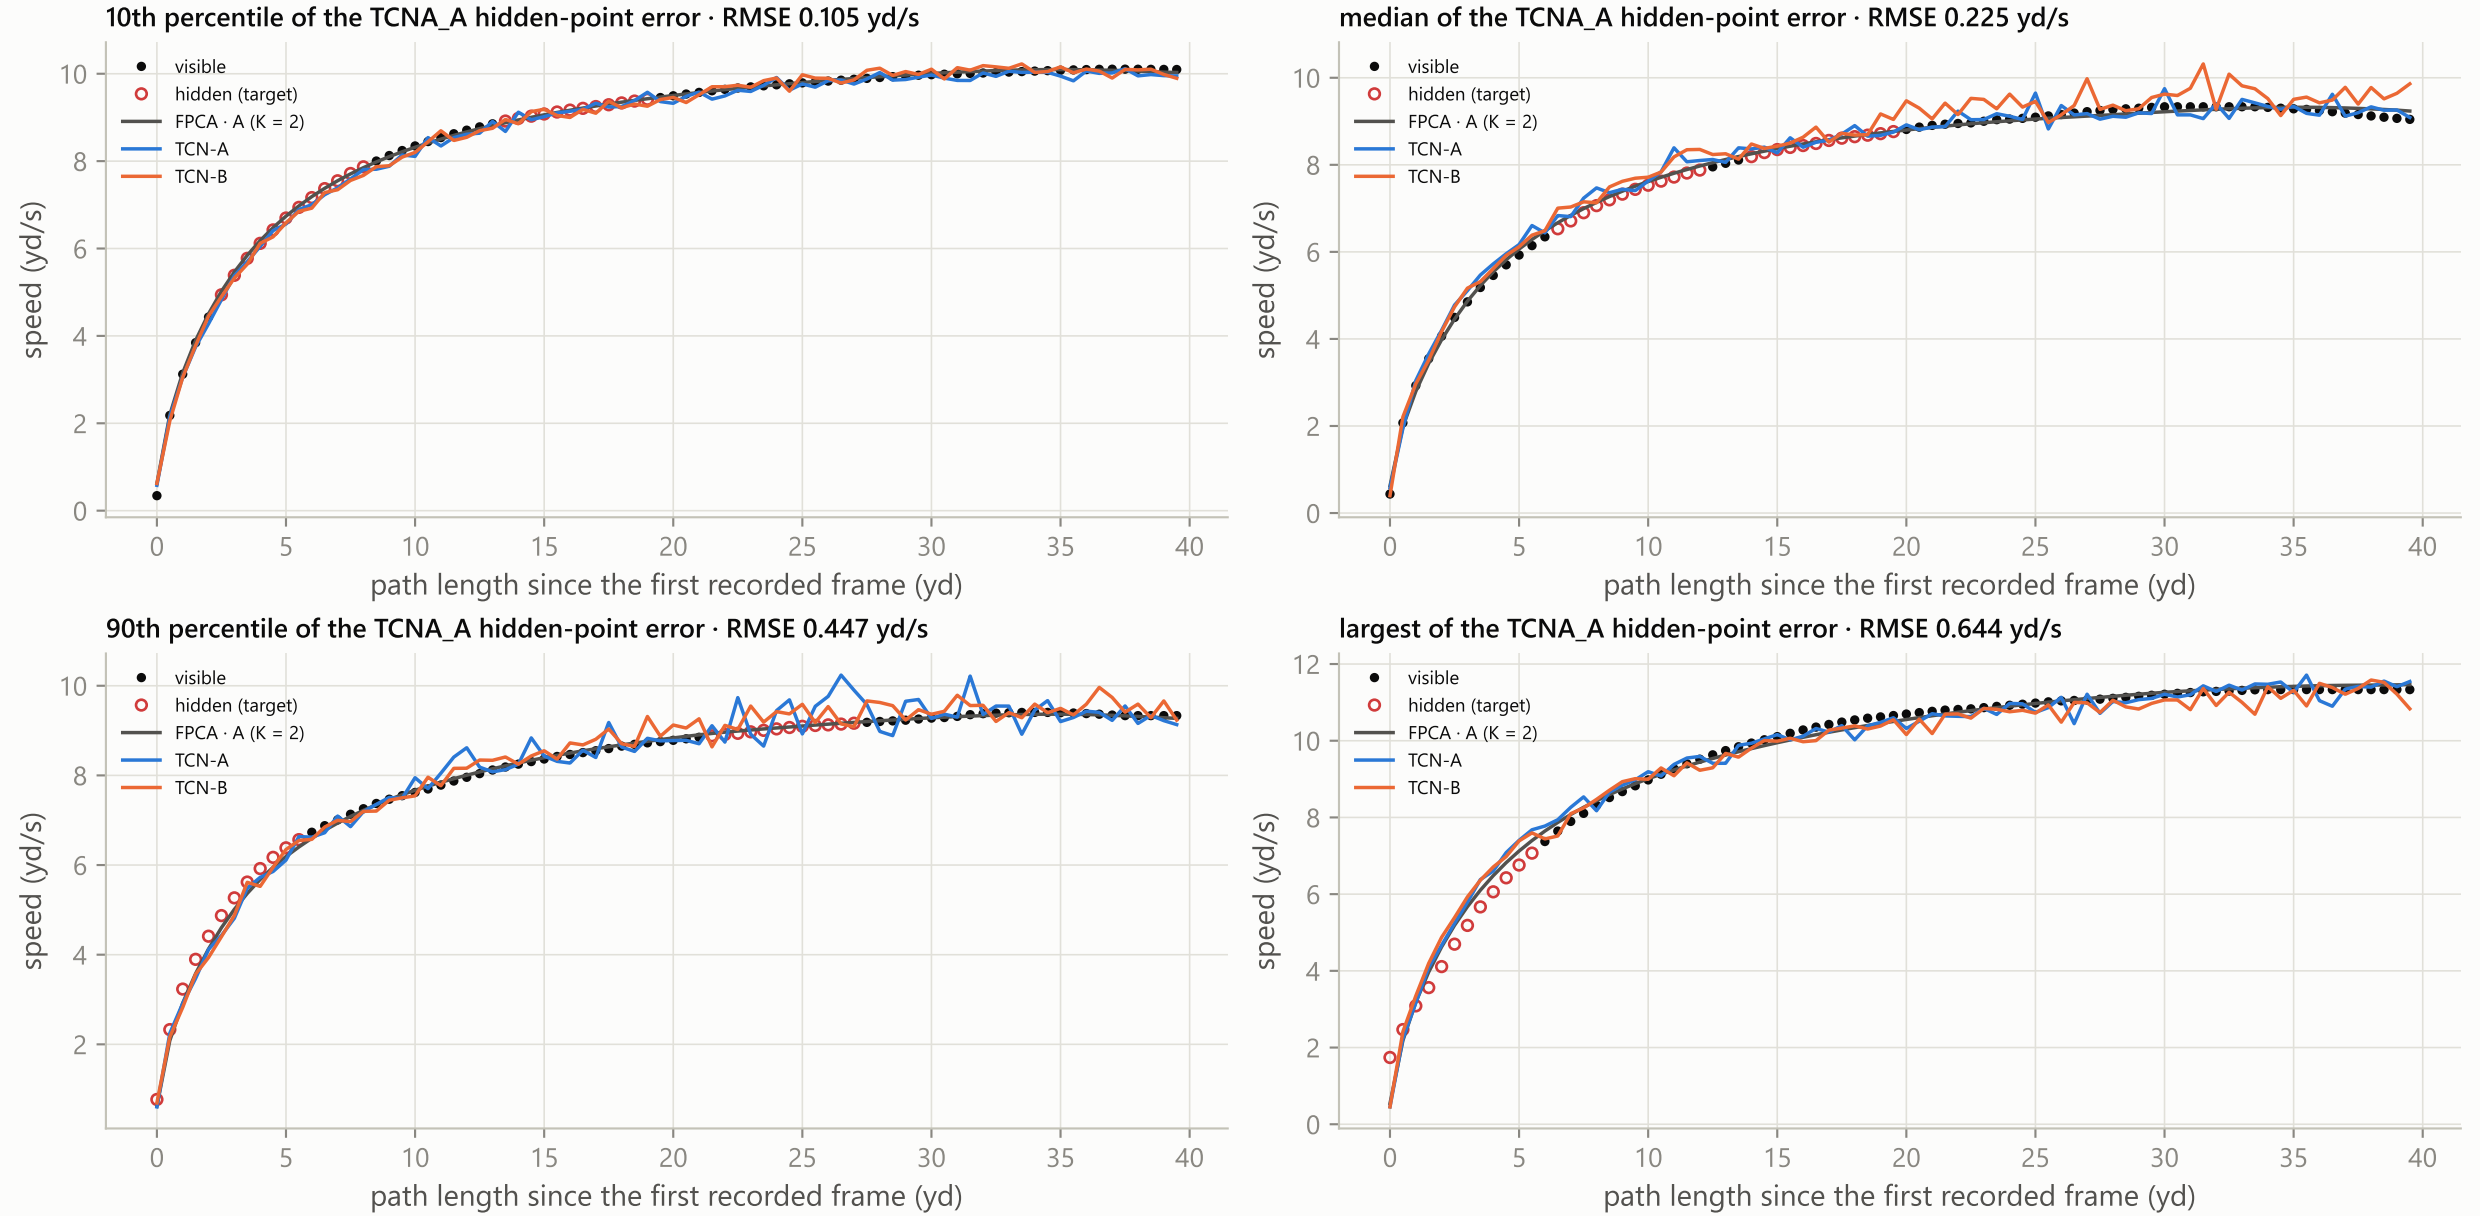

Unit: one held-out attempt per panel (its athlete was in no fit). Each model reconstructs the hidden points from the visible ones through its bottleneck: K scores for FPCA, the embedding for the encoders. Attempts are those at the 10th, 50th and 90th percentile and at the maximum of the TCN-A hidden-point error — chosen by rule, not by eye.