# Raw against residual embeddings: what does removing the stopwatch do?

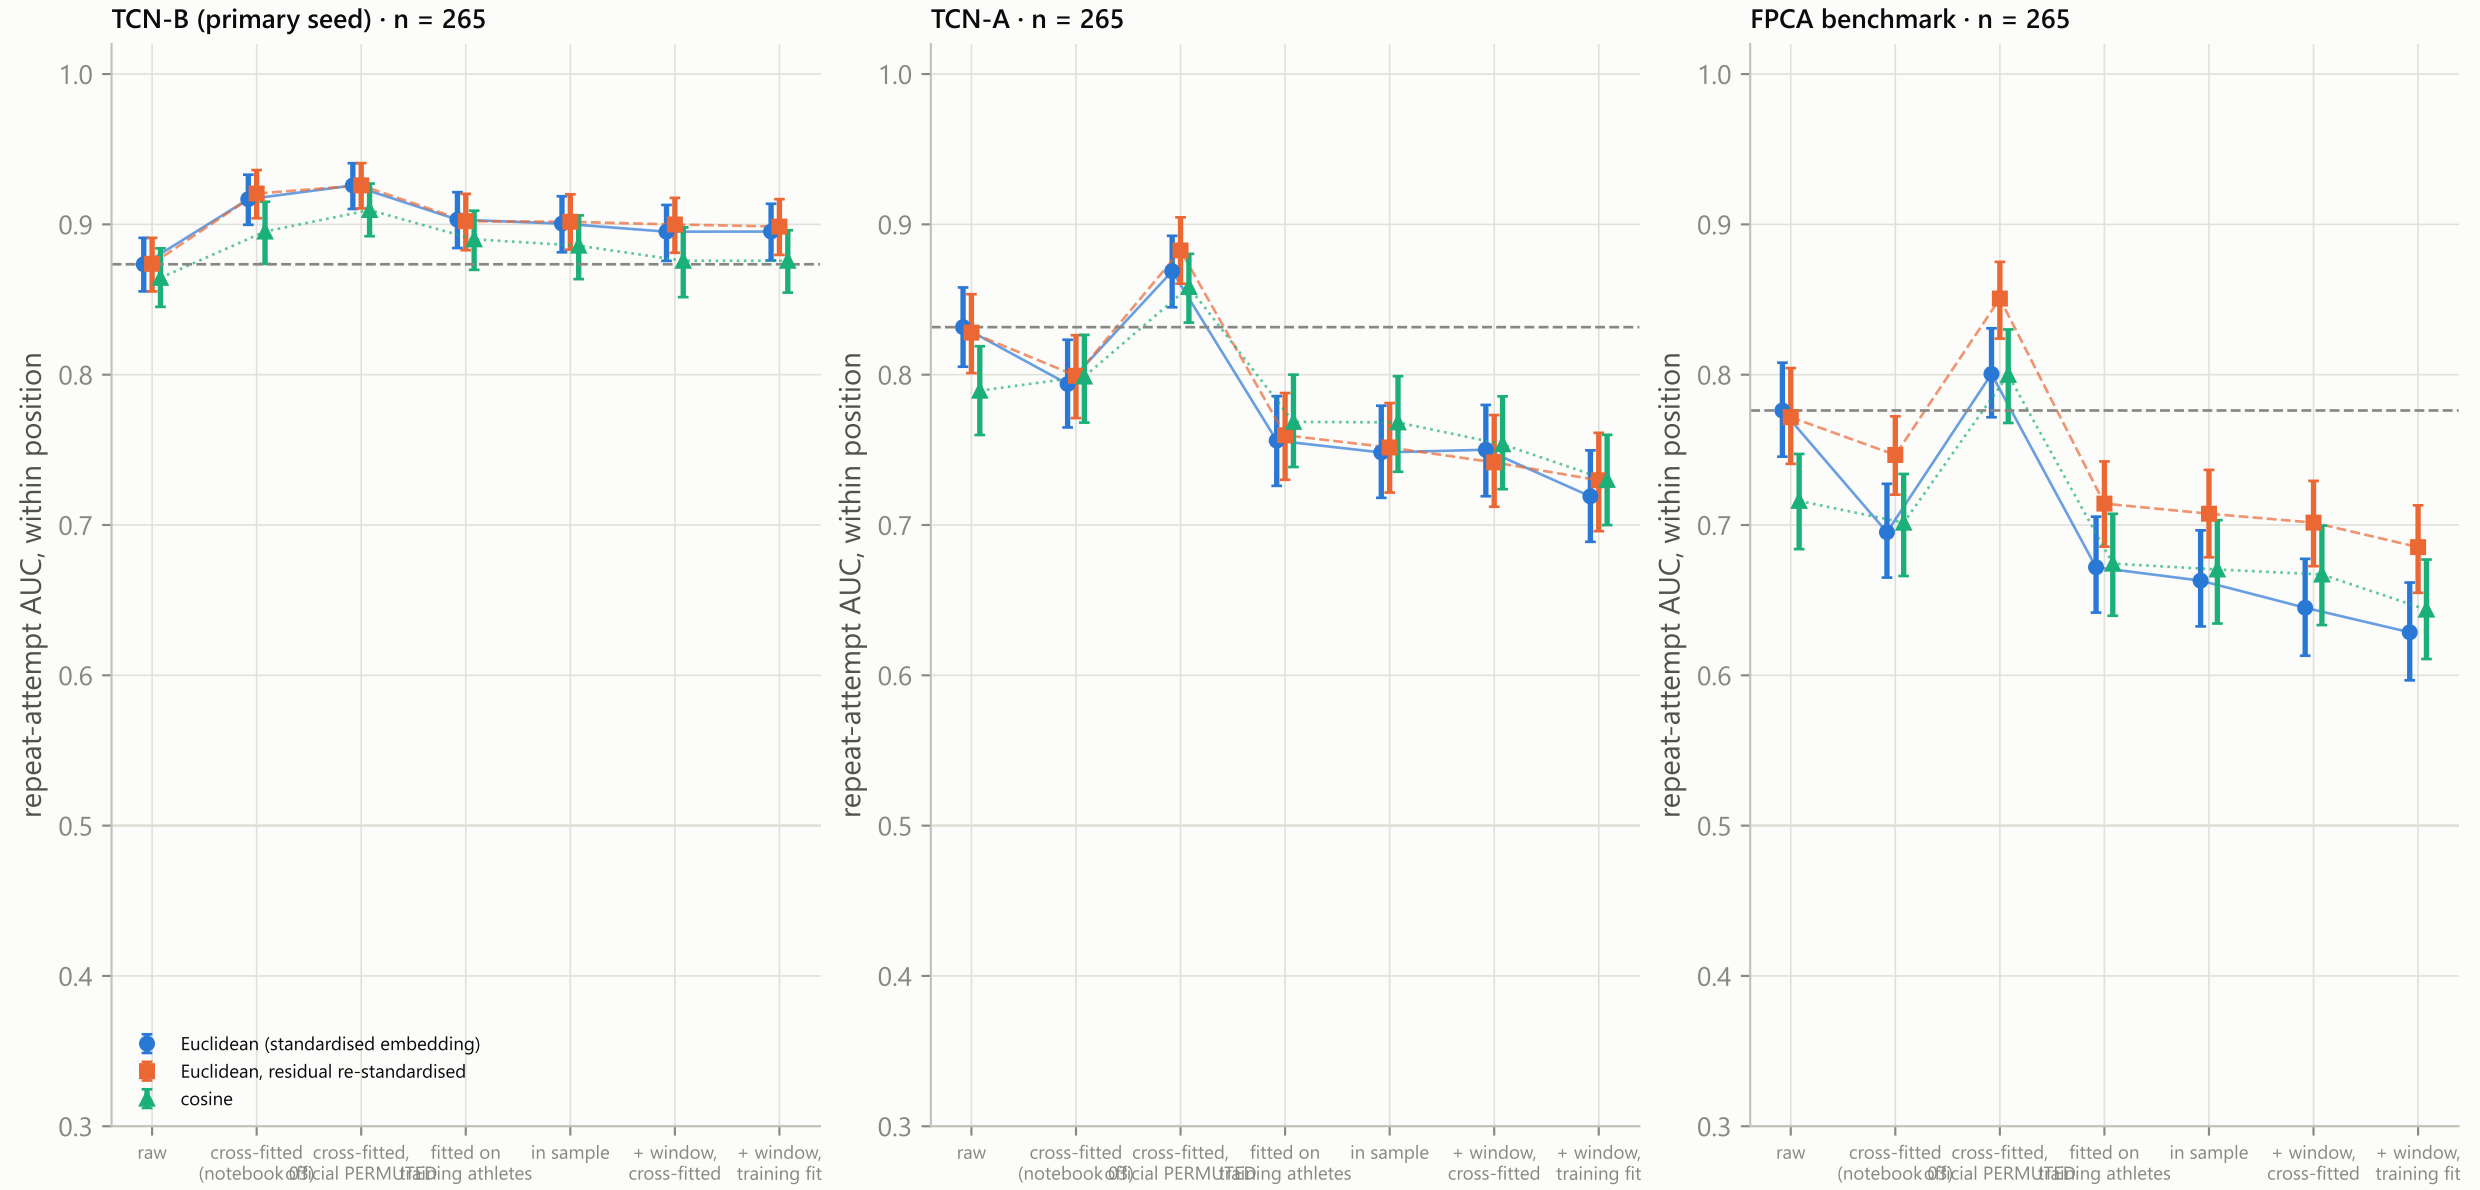


Unit: role:confirm held-out athlete with both official times; the same athletes, positive pair (first two attempts) and gallery (position, fold) at every x. x = how the linear prediction from official forty, 10-yard, weight and height (then also the recording window) was removed. Dashed line = raw value. Permuting the official results between athletes removes nothing real: any gain there is produced by the procedure. One function fitted on training athletes removes the same vector from both attempts of an athlete. Whisker = 95 % athlete bootstrap.