

UC: Projetos

Assunto:

Projeto Restaurante – BackEnd – Parte 1

UC: Projetos

Assunto:

Projeto Restaurante – BackEnd

01 – Criando a Estrutura do Projeto



Cmder



C:\Users\Administrador
λ

Instalar o prompt CMDER PARA
gerenciar os servidores backend



C:\Users\Administrador

λ npm install express-generator -g



Instalar via npm o express-generator em nível global

C:\Users\Administrador

λ npm install express-generator -g

npm **WARN** deprecated mkdirp@0.5.1: Legacy versions of mkdirp are no longer supported. Please update to mkdirp 1.x. (Note that the API surface has changed to use Promises in 1.x.)

added 10 packages in 3s

C:\Users\Administrador

λ

Está instalado.





Lixeira



Cmder



Movavi

Video Sui...



26-09-24



CCleaner



projeto



Oracle VM

VirtualBox



Google

Chrome



Microsoft

Edge



Firefox




Adobe

Acrobat DC

Criar a pasta do projeto na área de trabalho



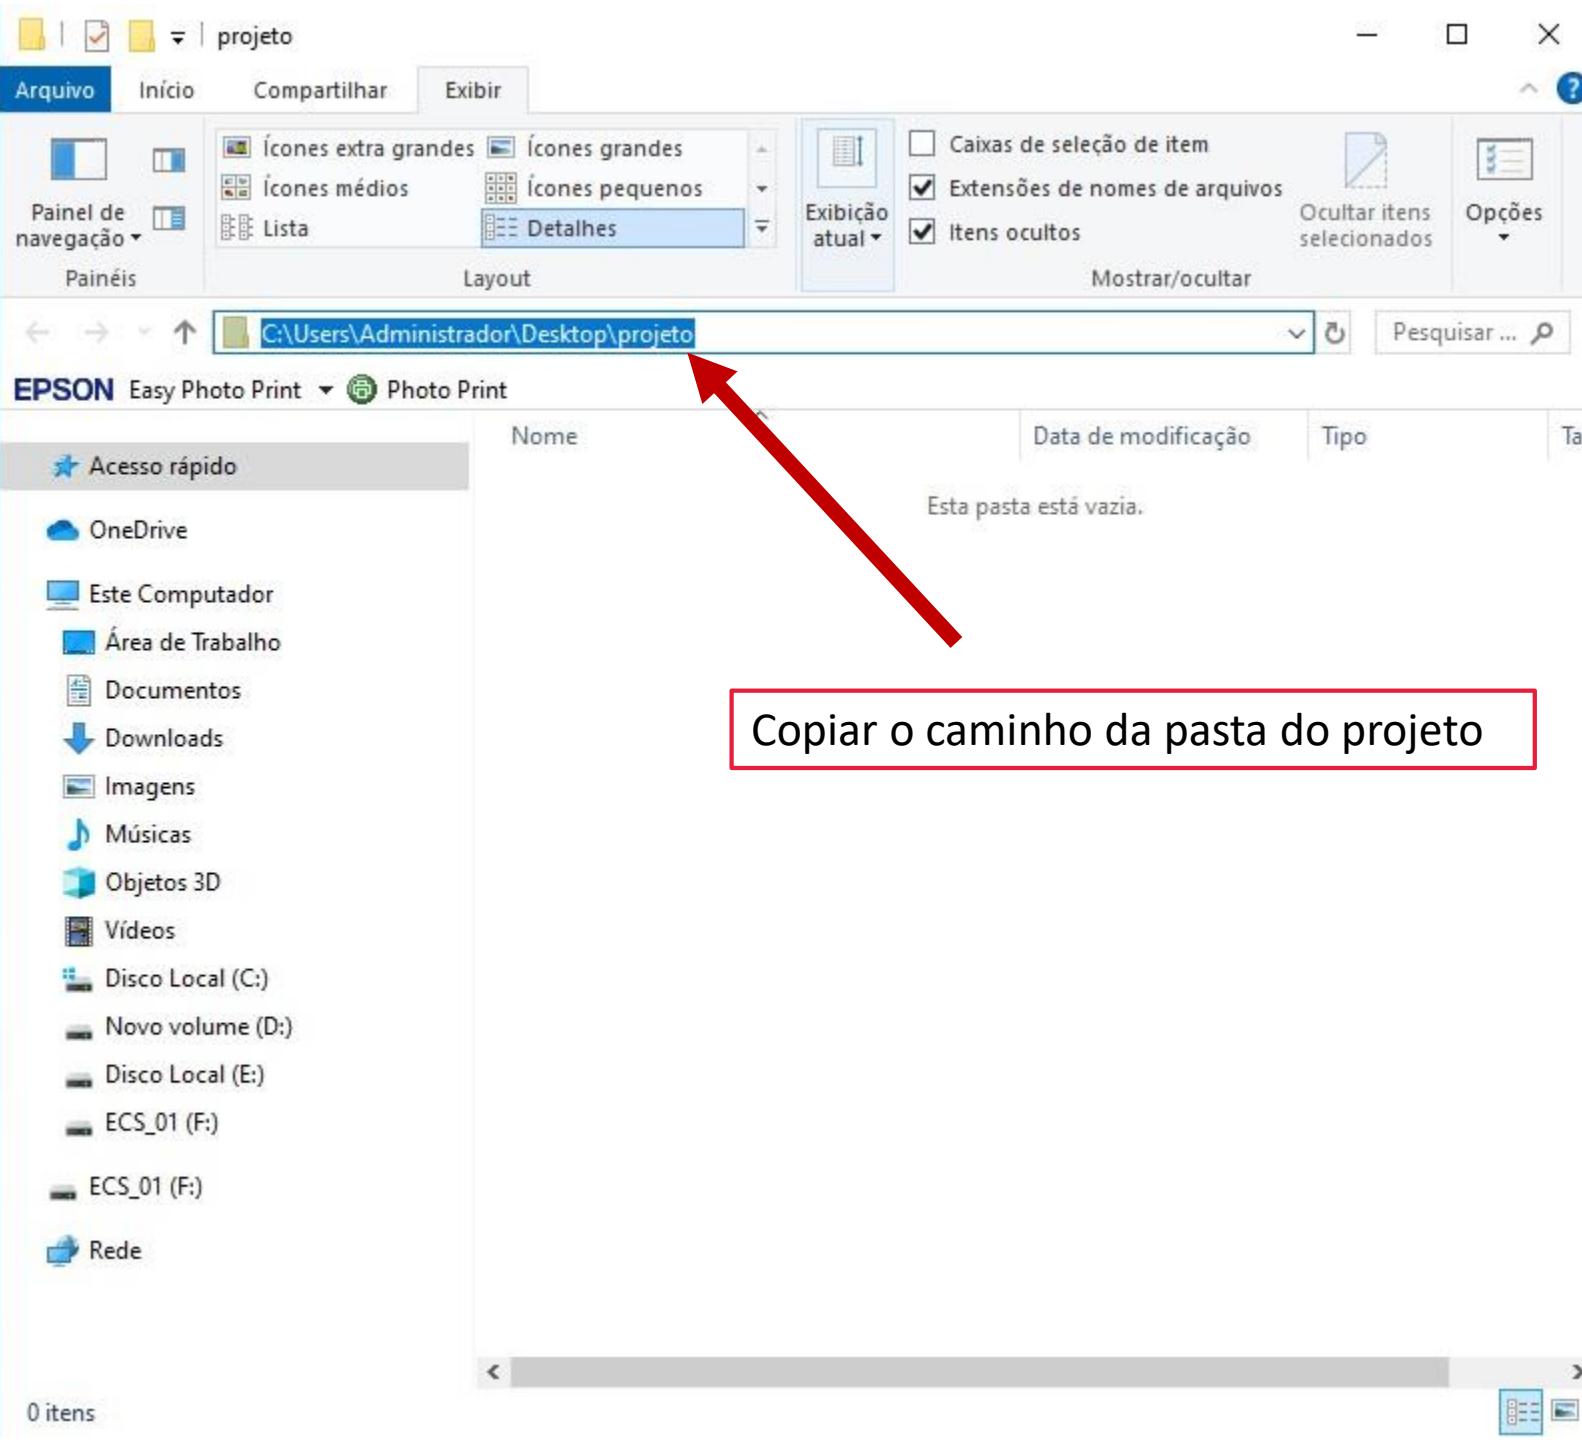

```
C:\Users\Administrador
λ npm install express-generator -g
npm WARN deprecated mkdirp@0.5.1: Legacy versions of mkdirp are no longer supported. Please update to mkdirp 1.x. (Note that the API surface has changed to use Promises in 1.x.)
added 10 packages in 3s
```

```
C:\Users\Administrador
λ cd C:\Users\Administrador\Desktop\projeto
```

Right=Accept Suggestion

Colar no cmder o caminho da pasta anterior para entarmos via prompt nessa pasta e criarmos a estrutura do projeto na pasta



```
C:\Users\Administrador
λ npm install express-generator -g
npm WARN deprecated mkdirp@0.5.1: Legacy versions of mkdirp are no longer supported. Please update to mkdirp 1.x. (Note that the API surface has changed to use Promises in 1.x.)
added 10 packages in 3s
```

```
C:\Users\Administrador
λ cd C:\Users\Administrador\Desktop\projeto
```

```
C:\Users\Administrador\Desktop\projeto
λ
```

Visualizar a pasta atual no prompt



C:\Users\Administrador\Desktop\projeto

```
λ express -help
```

warning: option `--ejs' has been renamed to `--view=ejs'

Usage: express [options] [dir]

Options:

```
--version          output the version number
-e, --ejs          add ejs engine support
--pug             add pug engine support
--hbs             add handlebars engine support
-H, --hogan        add hogan.js engine support
-v, --view <engine>  add view <engine> support (dust|ejs|hbs|hjs|jade|pug|twig|vash) (defaults to jade)
--no-view         use static html instead of view engine
-c, --css <engine>  add stylesheet <engine> support (less|stylus|compass|sass) (defaults to plain css)
--git             add .gitignore
-f, --force        force on non-empty directory
-h, --help          output usage information
```

Executar o comando `express --help` para visualizarmos as opções liberadas para esse comando

C:\Users\Administrador\Desktop\projeto

八

```
C:\Users\Administrador\Desktop\projeto
λ express -help

warning: option `--ejs` has been renamed to `--view=ejs`
```

Usage: express [options] [dir]

Options:

| | |
|---------------------|--|
| --version | output the version number |
| -e, --ejs | add ejs engine support |
| --pug | add pug engine support |
| --hbs | add handlebars engine support |
| -H, --hogan | add hogan.js engine support |
| -v, --view <engine> | add view <engine> support (dust ejs hbs hjs jade pug twig vash) (defaults to jade) |
| --no-view | use static html instead of view engine |
| -c, --css <engine> | add stylesheet <engine> support (less stylus compass sass) (defaults to plain css) |
| --git | add .gitignore |
| -f, --force | force on non-empty directory |
| -h, --help | output usage information |

```
C:\Users\Administrador\Desktop\projeto
λ express --ejs saboroso
```



Usaremos o express adicionando o suporte ao EJS no projeto com o nome saboroso

```
warning: option `--ejs` has been renamed to `--view=ejjs`
```

```
create : saboroso\  
create : saboroso\public\  
create : saboroso\public\javascripts\  
create : saboroso\public\images\  
create : saboroso\public\stylesheets\  
create : saboroso\public\stylesheets\style.css  
create : saboroso\routes\  
create : saboroso\routes\index.js  
create : saboroso\routes\users.js  
create : saboroso\views\  
create : saboroso\views\error.ejs  
create : saboroso\views\index.ejs  
create : saboroso\app.js  
create : saboroso\package.json  
create : saboroso\bin\  
create : saboroso\bin\www
```

```
change directory:
```

```
> cd saboroso
```

```
install dependencies:
```

```
> npm install
```

```
run the app:
```

```
> SET DEBUG=saboroso:* & npm start
```

C:\Users\Administrador\Desktop\projeto

λ

```
C:\Users\Administrador\Desktop\projeto
λ ls
saboroso/
```

Executar o ls para listar as pastas do diretório atual

```
C:\Users\Administrador\Desktop\projeto
λ |
```

```
C:\Users\Administrador\Desktop\projeto
```

```
λ ls
```

```
saboroso/
```

```
C:\Users\Administrador\Desktop\projeto
```

```
λ cd saboroso\
```

Entrar na pasta do projeto saboroso

```
C:\Users\Administrador\Desktop\projeto\saboroso
```

```
λ ls
```

```
app.js bin/ package.json public/ routes/ views/
```

Executar o ls para listar as pastas do diretório atual

```
C:\Users\Administrador\Desktop\projeto\saboroso
```

```
λ |
```

A screenshot of a Windows operating system interface. On the left, a file explorer window titled 'projeto' shows a folder structure: 'Este Computador > Área de Trabalho > projeto'. Inside 'projeto', there is a folder named 'saboroso'. A red arrow points from the terminal window below to the 'saboroso' folder in the file explorer. On the right, a terminal window titled 'Cmder' is open, displaying the command-line interface. The terminal shows the user navigating through directories: starting at 'C:\Users\Administrador\Desktop\projeto', changing to the 'saboroso' folder, and then listing the contents of 'C:\Users\Administrador\Desktop\projeto\saboroso'. The terminal prompt ends with a cursor at the start of a new line.

Arquivo Início Compartilhar Exibir

Painel de navegação ▾ Layout Exibição atual ▾ Mostrar/ocultar Opções ▾

Ícones extra grandes Ícones grandes
Ícones médios Ícones pequenos
Lista Detalhes

Caixas de seleção de item
Extensões de nomes de arquivos
Itens ocultos

Painéis

Este Computador > Área de Trabalho > projeto

EPSON Easy Photo Print ▾ Photo Print

Acesso rápido

OneDrive

Este Computador

Área de Trabalho

Documentos

Downloads

Imagens

Músicas

Objetos 3D

Vídeos

Disco Local (C:)

Novo volume (D:)

Disco Local (E:)

ECS_01 (F:)

ECS_01 (F:)

Rede

Nome Data de modificação Tipo

saboroso 23/09/2024 20:33 Pasta de ar

C:\Users\Administrador\Desktop\projeto

λ ls

saboroso/

C:\Users\Administrador\Desktop\projeto

λ cd saboroso\

C:\Users\Administrador\Desktop\projeto\saboroso

λ ls

app.js bin/ package.json public/ routes/ views/

C:\Users\Administrador\Desktop\projeto\saboroso

λ |

cmd.exe

Search

+

☰

1 item

Visualizar no explorador de arquivos as pastas do diretório que estamos vendo no prompt

A screenshot of a Windows operating system interface. At the top is the taskbar with the Start button, a search bar containing 'saboroso', and several pinned icons. Below the taskbar is the system tray.

The main window is a File Explorer showing the directory `C:\Users\Administrador\Desktop\projeto\saboroso`. The left sidebar lists common locations like Acesso rápido, OneDrive, Este Computador, Área de Trabalho, and various drives. The right pane displays a list of files and folders:

| Nome | Data de modificação | Tipo |
|--------------|---------------------|-------------|
| bin | 23/09/2024 20:33 | Pasta de ar |
| public | 23/09/2024 20:33 | Pasta de ar |
| routes | 23/09/2024 20:33 | Pasta de ar |
| views | 23/09/2024 20:33 | Pasta de ar |
| app.js | 23/09/2024 20:33 | Arquivo JS |
| package.json | 23/09/2024 20:33 | Arquivo Fo |

A red arrow points from the terminal window to the 'saboroso' folder in the File Explorer. A red box highlights the text in the terminal window.

Visualizar no explorador de arquivos as pastas do diretório que estamos vendo no prompt

The terminal window (Cmder) shows the following command history:

```
C:\Users\Administrador\Desktop\projeto
λ ls
saboroso/

C:\Users\Administrador\Desktop\projeto
λ cd saboroso\

C:\Users\Administrador\Desktop\projeto\saboroso
λ ls
app.js bin/ package.json public/ routes/ views/

C:\Users\Administrador\Desktop\projeto\saboroso
λ
```

```
C:\Users\Administrador\Desktop\projeto
```

```
λ ls
```

```
saboroso/
```

```
C:\Users\Administrador\Desktop\projeto
```

```
λ cd saboroso\
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
```

```
λ ls
```

```
app.js bin/ package.json public/ routes/ views/
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
```

```
λ [ ]
```



Retornando ao prompt

```
C:\Users\Administrador\Desktop\projeto
λ ls
saboroso/

C:\Users\Administrador\Desktop\projeto
λ cd saboroso\

C:\Users\Administrador\Desktop\projeto\saboroso
λ ls
app.js  bin/  package.json  public/  routes/  views/
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ npm install
```



Em seguida, instalaremos as dependências. Ele irá ler o package.json, ver as dependências necessárias e fazer o download e instalar cada dependência, que ficará no node_modules

```
C:\Users\Administrador\Desktop\projeto
λ ls
saboroso/

C:\Users\Administrador\Desktop\projeto
λ cd saboroso\

C:\Users\Administrador\Desktop\projeto\saboroso
λ ls
app.js  bin/  package.json  public/  routes/  views/

C:\Users\Administrador\Desktop\projeto\saboroso
λ npm install

added 54 packages, and audited 55 packages in 5s

7 vulnerabilities (2 moderate, 4 high, 1 critical)

To address issues that do not require attention, run:
  npm audit fix

To address all issues (including breaking changes), run:
  npm audit fix --force

Run `npm audit` for details.

C:\Users\Administrador\Desktop\projeto\saboroso
λ
```

Resultado positivo das instalações executadas



```
C:\Users\Administrador\Desktop\projeto
λ ls
saboroso/

C:\Users\Administrador\Desktop\projeto
λ cd saboroso\

C:\Users\Administrador\Desktop\projeto\saboroso
λ ls
app.js  bin/  package.json  public/  routes/  views/

C:\Users\Administrador\Desktop\projeto\saboroso
λ npm install

added 54 packages, and audited 55 packages in 5s

7 vulnerabilities (2 moderate, 4 high, 1 critical)

To address issues that do not require attention, run:
  npm audit fix

To address all issues (including breaking changes), run:
  npm audit fix --force

Run `npm audit` for details.

C:\Users\Administrador\Desktop\projeto\saboroso
λ set DEBUG=saboroso:* & npm start
```

Em seguida, iremos subir o servidor definindo uma variável de ambiente usando `set DEBUG` e com o `&`, executamos um segundo comando `npm start` para subir o serviço.

```
λ ls  
saboroso/  
  
C:\Users\Administrador\Desktop\projeto  
λ cd saboroso\  
  
C:\Users\Administrador\Desktop\projeto\saboroso  
λ ls  
app.js bin/ package.json public/ routes/ views/  
  
C:\Users\Administrador\Desktop\projeto\saboroso  
λ npm install
```

added 54 packages, and audited 55 packages in 5s

7 vulnerabilities (2 moderate, 4 high, 1 critical)

To address issues that do not require attention, run:
npm audit fix

To address all issues (including breaking changes), run:
npm audit fix --force


Run `npm audit` for details.


```
C:\Users\Administrador\Desktop\projeto\saboroso  
λ set DEBUG=saboroso:* & npm start  
  
> saboroso@0.0.0 start  
> node ./bin/www
```

saboroso:server Listening on port 3000 +0ms


Irá disponibilizar a porta 3000 (que é a padrão)




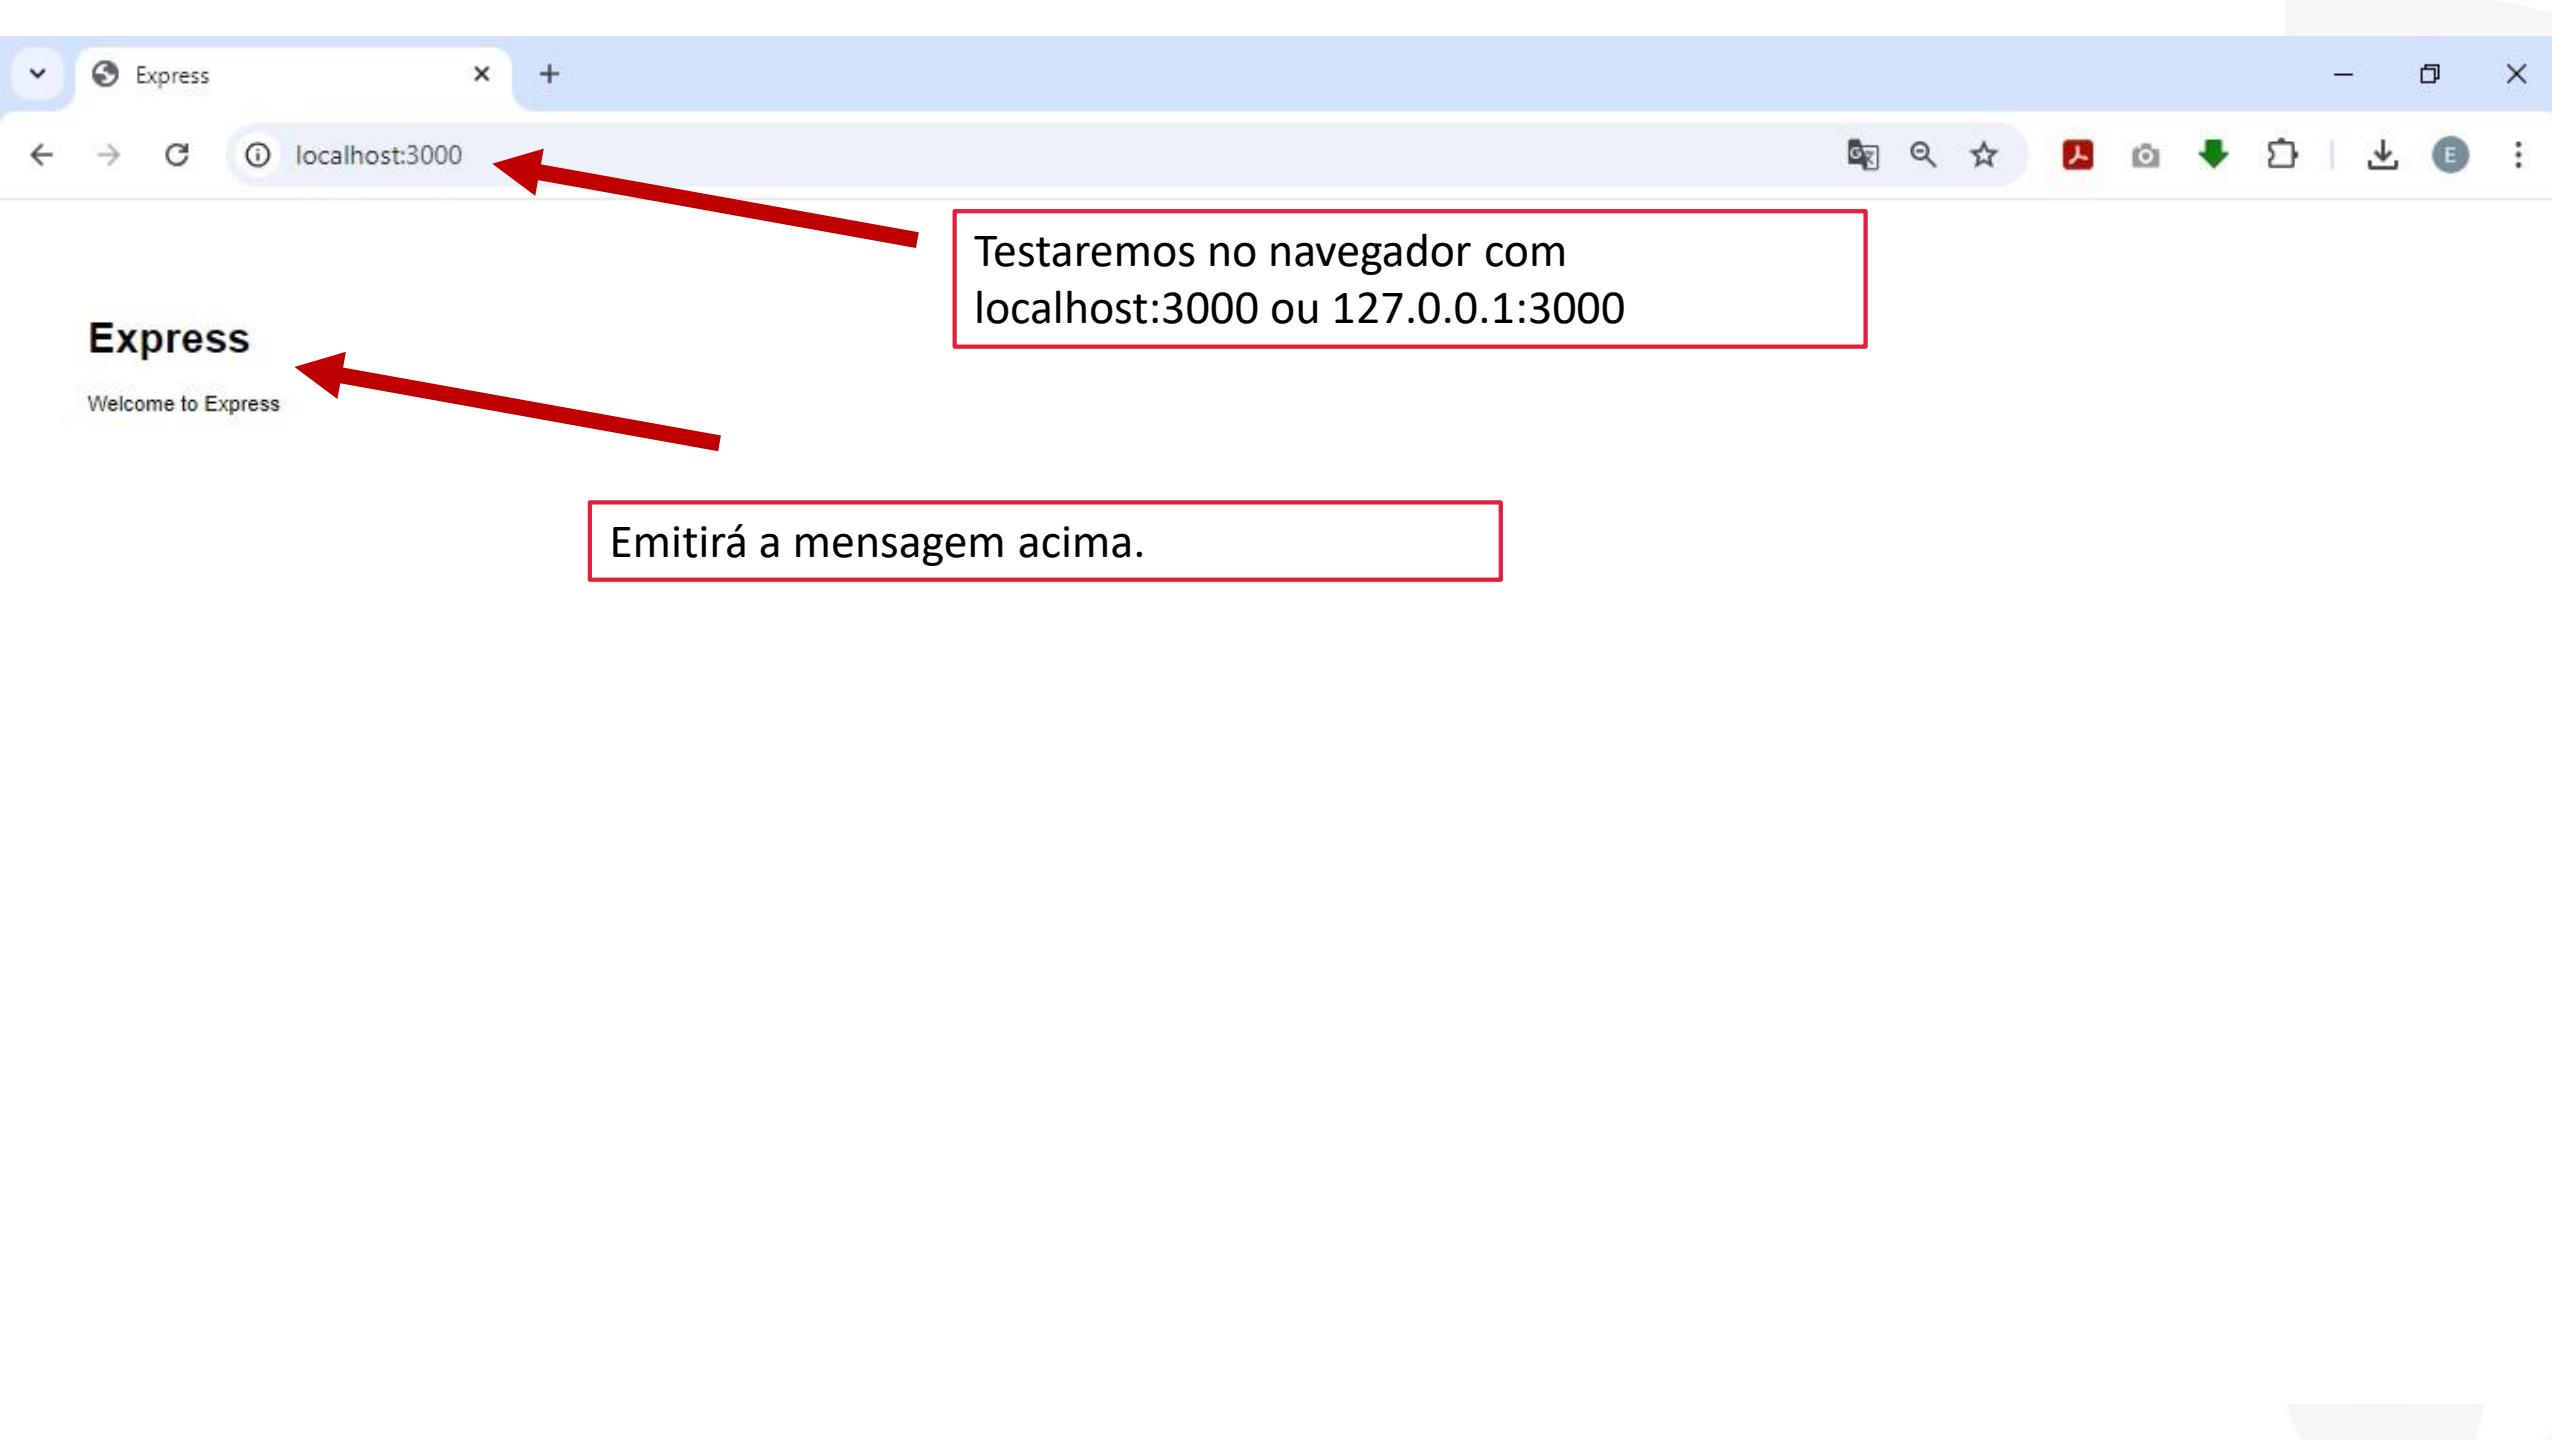






Em seguida, copiaremos todos os arquivos e pastas que foram utilizados na etapa anterior do projeto (frontend)

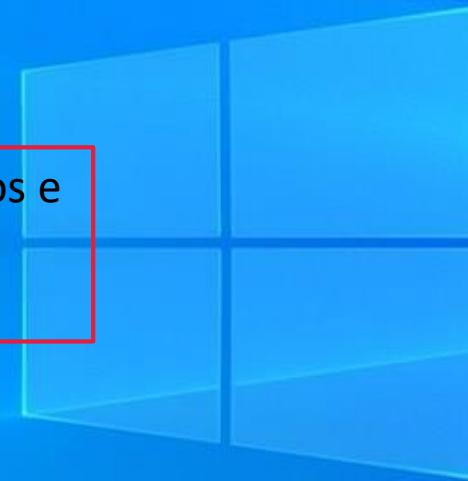


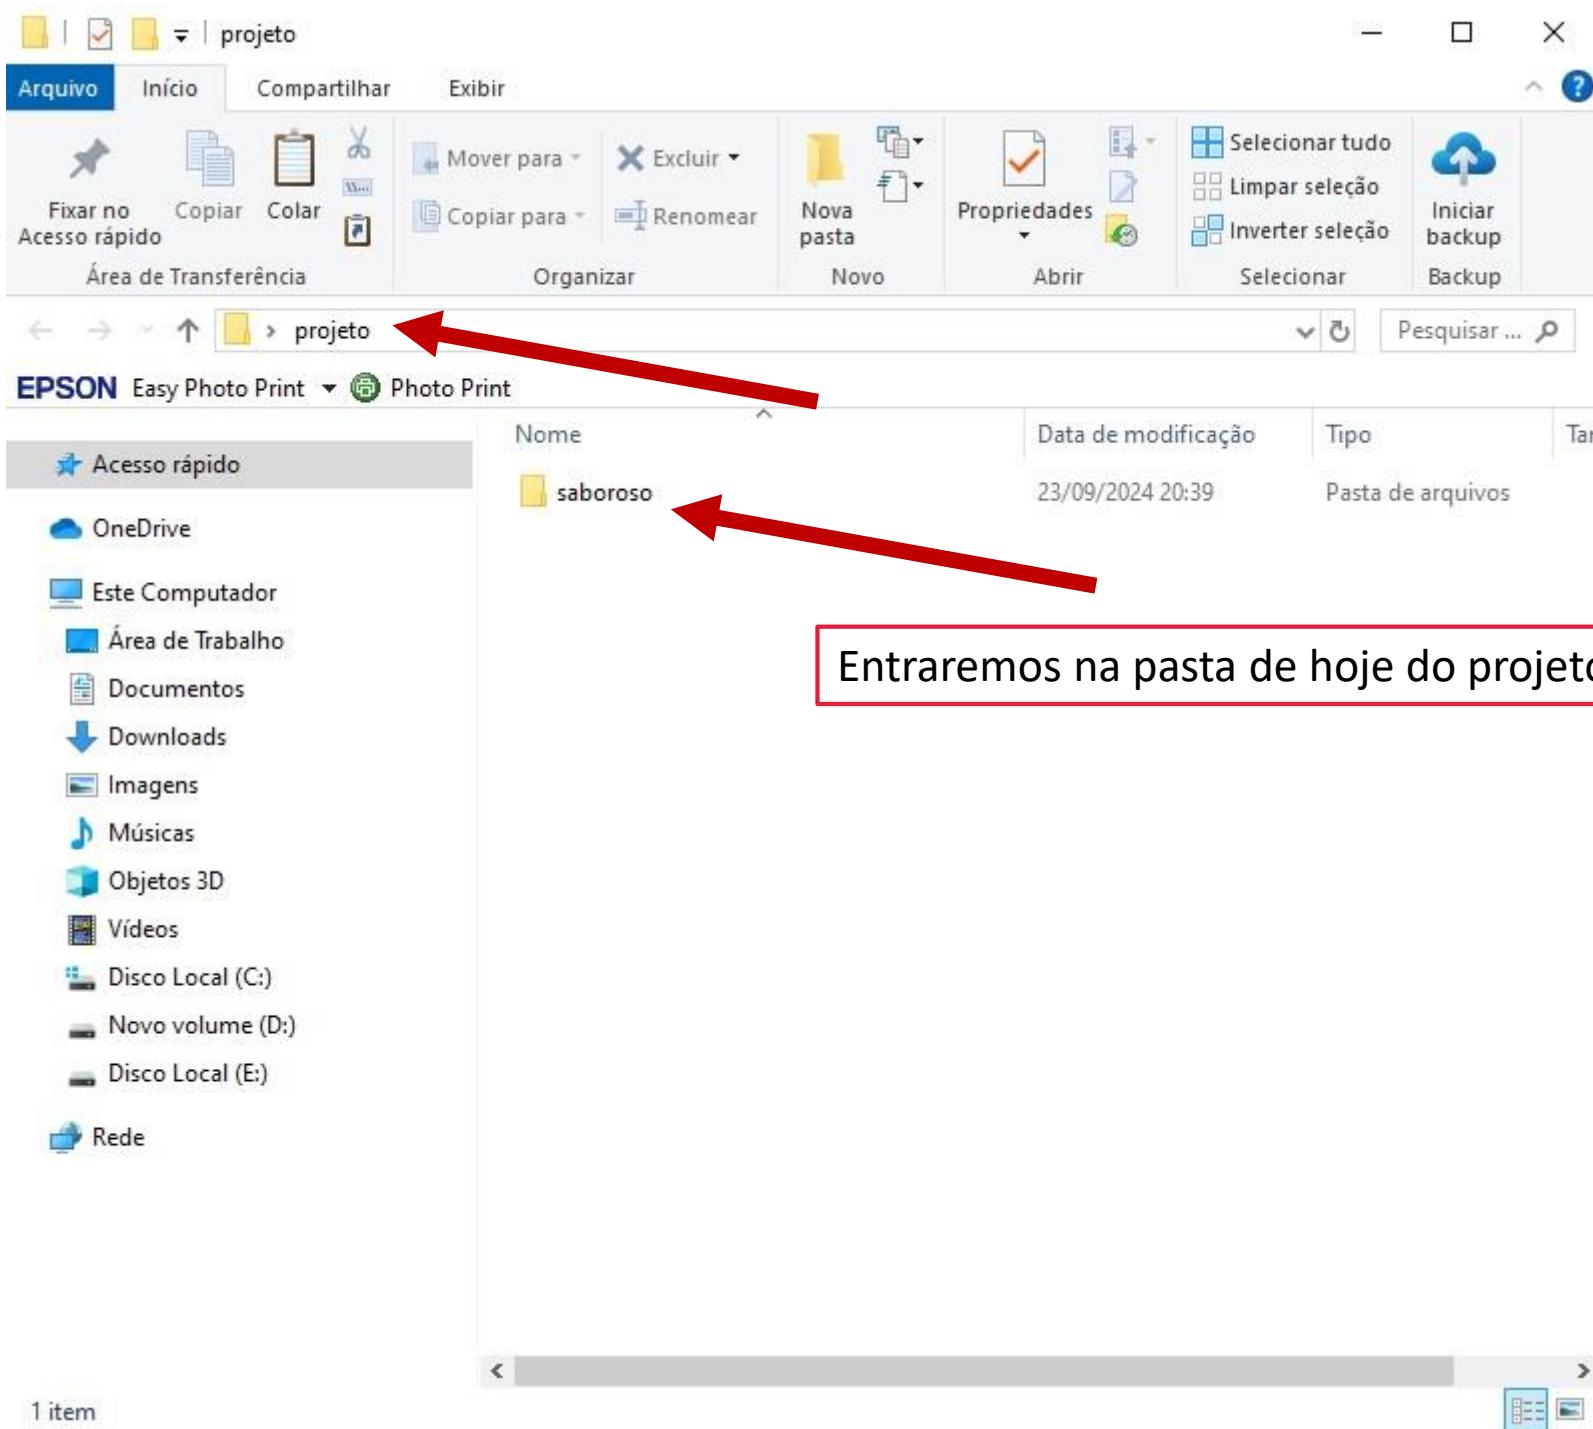


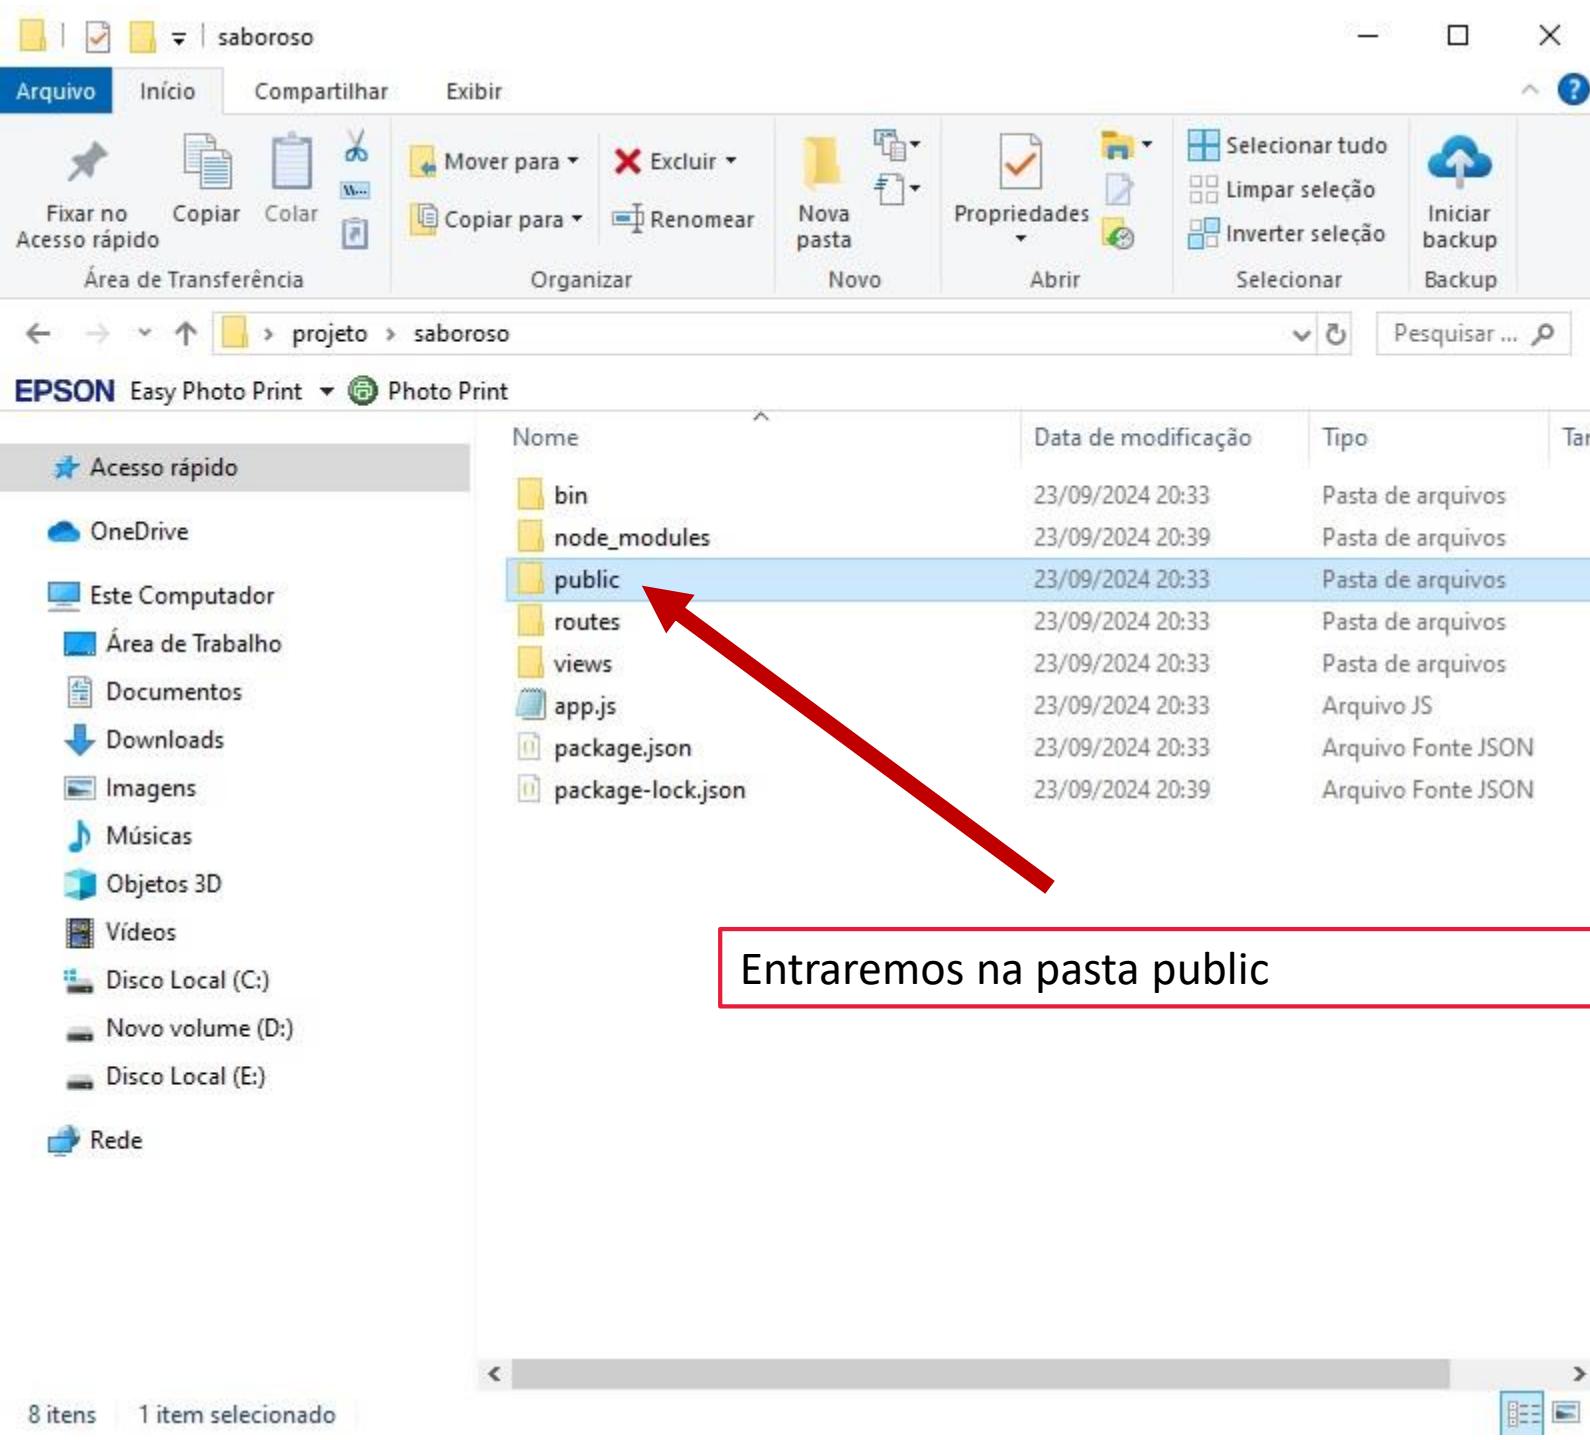




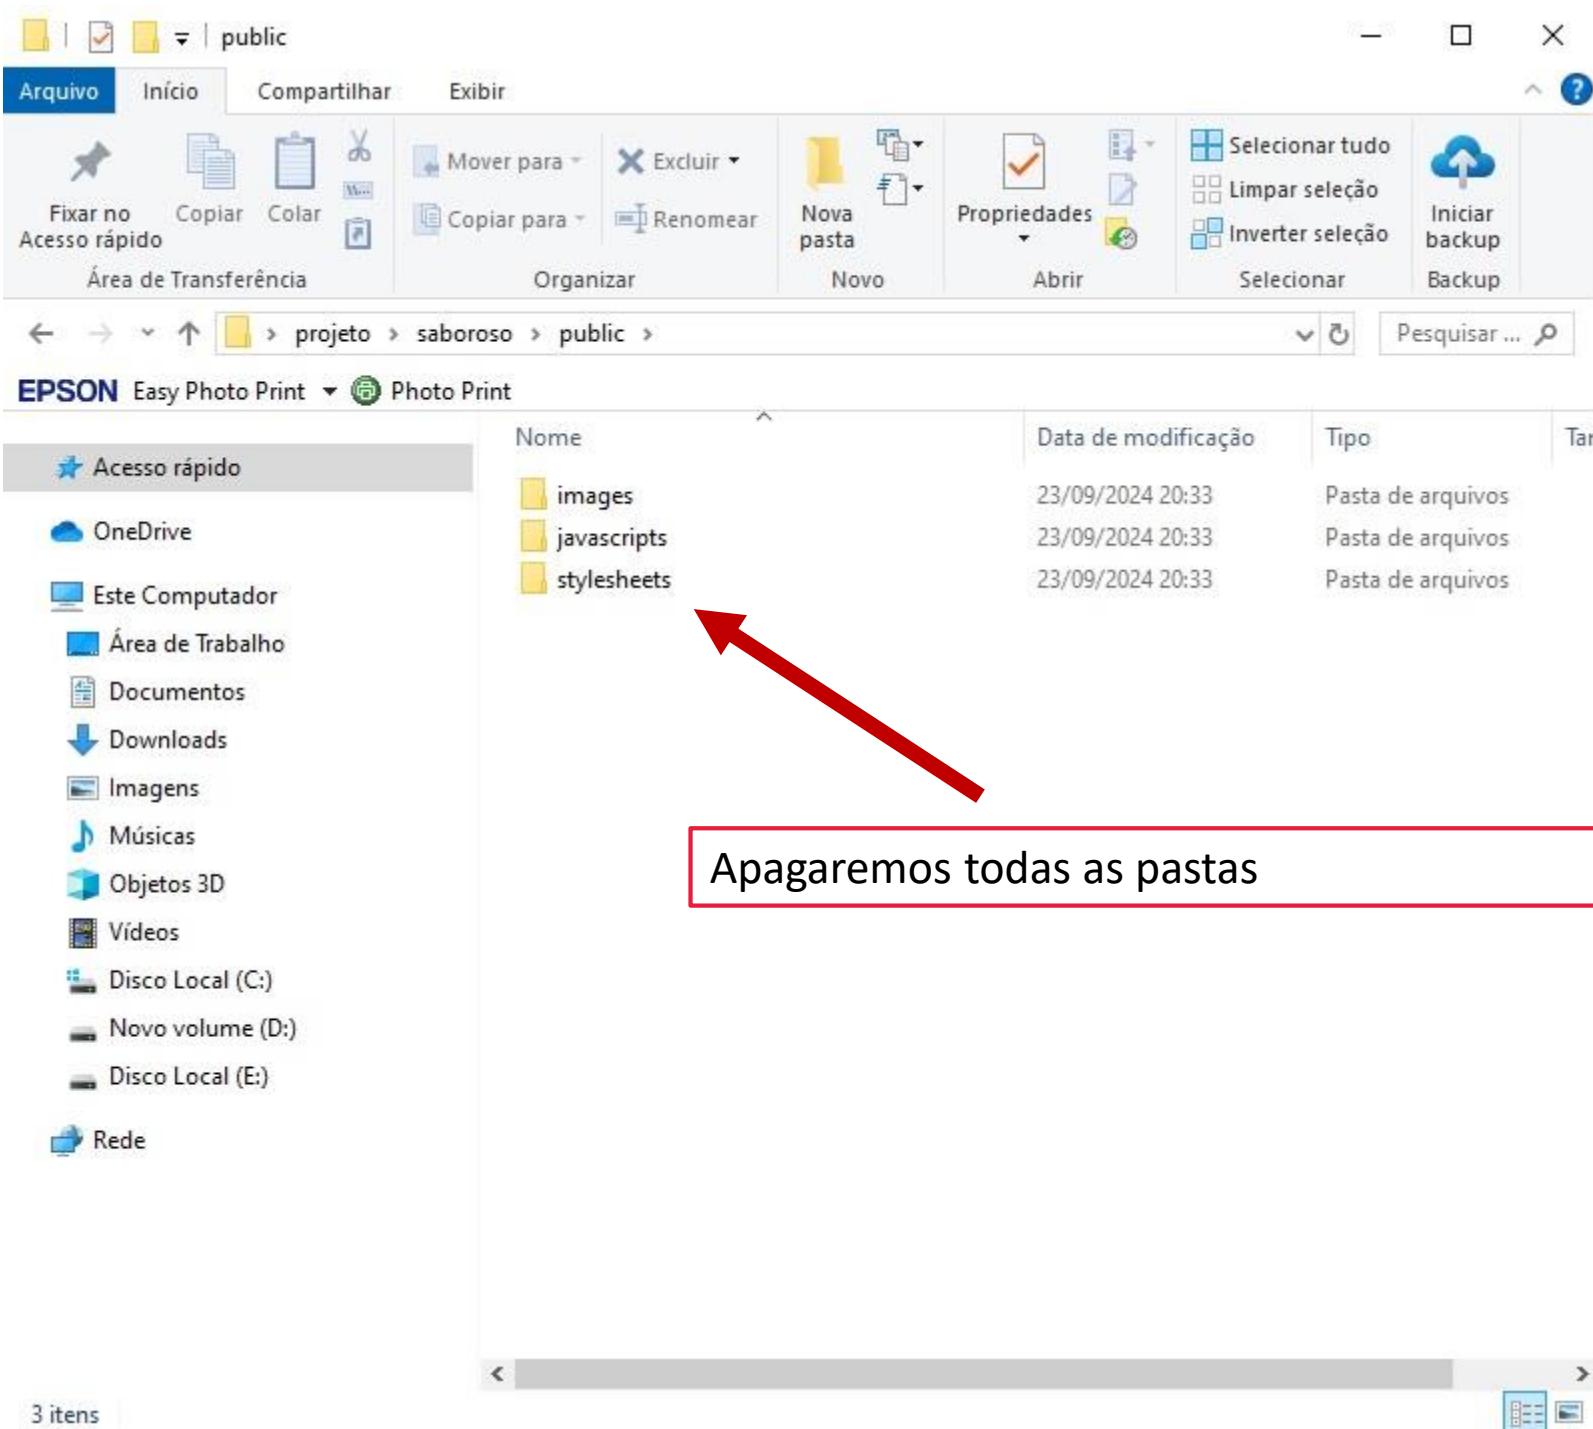


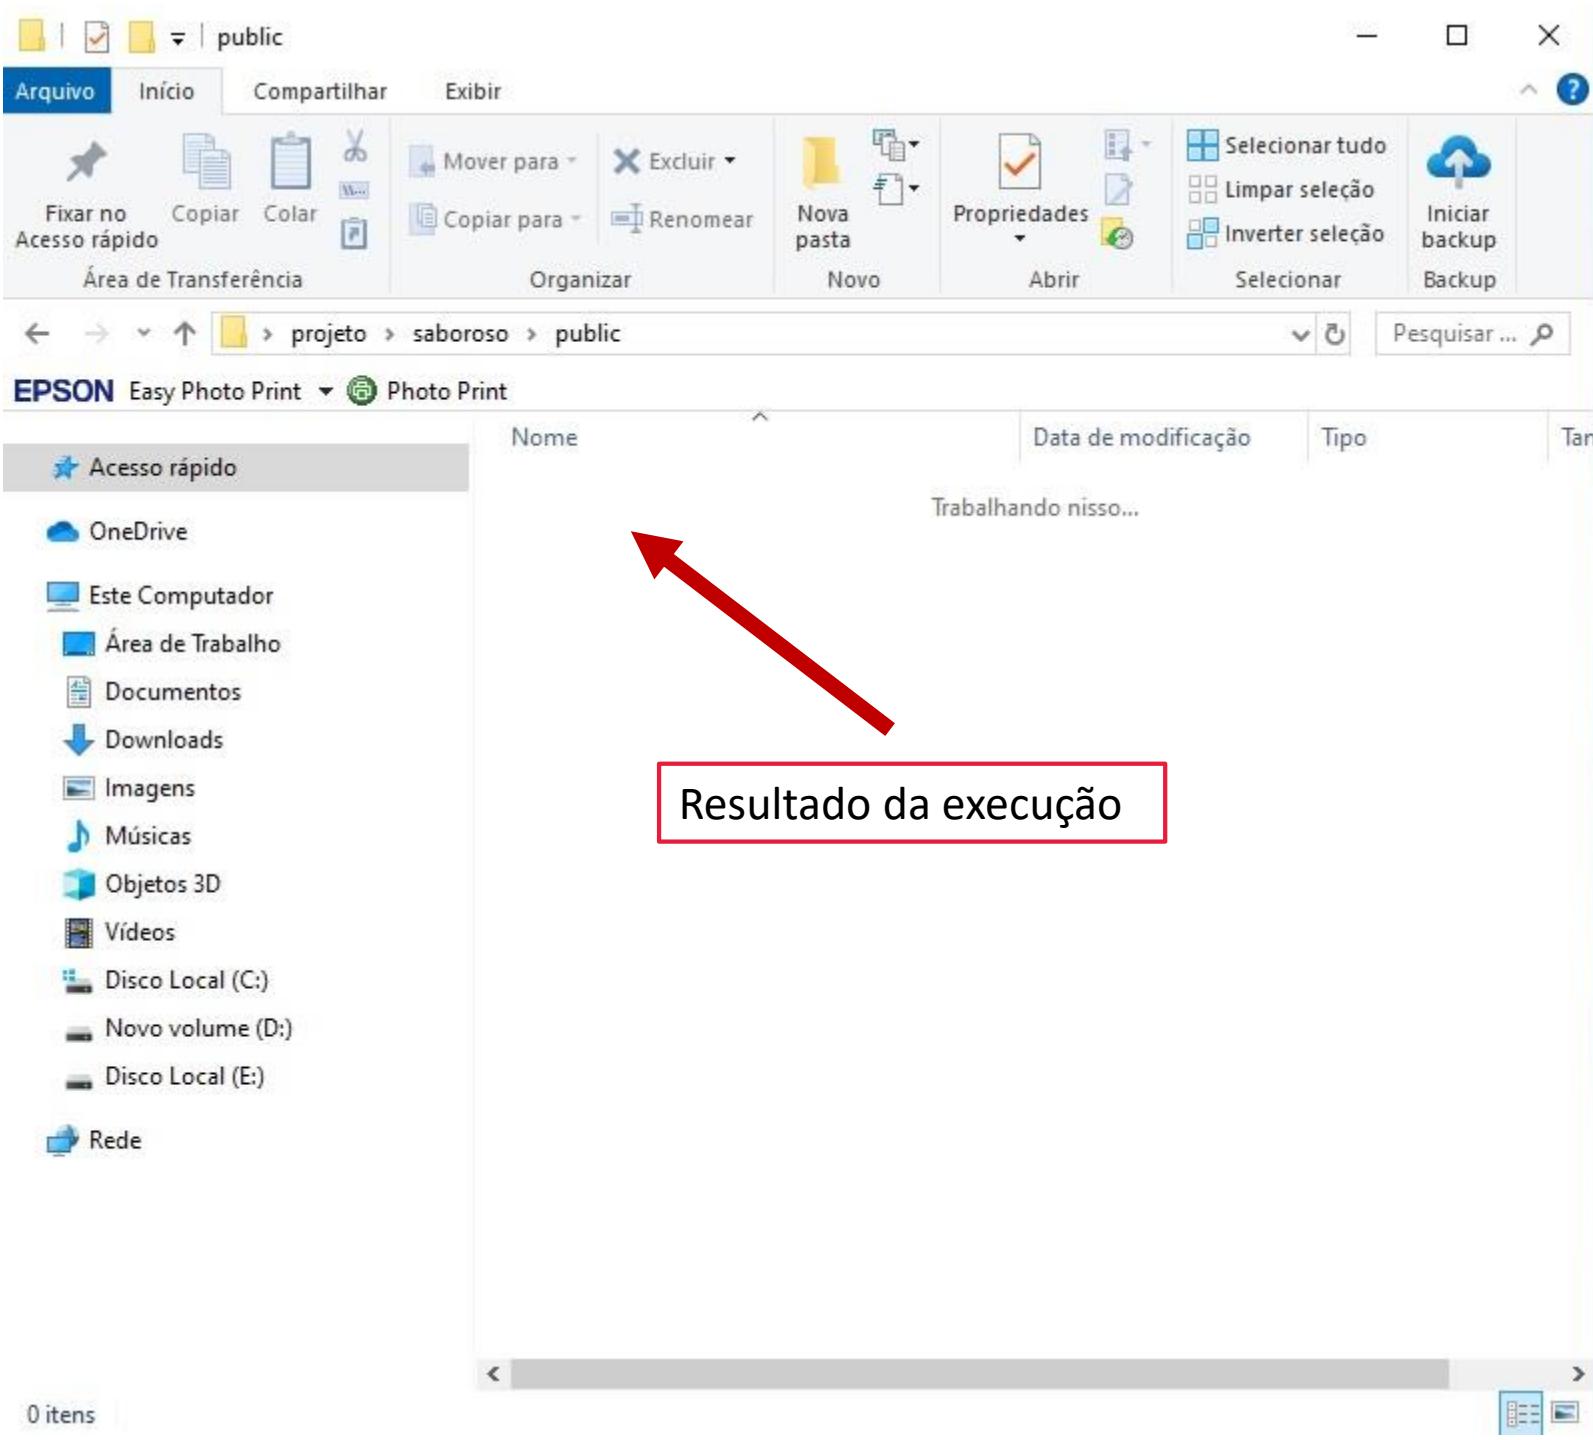

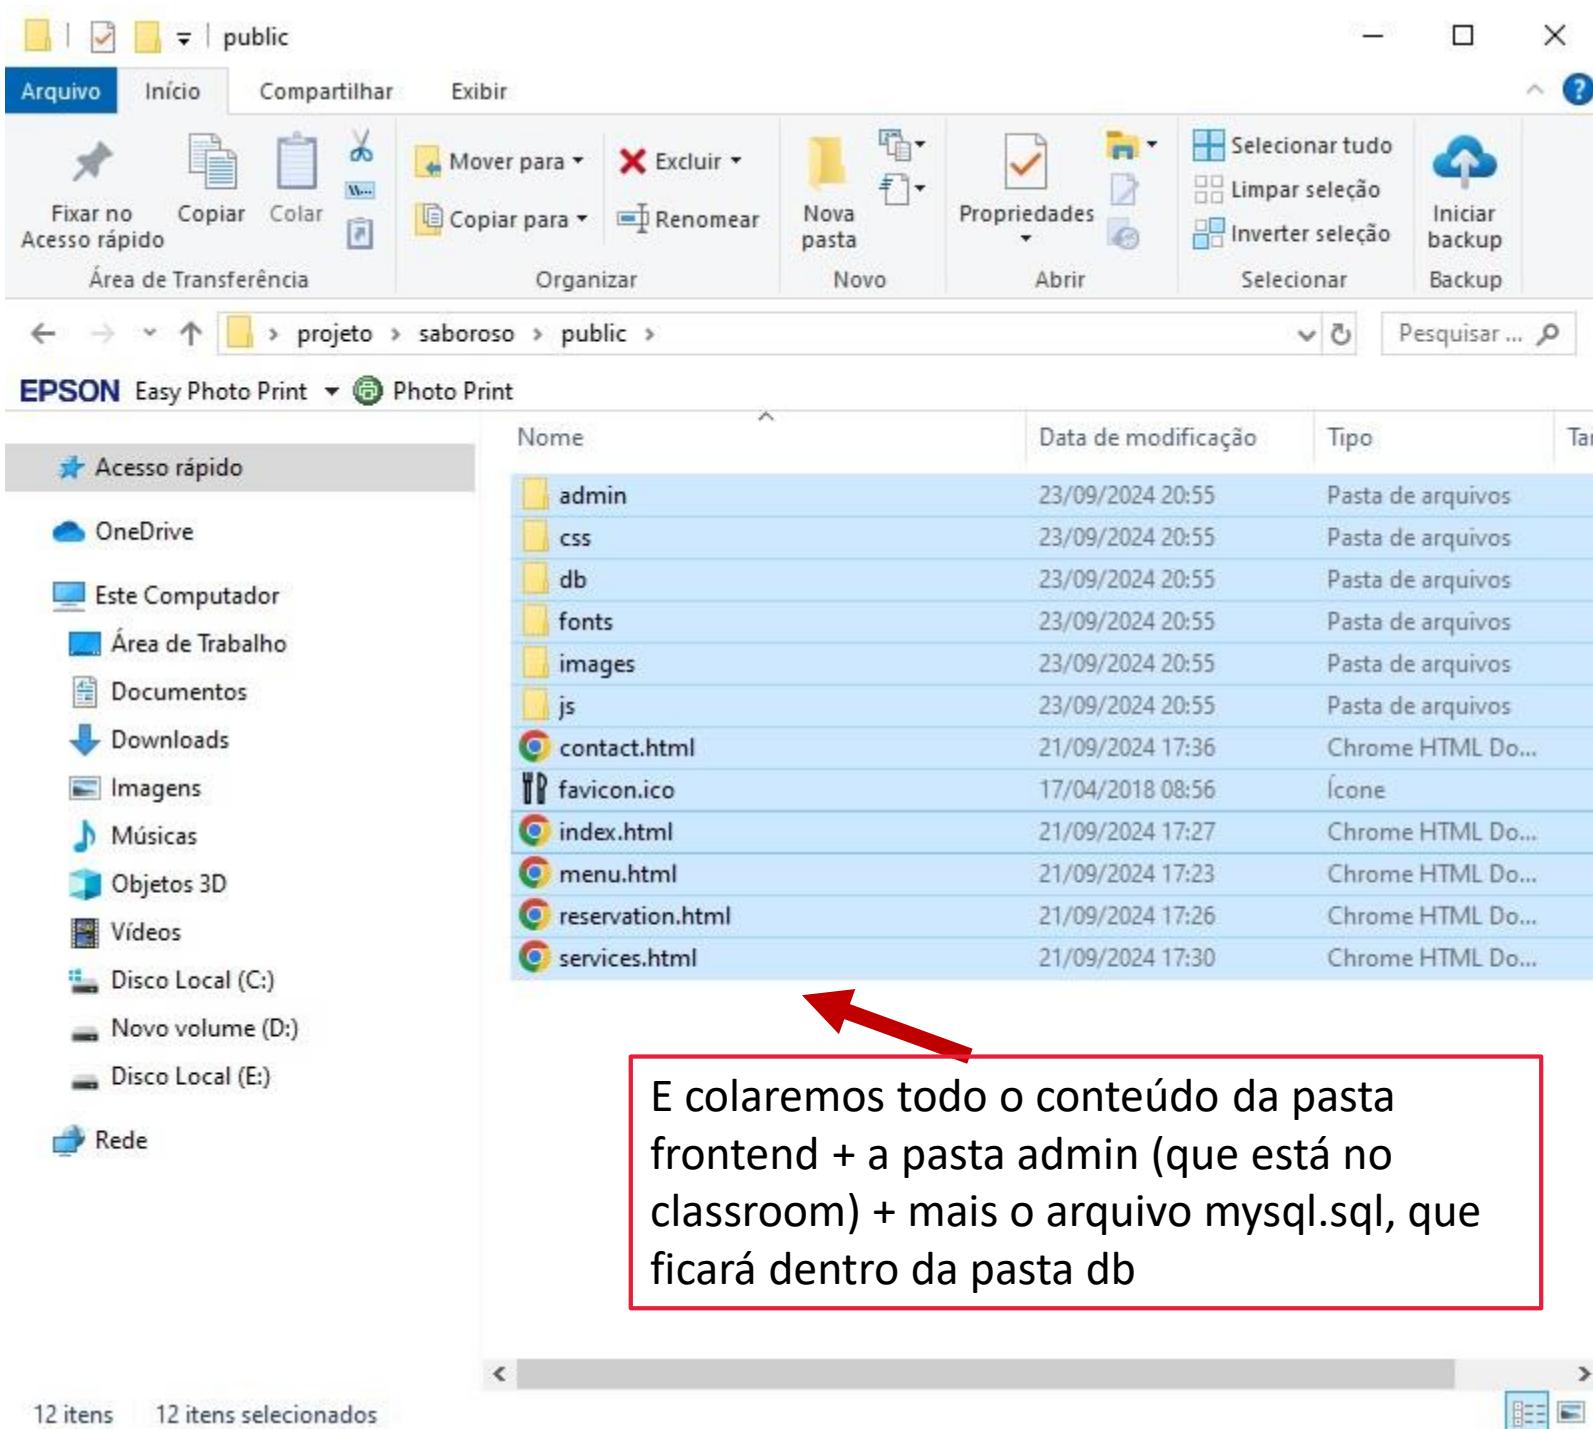


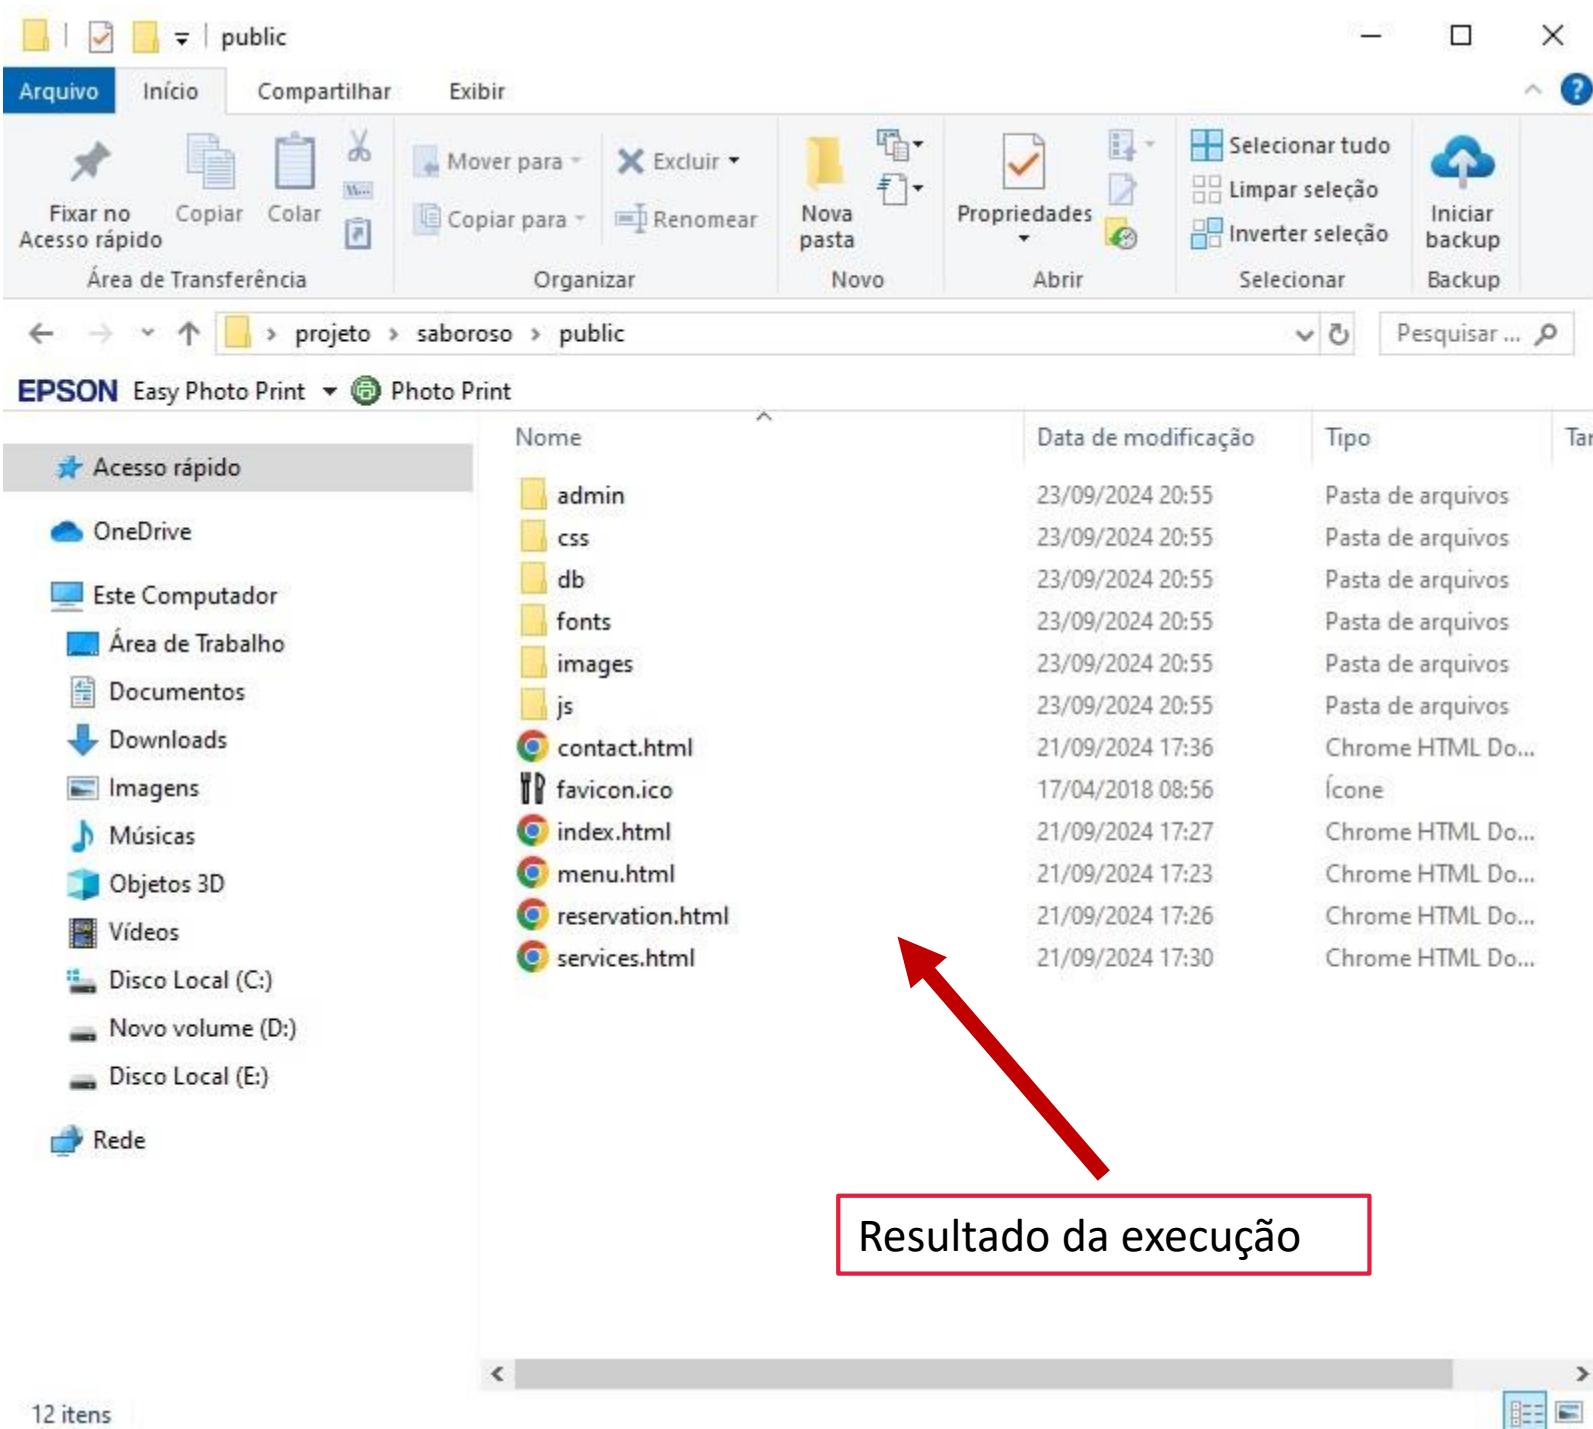


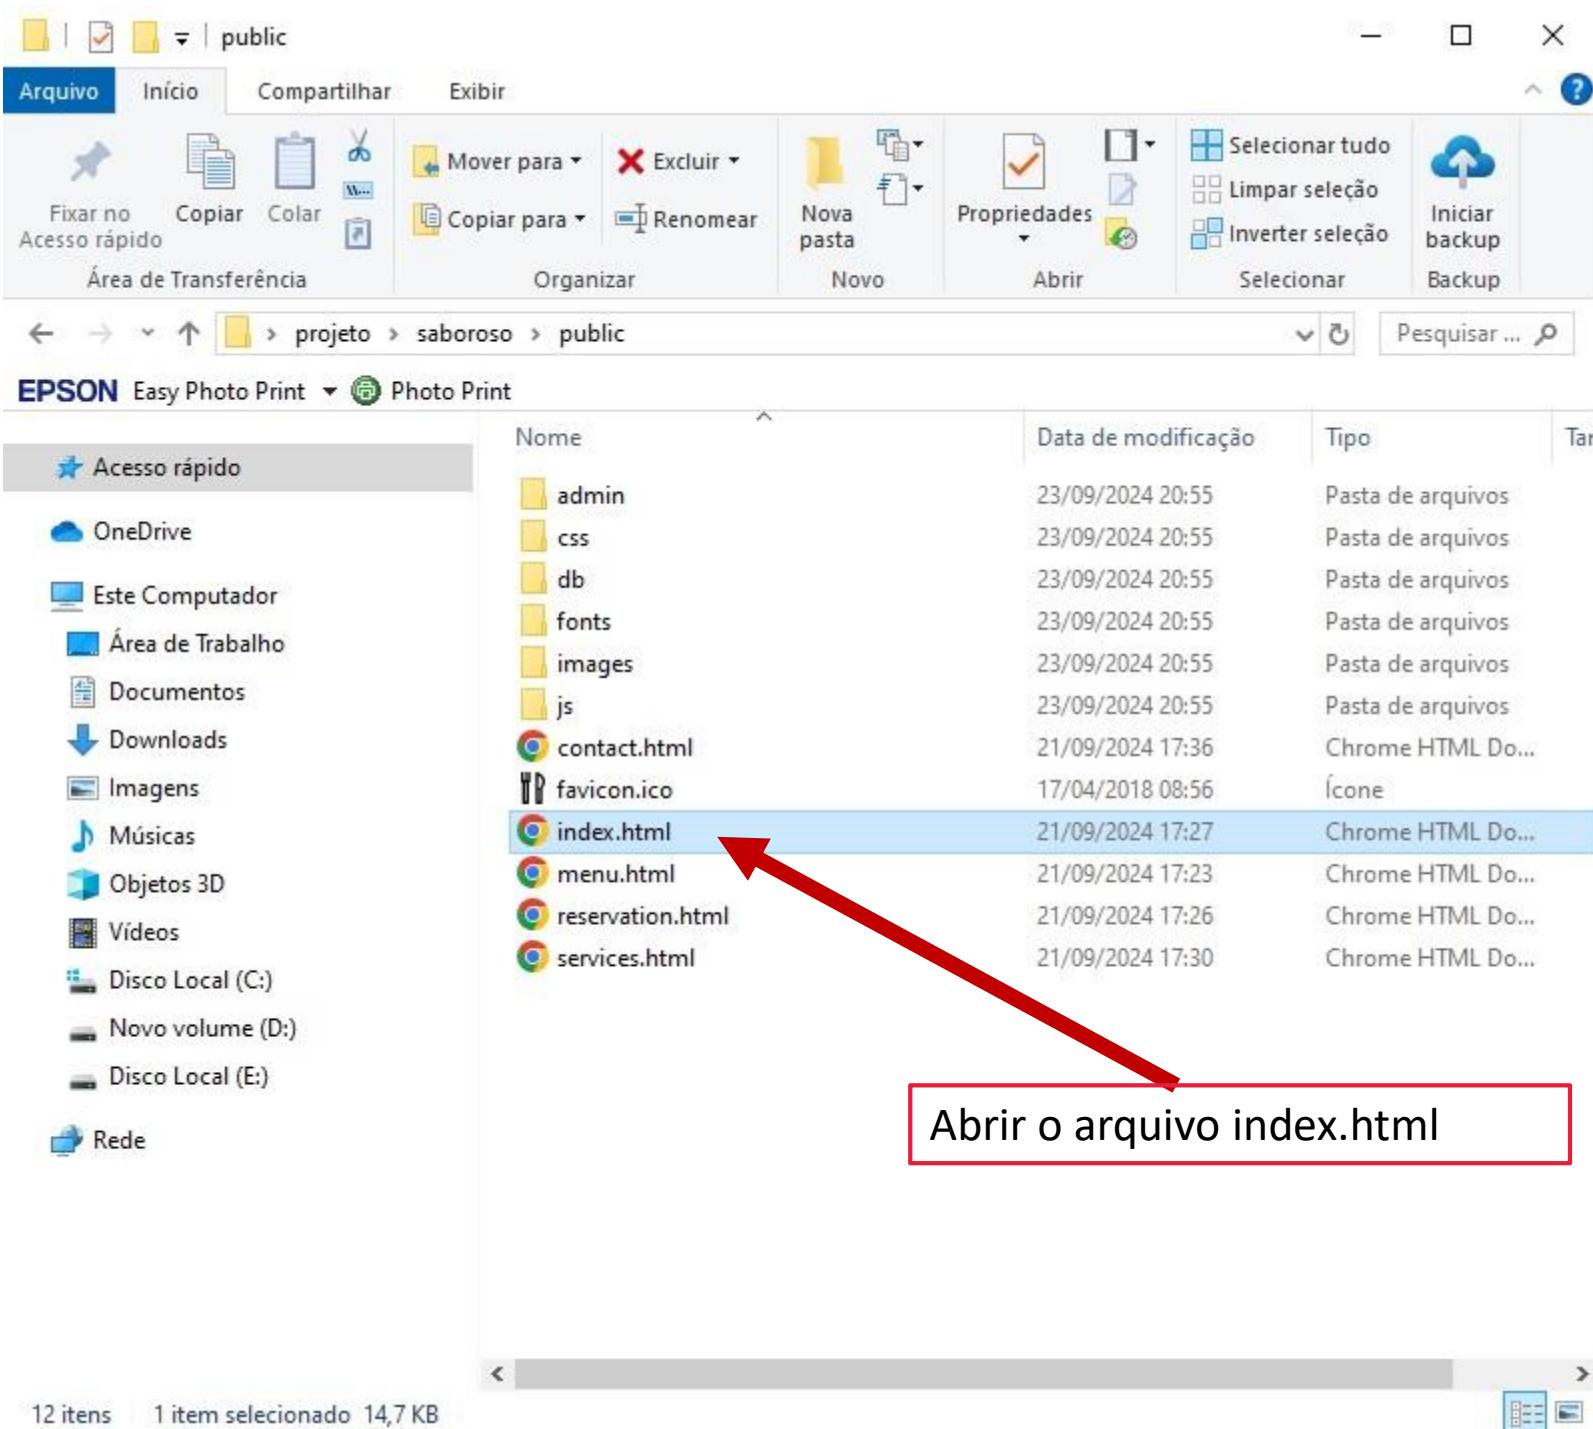

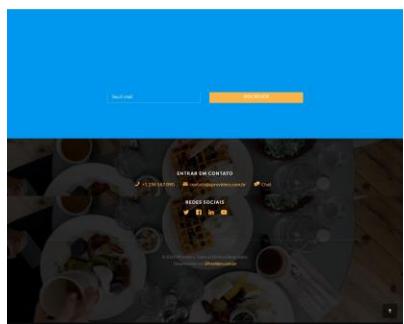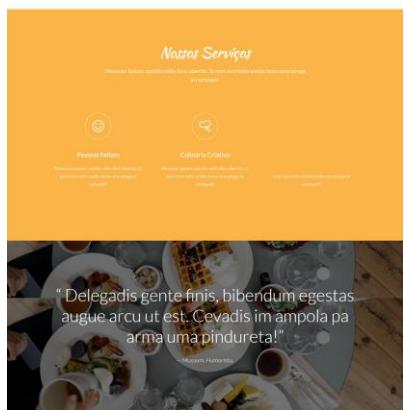

Resultado da execução

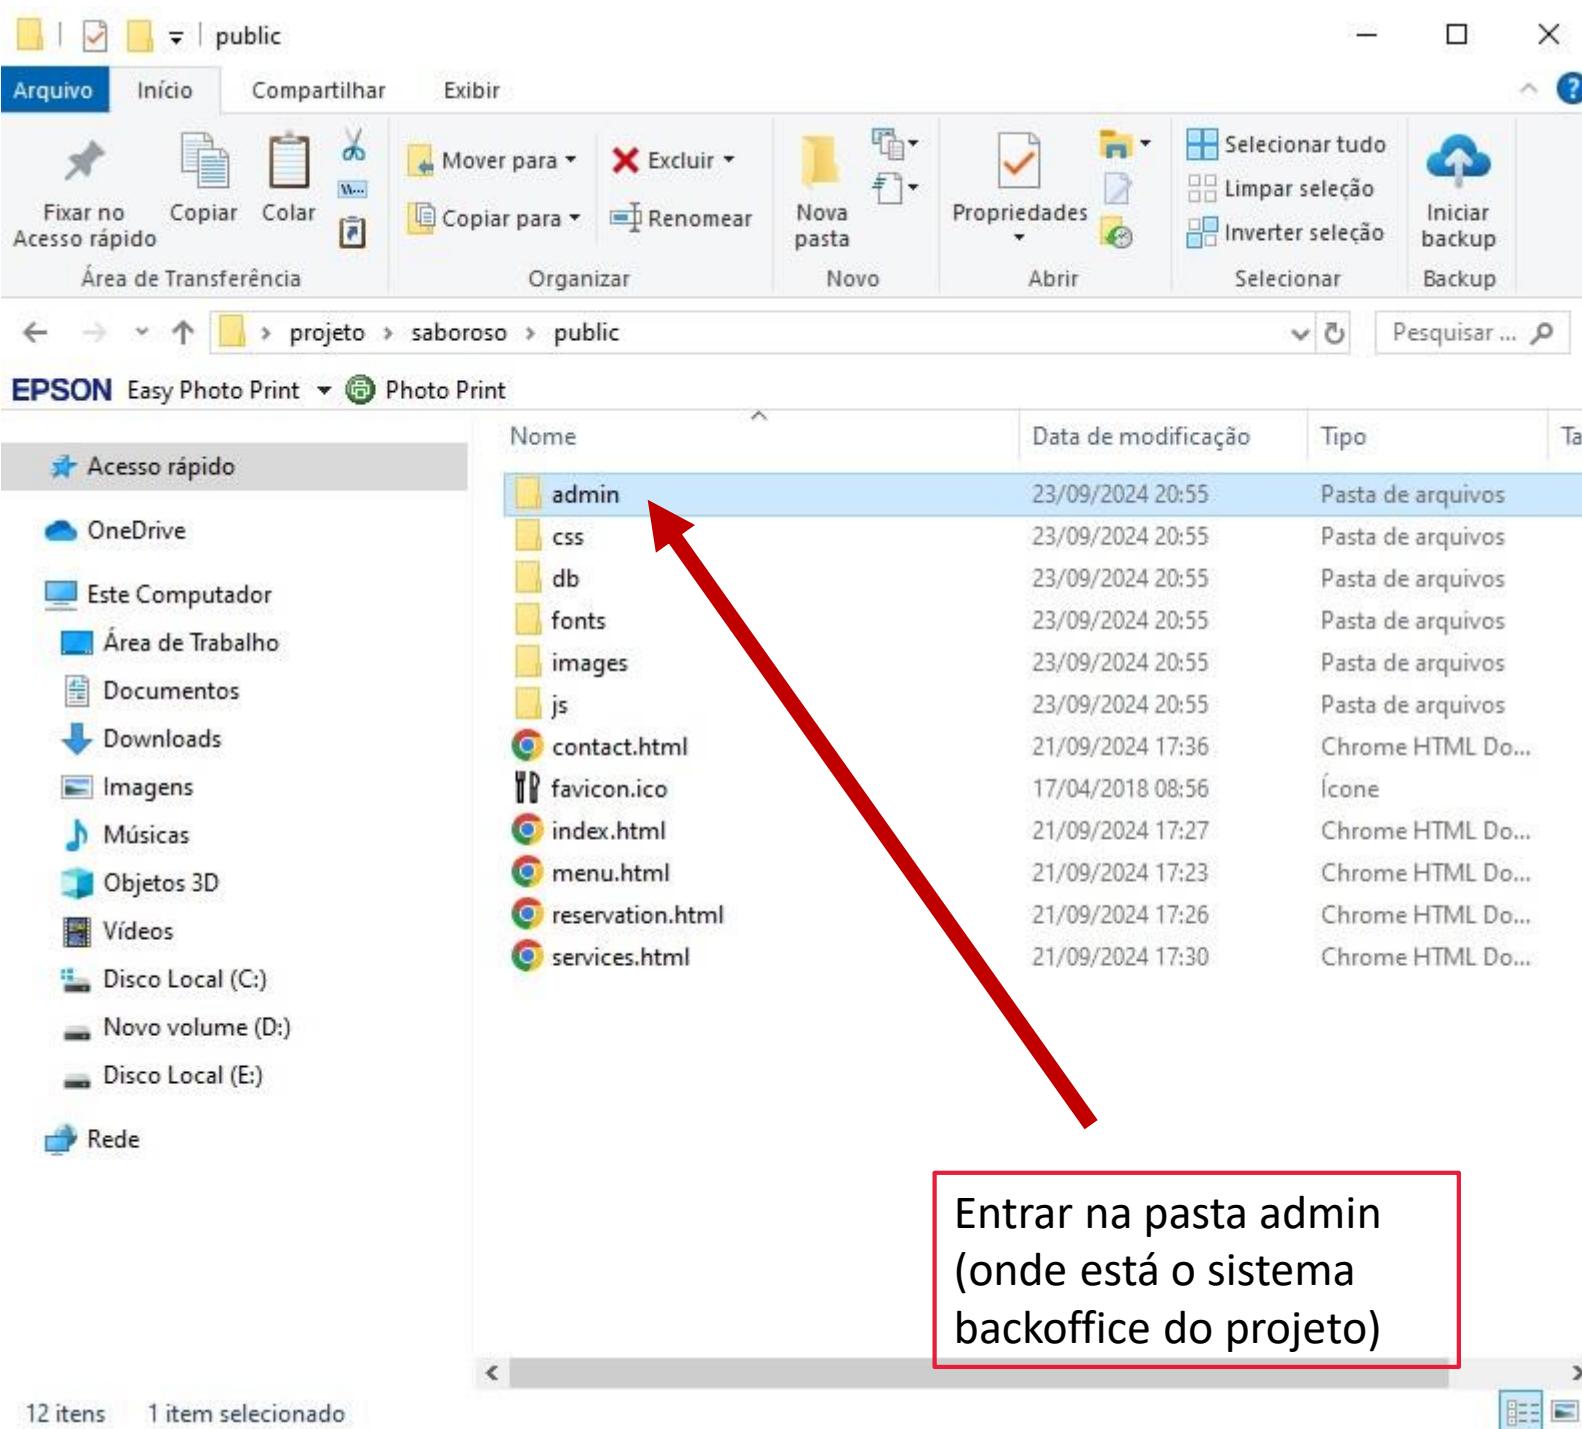

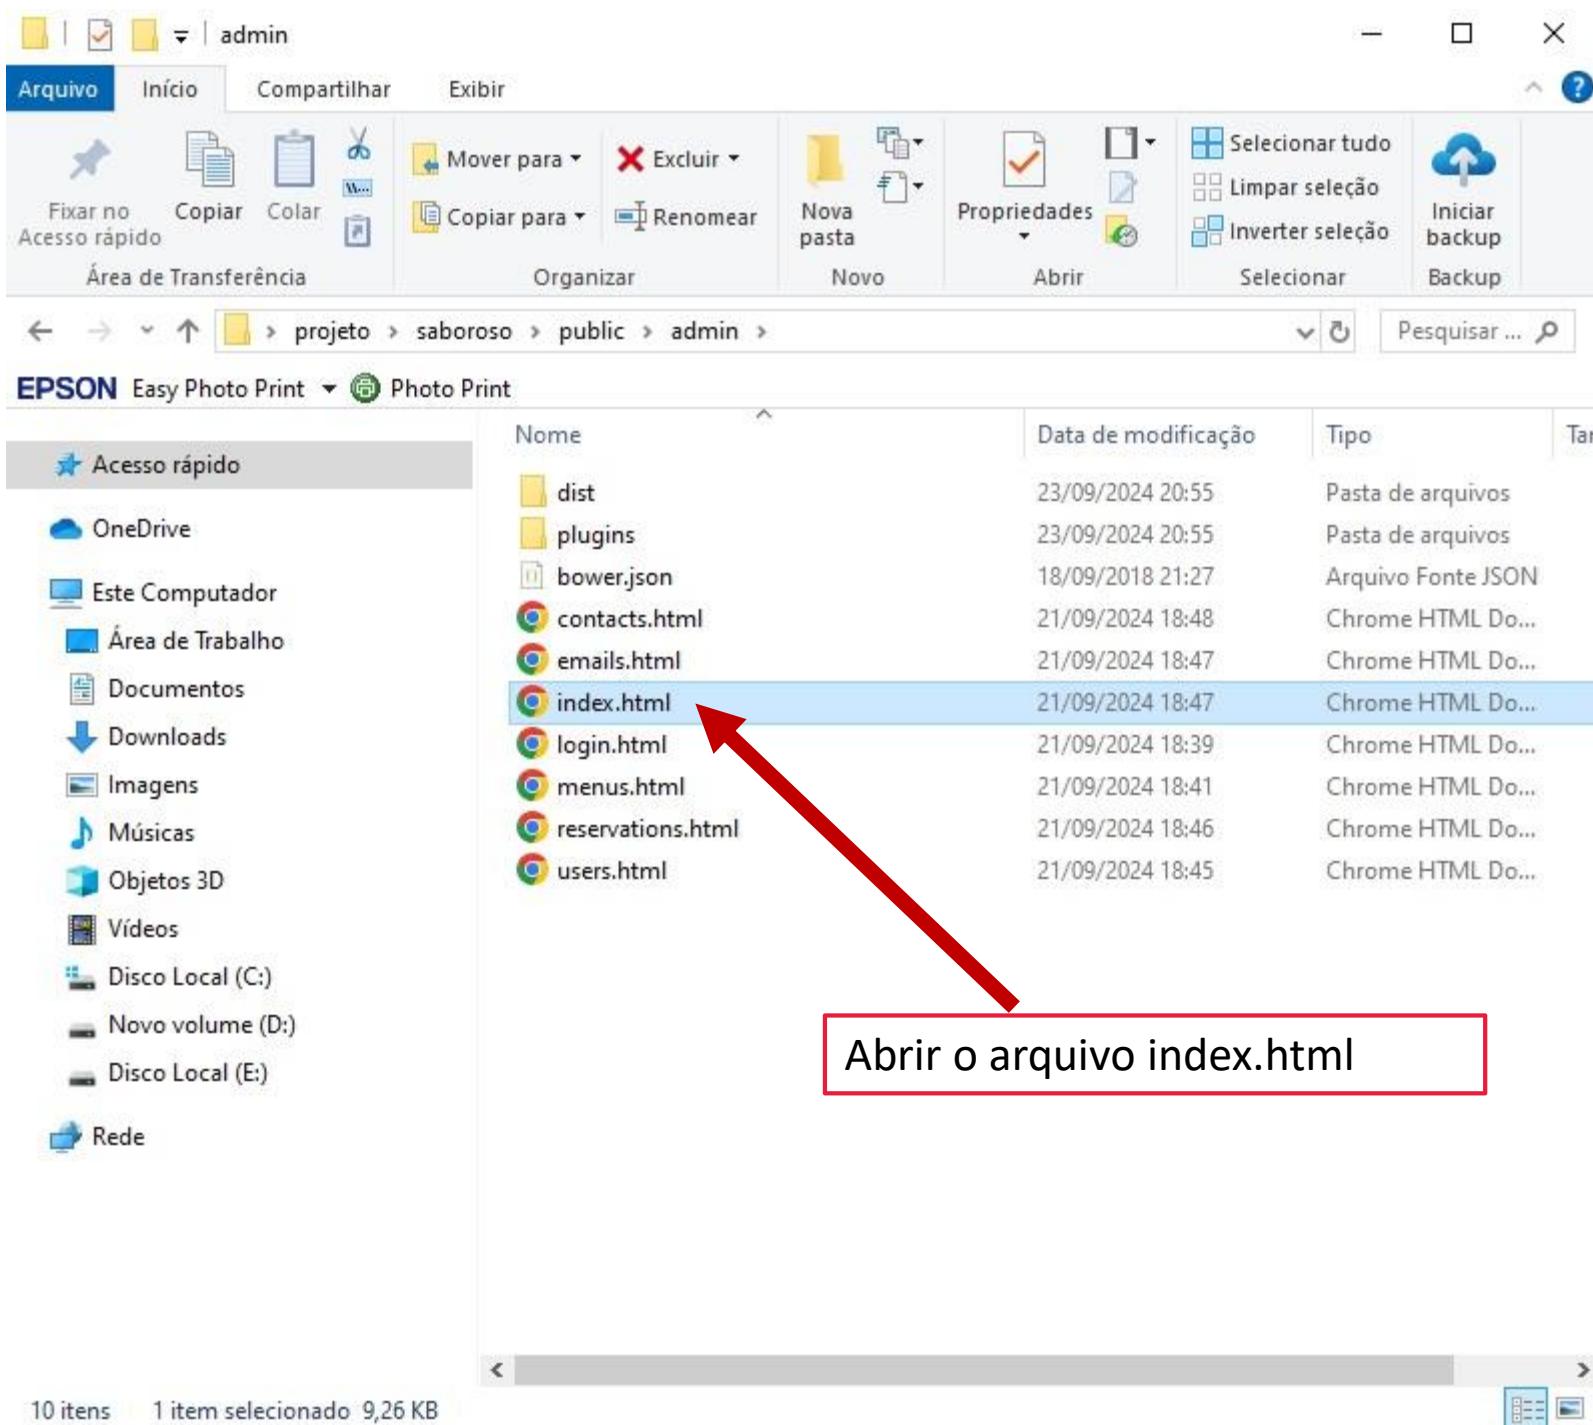



MENU

[Tela Inicial](#)[Menu](#)[Reservas](#)[Contatos](#)[Usuários](#)[E-mails](#)

Tela Inicial



RESERVAS
90



CONTATOS
41



MENU
3




USUÁRIOS
2

[Perfil](#)
[Sair](#)

Visualizaremos uma prévia do
backoffice



Fulano Junior
fulano@sproviders.com.br

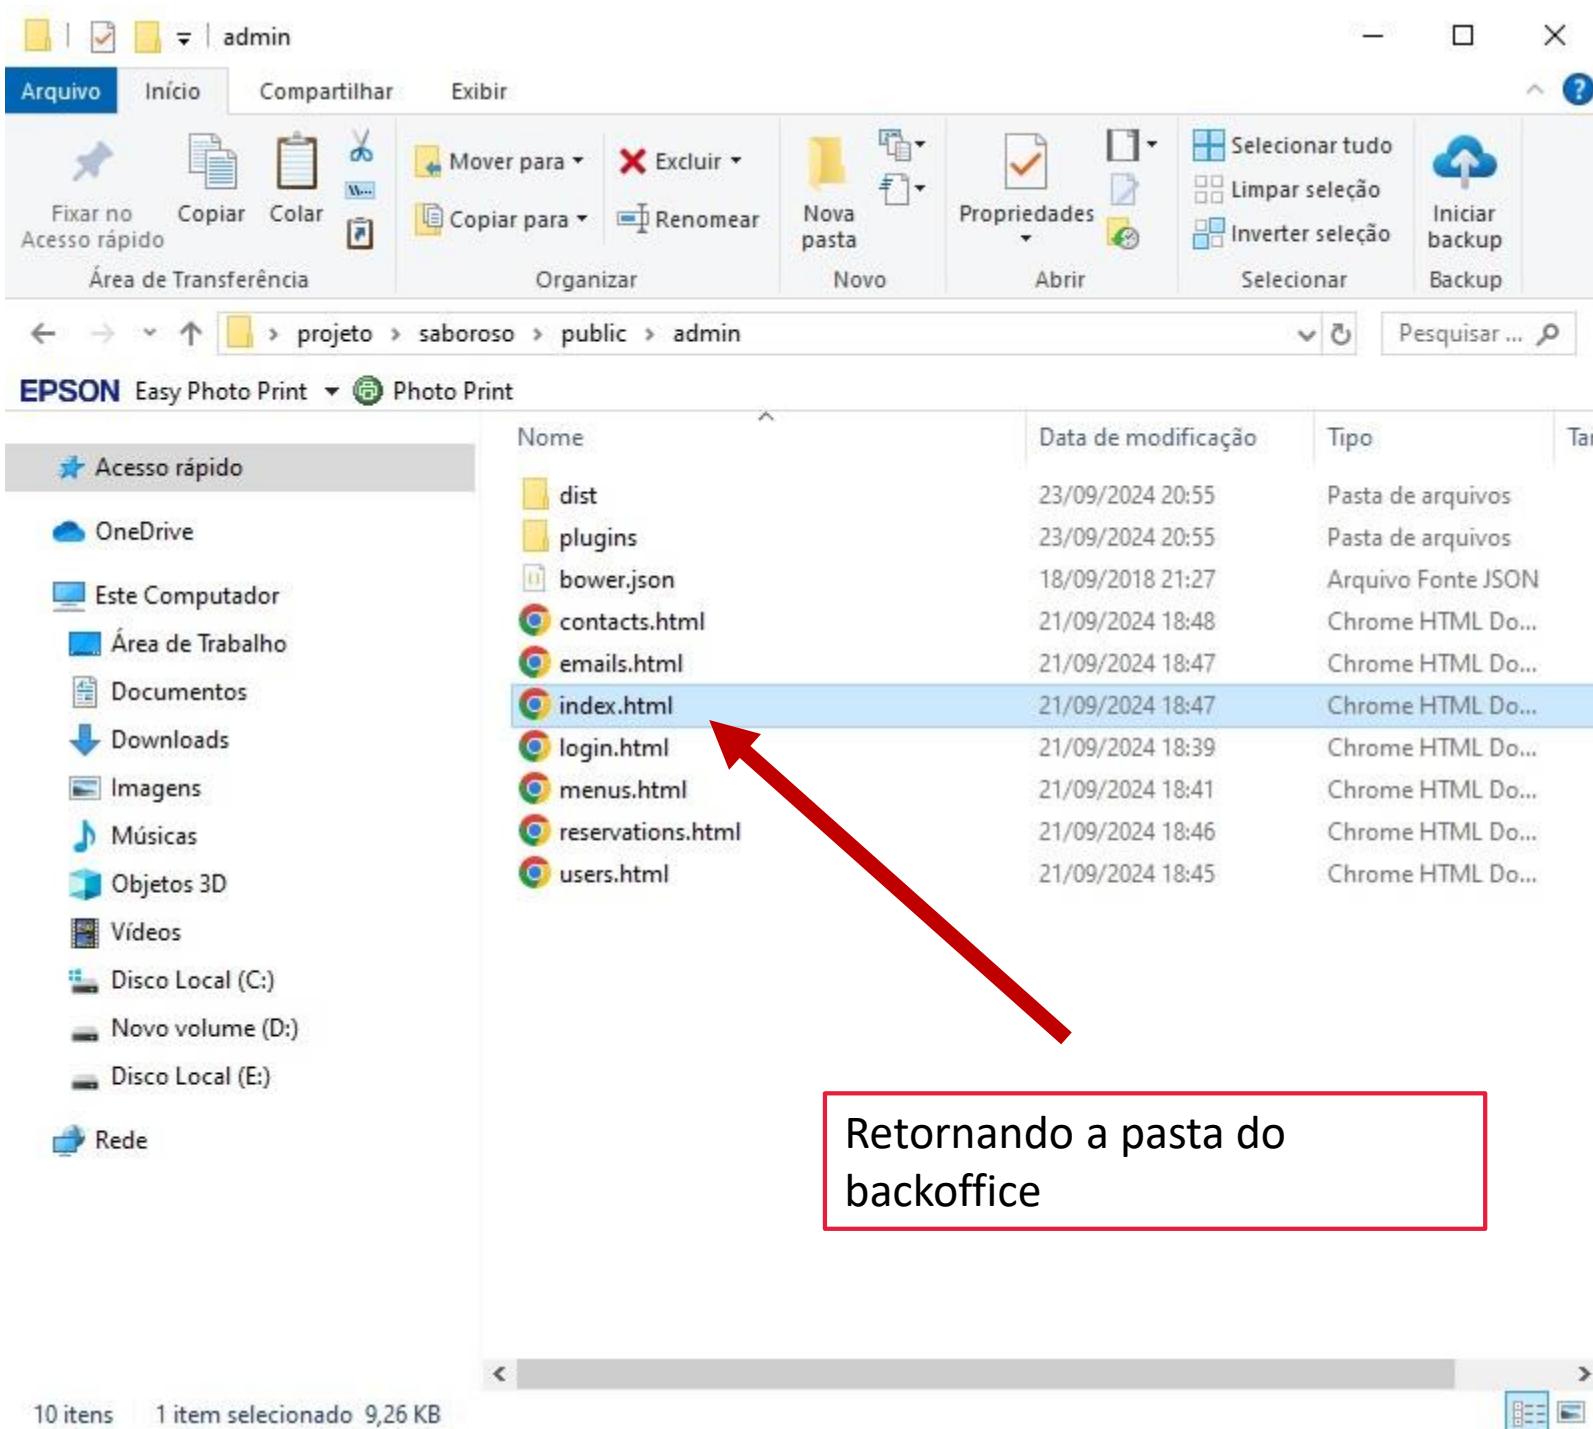

```
C:\Users\Administrador\Desktop\projeto
λ cd saboroso\

C:\Users\Administrador\Desktop\projeto\saboroso
λ ls
app.js  bin/  package.json  public/  routes/  views/

C:\Users\Administrador\Desktop\projeto\saboroso
λ npm install

added 54 packages, and audited 55 packages in 5s

7 vulnerabilities (2 moderate, 4 high, 1 critical)

To address issues that do not require attention, run:
  npm audit fix

To address all issues (including breaking changes), run:
  npm audit fix --force

Run `npm audit` for details.
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ set DEBUG=saboroso:* & npm start
```

```
> saboroso@0.0.0 start
> node ./bin/www

  saboroso:server Listening on port 3000 +0ms
GET / 200 19.015 ms - 207
GET /stylesheets/style.css 200 6.010 ms - 111
GET /favicon.ico 404 3.017 ms - 1173
```

```
node.exe
```

No CMDER, iremos abrir uma nova sessão



```
C:\Users\Administrador\Desktop\projeto
λ cd saboroso\
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ ls
app.js  bin/  package.json  public/  routes/  views/
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ npm install
```

```
added 54 packages, and audited 55 packages in 5s
```

```
7 vulnerabilities (2 moderate, 4 high, 1 critical)
```

```
To address issues that do not require attention,
npm audit fix
```


```
To address all issues (including breaking changes)
npm audit fix --force
```

```
Run `npm audit` for details.
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ set DEBUG=saboroso:* & npm start
```

```
> saboroso@0.0.0 start
> node ./bin/www
```

```
saboroso:server Listening on port 3000 +0ms
GET / 200 19.015 ms - 207
GET /stylesheets/style.css 200 6.010 ms - 111
GET /favicon.ico 404 3.017 ms - 1173
```

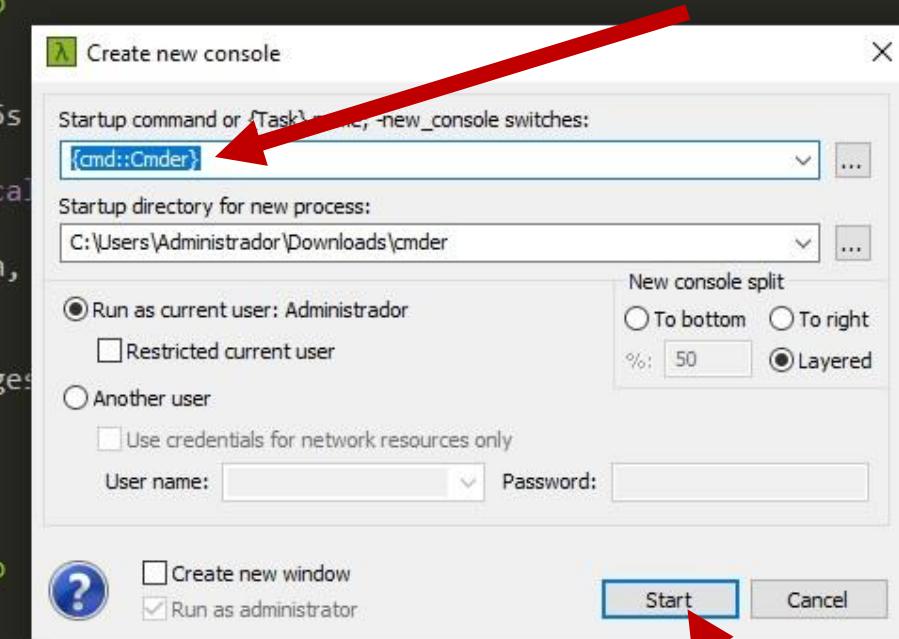

Manter as informações conforme a tela e iniciar

C:\Users\Administrador\Downloads\cmder
λ |

Está no caminho padrão

Teremos duas sessões do CMDER. Essa é a sessão 2

```
C:\Users\Administrador\Desktop\projeto
λ cd saboroso\

C:\Users\Administrador\Desktop\projeto\saboroso
λ ls
app.js  bin/  package.json  public/  routes/  views/
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
```

```
λ npm install
```

```
added 54 packages, and audited 55 packages in 5s
```

```
7 vulnerabilities (2 moderate, 4 high, 1 critical)
```

```
To address issues that do not require attention, run:
```

```
npm audit fix
```

```
To address all issues (including breaking changes), run:
```

```
npm audit fix --force
```

```
Run `npm audit` for details.
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
```

```
λ set DEBUG=saboroso:* & npm start
```

```
> saboroso@0.0.0 start
```

```
> node ./bin/www
```


```
saboroso:server Listening on port 3000 +0ms
```


```
GET / 200 19.015 ms - 207
```

```
GET /stylesheets/style.css 200 6.010 ms - 111
```

```
GET /favicon.ico 404 3.017 ms - 1173
```

Essa é a sessão 1

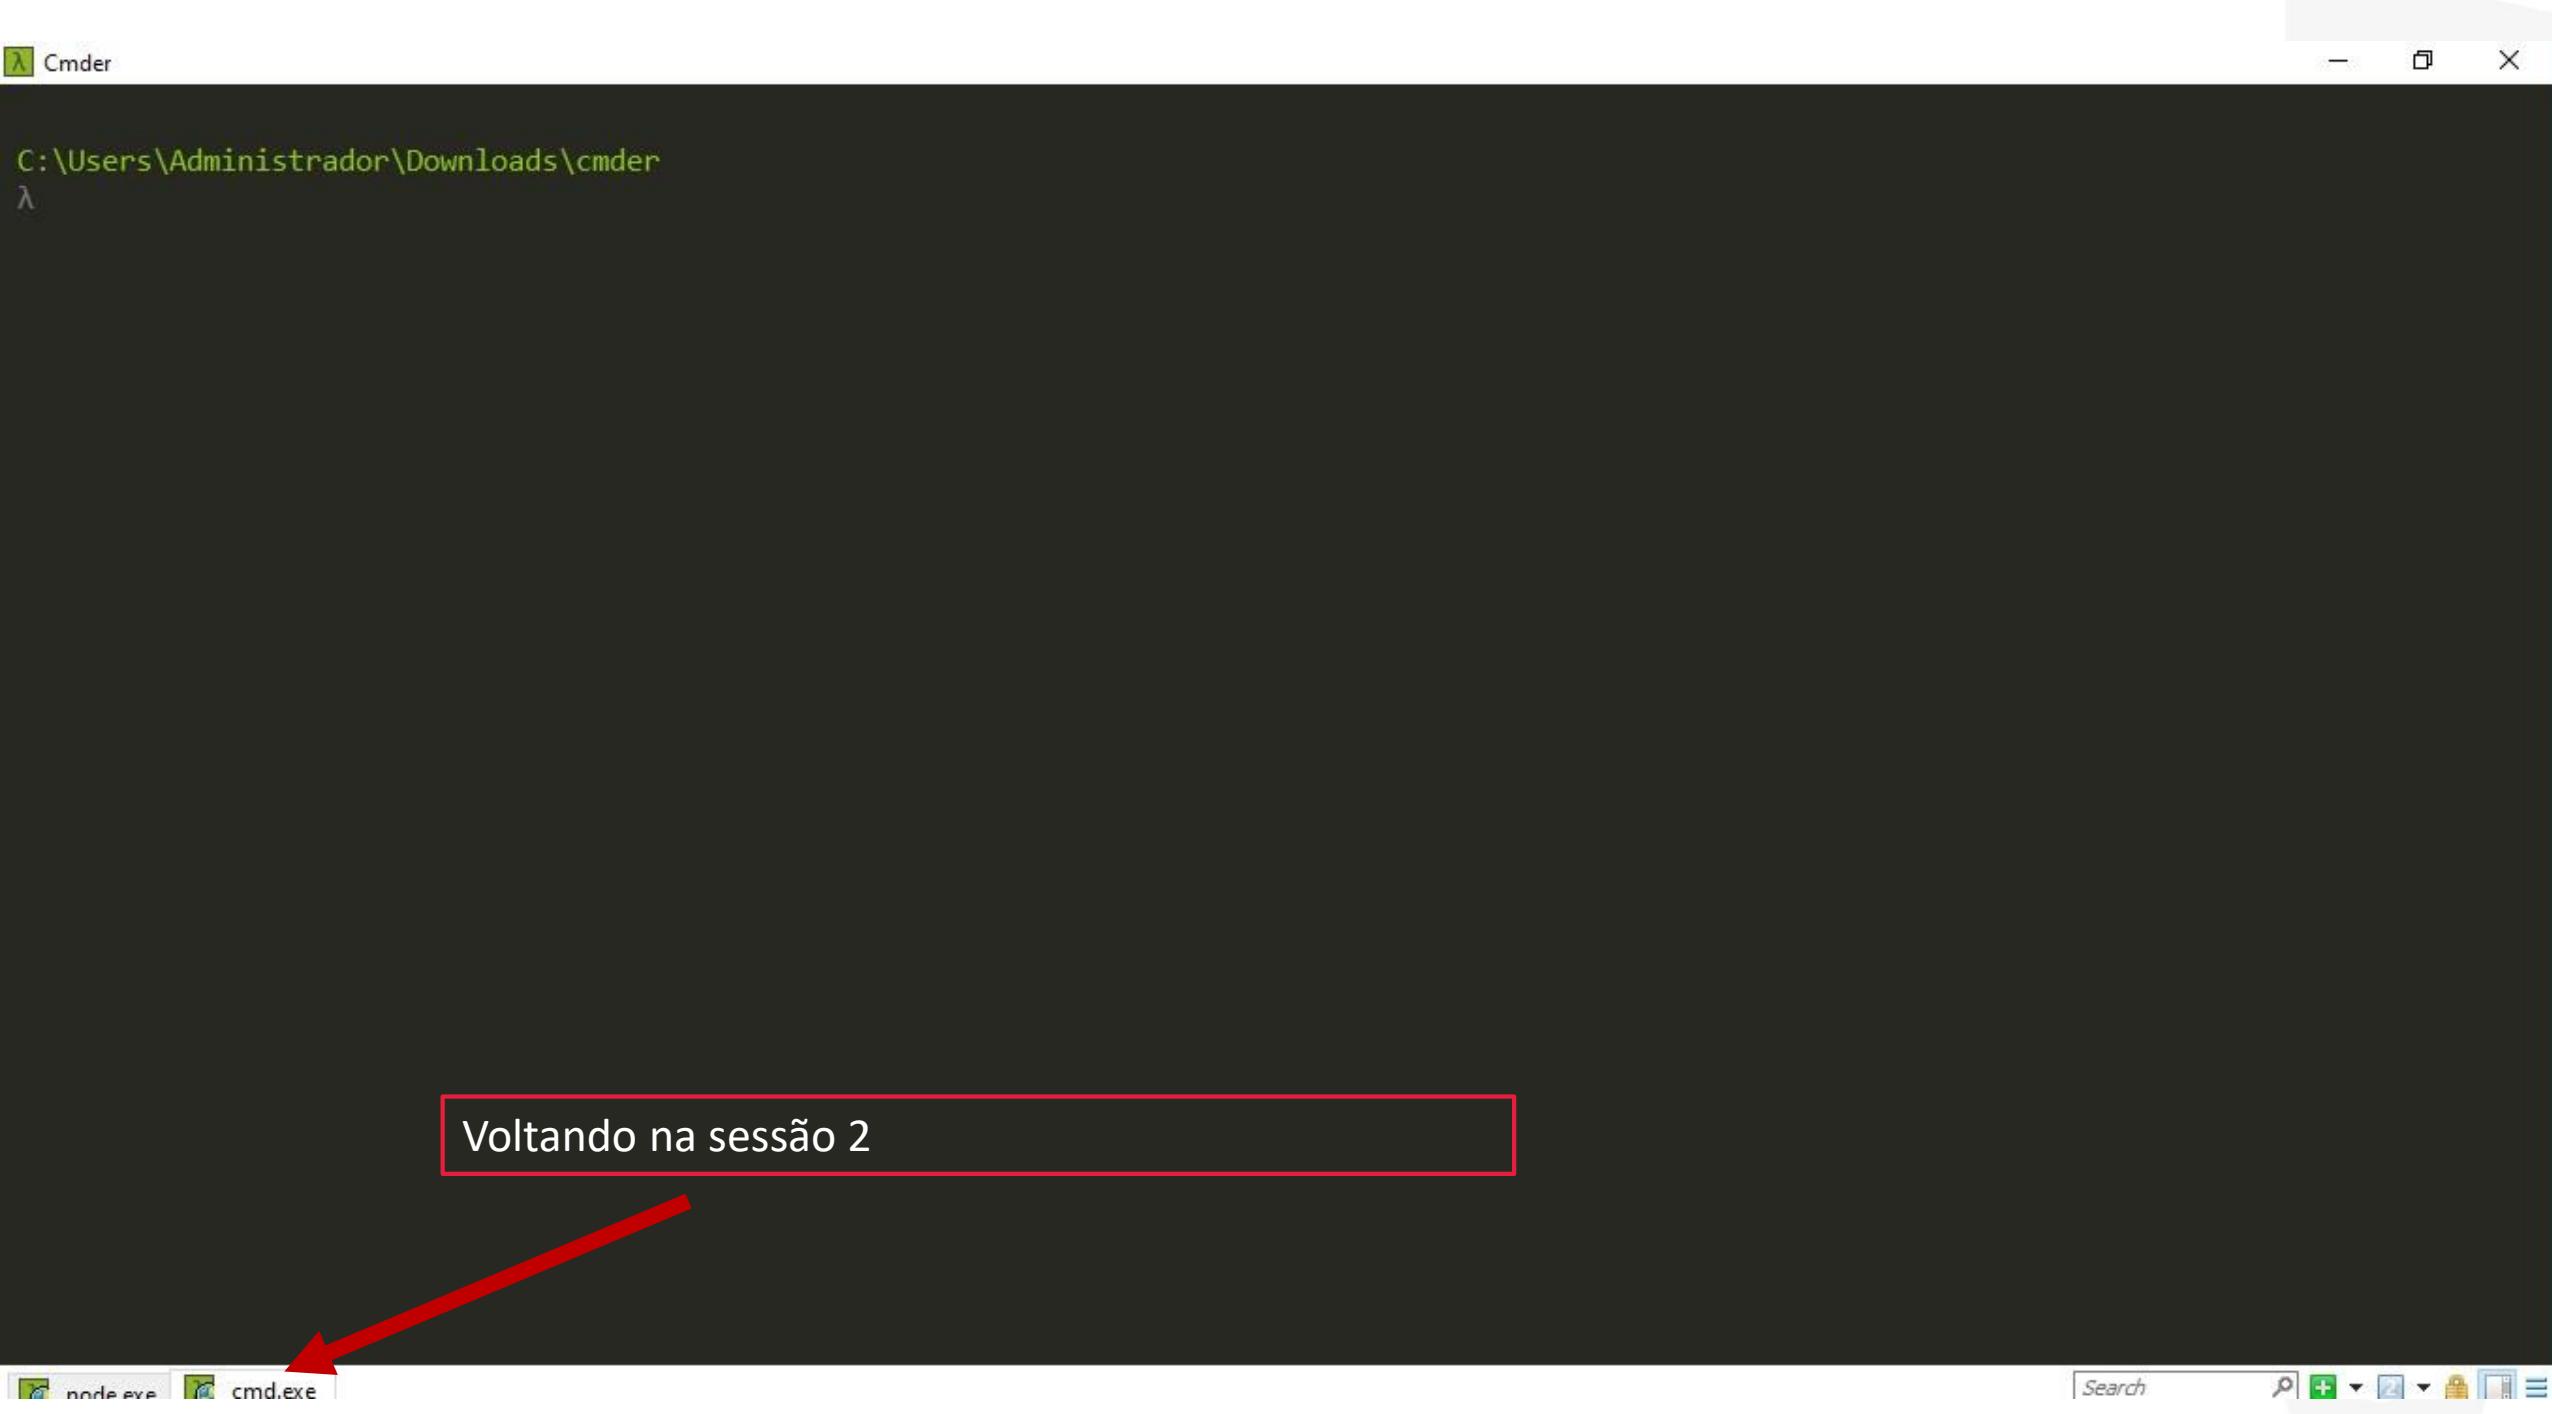

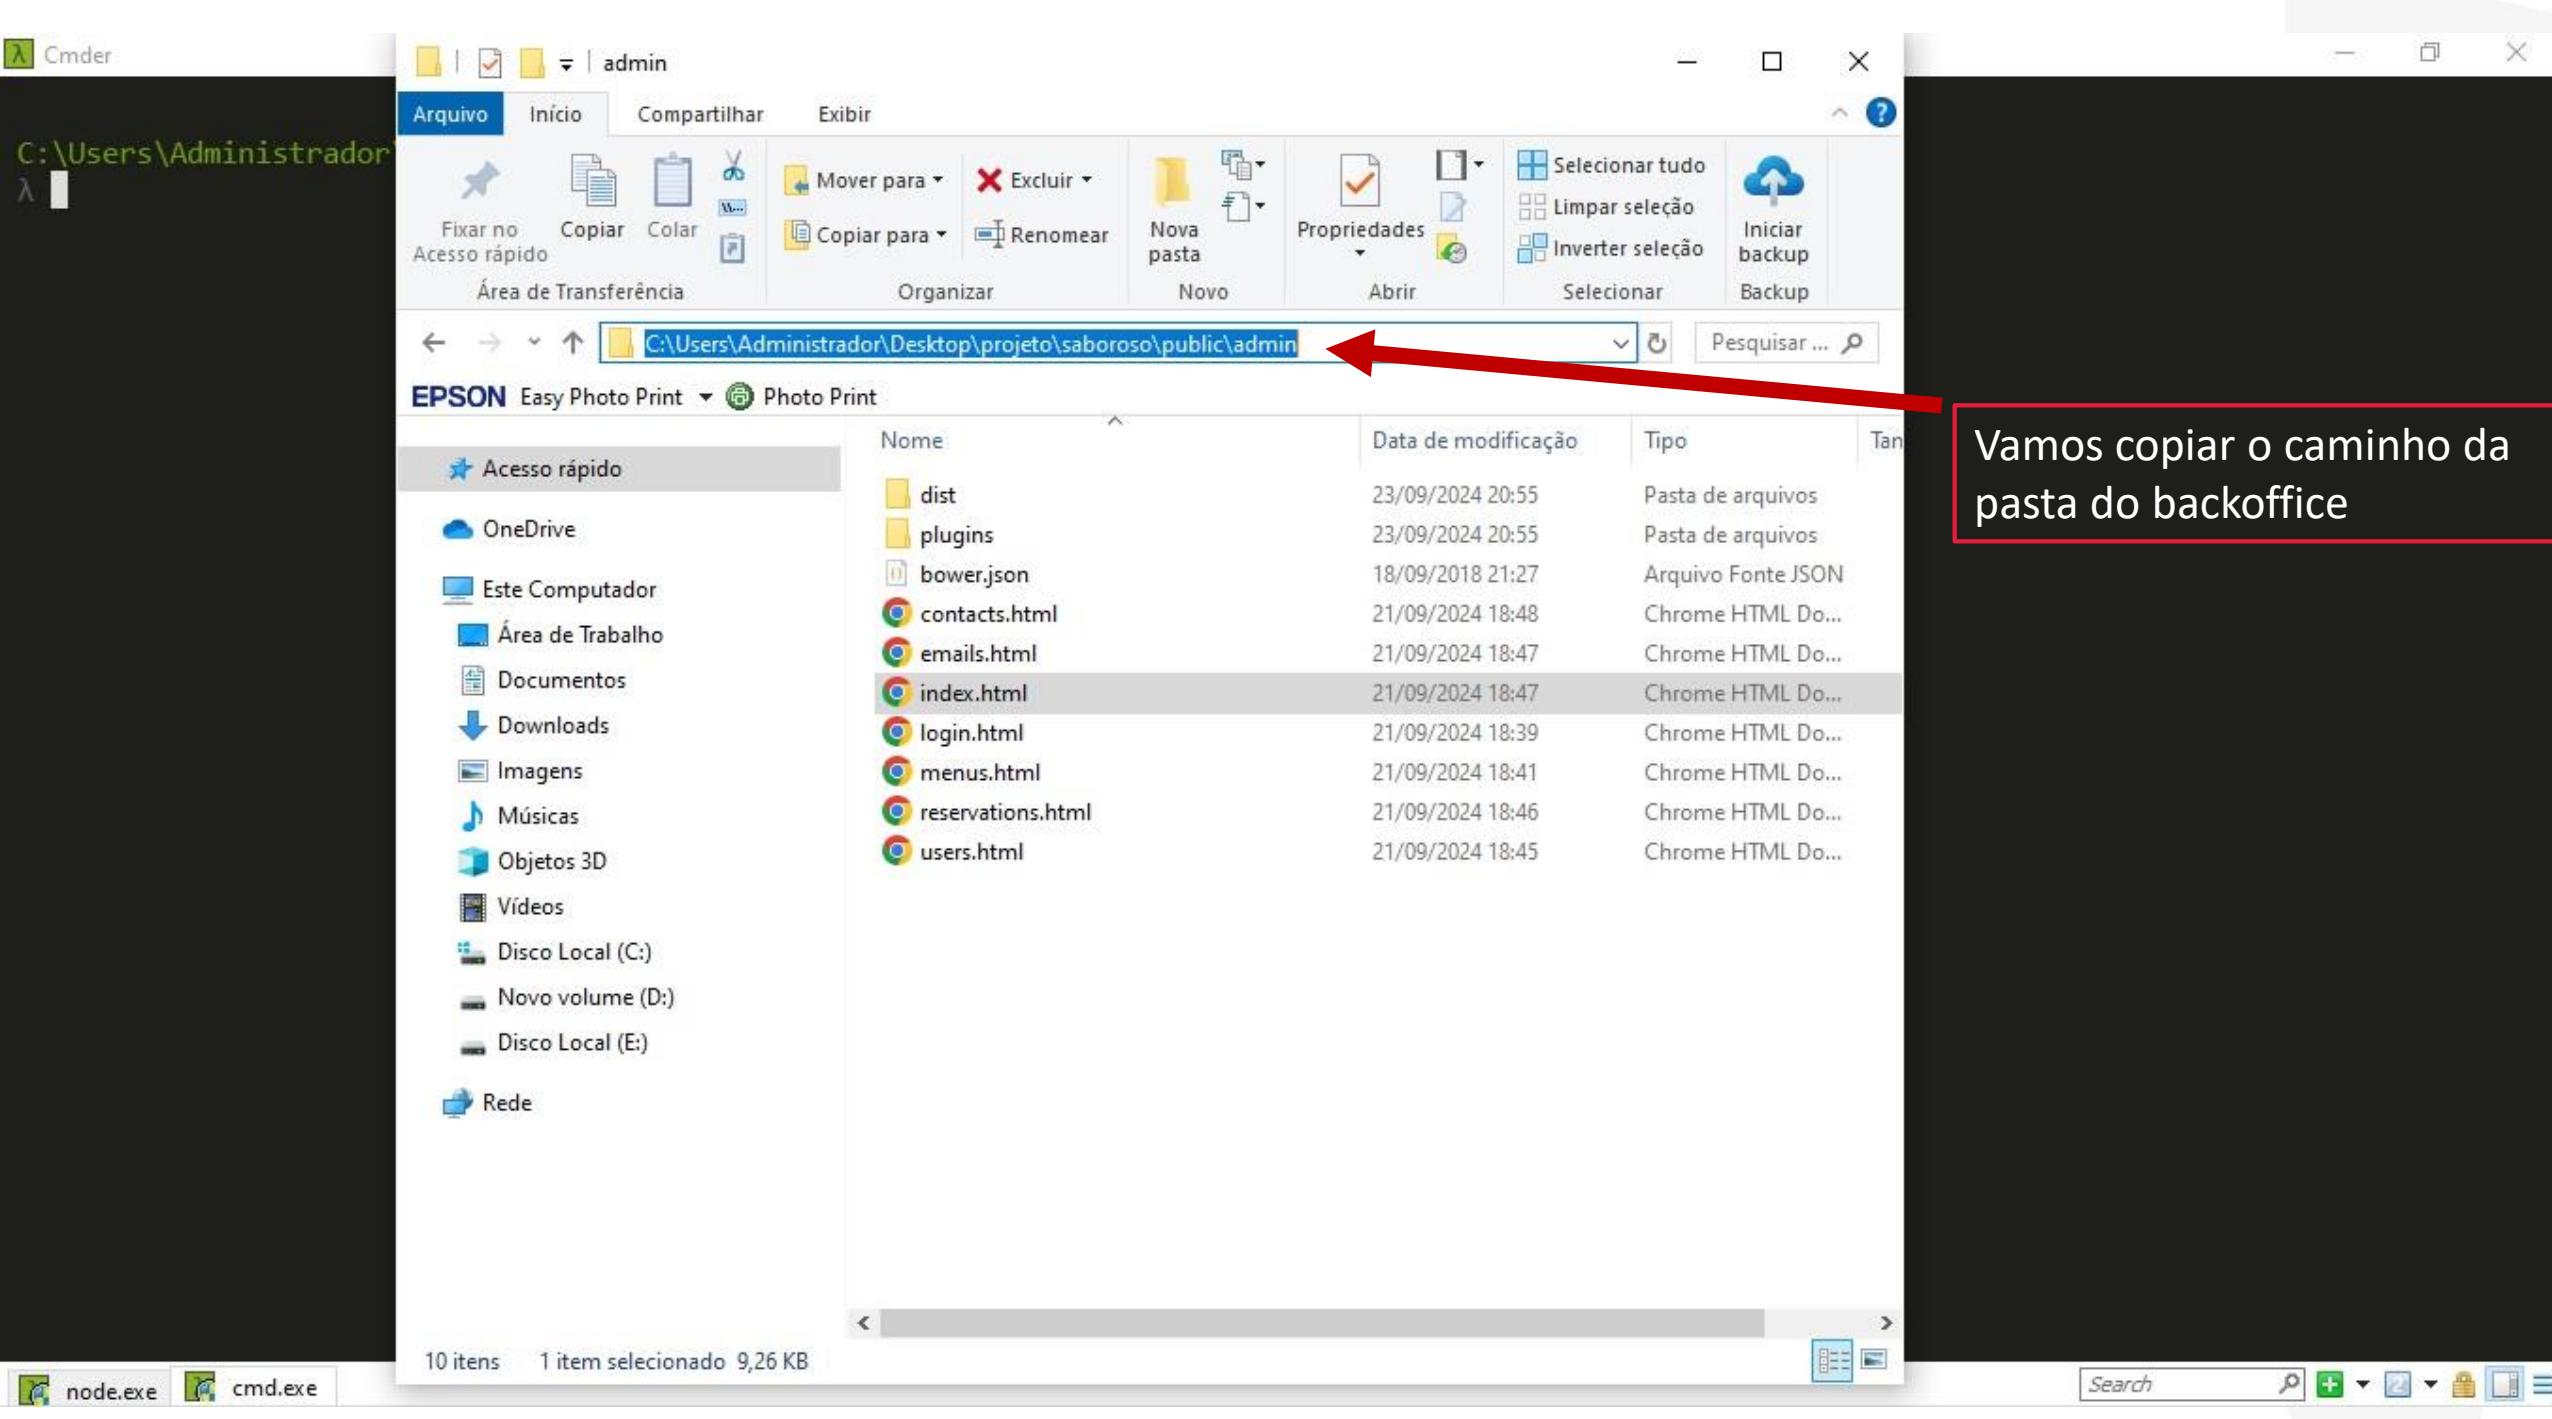

```
C:\Users\Administrador\Downloads\cmder
λ cd C:\Users\Administrador\Desktop\projeto\saboroso\public\admin
```

```
C:\Users\Administrador\Desktop\projeto\saboroso\public\admin
```

E colar no prompt, usando o comando cd anteriormente para entrar na pasta

```
C:\Users\Administrador\Downloads\cmder
λ cd C:\Users\Administrador\Desktop\projeto\saboroso\public\admin

C:\Users\Administrador\Desktop\projeto\saboroso\public\admin
λ npm install bower -g
```

Na pasta do backoffice, instalaremos o bower porque é uma dependência do adminlte (backoffice). O bower é para melhorar os assets. Primeiro, baixaremos o bower.



```
C:\Users\Administrador\Downloads\cmder
λ cd C:\Users\Administrador\Desktop\projeto\saboroso\public\admin
```

```
C:\Users\Administrador\Desktop\projeto\saboroso\public\admin
λ npm install bower -g
```

```
added 1 package in 12s
```

Resultado da execução anterior

```
C:\Users\Administrador\Desktop\projeto\saboroso\public\admin
λ
```



```
C:\Users\Administrador\Downloads\cmder
λ cd C:\Users\Administrador\Desktop\projeto\saboroso\public\admin
```

```
C:\Users\Administrador\Desktop\projeto\saboroso\public\admin
λ npm install bower -g
```

```
added 1 package in 12s
```

```
C:\Users\Administrador\Desktop\projeto\saboroso\public\admin
λ bower install
```



Instalar o bower

```
raphael#2.3.0 bower_components\raphael
└── eve-raphael#0.5.0

mocha#1.17.1 bower_components\mocha

eve-raphael#0.5.0 bower_components\eve-raphael

bootstrap-datepicker#1.10.0 bower_components\bootstrap-datepicker
└── jquery#3.7.1

bootstrap#3.4.1 bower_components\bootstrap
└── jquery#3.7.1

fullcalendar#3.10.5 bower_components\fullcalendar
└── jquery#3.7.1
└── moment#2.30.1

select2#4.0.13 bower_components\select2

jquery-ui#1.11.4 bower_components\jquery-ui
└── jquery#3.7.1

moment#2.30.1 bower_components\moment

font-awesome#4.7.0 bower_components\font-awesome

Ionicons#2.0.1 bower_components\Ionicons

ckeditor#4.25.0 bower_components\ckeditor

C:\Users\Administrador\Desktop\projeto\saboroso\public\admin
λ
```

Resultado da execução anterior



Express

Admin - SP

Arquivo C:/Users/Administrador/Desktop/projeto/saboroso/public/admin/index.html

SP

Tela Inicial

RESERVAS
90

CONTATOS
41

MENU
3

USUÁRIOS
2

Fulano Junior
fulano@sproviders.com.br

Atualizar a página

Antes do bower

Perfil
Sair

Express Admin - SP Arquivo C:/Users/Administrador/Desktop/projeto/saboroso/public/admin/index.html SP Fulano Junior

Fulano Junior Online

MENU

Tela Inicial

RESERVAS 90

CONTATOS 41

MENU 3

USUÁRIOS 2

Página atualizada com bower

Projeto desenvolvido no CT Desenvolvimento de Sistemas.

SP

Express Admin - SP Arquivo C:/Users/Administrador/Desktop/projeto/saboroso/public/admin/index.html SP Fulano Junior

Fulano Junior Online

MENU

Tela Inicial

RESERVAS 90

CONTATOS 41

MENU 3

USUÁRIOS 2

Home > Usuários

Na tela inicial, temos um resumo do sistema em dashboard

Projeto desenvolvido no CT Desenvolvimento de Sistemas.
file:///C:/Users/Administrador/Desktop/projeto/saboroso/public/admin/index.htm...

Express

Admin - SP

Arquivo C:/Users/Administrador/Desktop/projeto/saboroso/public/admin/index.html

SP

Fulano Junior

Tela Inicial

RESERVAS 90

CONTATOS 41

MENU 3

USUÁRIOS 2

Barra lateral minimizada

Projeto desenvolvido no CT Desenvolvimento de Sistemas.

SP

The screenshot displays a web-based administration interface with a sidebar on the left containing icons for various functions: Reservas (calendar icon), Contatos (chat icon), Menu (fork and knife icon), and Usuários (people icon). The main content area is titled 'Tela Inicial' and shows four summary cards: 'RESERVAS 90', 'CONTATOS 41', 'MENU 3', and 'USUÁRIOS 2'. A red arrow points from the sidebar area to a red-bordered box labeled 'Barra lateral minimizada' (Minimized sidebar). The top navigation bar shows tabs for 'Express' and 'Admin - SP', and the address bar indicates the file path 'C:/Users/Administrador/Desktop/projeto/saboroso/public/admin/index.html'. The top right corner shows the user profile 'Fulano Junior'. The bottom of the page has a footer with the text 'Projeto desenvolvido no CT Desenvolvimento de Sistemas.' and the letter 'SP'.

Express

Admin - SP

Arquivo C:/Users/Administrador/Desktop/projeto/saboroso/public/admin/index.html

SP

Fulano Junior

Fulano Junior
Online

MENU

Tela Inicial

RESERVAS 90

CONTATOS 41

MENU 3

USUÁRIOS 2

Barra lateral expandida

Projeto desenvolvido no CT Desenvolvimento de Sistemas.

SP

SP



Fulano Junior



Fulano Junior

Online

MENU

Tela Inicial

Menu

Reservas

Contatos

Usuários

E-mails

Menu

Home > Menu

Lista

+ Novo

Foto Título Descrição Preço Ações

1. Update software Diuretics paradis num copo é motivis de denguis. R\$1,99 Editar Excluir



Na opção MENU, os funcionários terão os acessos de informações acima

Express Admin - SP Arquivo C:/Users/Administrador/Desktop/projeto/saboroso/public/admin/reservations.html SP Fulano Junior

Fulano Junior Online MENU Tela Inicial Menu Reservas Contatos Usuários E-mails

Reservas

Lista

+ Novo

| # | Nome | E-mail | Pessoas | Data | Hora | Ações |
|----|-------|---------------------------|---------|----------|-------|--|
| 1. | Hcode | contato@sproviders.com.br | 2 | 1/1/2024 | 10:30 | <button>Editar</button> <button>Excluir</button> |

dd/mm/aaaa dd/mm/aaaa OK

* 1 2 3 »

Na opção RESERVAS, os funcionários terão os acessos de informações acima

Projeto desenvolvido no CT Desenvolvimento de Sistemas. SP

S Express Admin - SP Arquivo C:/Users/Administrador/Desktop/projeto/saboroso/public/admin/contacts.html Fulano Junior

SP Fulano Junior Online MENU Tela Inicial Menu Reservas Contatos Usuários E-mails

Contatos

Home > Contatos

Lista

| # | Nome | E-mail | Mensagem | Ações |
|----|------|---------------------------|---|--------------------------|
| 1. | SP | contato@sproviders.com.br | Mussum Ipsum, cacilds vidis litro abertis. Manduma pindureta quium dia nois paga. Viva Forevis aptent taciti sociosqu ad litora torquent. In elementis mé pra quem é amistosis quis leo. Admodum accumsan disputationi eu sit. Vide electram sadipscing et per. | <button>Excluir</button> |

Na opção CONTATOS, os funcionários terão os acessos de informações acima

Projeto desenvolvido no CT Desenvolvimento de Sistemas. SP

The screenshot shows a web application interface for managing users. At the top, there are two browser tabs: 'Express' and 'Admin - SP'. The main window title is 'Arquivo C:/Users/Administrador/Desktop/projeto/saboroso/public/admin/users.html'. The page header includes the text 'SP', a user profile for 'Fulano Junior' (status 'Online'), and a navigation bar with 'Home > Usuários'. On the left, a dark sidebar menu lists 'Tela Inicial', 'Menu', 'Reservas', 'Contatos', 'Usuários' (which is highlighted with a red arrow), and 'E-mails'. The main content area is titled 'Usuários' and contains a table titled 'Lista'. The table has columns '#', 'Nome', 'E-mail', and 'Ações'. A single row is shown: '#1' with 'Nome' 'SP' and 'E-mail' 'contato@sproviders.com.br'. To the right of the row are three buttons: 'Editar' (blue), 'Alterar Senha' (orange), and 'Excluir' (red). A green 'Novo' button is located at the top right of the table. A red callout box with a double-headed arrow points from the 'Usuários' menu item to the 'Alterar Senha' button.

SP

Fulano Junior
Online

MENU

Tela Inicial

Menu

Reservas

Contatos

Usuários

E-mails

Arquivo C:/Users/Administrador/Desktop/projeto/saboroso/public/admin/users.html

SP Fulano Junior

Home > Usuários

Usuários

Lista

+ Novo

| # | Nome | E-mail | Ações |
|----|------|---------------------------|---|
| 1. | SP | contato@sproviders.com.br | <button>Editar</button> <button>Alterar Senha</button> <button>Excluir</button> |

Na opção USUÁRIOS, os funcionários terão os acessos de informações acima

Projeto desenvolvido no CT Desenvolvimento de Sistemas.

SP

The screenshot shows a web browser window with a blue header bar. The title bar displays 'Express' and 'Admin - SP'. The address bar shows the URL 'C:/Users/Administrador/Desktop/projeto/saboroso/public/admin/emails.html'. The main content area has a dark blue header with the letters 'SP' and a user profile for 'Fulano Junior' (status: Online). A navigation menu on the left includes links for 'Tela Inicial', 'Menu', 'Reservas', 'Contatos', 'Usuários', and 'E-mails' (which is highlighted with a red arrow pointing from the bottom left). The central page is titled 'E-mails' and contains a table with one row. The table has columns for '#', 'E-mail', and 'Ações'. The first row shows '1.' followed by the email address ' contato@sproviders.com.br' and a red 'Excluir' button. A large red arrow points upwards from the 'E-mails' link in the sidebar towards the 'Excluir' button. A callout box with a red border contains the text: 'Na opção E-MAILS, os funcionários terão os acessos de informações acima'.

Projeto desenvolvido no CT Desenvolvimento de Sistemas.


SP


UC: Projetos


Assunto:


Projeto Restaurante – BackEnd


02 – Instalando e Configurando o MySQL

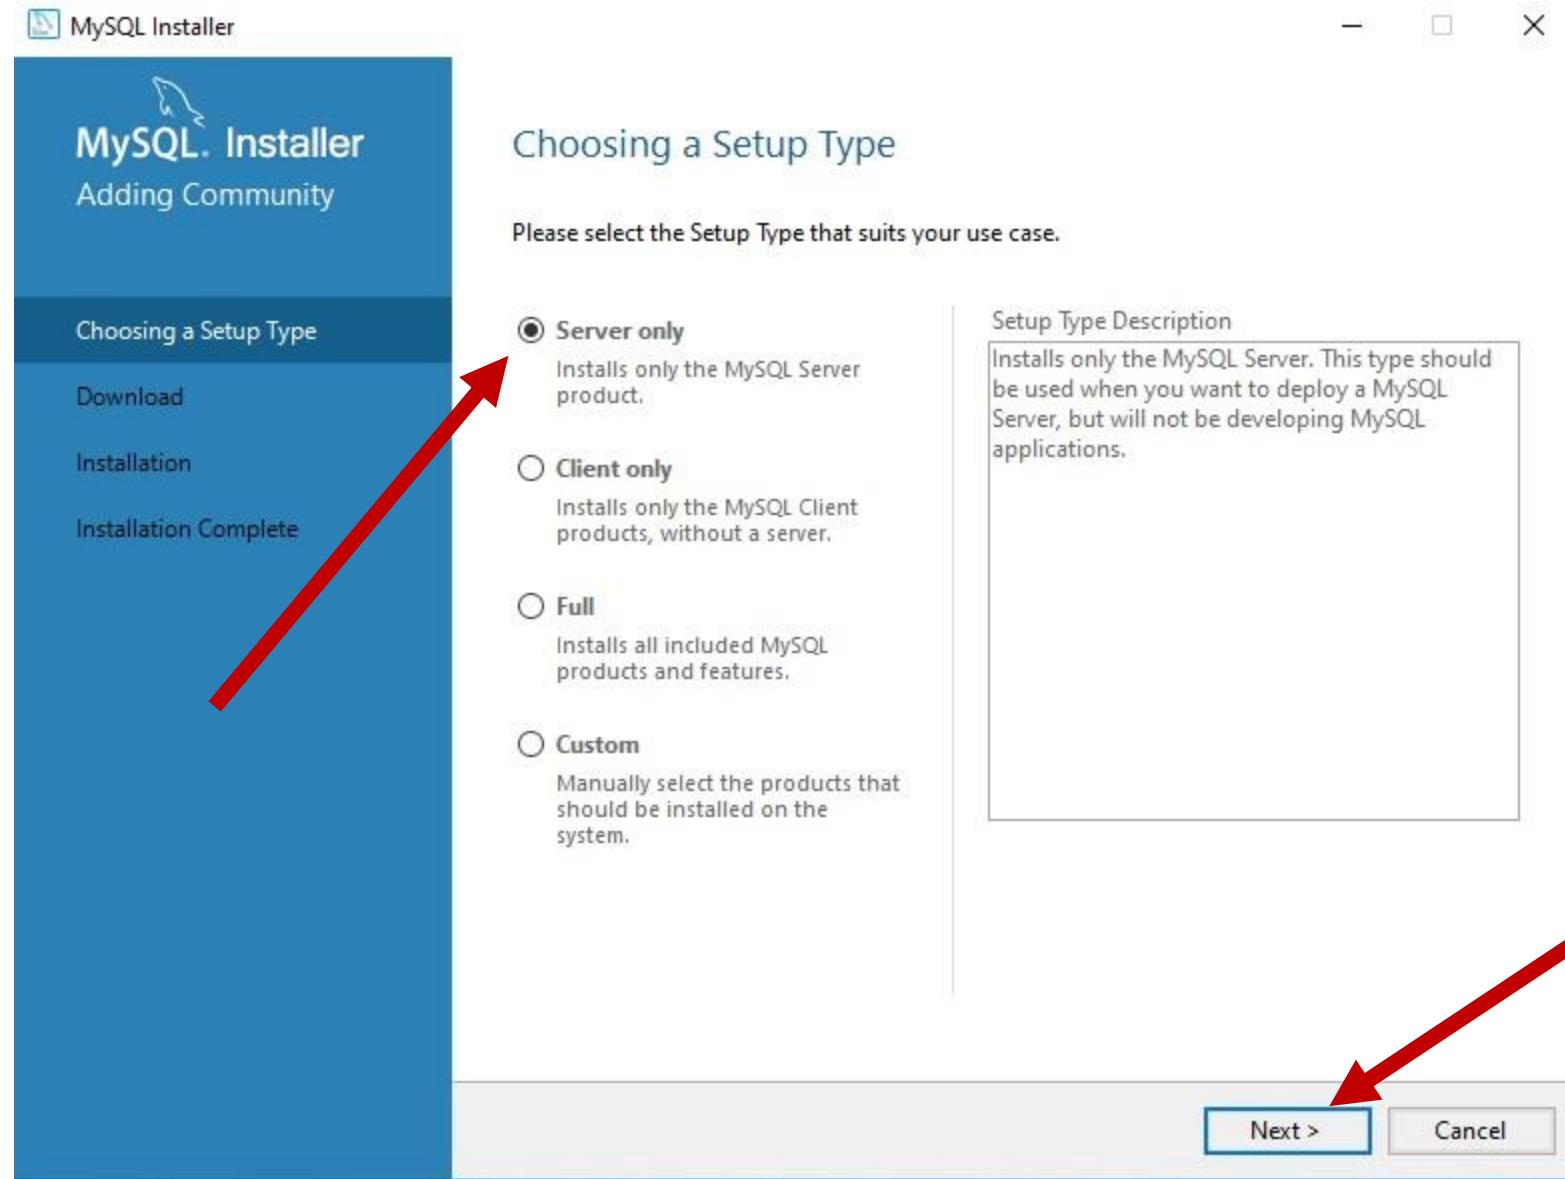


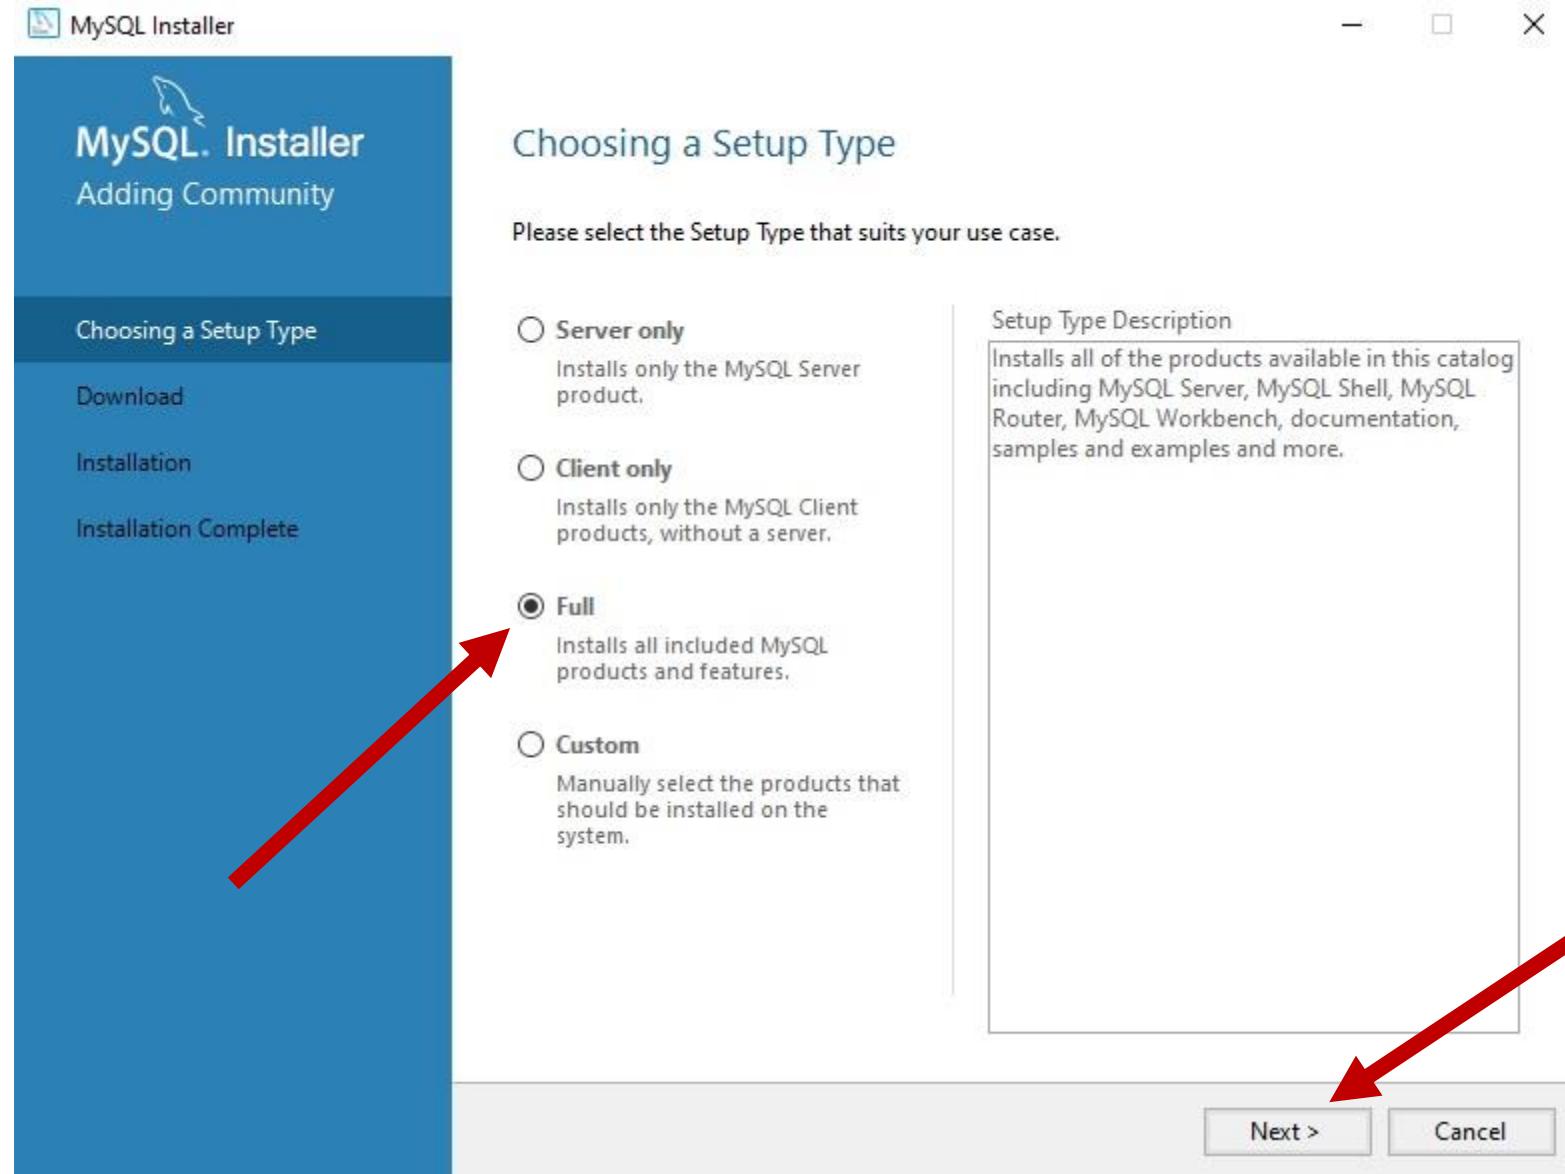


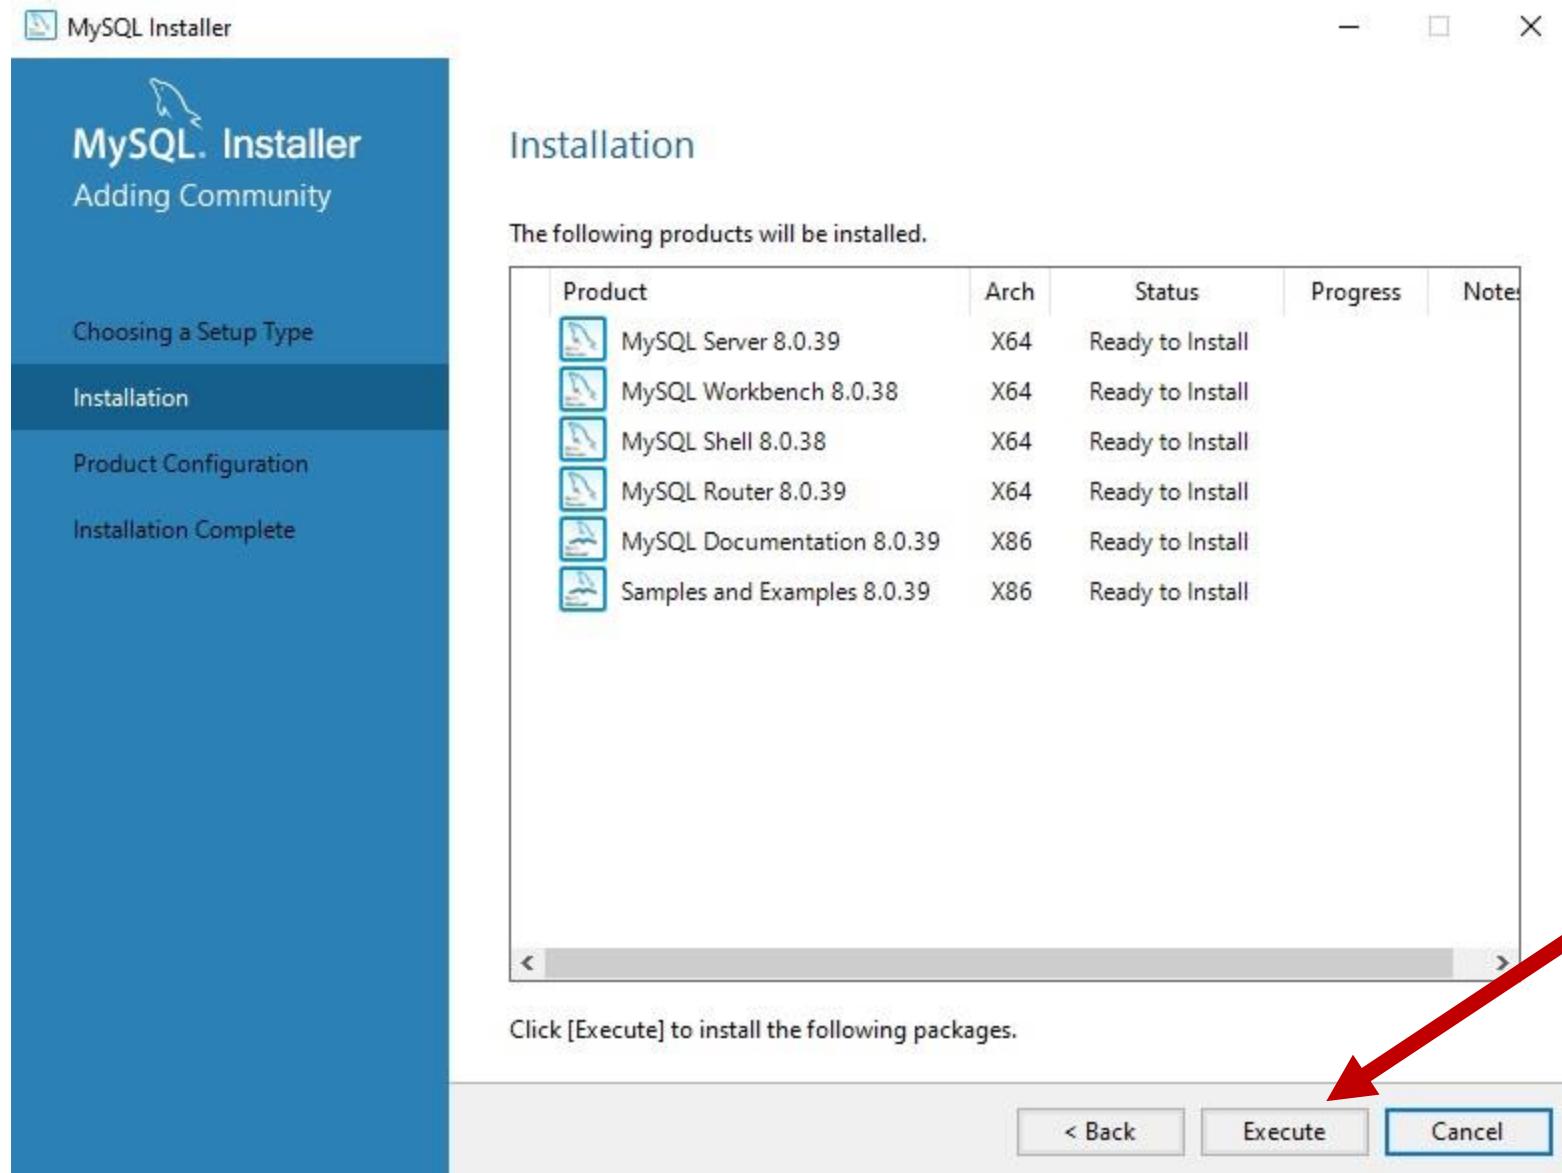


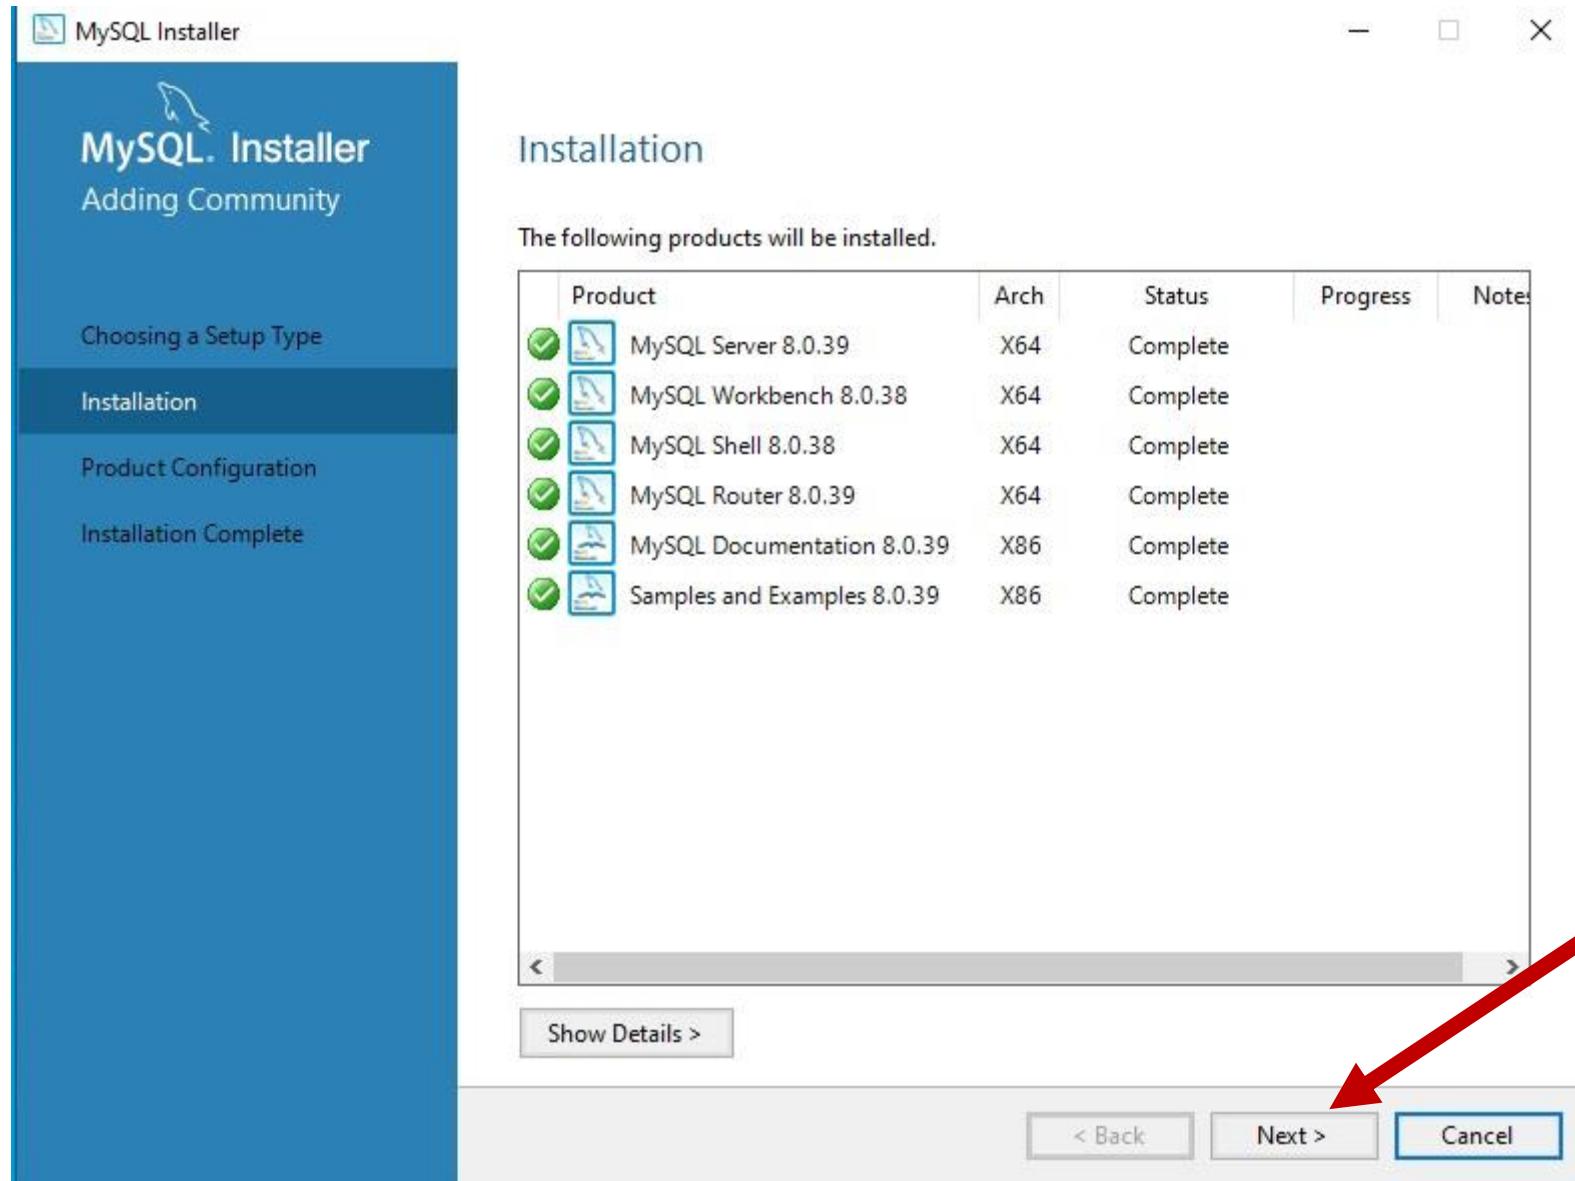


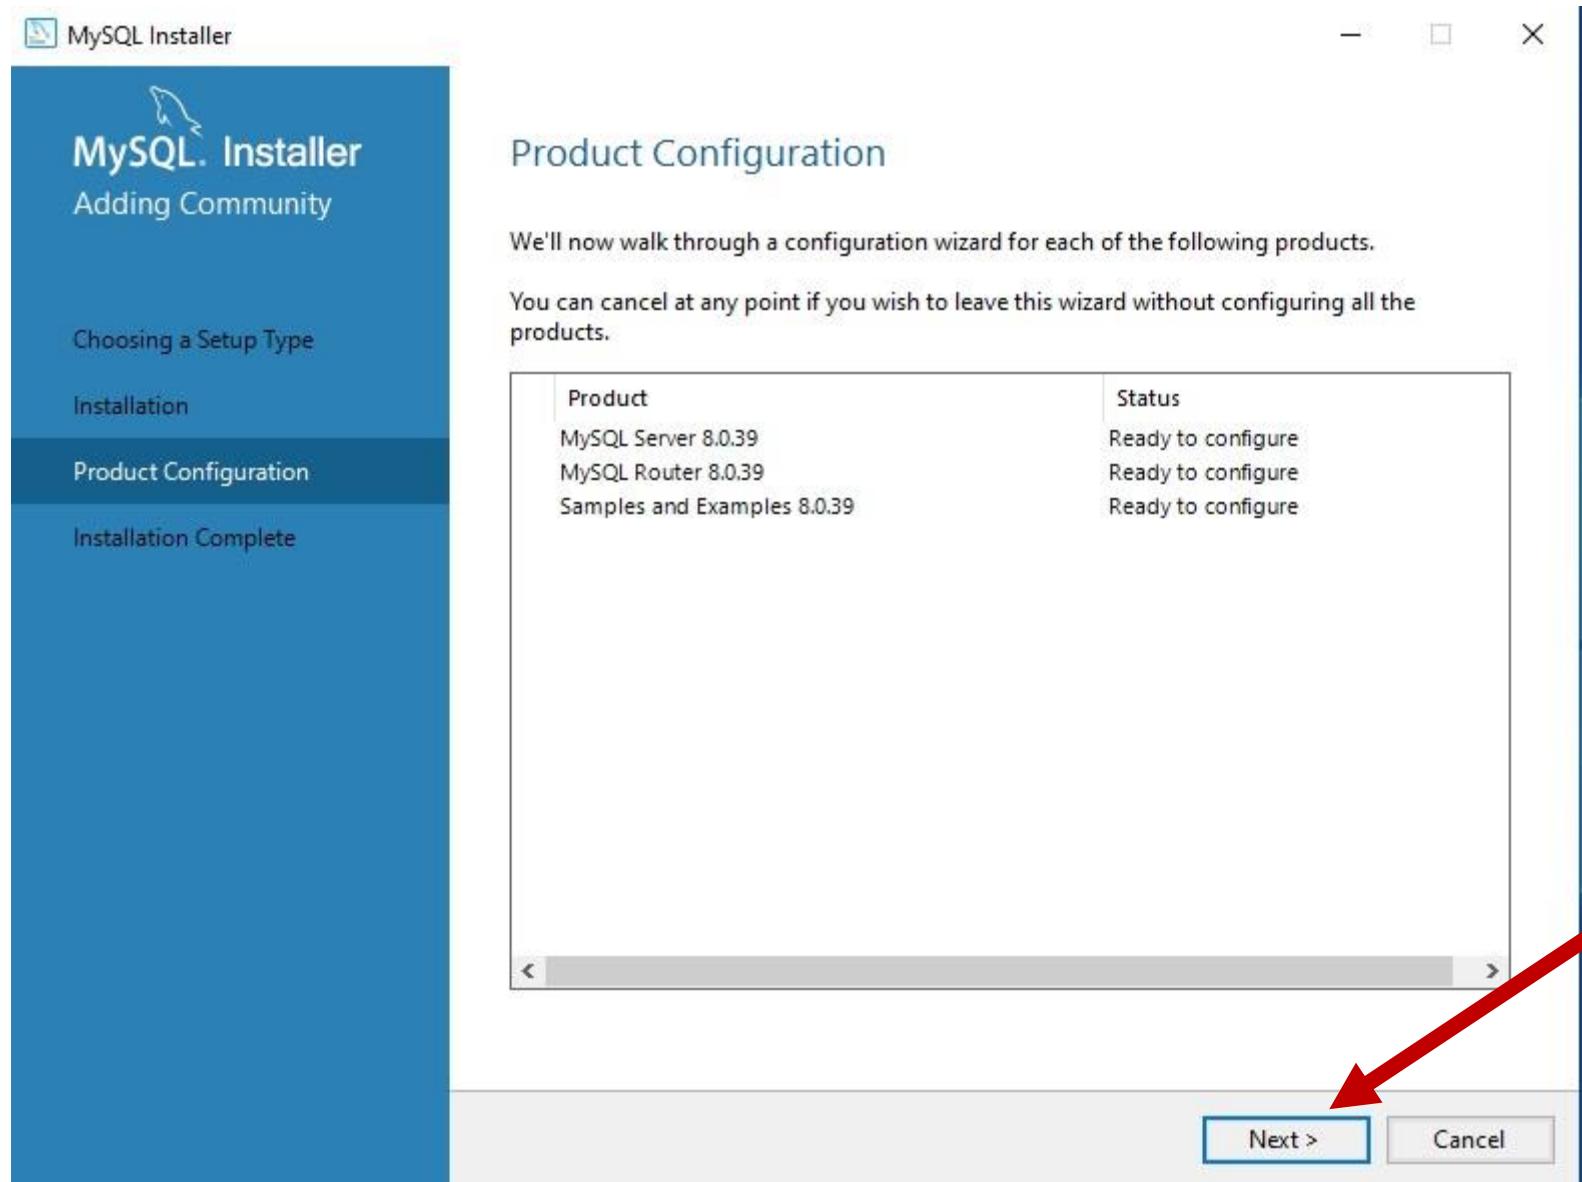

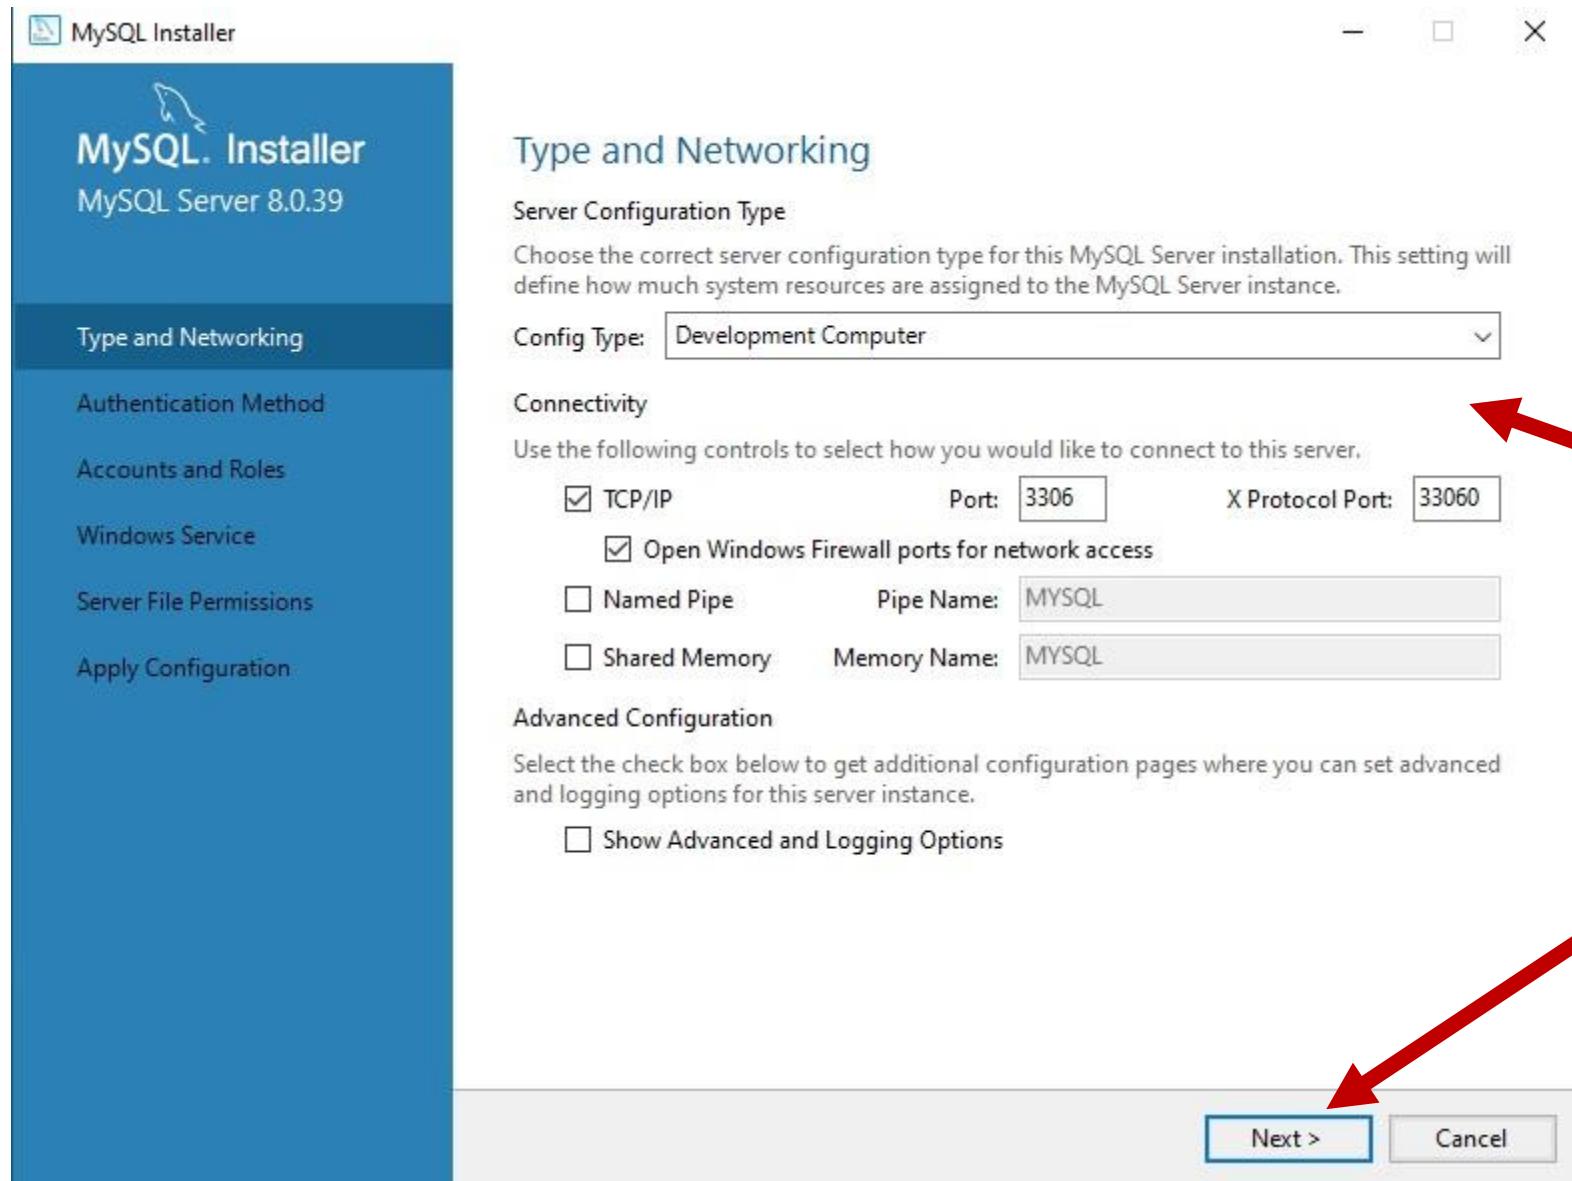


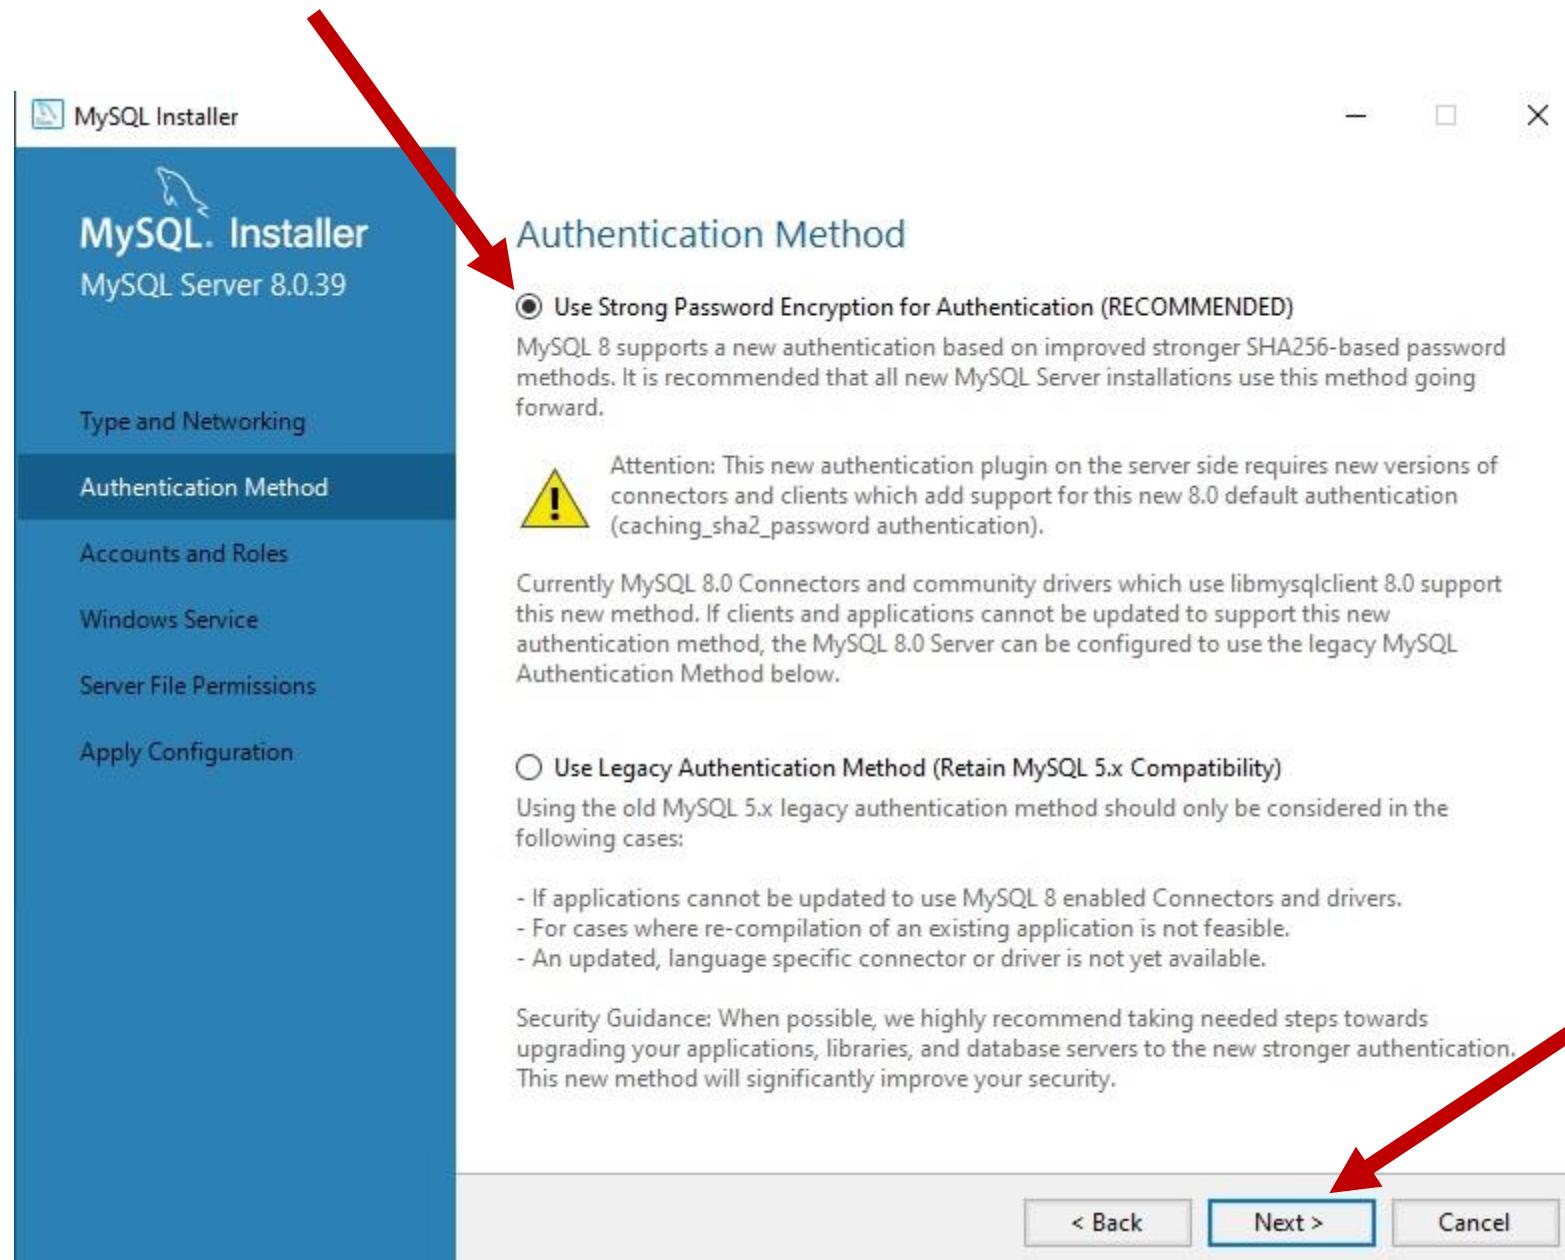


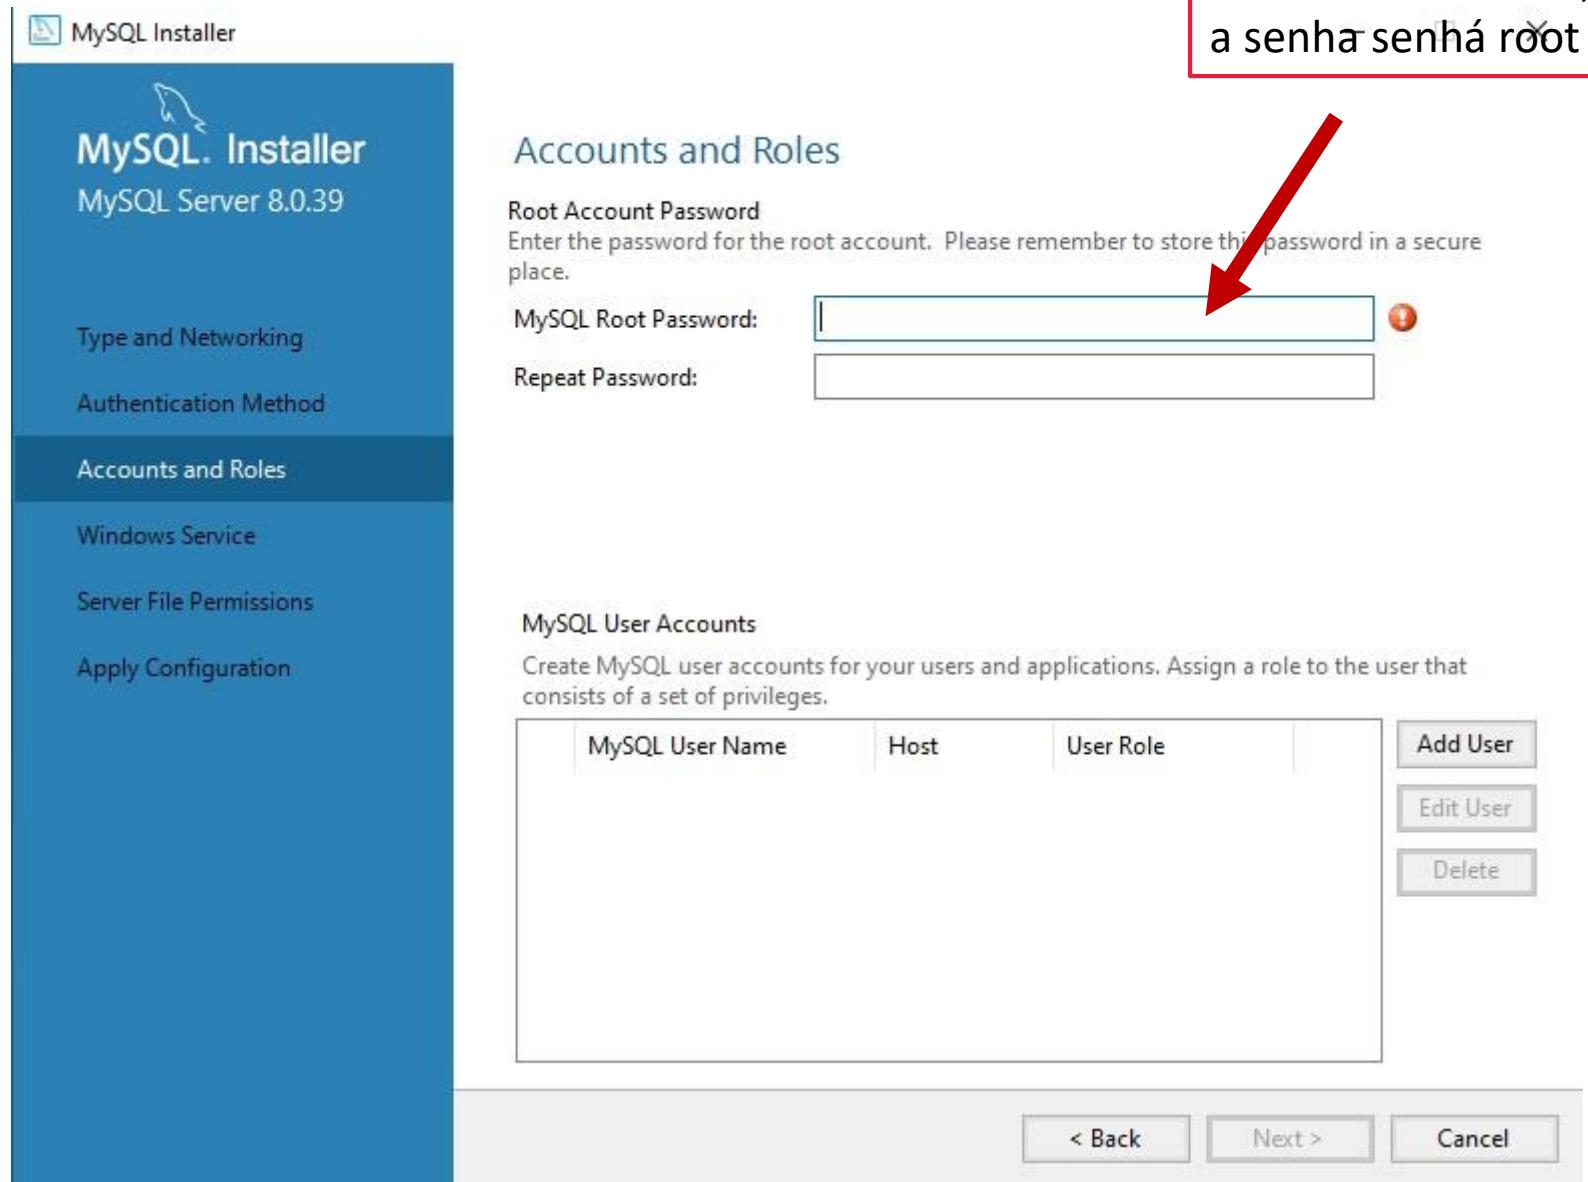


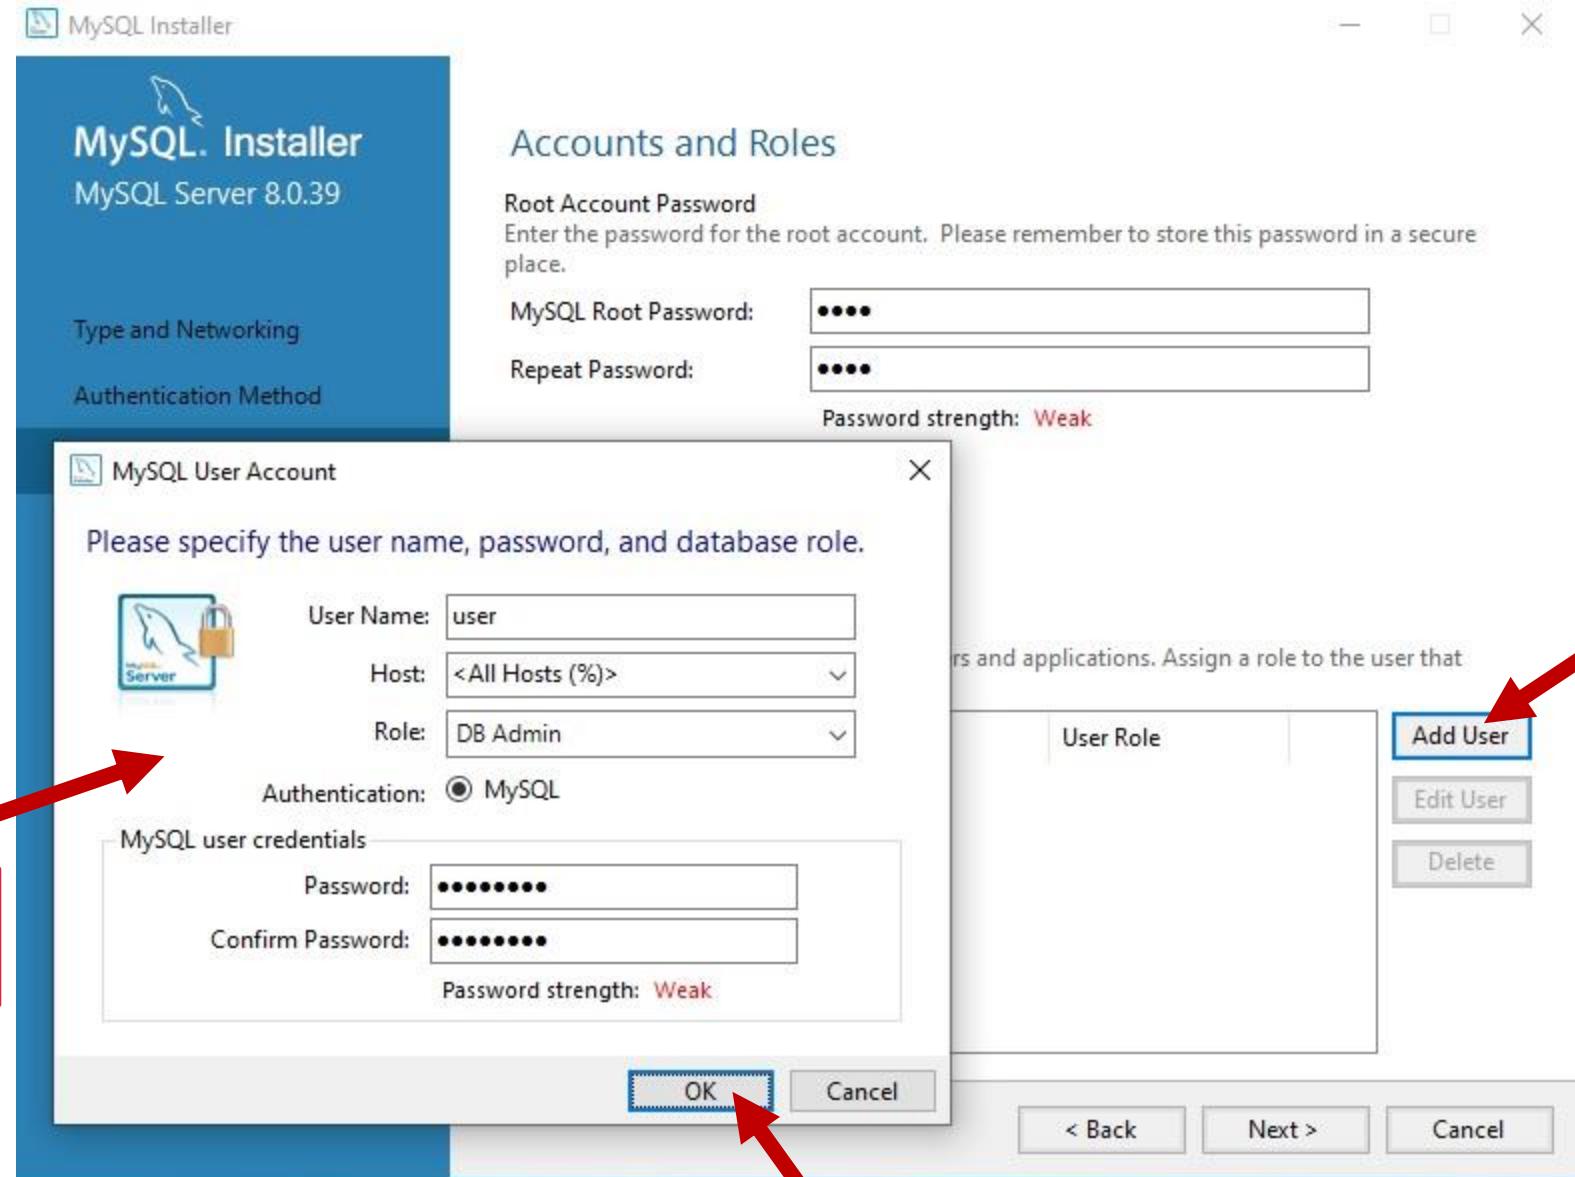



Usuário: user e
senha: password

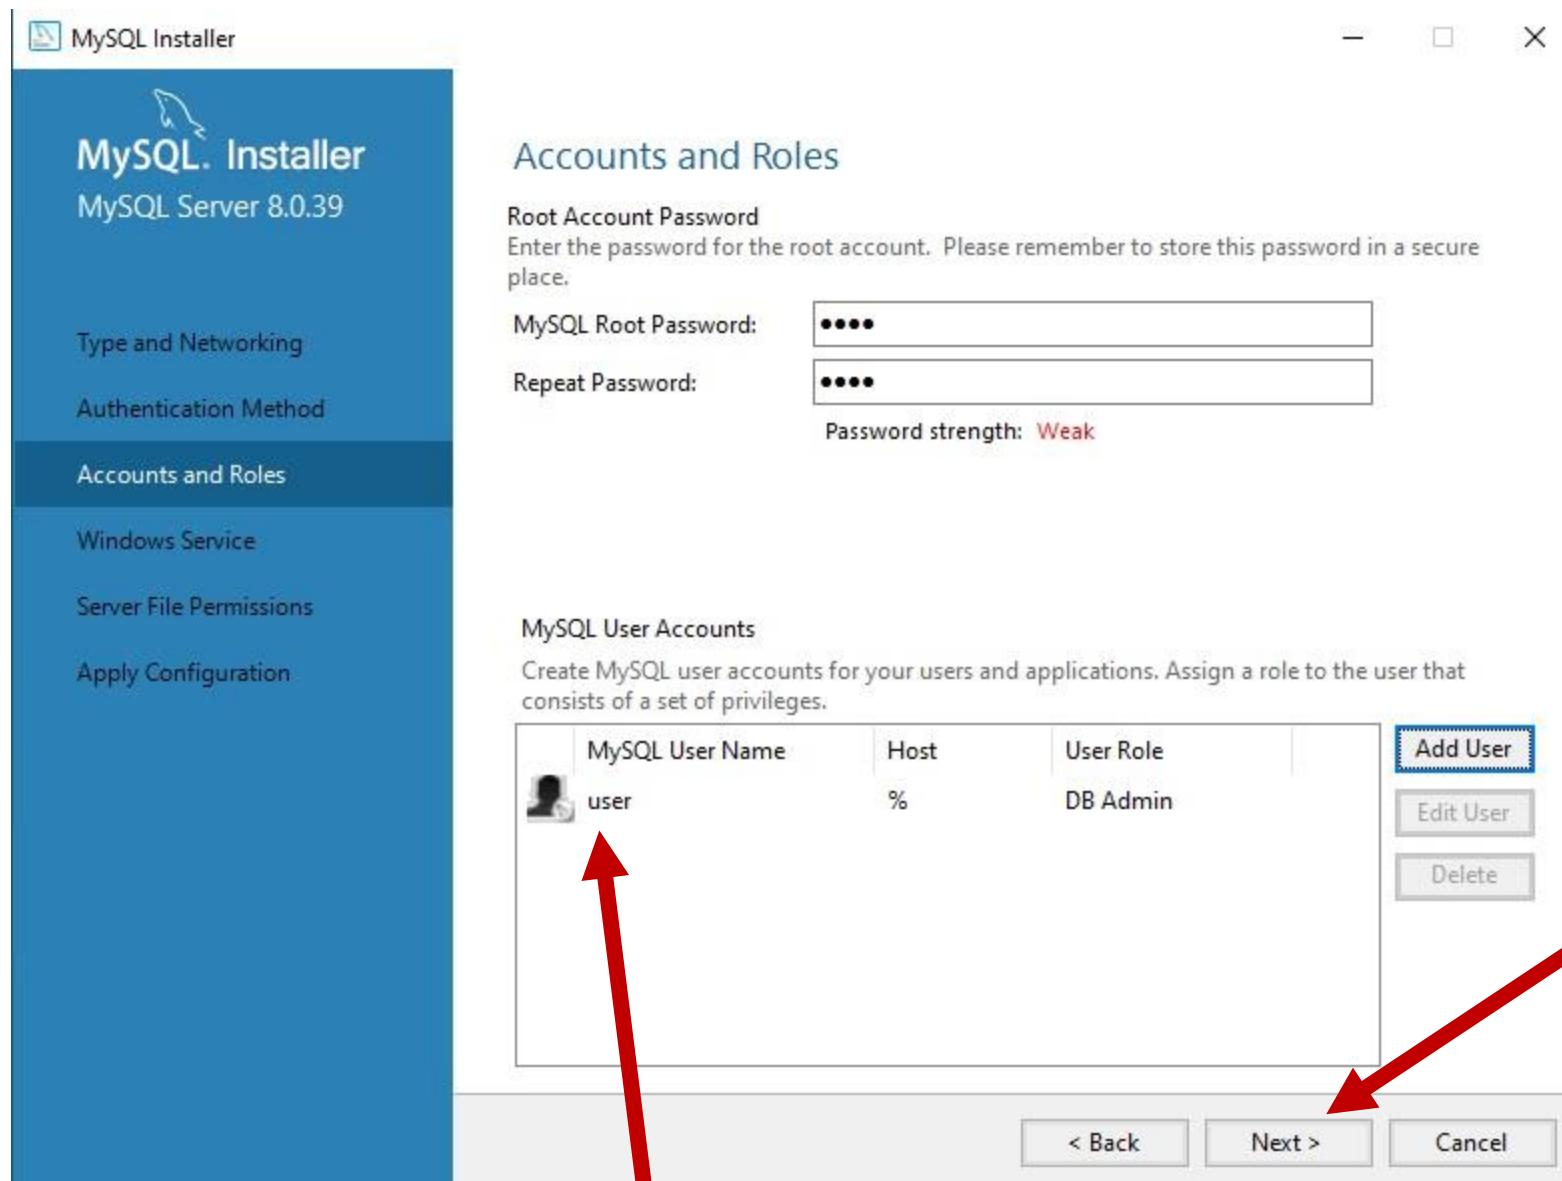


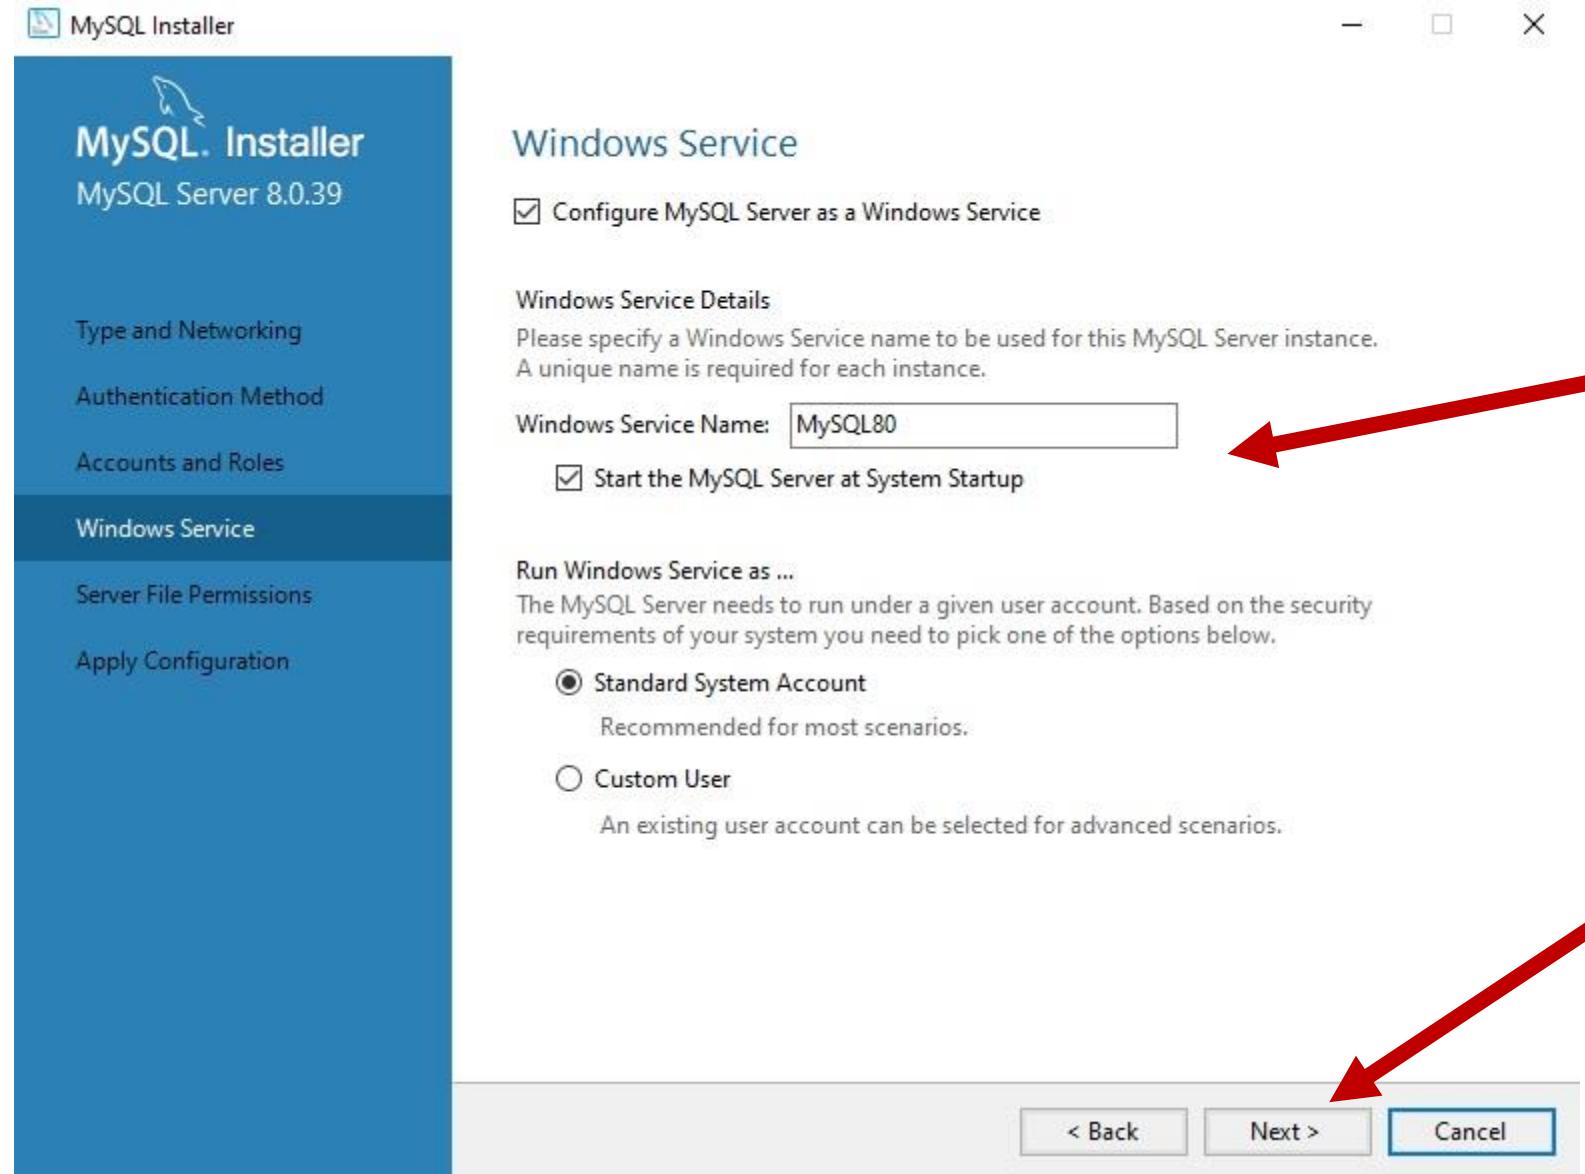


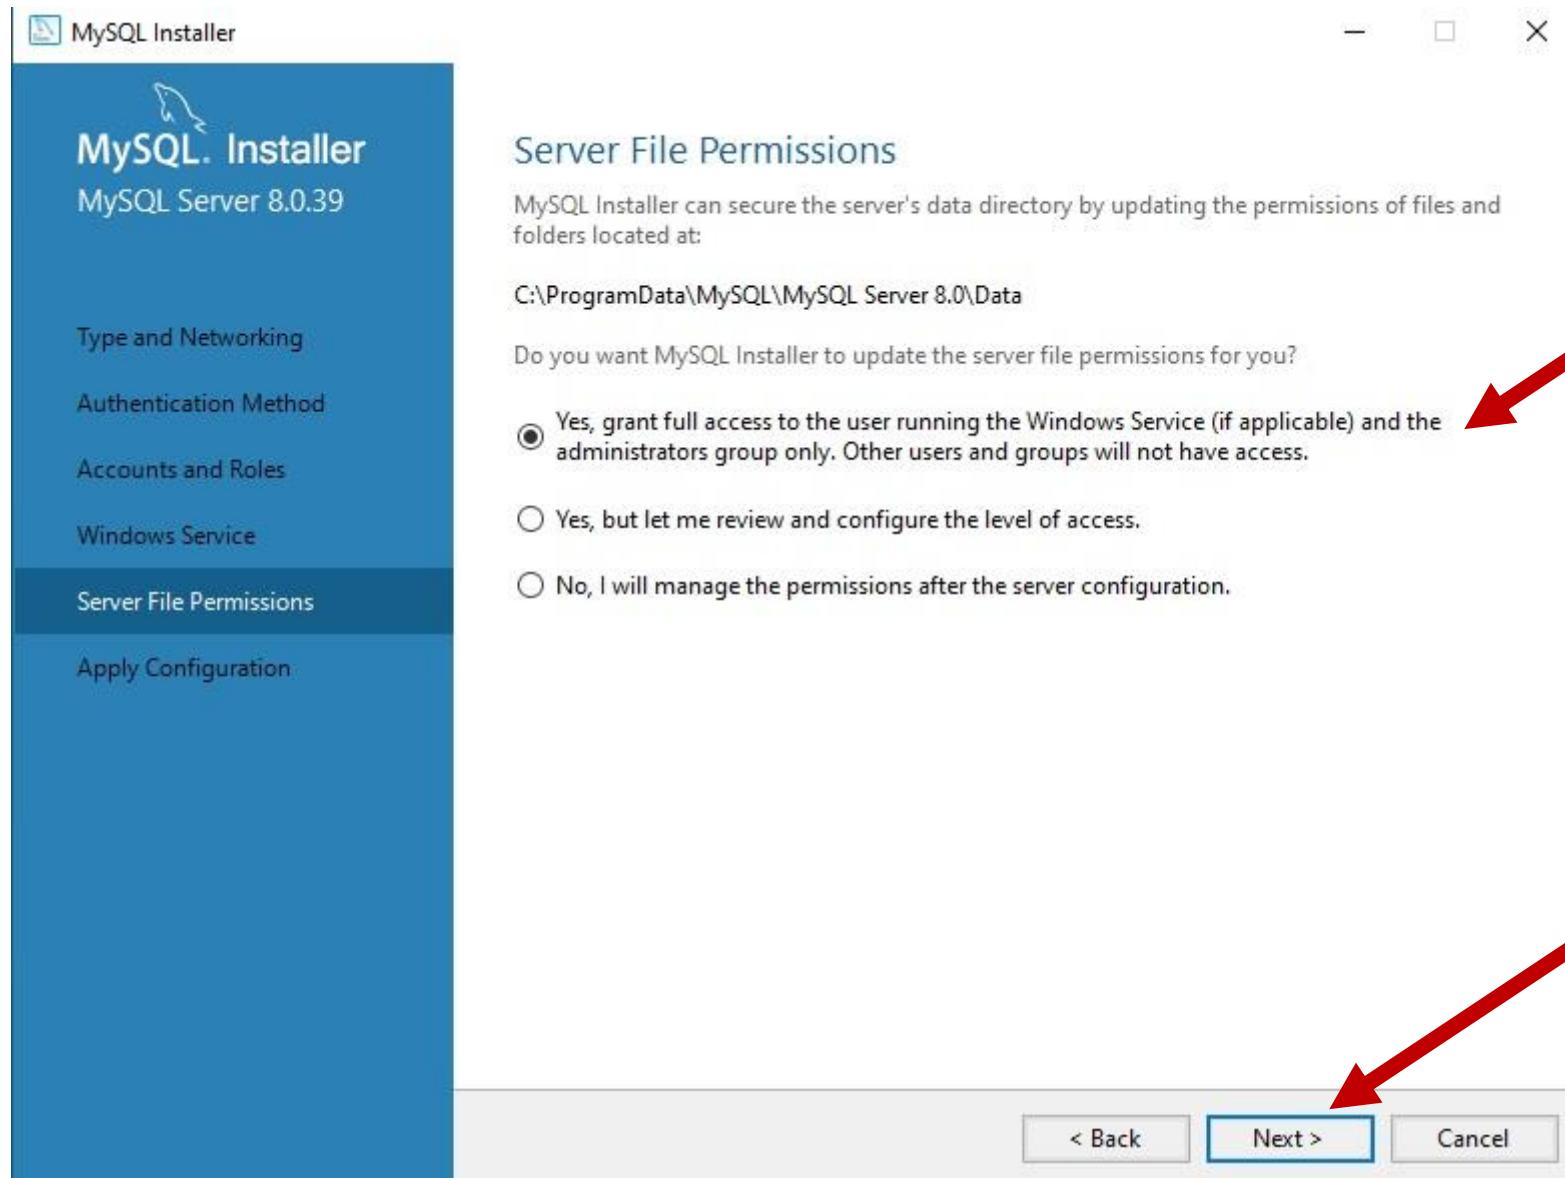


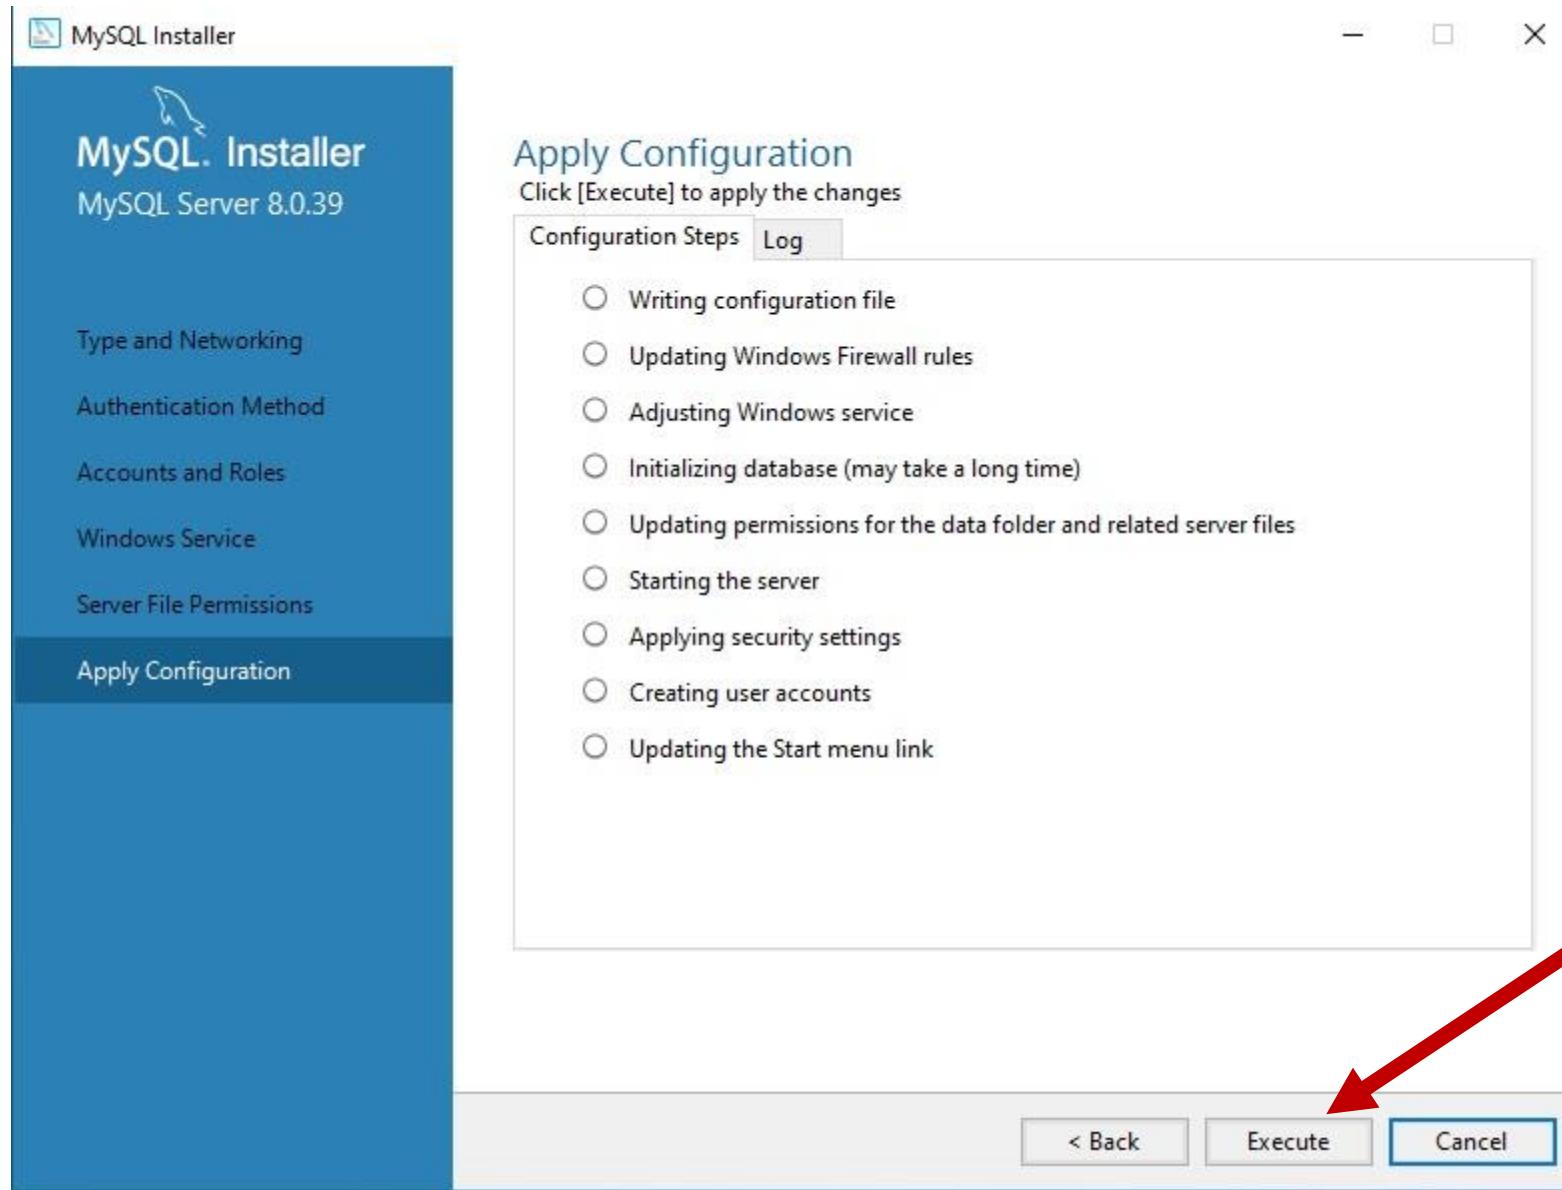


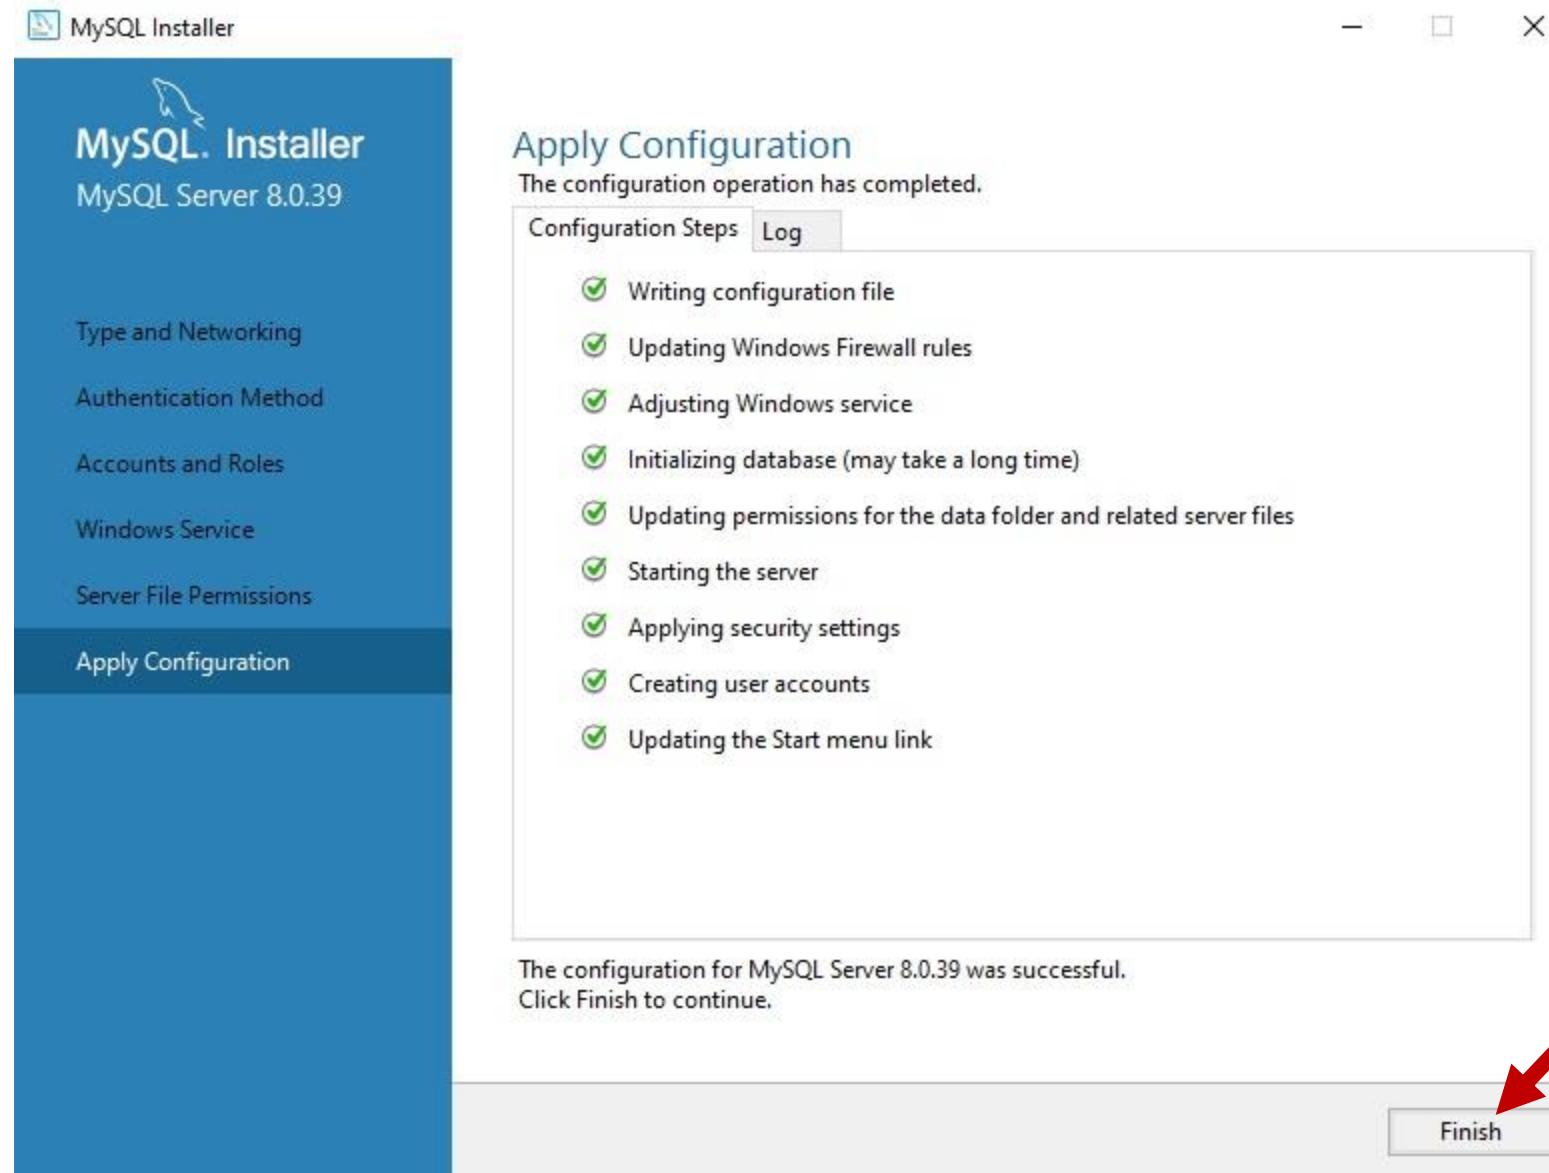


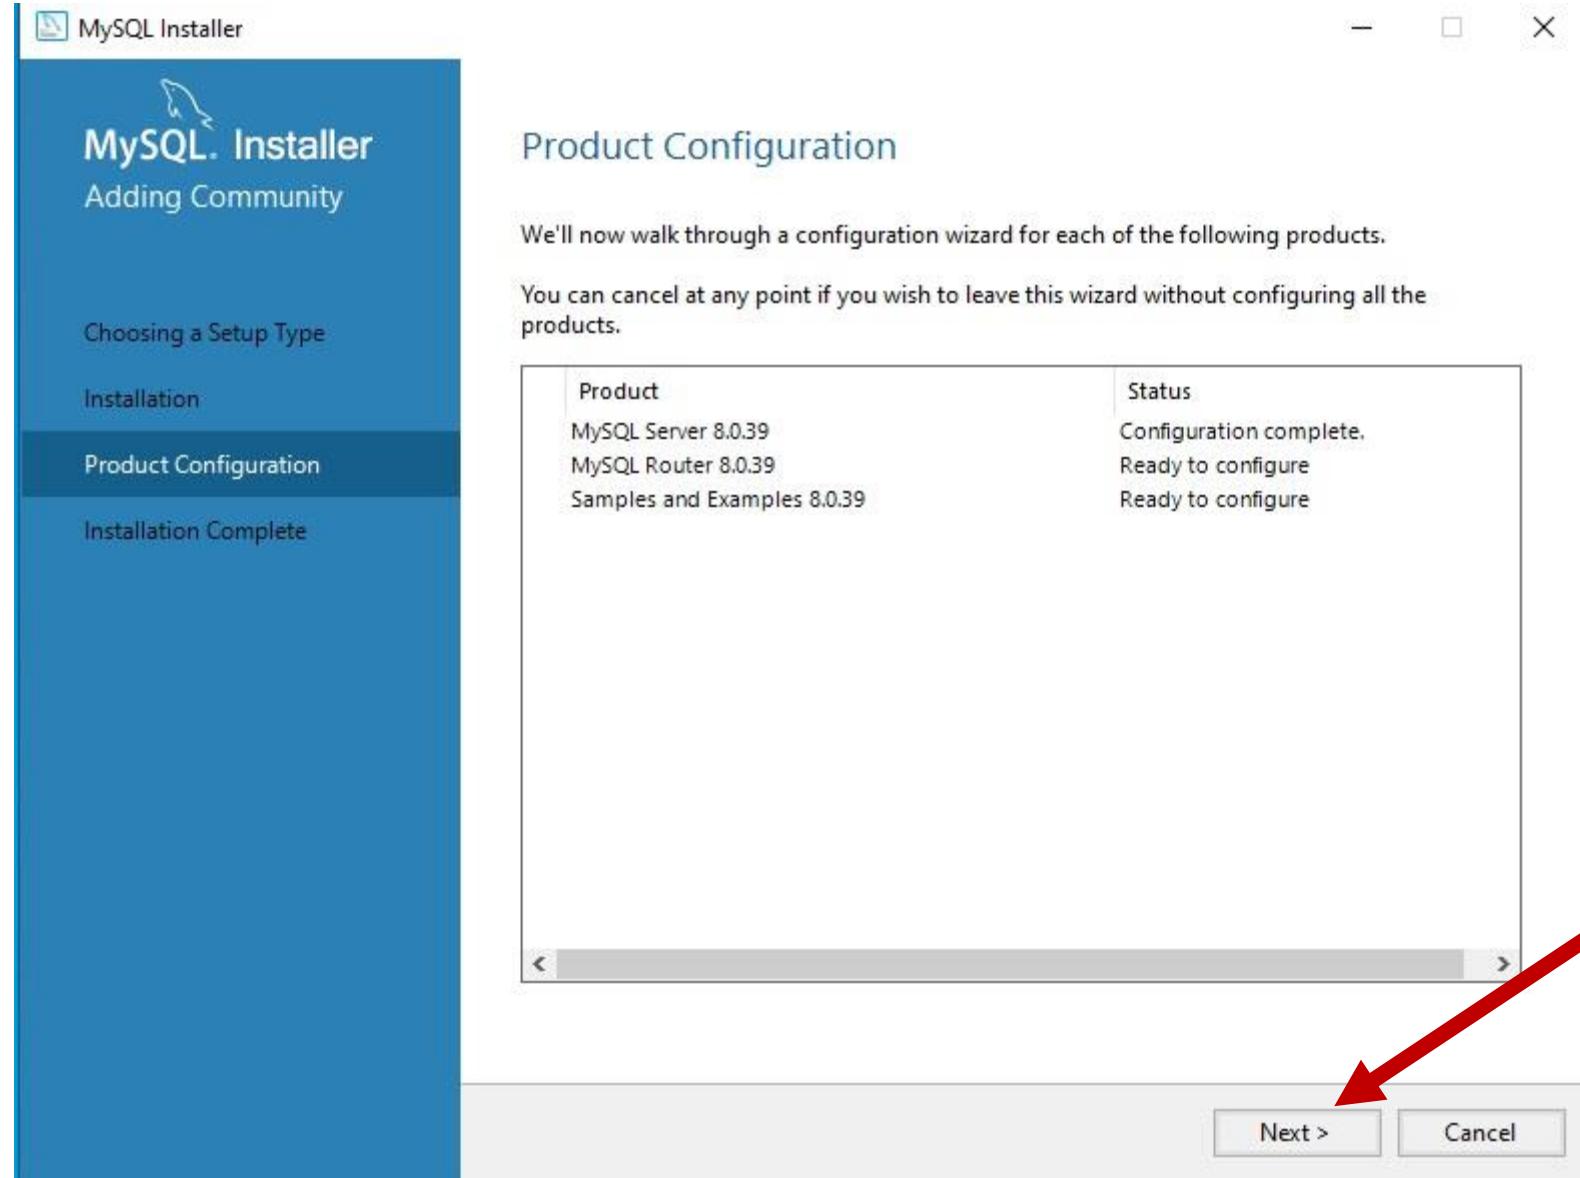


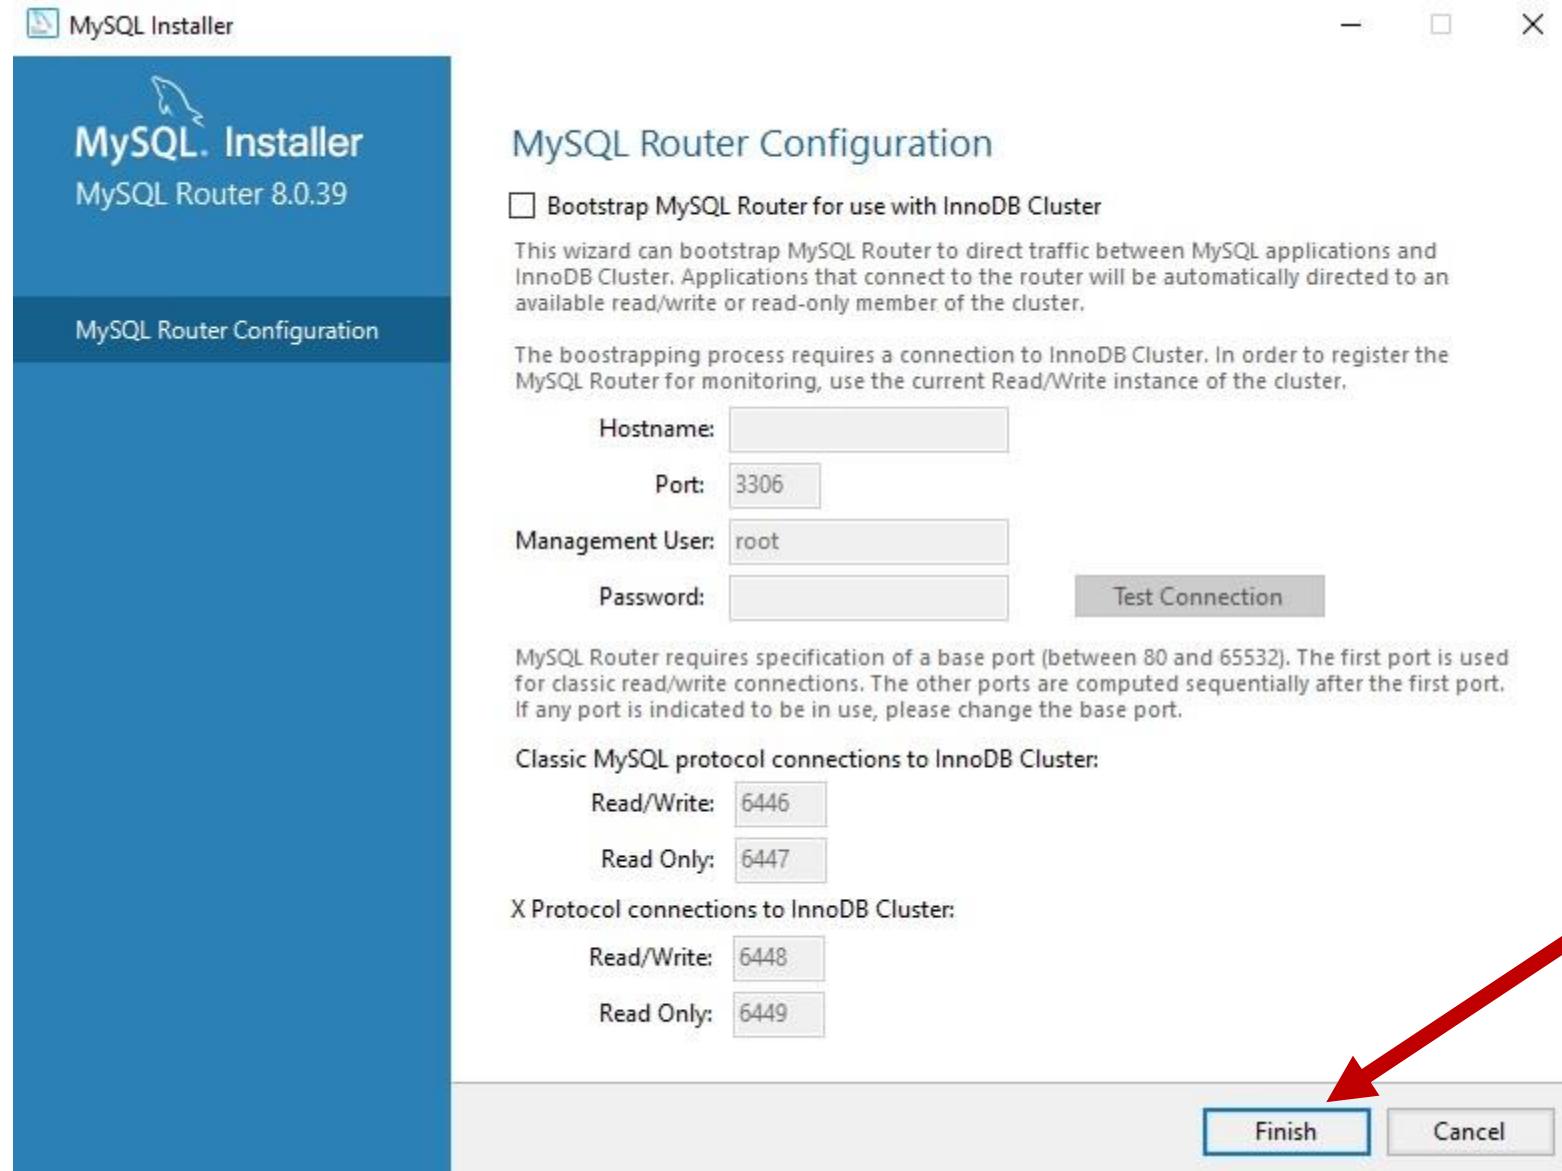


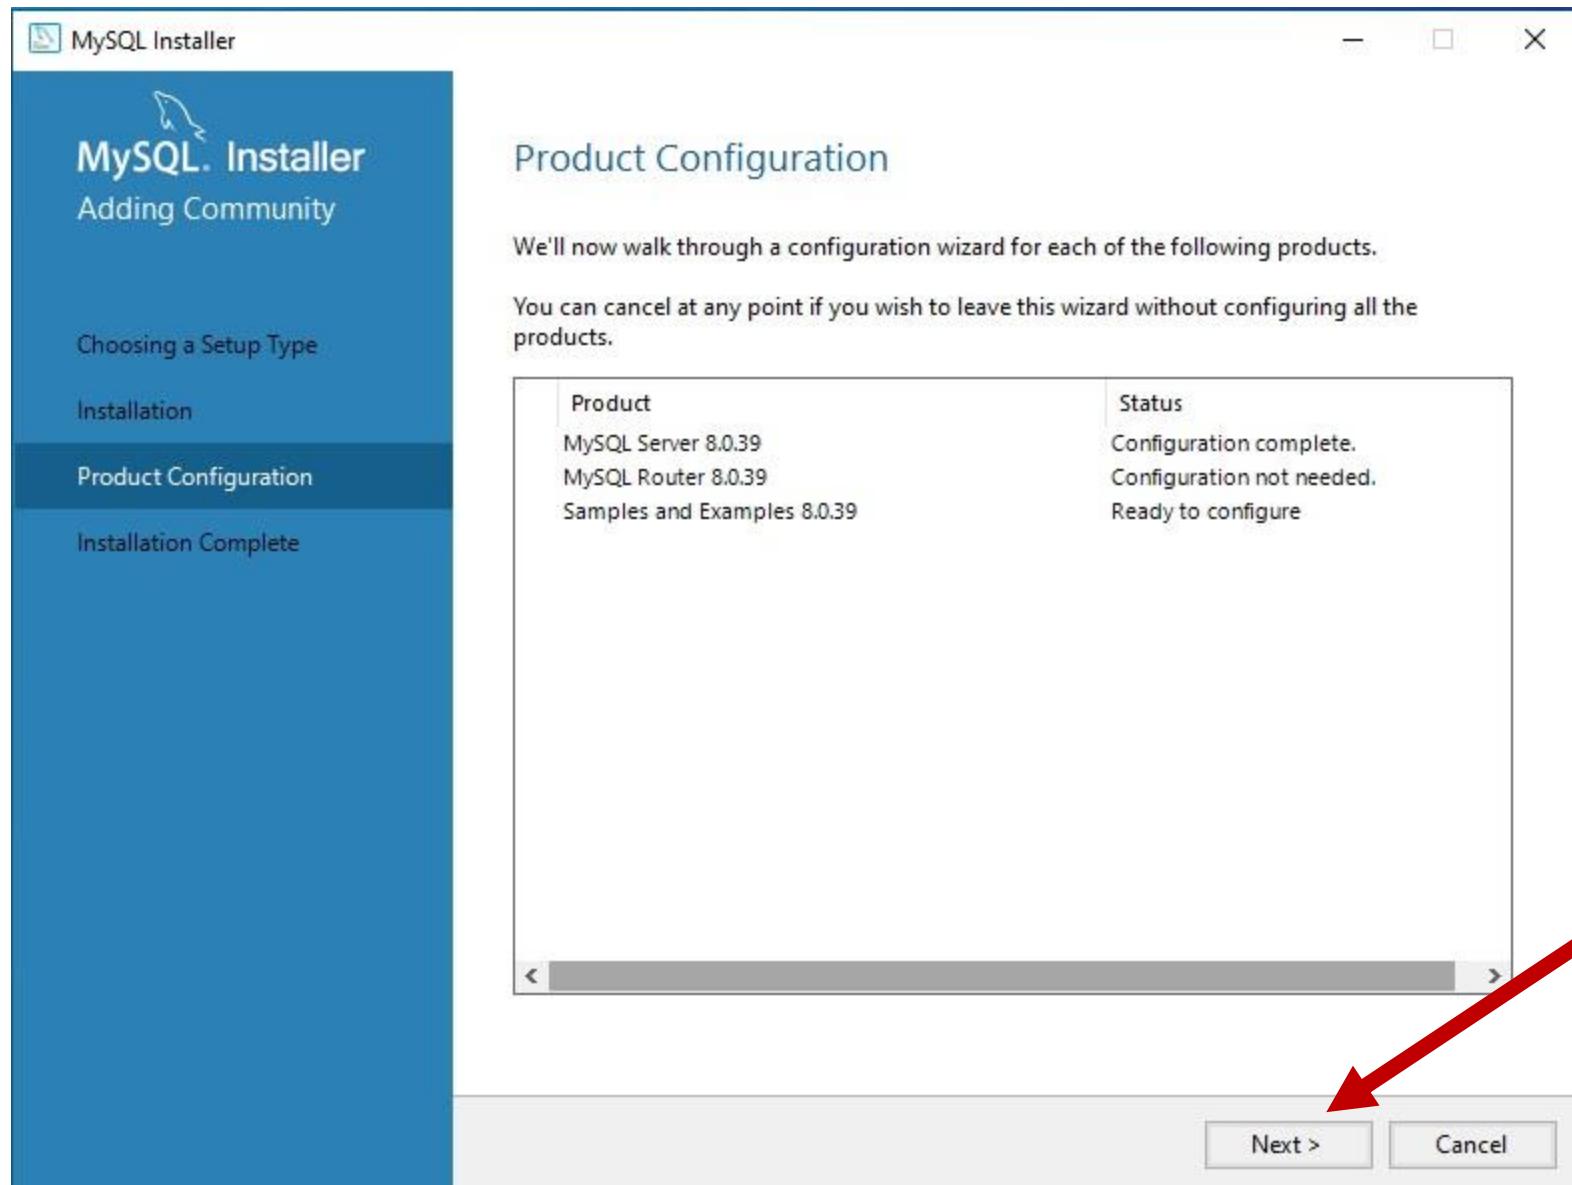


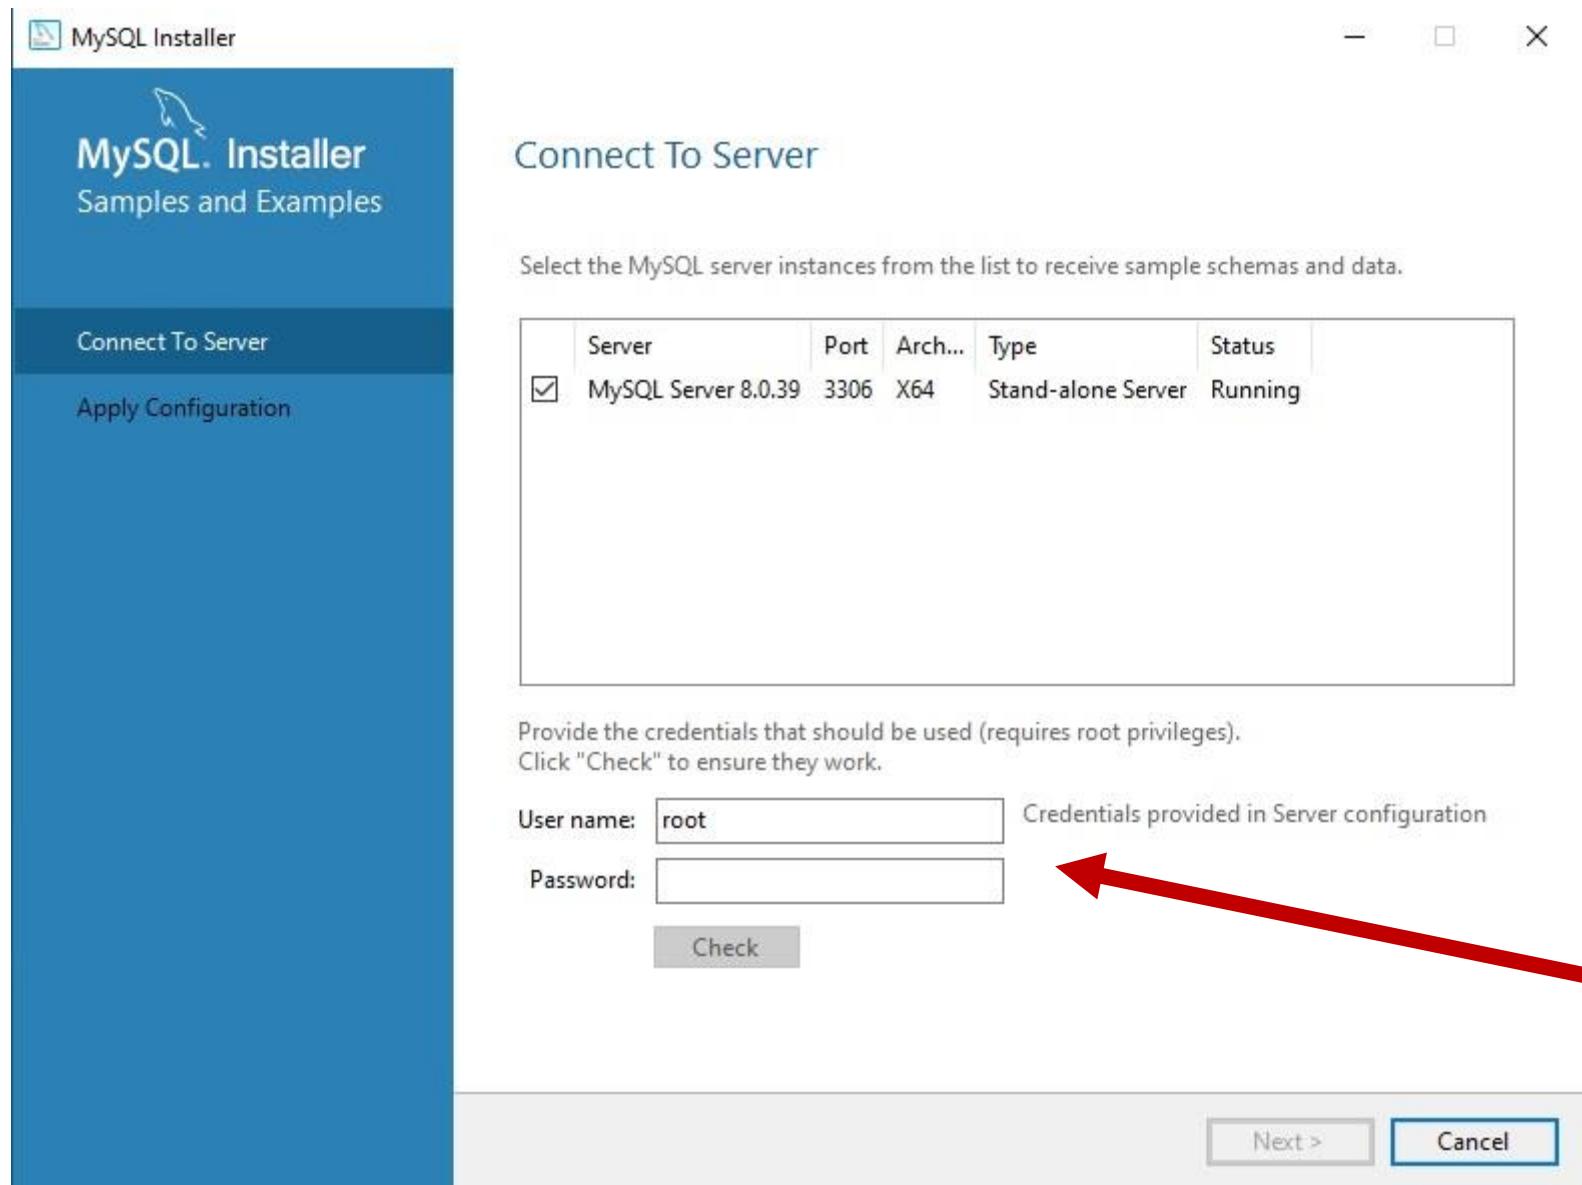


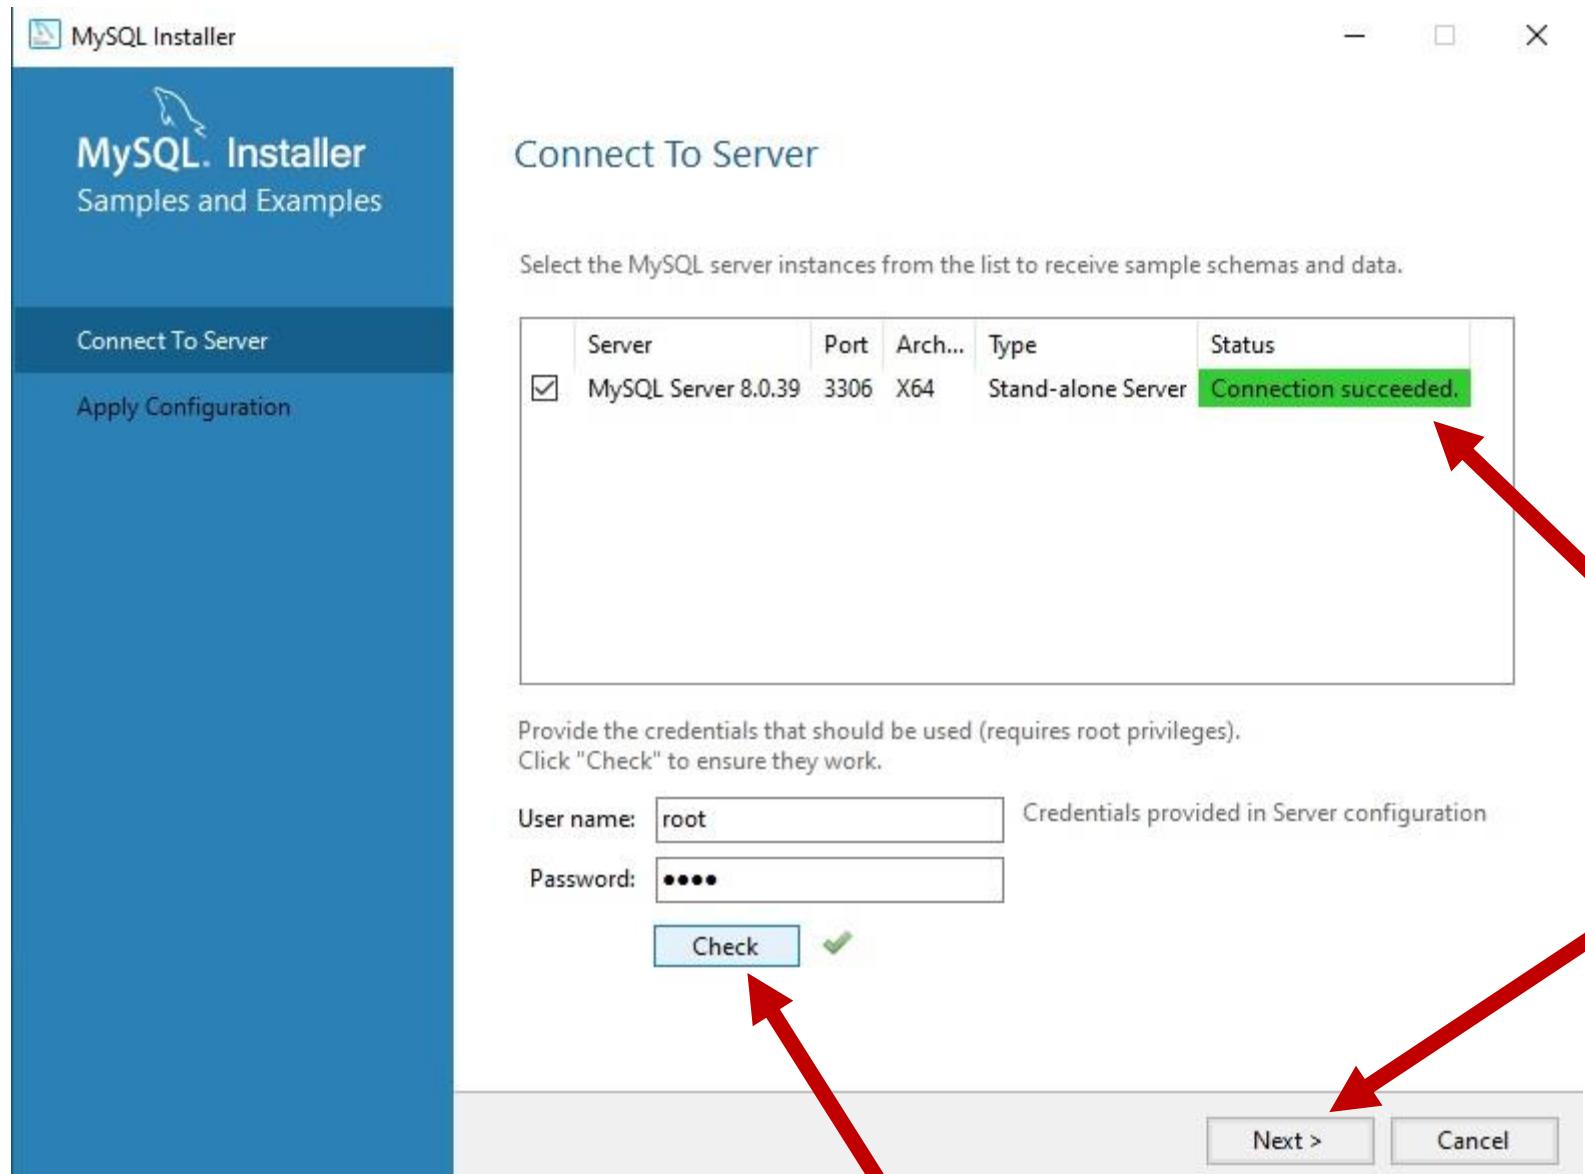

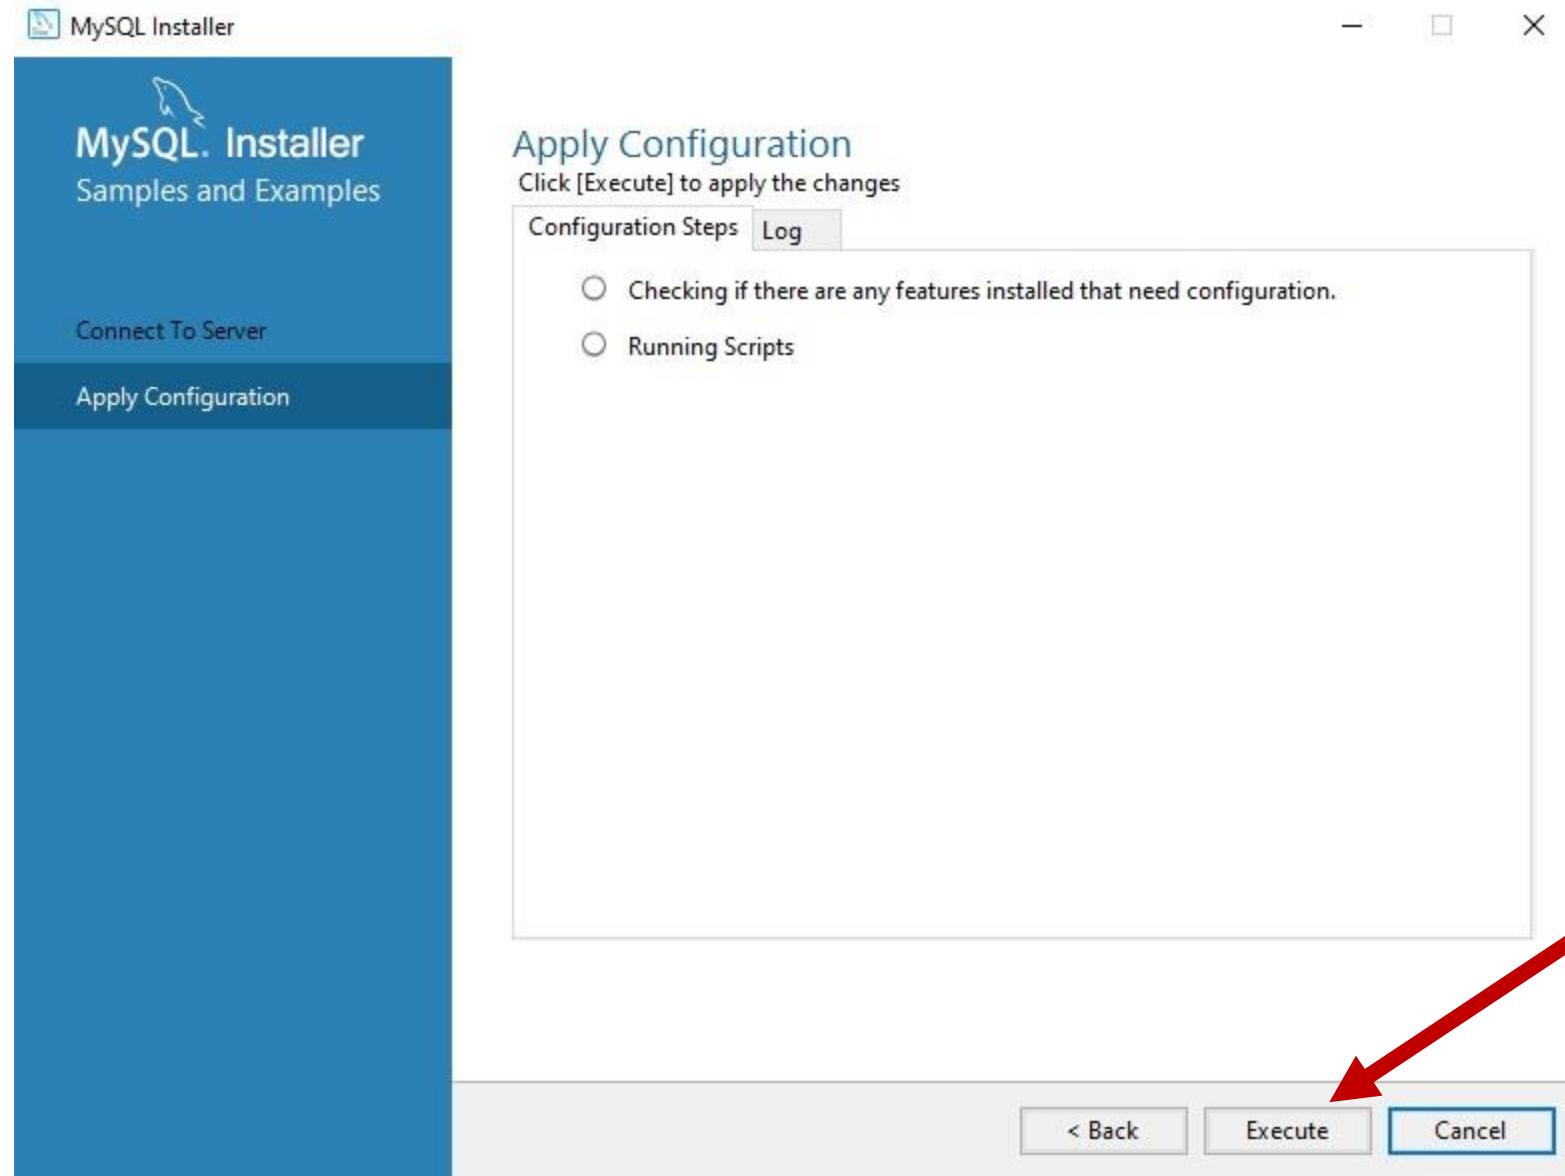

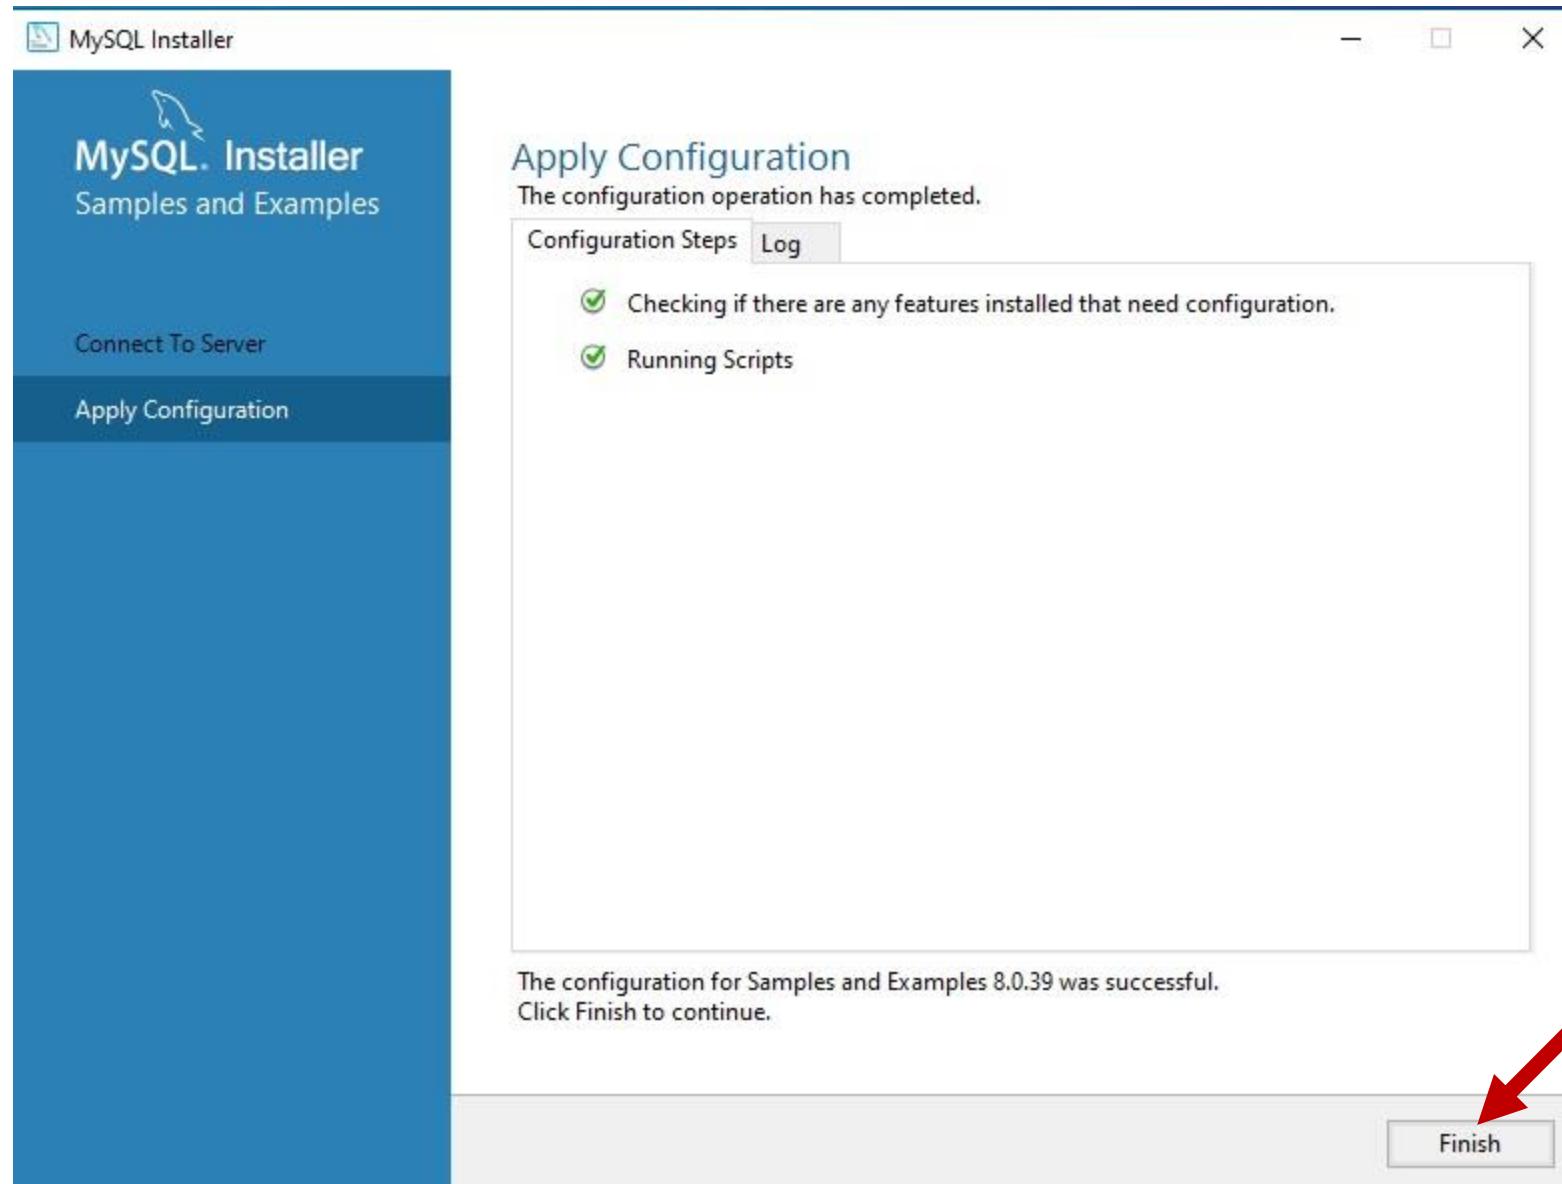

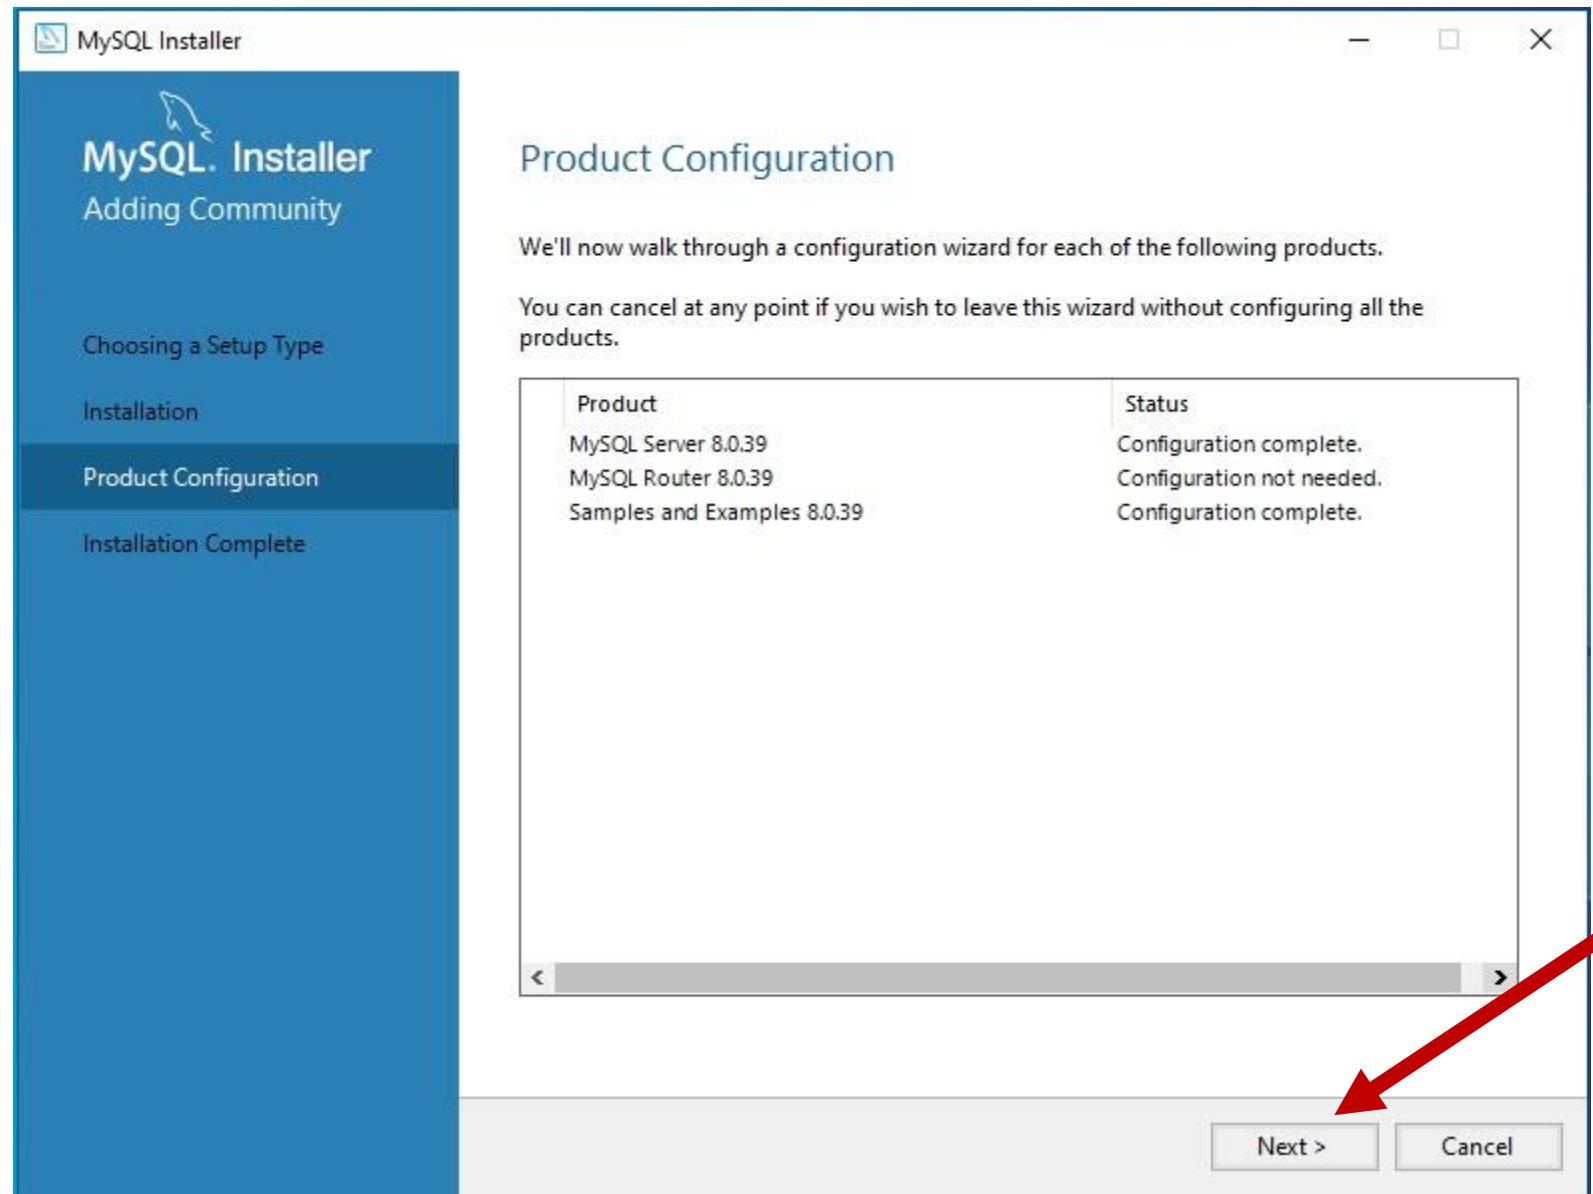

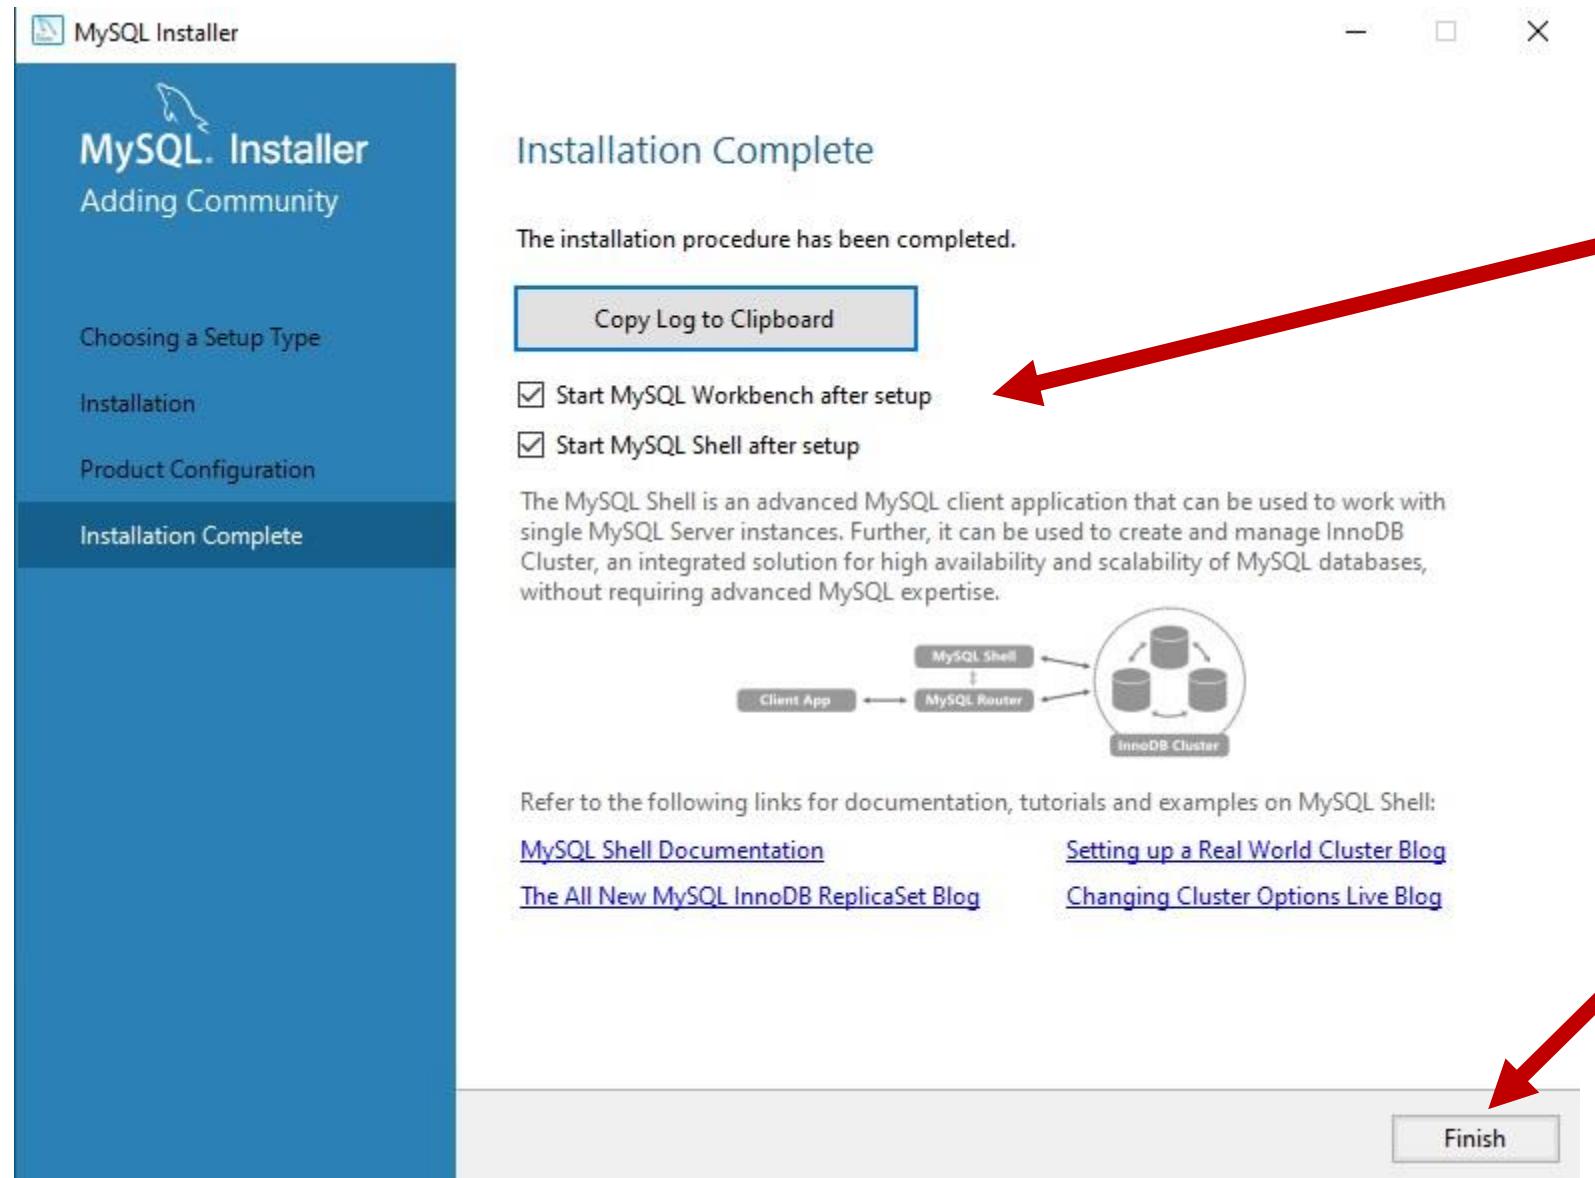



Welcome to MySQL Workbench

MySQL Workbench is the official graphical user interface (GUI) tool for MySQL. It allows you to design, create and browse your database schemas, work with database objects and insert data as well as design and run SQL queries to work with stored data. You can also migrate schemas and data from other database vendors to your MySQL database.

[Browse Documentation >](#)[Read the Blog >](#)[Discuss on the Forums >](#)

MySQL Connections



Local instance MySQL80

 root
 localhost:3306




Welcome to MySQL Workbench

MySQL Workbench is the
create and browse your
design and run SQL queries

[Browse Documentation >](#)


MySQL Connections +

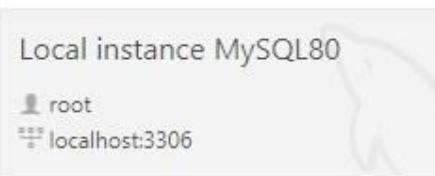

Local instance MySQL80



root



localhost:3306



Senha: root

ows you to design,
t data as well as
and data from other

[Discuss on the Forums >](#)[Filter connections](#)



Welcome to MySQL Workbench

MySQL Workbench is the
create and browse your
design and run SQL queries

[Browse Documentation >](#)

MySQL Connections +

Local instance MySQL80

root
localhost:3306



ows you to design,
t data as well as
and data from other

[Discuss on the Forums >](#)

 [Filter connections](#)

MySQL Workbench

Local instance MySQL80 X

File Edit View Query Database Server Tools Scripting Help

SQL Editor

Navigator

SCHEMAS

Filter objects

sakila

sys

world

Query 1

1

Criar um novo banco de dados com o nome saboroso

Administration Schemas

No object selected


Output

Action Output

Time Action Message Duration / Fetch

Object Info Session

A red arrow originates from the 'Navigator' tab in the top-left corner of the MySQL Workbench interface. It points diagonally down and to the right, ending at a callout box. The callout box has a red border and contains the text 'Criar um novo banco de dados com o nome saboroso'.

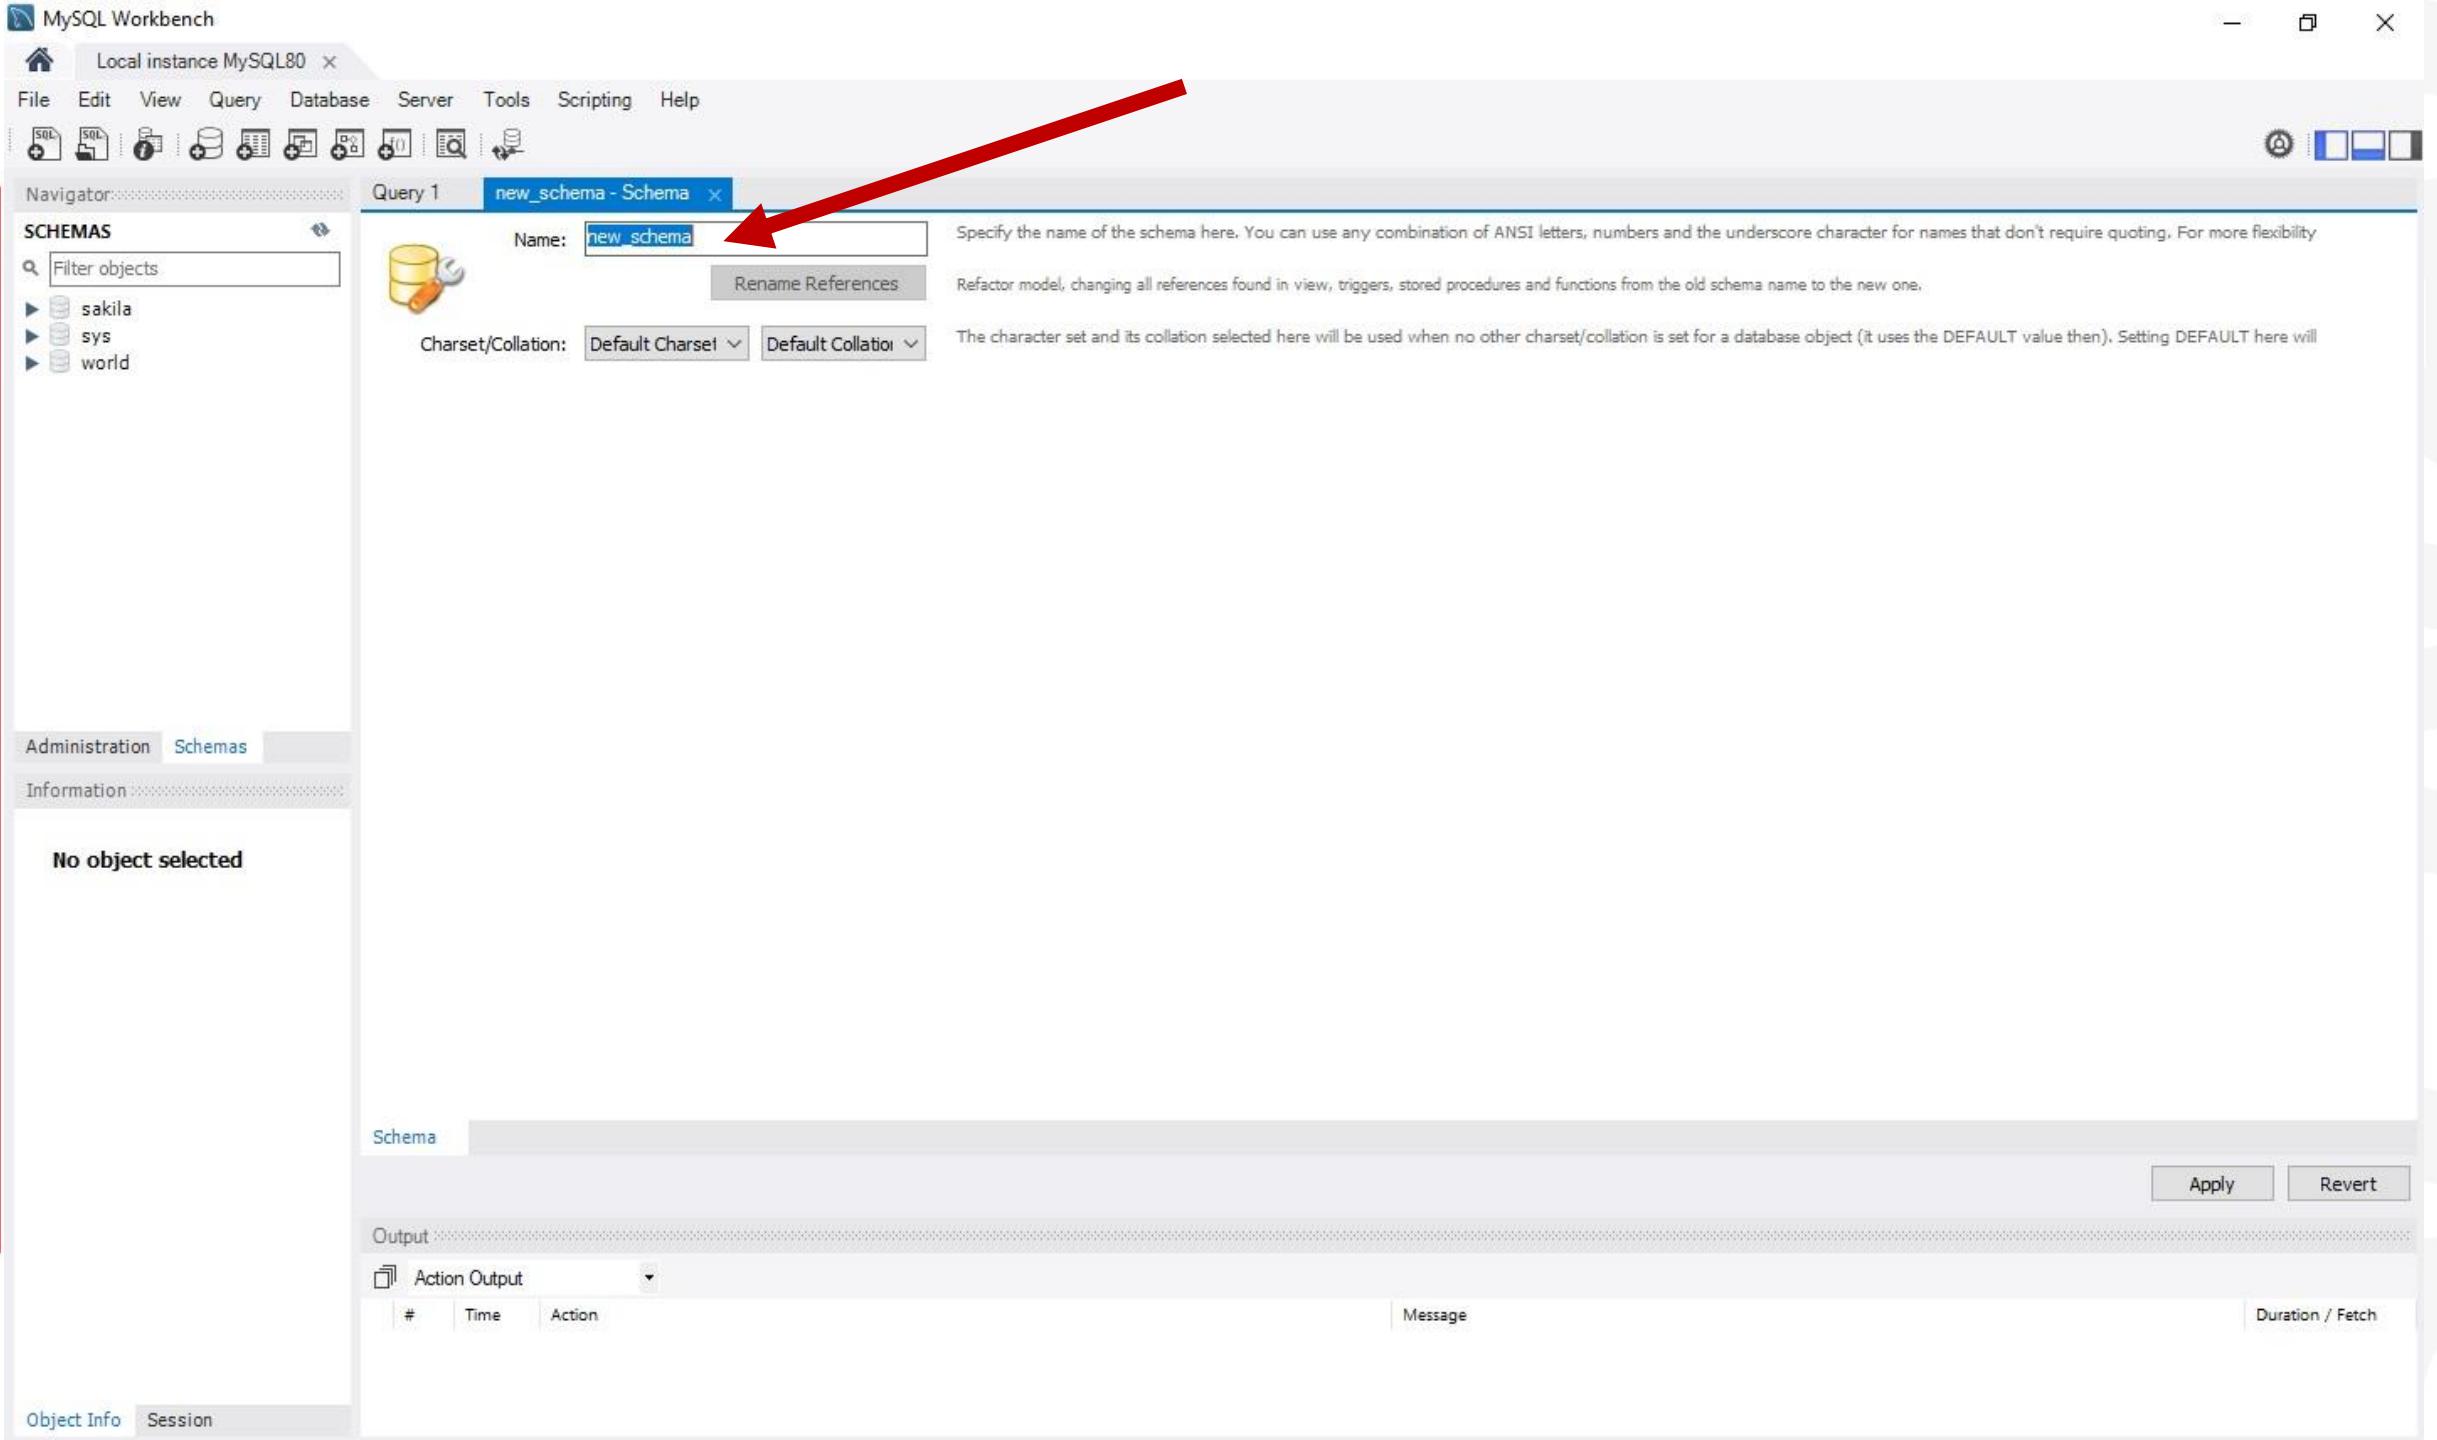



Navigator:

SCHEMAS

Filter objects

- sakila
- sys
- world

Query 1 saboroso - Schema ×



Name: saboroso

Rename References

Specify the name of the schema here. You can use any combination of ANSI letters, numbers and the underscore character for names that don't require quoting. For more flexibility

Refactor model, changing all references found in view, triggers, stored procedures and functions from the old schema name to the new one.

Charset/Collation: Default Charset ▾ Default Collation ▾

The character set and its collation selected here will be used when no other charset/collation is set for a database object (it uses the DEFAULT value then). Setting DEFAULT here will

Administration Schemas

Information

No object selected

Schema

Apply Revert

Output

Action Output

Time Action

Message

Duration / Fetch

Object Info Session

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

Schemas

Name: saboroso - Schema ×

Apply SQL Script to Database

Review SQL Script

Charset/Collation: Apply SQL Script

Online DDL

Algorithm: Default Lock Type: Default

1 CREATE SCHEMA `saboroso` ;
2

Review the SQL Script to be Applied on the Database

No object selected

Information

Schema

Output

Action Output

Time Action

4 1 19:09:48 Apply changes to saboroso

Message

Applying object changes ...

Duration / Fetch

Back Apply Cancel

Apply Revert

Navigator

Object Info Session

The screenshot shows the MySQL Workbench interface with a modal dialog titled "Review SQL Script" for applying a schema named "saboroso". The SQL script contains the command "CREATE SCHEMA `saboroso` ;". The "Apply" button in the dialog is highlighted with a red arrow. Another red arrow points from the "saboroso" schema name in the list of schemas on the left to the same "Apply" button. This visual cue indicates that applying the schema will also affect the "saboroso" entry in the schema list.



Navigator

SCHEMAS

- Filter objects
- saboroso
- sakila
- sys
- world

Query 1 saboroso - Schema ×



Charset/Collation

Name: Apply SQL Script to Database

Review SQL Script

Apply SQL Script

Applying SQL script to the database

The following tasks will now be executed. Please monitor the execution.
Press Show Logs to see the execution logs.

 Execute SQL Statements

SQL script was successfully applied to the database.



Administration Schemas

Information

No object selected

Schema

Show Logs

Back

Finish

Cancel

Apply Revert

Output

Action Output

| # | Time | Action |
|---|----------|--------|
| 1 | 19:09:48 | |

Message
Changes applied to saboroso

Duration / Fetch

Object Info Session



Navigator

SCHEMAS

- ▶ saboroso
- ▶ sakila
- ▶ sys
- ▶ world

Query 1 saboroso - Schema ×



Name: saboroso

Rename References

Specify the name of the schema here. You can use any combination of ANSI letters, numbers and the underscore character for names that don't require quoting. For more flexibility

Refactor model, changing all references found in view, triggers, stored procedures and functions from the old schema name to the new one.

Charset/Collation: Default Charset ▾ Default Collation ▾

The character set and its collation selected here will be used when no other charset/collation is set for a database object (it uses the DEFAULT value then). Setting DEFAULT here will

Administration Schemas

Information

No object selected

Schema

Apply Revert

Output

Action Output

Time Action

1 19:09:48 Apply changes to saboroso

Message

Changes applied

Duration / Fetch

Object Info Session



Navigator

SCHEMAS

Filter objects

- ▼ saboroso
 - Tables
 - Views
 - Stored Procedures
 - Functions
- sakila
- sys
- world



Query 1 saboroso - Schema ×

Name: saboroso

Specify the name of the schema here. You can use any combination of ANSI letters, numbers and the underscore character for names that don't require quoting. For more flexibility



Rename References



Charset/Collation: Default Charset ▾ Default Collation ▾

The character set and its collation selected here will be used when no other charset/collation is set for a database object (it uses the DEFAULT value then). Setting DEFAULT here will

Administration Schemas

Information

No object selected

Schema

Apply Revert

Output

Action Output

Time Action


| # | Time | Action |
|---|----------|---------------------------|
| 1 | 19:09:48 | Apply changes to saboroso |


Message


Changes applied

Duration / Fetch

Object Info Session

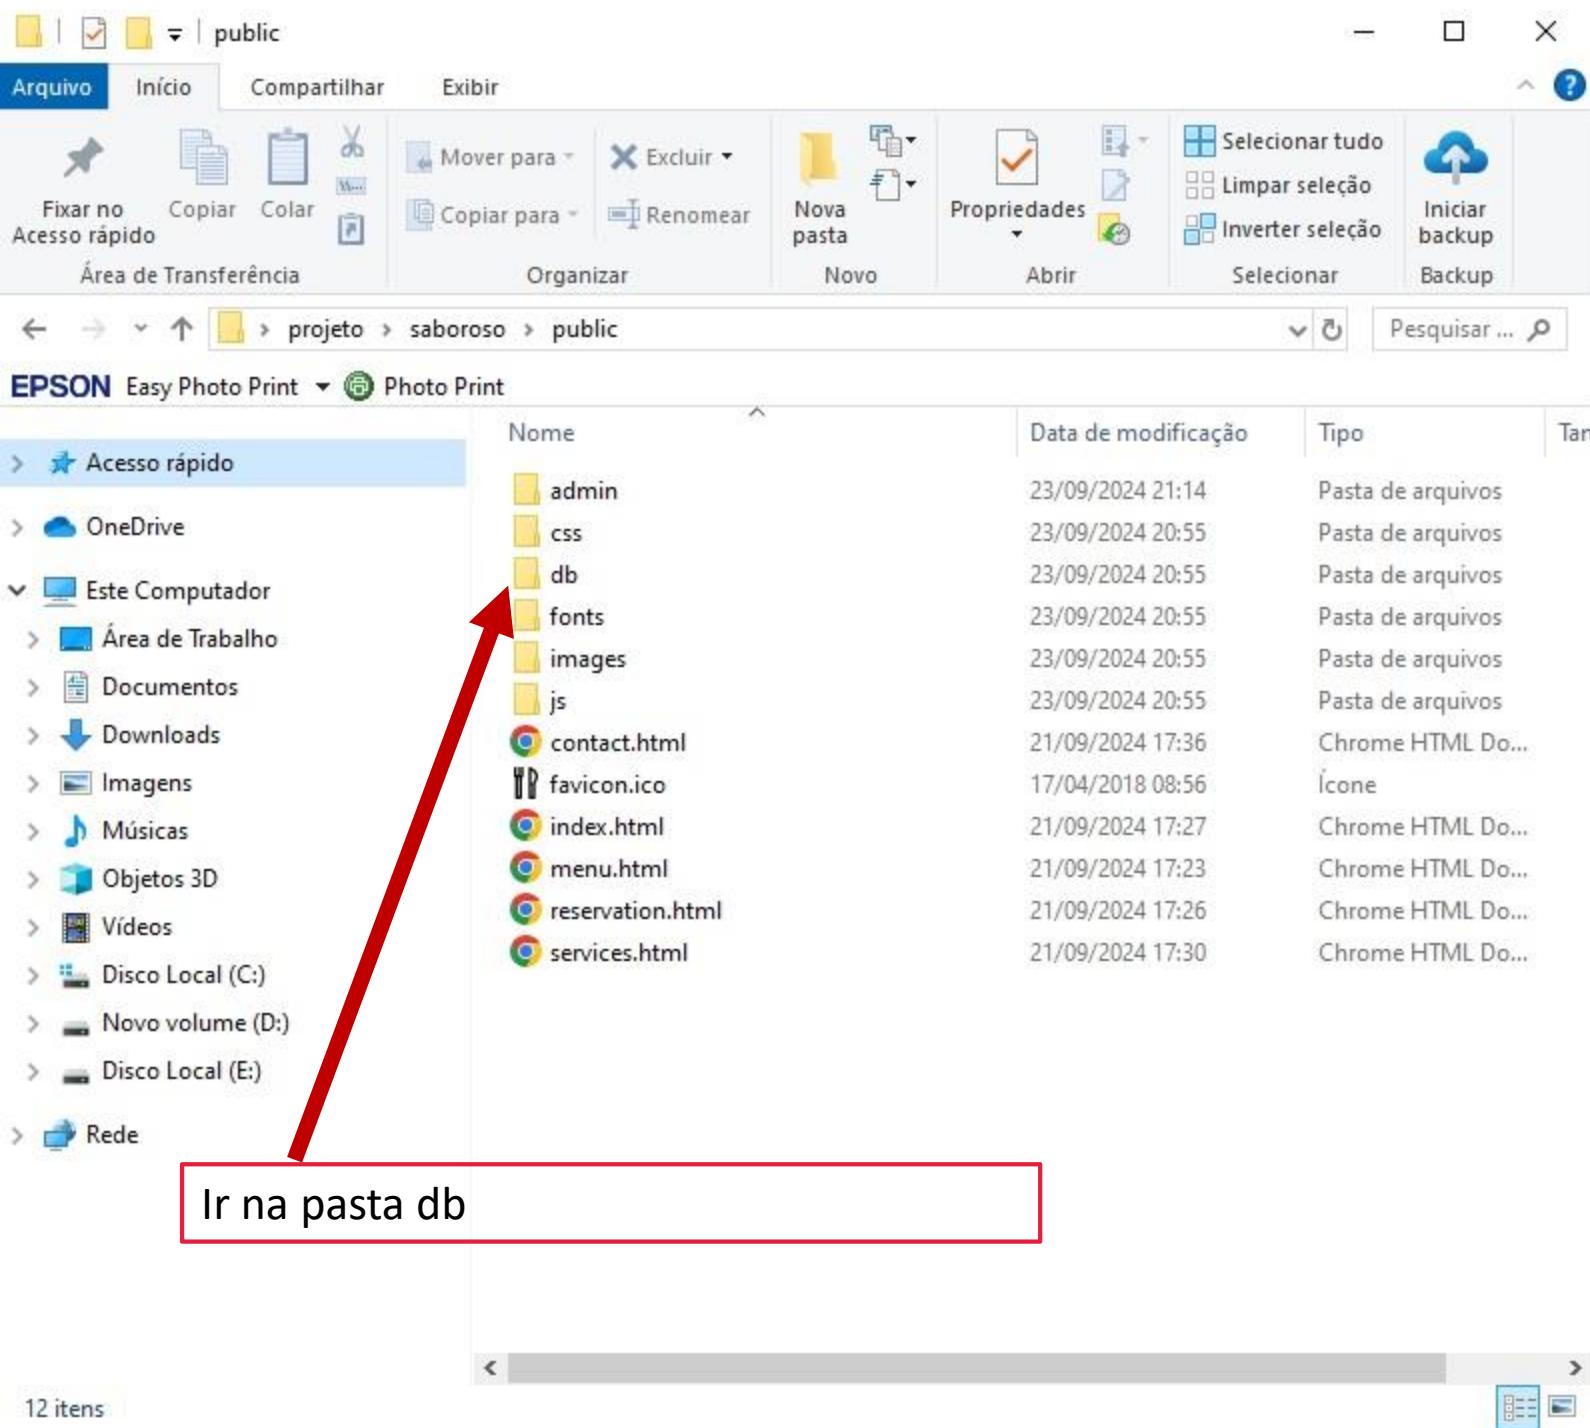

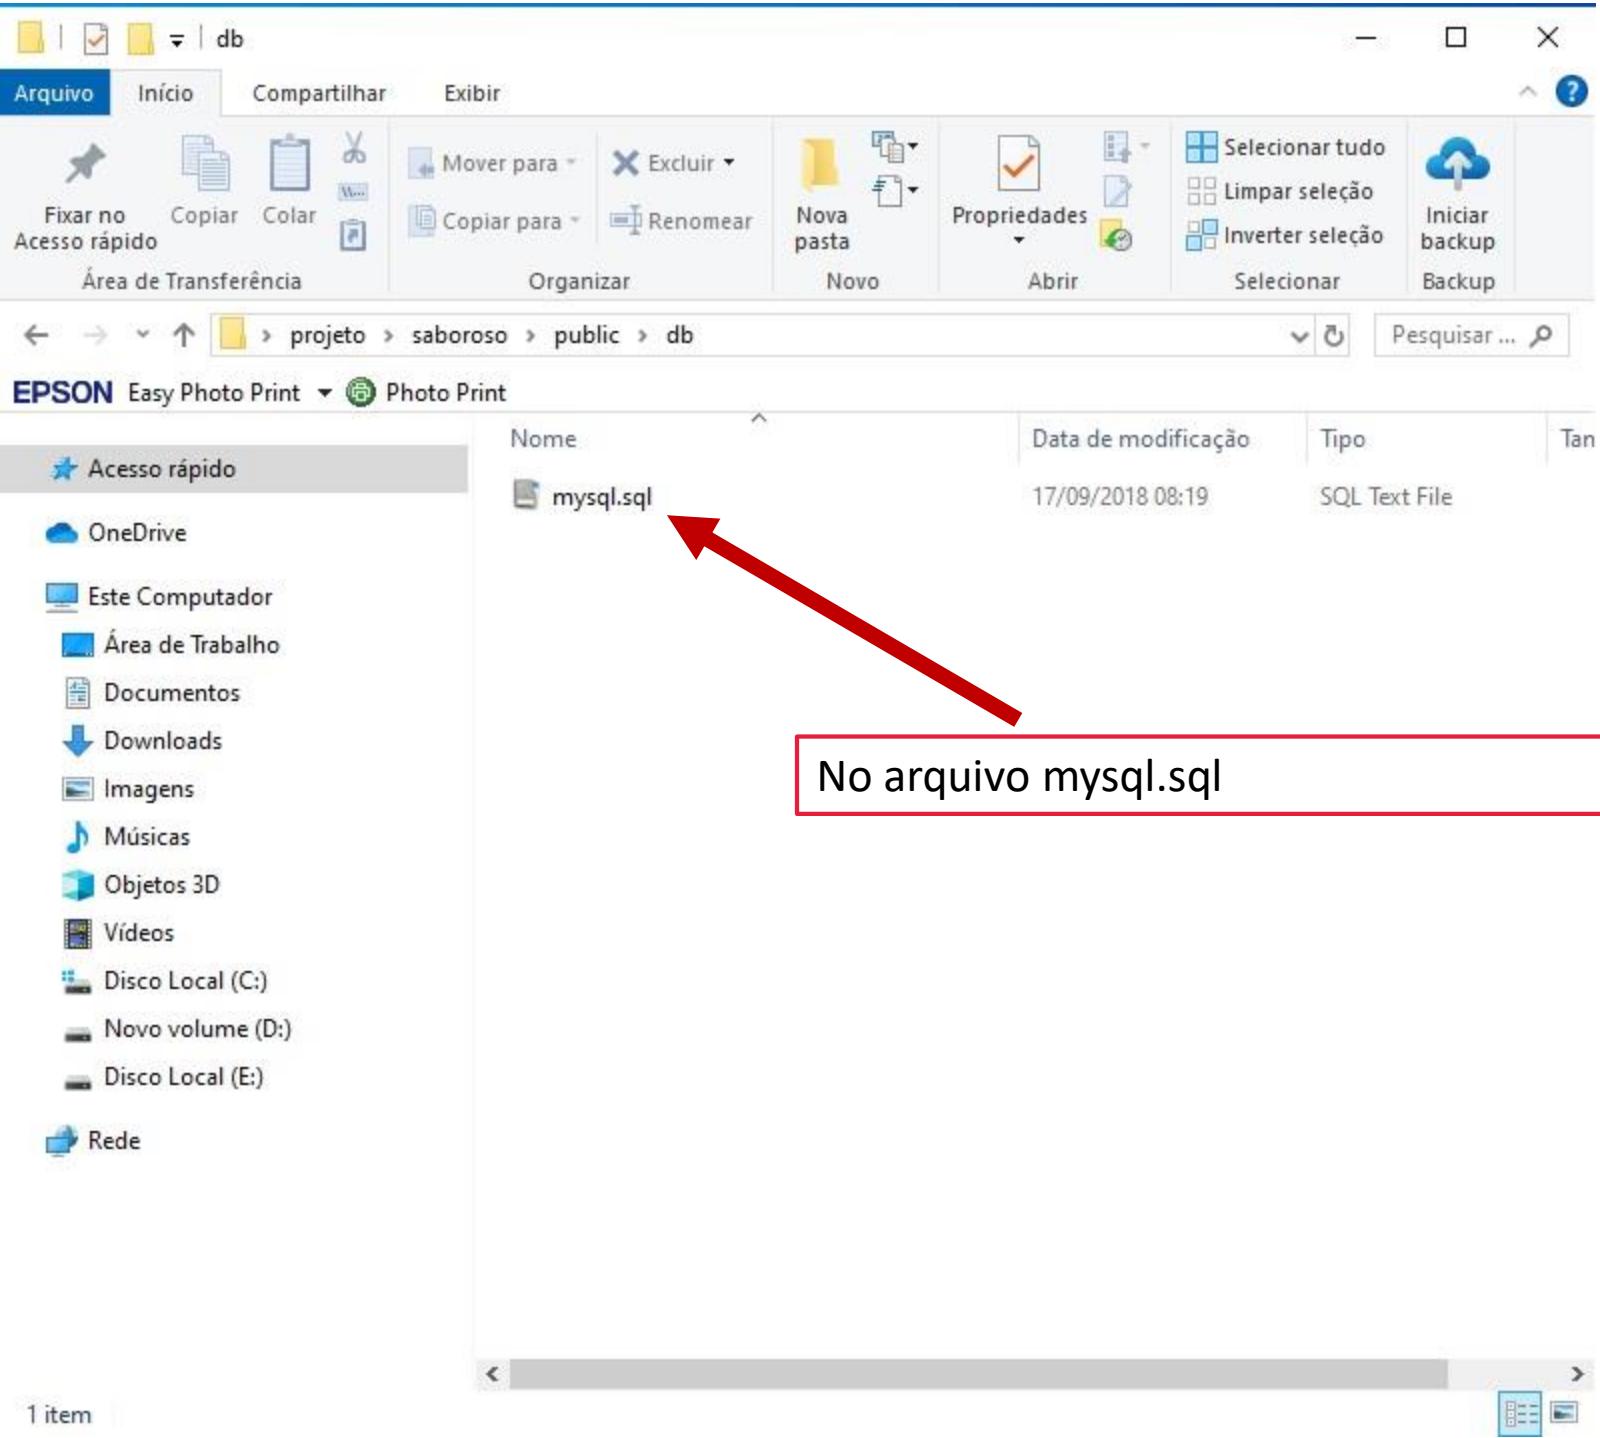

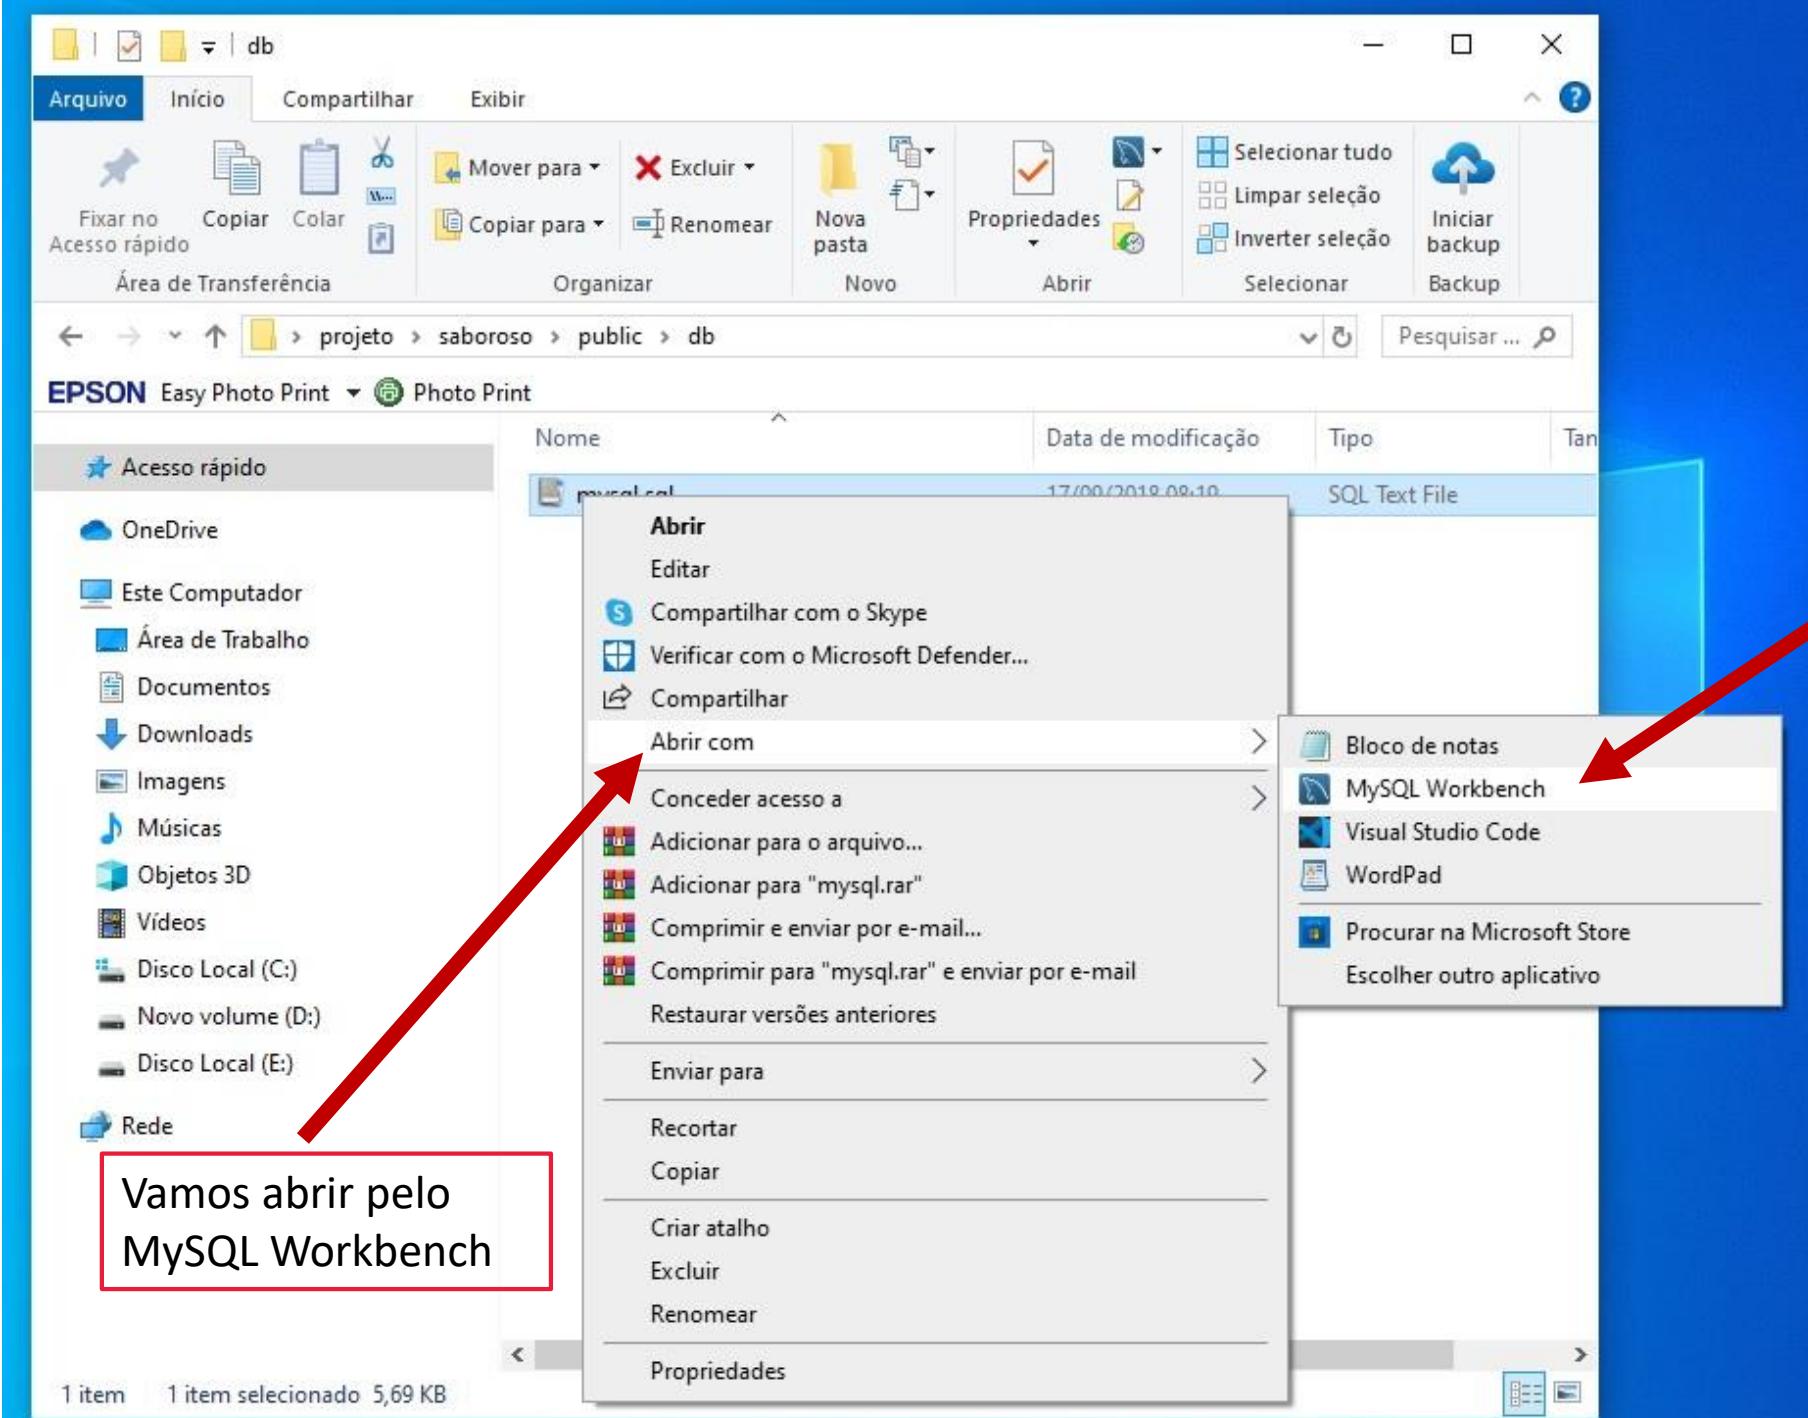

MySQL Workbench

Local instance MySQL80 x unconnected

File Edit View Query Database Server Tools Scripting Help

Navigator mysql

SCHEMAS

Filter objects

Not connected

Administration Schemas

Information

Ele abrirá em uma nova sessão de banco de dados

-- MySQL dump 10.13 Distrib 5.7.17, for Win64 (x86_64)

--

-- Host: 127.0.0.1 Database: saboroso

--

-- Server version 5.7.20-log

--

/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;

/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;

/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;

/*!40101 SET NAMES utf8 */;

/*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;

/*!40103 SET TIME_ZONE='+00:00' */;

/*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;

/*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;

/*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;

/*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;

--

-- Table structure for table `tb_contacts`

--

--

DROP TABLE IF EXISTS `tb_contacts`;

/*!40101 SET @saved_cs_client = @@character_set_client */;

/*!40101 SET character_set_client = utf8 */;

CREATE TABLE `tb_contacts` (

`id` int(11) NOT NULL AUTO_INCREMENT,

`name` varchar(255) NOT NULL,

`email` varchar(255) NOT NULL,

`phone` varchar(20) NOT NULL,

`address` varchar(255) NOT NULL,

`city` varchar(50) NOT NULL,

`state` varchar(50) NOT NULL,

`zip` varchar(10) NOT NULL,

`country` varchar(50) NOT NULL,

`notes` text NOT NULL,

`status` enum('Active', 'Inactive') NOT NULL,

`created_at` timestamp NOT NULL DEFAULT CURRENT_TIMESTAMP,

`updated_at` timestamp NOT NULL DEFAULT CURRENT_TIMESTAMP ON UPDATE CURRENT_TIMESTAMP

);

Output

Action Output

Time Action Message Duration / Fetch

Object Info Session

Visualize o conteúdo.

MySQL Workbench

Local instance MySQL80 unconnected

File Edit View Query Database Server Tools Scripting Help

Schemas

Filter objects Not connected

Administration Schemas

Information

mysqл

-- MySQL dump 10.13 Distrib 5.7.17, for Win64 (x86_64)
--
-- Host: 127.0.0.1 Database: saboroso
--
-- Server version 5.7.20-log
--
/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
/*!40101 SET NAMES utf8 */;
/*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
/*!40103 SET TIME_ZONE='+00:00' */;
/*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
/*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
/*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
/*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;
--
-- Table structure for table `tb_contacts`
--
DROP TABLE IF EXISTS `tb_contacts`;
/*!40101 SET @saved_cs_client = @@character_set_client */;
/*!40101 SET character_set_client = utf8 */;
CREATE TABLE `tb_contacts` (
 `id` int(11) NOT NULL AUTO_INCREMENT,
 `name` varchar(100) NOT NULL,
 `email` varchar(100) NOT NULL,
 `phone` varchar(15) NOT NULL,
 `address` varchar(255) NOT NULL,
 `city` varchar(50) NOT NULL,
 `state` varchar(50) NOT NULL,
 `zip_code` varchar(10) NOT NULL,
 `country` varchar(50) NOT NULL,
 `notes` text,
 `created_at` timestamp NOT NULL DEFAULT CURRENT_TIMESTAMP,
 `updated_at` timestamp NOT NULL DEFAULT CURRENT_TIMESTAMP ON UPDATE CURRENT_TIMESTAMP
);

Output

Action Output

Time Action Message Duration / Fetch

Em seguida, copiar todo o conteúdo que criará a estrutura do banco de dados.

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

saboroso

- Tables
- Views
- Stored Procedures
- Functions

sakila

sys

world

Administration Schemas

Information

Schema: saboroso

Na sessão do bd saboroso

Na query

Abre uma query SQL

Cole o conteúdo copiado anteriormente

Output

Action Output

| # | Time | Action |
|---|----------|---------------------------|
| 1 | 19:09:48 | Apply changes to saboroso |

Message

Changes applied

Duration / Fetch

Object Info Session

SQL Editor closed

```
-- MySQL dump 10.17 Distrib 5.7.17, for Win64 (x86_64)
-- 
-- Host: 127.0.0.1    Database: saboroso
-- 
-- Server version      5.7.20-log
-- 
-- 
-- /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
-- /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
-- /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
-- /*!40101 SET NAMES utf8 */;
-- /*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
-- /*!40103 SET TIME_ZONE='+00:00' */;
-- /*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
-- /*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
-- /*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
-- /*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;
-- 
-- 
-- Table structure for table `tb_contacts`
-- 
-- 
-- DROP TABLE IF EXISTS `tb_contacts`;
-- 
-- /*!40101 SET @saved_cs_client      = @@character_set_client */;
-- 
-- /*!40101 SET character_set_client = utf8 */;
-- 
-- CREATE TABLE `tb_contacts` (

```

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

Schemas

Navigator

SCHEMAS

Filter objects

saboroso

- Tables
- Views
- Stored Procedures
- Functions

sakila

sys

world

Administration Schemas

Information

Schema: saboroso

Execute a criação da estrutura do bd

SQL File 3*

Limit to 1000 rows

-- MySQL dump 10.13 Distrib 5.7.17, for Win64 (x86_64)
-- Execute the selected portion of the script or everything, if there is no selection
-- Host: 127.0.0.1 Database: saboroso
--
-- Server version 5.7.20-log
--
/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
/*!40101 SET NAMES utf8 */;
/*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
/*!40103 SET TIME_ZONE='+00:00' */;
/*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
/*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
/*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
/*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;
--
-- Table structure for table `tb_contacts`
--
--
DROP TABLE IF EXISTS `tb_contacts`;
/*!40101 SET @saved_cs_client = @@character_set_client */;
/*!40101 SET character_set_client = utf8 */;
CREATE TABLE `tb_contacts` (

Action Output

| # | Time | Action | Message | Duration / Fetch |
|---|----------|---------------------------|-----------------|------------------|
| 1 | 18:09:39 | Apply changes to saboroso | Changes applied | |

Object Info Session

SQL Editor closed

The screenshot shows the MySQL Workbench interface with a red arrow pointing to the execute button in the toolbar. A callout box highlights the text 'Execute a criação da estrutura do bd'.



Navigator

SCHEMAS

Filter objects

- ▼ saboroso
 - Tables
 - Views
 - Stored Procedures
 - Functions
- ▶ sakila
- ▶ sys
- ▶ world

Administration Schemas

Information

Schema: saboroso

Query 1 × saboroso - Schema

```
1 -- MySQL dump 10.13 Distrib 5.7.17, for Win64 (x86_64)
2 --
3 -- Host: 127.0.0.1   Database: saboroso
4 --
5 -- Server version      5.7.20-log
6
7 • /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
8 • /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
9 • /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
10 • /*!40101 SET NAMES utf8 */;
11 • /*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
12 • /*!40103 SET TIME_ZONE='+00:00' */;
13 • /*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
14 • /*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
15 • /*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
16 • /*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;
17 --
18 --
19 -- Table structure for table `tb_contacts`
20 --
21
```

Output

| Action Output | # | Time | Action | Message | Duration / Fetch |
|---------------|---|----------|--|--|------------------|
| | 1 | 19:09:48 | Apply changes to saboroso | Changes applied | |
| | 2 | 19:20:48 | /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */ | 0 row(s) affected | 0.000 sec |
| | 3 | 19:20:48 | /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */ | 0 row(s) affected | 0.000 sec |
| | 4 | 19:20:48 | /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */ | 0 row(s) affected | 0.000 sec |
| | 5 | 19:20:48 | /*!40101 SET NAMES utf8 */ | 0 row(s) affected, 1 warning(s): 3719 'utf8' is currently an alias for the character set UTF8MB3, but will ... | 0.000 sec |
| | 6 | 19:20:48 | /*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */ | 0 row(s) affected | 0.000 sec |
| | 7 | 19:20:48 | /*!40103 SET TIME_ZONE='+00:00' */ | 0 row(s) affected | 0.000 sec |

Resultado positivo da execução

Ative o bd saboroso como schema padrão

MySQL Workbench - Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Schemas

Filter objects

saboroso

- Tables
- Views
- Stored Procedures
- Functions

sakila

sys

world

Administration Schema Information

Schema: saboroso

Load Spatial Data

Set as Default Schema

Filter to This Schema

Schema Inspector

Table Data Import Wizard

Copy to Clipboard

Send to SQL Editor

Create Schema...

Alter Schema...

Drop Schema...

Search Table Data...

Refresh All

SQL File 3*

1 -- MySQL dump 10.13 Distrib 5.7.17, for Win64 (x86_64)

127.0.0.1 Database: saboroso

Server version 5.7.20-log

```
SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
SET NAMES utf8 */;
SET @OLD_TIME_ZONE=@@TIME_ZONE */;
SET TIME_ZONE='+00:00' */;
SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
```

16 • /*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;

17

18 --

19 -- Table structure for table `tb_contacts`

20 --

21

22 • DROP TABLE IF EXISTS `tb_contacts`;

23 • /*!40101 SET @saved_cs_client = @@character_set_client */;

24 • /*!40101 SET character_set_client = utf8 */;

25 • CREATE TABLE `tb_contacts` (

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character set. | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Query Completed

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

saboroso

Tables

Views

Stored Procedures

Functions

sakila

sys

world

Administration Schemas

Information

Schema: saboroso

Nas tabelas do bd

SQL File 3*

Limit to 1000 rows

1 -- MySQL dump 10.13 Distrib 5.7.17, for Win64 (x86_64)
2 --
3 -- Host: 127.0.0.1 Database: saboroso
4 --
5 -- Server version 5.7.20-log
6
7 • /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
8 • /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
9 • /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
10 • /*!40101 SET NAMES utf8 */;
11 • /*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
12 • /*!40103 SET TIME_ZONE='+00:00' */;
13 • /*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
14 • /*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
15 • /*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
16 • /*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;
17
18 --
19 -- Table structure for table `tb_contacts`
20 --


Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Query Completed

Expandir a lista de tabelas

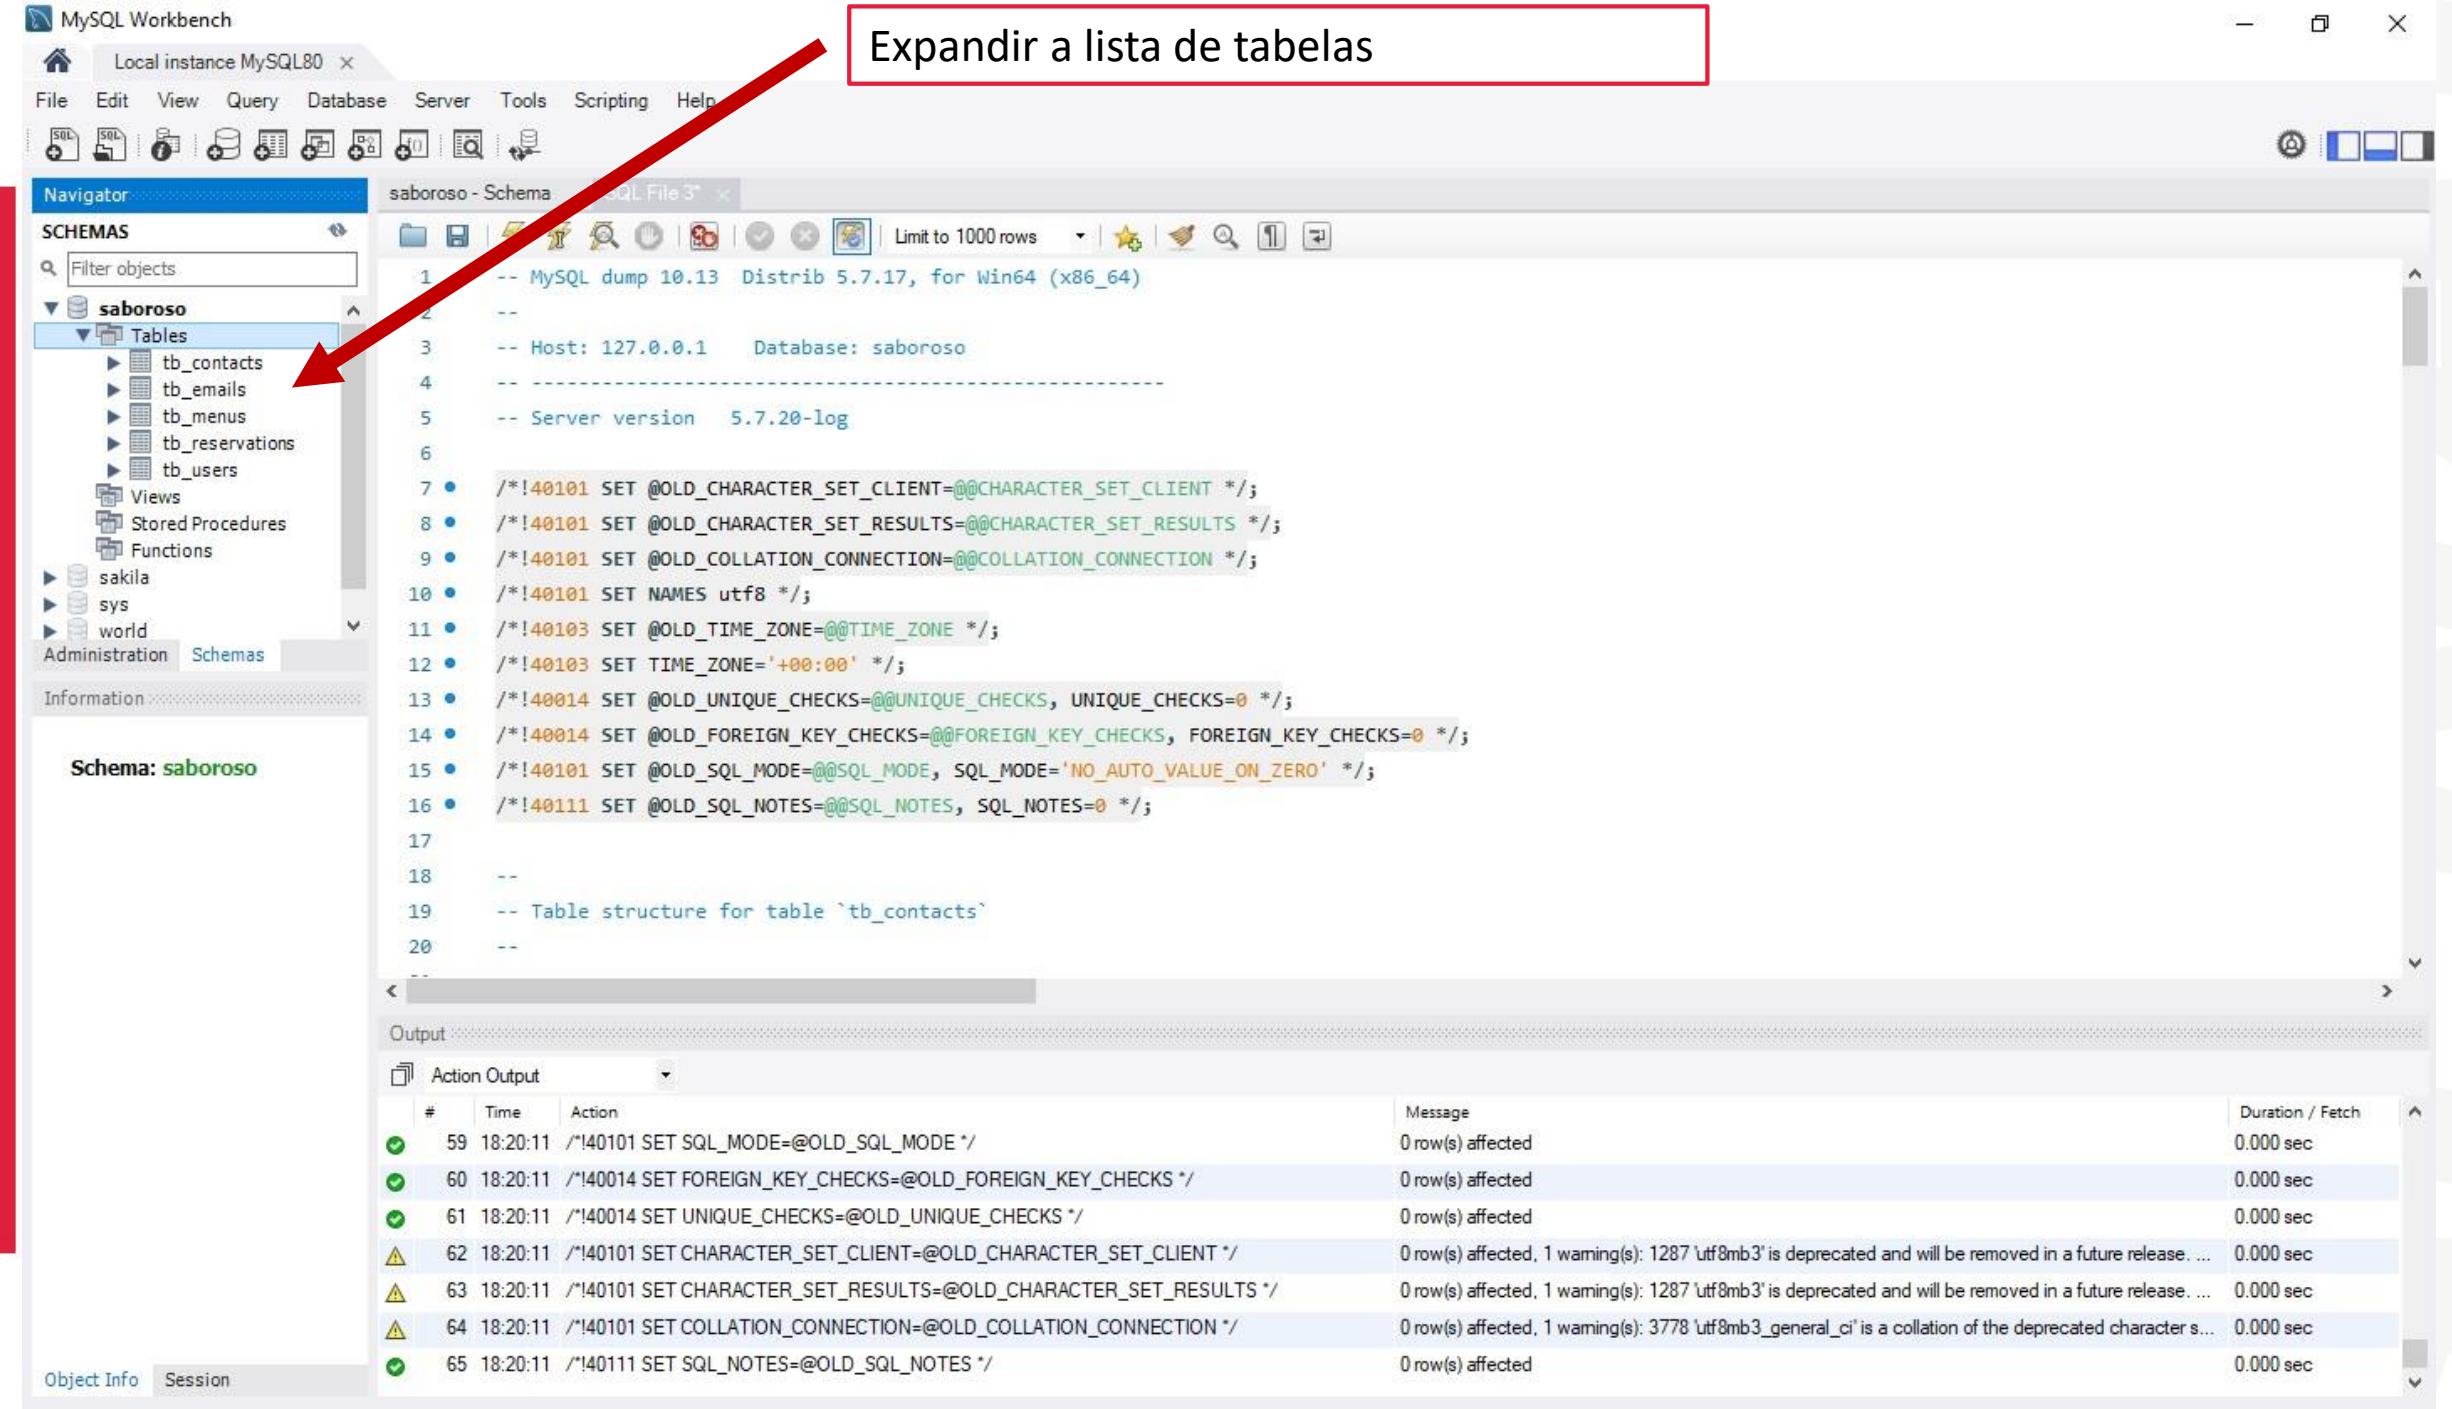

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQL DDL Data Definition Data Manipulation Object Explorer Session Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

saboroso - Schema SQL File 3 ×

1 -- MySQL dump 10.13 Distrib 5.7.17, for Win64 (x86_64)
2 --
3 -- Host: localhost (local)
4 --
5 -- Server version 5.7.20-log
6
7 • /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
8 • /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
9 • /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
10 • /*!40101 SET NAMES utf8 */;
11 • /*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
12 • /*!40103 SET TIME_ZONE='+00:00' */;
13 • /*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
14 • /*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
15 • /*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
16 • /*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;
17
18 --
19 -- Table structure for table `tb_contacts`
20
21

Vamos configurar o uso do usuário user no banco de dados

Em seguida, na sessão administração

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character ... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session Closing Administrator.

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQL SQL Schema Object Info Session

Navigator saboroso - Schema SQL File 3* Administration - Users and Privil... ×

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

User Accounts

Details for account user@%

Login Name: user You may create multiple accounts with the same name to connect from different hosts.

Authentication Type: Standard For the standard password and/or host based authentication, select 'Standard'.

Limit to Hosts Matching: % % and _ wildcards may be used

Password: ***** Type a password to reset it.

Consider using a password with 8 or more characters with mixed case letters, numbers and punctuation marks.

Confirm Password: ***** Enter password again to confirm.

Expire Password

Add Account Delete Refresh

Revert Apply

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Aplicar as configurações com a senha password

Account 'user@localhost' was deleted

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SOL SQL Navigator saboroso - Schema SQL File 3* Administration - Users and Privil... ×

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

Add Account Delete Refresh Revert Apply

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Closing Administrator.

Details for account newuser@%

User Accounts

| User | From Host |
|------------------|-----------|
| mysql.infoschema | localhost |
| mysql.session | localhost |
| mysql.sys | localhost |
| newuser | % |
| root | localhost |
| user | % |

Login Name: newuser You may create multiple accounts with the same name to connect from different hosts.

Authentication Type: Standard For the standard password and/or host based authentication, select 'Standard'.

Limit to Hosts Matching: % % and _ wildcards may be used

Password: Type a password to reset it.

Consider using a password with 8 or more characters with mixed case letters, numbers and punctuation marks.

Confirm Password: Enter password again to confirm.

Expire Password

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SOL SQL DDL DML Scripts Database Object Browser Session Navigator saboroso - Schema SQL File 3* Administration - Users and Privil... ×

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

Add Account Delete Refresh

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|---|--|------------------|
| 59 | 18:20:11 | /!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Closing Administrator.

Details for account newuser@%

User Accounts

| User | From Host |
|------------------|-----------|
| mysql.infoschema | localhost |
| mysql.session | localhost |
| mysql.sys | localhost |
| newuser | % |
| root | localhost |
| user | % |

Login Account Limits Administrative Roles Schema Privileges

Login Name: user You may create multiple accounts with the same name to connect from different hosts.

Authentication Type: Standard For the standard password, or host based authentication, select 'Standard'.

Limit to Hosts Matching: localhost % and _ wildcards may be used

Password: ***** Type a password to reset it.

Confirm Password: ***** Enter password again to confirm.

Weak password.

Expire Password

Aplicar as configurações com a senha password

Revert Apply

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SOL SQL Databases Tables Views Functions Triggers Indexes

Navigator: saboroso - Schema SQL File 3* Administration - Users and Privil... ×

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

Add Account Delete Refresh Revert Apply

Local instance MySQL80
Users and Privileges

User Accounts

| User | From Host |
|------------------|-----------|
| mysql.infoschema | localhost |
| mysql.session | localhost |
| mysql.sys | localhost |
| root | localhost |
| user | % |
| user | localhost |

Details for account user@localhost

Login Account Limits Administrative Roles Schema Privileges

Login Name: user You may create multiple accounts with the same name to connect from different hosts.

Authentication Type: Standard For the standard password and/or host based authentication, select 'Standard'.

Limit to Hosts Matching: localhost % and _ wildcards may be used

Password: ***** Type a password to reset it.

Consider using a password with 8 or more characters with mixed case letters, numbers and punctuation marks.

Confirm Password: ***** Enter password again to confirm.

Expire Password

Aplicar as configurações com a senha password

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Created account 'user@localhost'

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

SOL SQL Databases Tables Views Functions Triggers Events Objects

Navigator saboroso - Schema SQL File 3* Administration - Users and Privileges

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

Add Account Delete Refresh Revert Apply

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character ... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Created account 'user@localhost'

Local instance MySQL80

Users and Privileges

User Accounts

| User | From Host |
|------------------|-----------|
| mysql.infoschema | localhost |
| mysql.session | localhost |
| mysql.sys | localhost |
| root | localhost |
| user | % |
| user | localhost |

Details for account user@localhost

Login Account Limits Administrative Roles Schema Privileges

Role Description

- DBA grants the rights to perform all tasks
- MaintenanceAdmin grants rights needed to maintain server
- ProcessAdmin rights needed to assess, monitor, and kill any user proce...
- UserAdmin grants rights to create users logins and reset passwords
- SecurityAdmin rights to manage logins and grant and revoke server an...
- MonitorAdmin minimum set of rights needed to monitor server
- DBManager grants full rights on all databases
- DBDesigner rights to create and reverse engineer any database sche...
- ReplicationAdmin rights needed to setup and manage replication
- BackupAdmin minimal rights needed to backup any database

Global Privileges

- ALTER
- ALTER ROUTINE
- CREATE
- CREATE ROUTINE
- CREATE TABLESPACE
- CREATE TEMPORARY TABLES
- CREATE USER
- CREATE VIEW
- DELETE
- DROP
- EVENT
- EXECUTE
- FILE
- GRANT OPTION
- INDEX
- INSERT

Revoke All Privileges

Red arrow pointing to the "Schema Privileges" tab.

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

S Q L S Q L Databases Tables Views Functions Triggers Indexes Constraints

Navigator: saboroso - Schema SQL File 3* Administration - Users and Privileges

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

User Accounts

| User | From Host |
|------------------|-----------|
| mysql.infoschema | localhost |
| mysql.session | localhost |
| mysql.sys | localhost |
| root | localhost |
| user | % |
| user | localhost |

Details for account user@localhost

Login Account Limits Administrative Roles Schema Privileges

DBA Description grants the rights to perform all tasks

MaintenanceAdmin grants rights needed to maintain server

ProcessAdmin rights needed to assess, monitor, and kill any user proce...

UserAdmin grants rights to create users logins and reset passwords

SecurityAdmin rights to manage logins and grant and revoke server an...

MonitorAdmin minimum set of rights needed to monitor server

DBManager grants full rights on all databases

DBDesigner rights to create and reverse engineer any database sche...

ReplicationAdmin rights needed to setup and manage replication

BackupAdmin minimal rights needed to backup any database

Global Privileges

ALTER

ALTER ROUTINE

CREATE

CREATE ROUTINE

CREATE TABLESPACE

CREATE TEMPORARY TABLES

CREATE USER

CREATE VIEW

DELETE

DROP

EVENT

EXECUTE

FILE

GRANT OPTION

INDEX

INSERT

Revoke All Privileges

Add Account Delete Refresh Revert Apply

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Created account 'user@localhost'

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

SQL Editor Database Browser Object Explorer Session Navigator

Administration - Users and Privileges

User Accounts

Details for account user@localhost

User From Host

| | |
|------------------|-----------|
| mysql.infoschema | localhost |
| mysql.session | localhost |
| mysql.sys | localhost |
| root | localhost |
| user | % |
| user | localhost |

Login Account Limits Administrative Roles Schema Privileges

Role Description

- DBA grants the rights to perform all tasks
- MaintenanceAdmin grants rights needed to maintain server
- ProcessAdmin rights needed to assess, monitor, and kill any user proce...
- UserAdmin grants rights to create users logins and reset passwords
- SecurityAdmin rights to manage logins and grant and revoke server an...
- MonitorAdmin minimum set of rights needed to monitor server
- DBManager grants full rights on all databases
- DBDesigner rights to create and reverse engineer any database sche...
- ReplicationAdmin rights needed to setup and manage replication
- BackupAdmin minimal rights needed to backup any database
- Custom custom role

Global Privileges

- ALTER
- ALTER ROUTINE
- CREATE
- CREATE ROUTINE
- CREATE TABLESPACE
- CREATE TEMPORARY TABLES
- CREATE USER
- CREATE VIEW
- DELETE
- DROP
- EVENT
- EXECUTE
- FILE
- GRANT OPTION
- INDEX
- INSERT

Add Account Delete Refresh Revoke All Privileges Revert Apply

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Updated account 'user@localhost'



Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

saboroso - Schema SQL File 3* Administration - Users and Privile...

Local instance MySQL80
Users and Privileges

User Accounts

| User | From Host |
|------------------|-----------|
| mysql.infoschema | localhost |
| mysql.session | localhost |
| mysql.sys | localhost |
| newuser | % |
| root | localhost |
| user | % |
| user | localhost |

Details for account newuser@%

[Login](#) [Account Limits](#) [Administrative Roles](#) [Schema Privileges](#)Login Name:

You may create multiple accounts with the same name to connect from different hosts.

Authentication Type:

For the standard password and/or host based authentication, select 'Standard'.

Limit to Hosts Matching:

% and _ wildcards may be used

Password:

Type a password to reset it.

Consider using a password with 8 or more characters with mixed case letters, numbers and punctuation marks.

Confirm Password:

Enter password again to confirm.

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Updated account 'user@localhost'

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

SQL SOL Databases Tables Views Functions Triggers Indexes

Navigator saboroso - Schema SQL File 3* Administration - Users and Privileges

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

Add Account Delete Refresh

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Updated account 'user@localhost'

Details for account newuser@%

Login Name: user You may create multiple accounts with the same name to connect from different hosts.

Authentication Type: Standard For the standard password and/or host based authentication, select Standard.

Limit to Hosts Matching: 127.0.0.1 % and _ wildcards may be used

Password: ***** Type a new password to reset it.

Confirm Password: ***** Enter password again to confirm.

Weak password.

Apply Revert Apply

Aplicar as configurações com a senha password

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SOL SQL DDL DML Scripts Reports

Navigator saboroso - Schema SQL File 3+ Administration - Users and Privileges

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

Add Account Delete Refresh Revert Apply

Output Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Created account 'user@127.0.0.1'

The screenshot shows the MySQL Workbench interface with the 'Users and Privileges' tab selected. On the left, there's a sidebar with management, instance, and performance tabs. The main area has tabs for 'User Accounts' and 'Details for account user@127.0.0.1'. The 'User Accounts' tab displays a table of users with columns 'User' and 'From Host'. The 'Details' tab shows fields for login name ('user'), authentication type ('Standard'), host limit ('127.0.0.1'), password, and confirm password. Below the details are buttons for 'Expire Password' and 'Apply'. At the bottom, there's an output window showing SQL statements and their execution results.

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQL SQL+ Databases Tables Views Functions Triggers Scripts

Navigator saboroso - Schema SQL File 3* Administration - Users and Privil... ×

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

User Accounts

| User | From Host |
|------------------|-----------|
| mysql.infoschema | localhost |
| mysql.session | localhost |
| mysql.sys | localhost |
| root | localhost |
| user | % |
| user | 127.0.0.1 |
| user | localhost |

Select an account to edit or click [Add Account] to create a new one

Login Account Limits Administrative Roles Schema Privileges

Login Name: You may create multiple accounts with the same name to connect from different hosts.

Authentication Type: SHA256 Password For the standard password and/or host based authentication, select 'Standard'.

Limit to Hosts Matching: % and _ wildcards may be used

Password: Type a password to reset it.

Consider using a password with 8 or more characters with mixed case letters, numbers and punctuation marks.

Confirm Password: Enter password again to confirm.

Expire Password

Authentication String: Authentication plugin specific parameters.

Add Account Delete Refresh Revert Apply

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Closing Administrator.



Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

SQL File 3* ×

```
1 -- MySQL dump 10.13 Distrib 5.7.17, for Win64 (x86_64)
2 --
3 -- Host: 127.0.0.1   Database: saboroso
4 --
5 -- Server version      5.7.20-log
6
7 • /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
8 • /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
9 • /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
10 • /*!40101 SET NAMES utf8 */;
11 • /*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
12 • /*!40103 SET TIME_ZONE='+00:00' */;
13 • /*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
14 • /*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
15 • /*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
16 • /*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;
17
18 --
19 -- Table structure for table `tb_contacts`
20 --
```

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |



MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQL Navigator Data Export Data Import/Restore

Navigator SQL File 3* Create a new SQL tab for executing queries

Server Status Client Connections Users and Privileges Status and System Variables Data Export Data Import/Restore

INSTANCE Startup / Shutdown Server Logs Options File

PERFORMANCE Dashboard Performance Reports Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

SQL File 3*

Limit to 1000 rows

Abrir uma nova query

-- MySQL dump 10.13 Distrib 7.17. for Win64 (x86_64)
--
-- Host: 127.0.0.1 Database: saboroso
--
-- Server version 5.7.20-log

/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
/*!40101 SET NAMES utf8 */;
/*!40103 SET @OLD_TIME_ZONE=@@TIME_ZONE */;
/*!40103 SET TIME_ZONE='+00:00' */;
/*!40014 SET @OLD_UNIQUE_CHECKS=@@UNIQUE_CHECKS, UNIQUE_CHECKS=0 */;
/*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
/*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;
/*!40111 SET @OLD_SQL_NOTES=@@SQL_NOTES, SQL_NOTES=0 */;

--
-- Table structure for table `tb_contacts`
--

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Added new script editor

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQL File 3* SQL File 5 ×

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Added new script editor



MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQl DMS Tables Data Editor Scripts SQL File 3* SQL File 5* ×

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|--|--|------------------|
| 59 | 18:20:11 | /*!40101 SET SQL_MODE=@OLD_SQL_MODE */ | 0 row(s) affected | 0.000 sec |
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character ... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |

Object Info Session

Added new script editor

Iremos configurar os acessos dos usuários no banco de dados pelo nodejs, pois em alguns casos o plugin do mysql emite erros de acesso ao banco de dados quando não é feito essas 3 próximas configurações.

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQl SQL Databases Tables Views Functions Triggers Scripts

Navigator

SQL File 3* SCHEMAS ×

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|---|--|------------------|
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |
| 66 | 18:48:26 | ALTER USER 'user'@'%' IDENTIFIED WITH mysql_native_password BY 'password' | 0 row(s) affected | 0.000 sec |

Object Info Session

Query Completed

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQl SQL Databases Tables Views Functions Triggers Scripts Reports

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso


Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|---|--|------------------|
| 60 | 18:20:11 | /*!40014 SET FOREIGN_KEY_CHECKS=@OLD_FOREIGN_KEY_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character ... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |
| 66 | 18:48:26 | ALTER USER 'user'@'%' IDENTIFIED WITH mysql_native_password BY 'password' | 0 row(s) affected | 0.000 sec |

Object Info Session

Query Completed

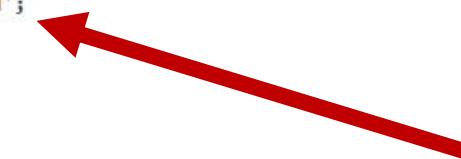

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQl SQL Navigator SQL File 3* SQL File 5* MANAGEMENT INSTANCE PERFORMANCE Administration Schemas Information Schema: saboroso

ALTER USER 'user'@'localhost' IDENTIFIED WITH mysql_native_password BY 'password';

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|---|--|------------------|
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |
| 66 | 18:48:26 | ALTER USER 'user'@'%' IDENTIFIED WITH mysql_native_password BY 'password' | 0 row(s) affected | 0.000 sec |
| 67 | 18:51:31 | ALTER USER 'user'@'localhost' IDENTIFIED WITH mysql_native_password BY 'password' | 0 row(s) affected | 0.000 sec |

Object Info Session

Query Completed

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQl SQL Databases Tables Views Functions Triggers Scripts

Navigator SQL File 3* SQL File 5* MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|---|--|------------------|
| 61 | 18:20:11 | /*!40014 SET UNIQUE_CHECKS=@OLD_UNIQUE_CHECKS */ | 0 row(s) affected | 0.000 sec |
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |
| 66 | 18:48:26 | ALTER USER 'user'@'%' IDENTIFIED WITH mysql_native_password BY 'password' | 0 row(s) affected | 0.000 sec |
| 67 | 18:51:31 | ALTER USER 'user'@'localhost' IDENTIFIED WITH mysql_native_password BY 'password' | 0 row(s) affected | 0.000 sec |

Object Info Session

Query Completed



MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQl SQL Navigator SQL File 3* SQL File 5* ×

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

Schema: saboroso

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|----|----------|---|--|------------------|
| 62 | 18:20:11 | /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 63 | 18:20:11 | /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */ | 0 row(s) affected, 1 warning(s): 1287 'utf8mb3' is deprecated and will be removed in a future release. ... | 0.000 sec |
| 64 | 18:20:11 | /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */ | 0 row(s) affected, 1 warning(s): 3778 'utf8mb3_general_ci' is a collation of the deprecated character s... | 0.000 sec |
| 65 | 18:20:11 | /*!40111 SET SQL_NOTES=@OLD_SQL_NOTES */ | 0 row(s) affected | 0.000 sec |
| 66 | 18:48:26 | ALTER USER 'user'@'%' IDENTIFIED WITH mysql_native_password BY 'password' | 0 row(s) affected | 0.000 sec |
| 67 | 18:51:31 | ALTER USER 'user'@'localhost' IDENTIFIED WITH mysql_native_password BY 'password' | 0 row(s) affected | 0.000 sec |
| 68 | 18:52:43 | ALTER USER 'user'@'127.0.0.1' IDENTIFIED WITH mysql_native_password BY 'password' | 0 row(s) affected | 0.000 sec |

Object Info Session

Query Completed

The screenshot shows the MySQL Workbench interface. The left sidebar contains sections for MANAGEMENT, INSTANCE, and PERFORMANCE. The MANAGEMENT section is currently selected. The bottom right corner features a large 'Output' tab, which is also highlighted by a red arrow. The main workspace displays a query editor with an 'ALTER USER' command and its execution results in the 'Action Output' table.

UC: Projetos

Assunto:

Projeto Restaurante – BackEnd

03 – Conectando o NodeJS com MySQL

Express Admin - SP npm - Pesquisa Google

google.com.br/search?q=npn&sc_esv=1556bdbe4d809509&sc_upv=1&sxsrf=ADLYWIJXZyj3DFu_BLozPG0AbakQDHAMhw%3A1727218442864&sourc...

npm

Todas Imagens Shopping Videos Notícias Livros Maps Mais Ferramentas

NPM
https://www.npmjs.com · Traduzir esta página

npm | Home
Relied upon by more than 17 million developers worldwide, npm is committed to making JavaScript development elegant, productive, and safe. The free npm Registry ...

Download and install Node.js ...
You must install Node.js and the npm command line interface ...

About npm
Documentation for the npm registry, website, and command-line ...

Npm Docs
Documentation for the npm registry, website, and command-line ...

Sign In
Sign In. Username. Forgot password? Password. Show ...

Npm-install
Description. This command installs a package and any packages ...

Mais resultados de npmjs.com »

As pessoas também perguntam :

What is npm?

npm Software


 Mais imagens

npm é um gerenciador de pacotes para o Node.js npm, Inc. é uma subsidiária do GitHub, que fornece hospedagem para desenvolvimento de software e controle de versão com o uso do Git. npm é o gerenciador de pacotes padrão para o ambiente de tempo de execução JavaScript Node.js. Wikipédia

Lançamento: 12 de janeiro de 2010 (14 anos)

Outras pessoas também pesquisaram

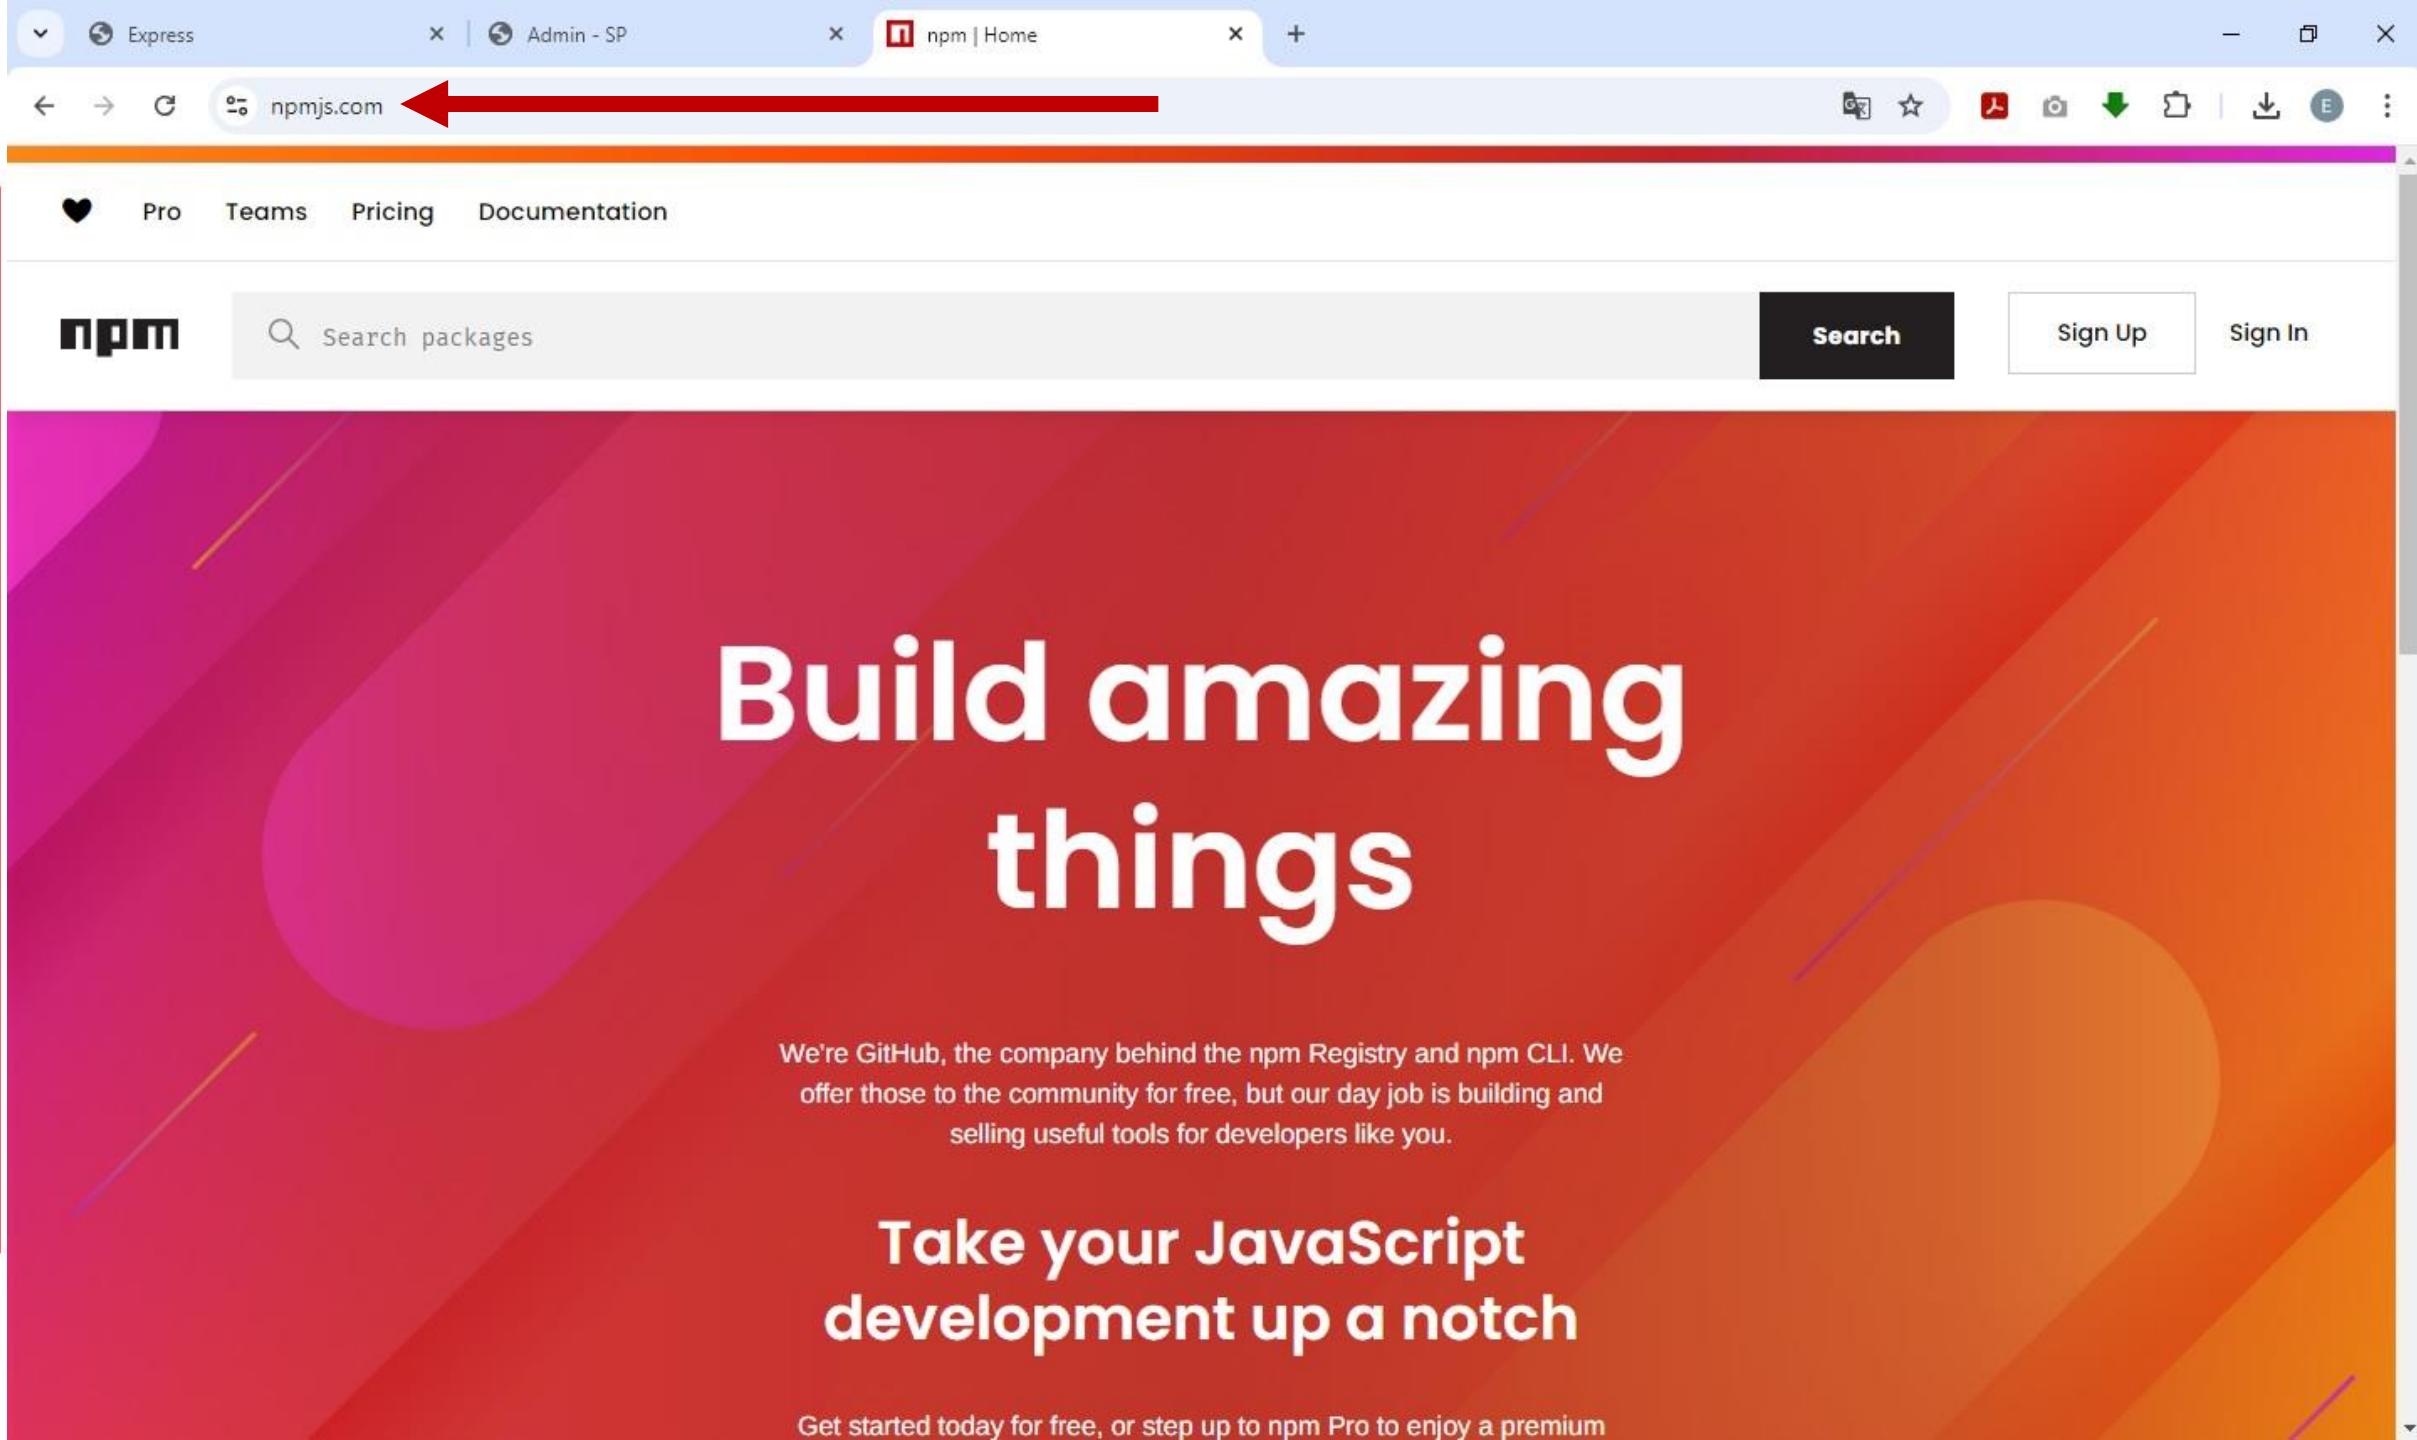

Pesquisando o módulo mysql no npm

The screenshot shows the npmjs.com homepage with a search bar at the top containing the query 'mysql'. A red arrow points from the text 'Pesquisando o módulo mysql no npm' to the search bar. Below the search bar, a list of npm packages related to MySQL is displayed. The first result is 'mysql', which is described as a 'Node.js driver for mysql. It is written in JavaScript, does not require compiling, and is 100% MIT licensed.' Other results include 'mysql2', 'mysql-baileys', 'mysql-kv', 'mysql-types-generator', 'mysql-transactional-tests', 'mysql-ksdb', 'mysql-dump-ts', '@mysql/xdevapi', and 'mysql-models-builder'. The 'mysql' package has a version listed as 2.18.1.

| Package | Description | Version |
|---------------------------|---|---------|
| mysql | A node.js driver for mysql. It is written in JavaScript, does not require compiling, and is 100% MIT licensed. | 2.18.1 |
| mysql2 | fast mysql driver. Implements core protocol, prepared statements, ssl and compression in native JS | 3.11.3 |
| mysql-baileys | Implementation of MySQL in Baileys. | 1.5.1 |
| mysql-kv | mysql-kv is a package that provides key-value store capabilities with time-to-live (TTL) expiration in MySQL. | 1.7.3 |
| mysql-types-generator | Generate Typescript types from a MySQL database | 2.0.0 |
| mysql-transactional-tests | Wraps each test in transaction for mysql database (driver `mysql` and `mysql2`) | 1.0.3 |
| mysql-ksdb | power by prilidianohussey | 1.0.1 |
| mysql-dump-ts | A TypeScript project to perform MySQL database dumps. | 1.0.0 |
| @mysql/xdevapi | MySQL Connector/Node.js - A Node.js driver for MySQL using the X Protocol and X DevAPI. | 8.0.35 |
| mysql-models-builder | The `kp-mysql-models` library simplifies MySQL database interaction, streamlining tasks such as creating, inserting, updat... | 1.4.0 |

development up a notch

Get started today for free, or step up to npm Pro to enjoy a premium

Pro Teams Pricing Documentation

 mysql

Search

Sign Up

Sign In

6000 packages found

1 2 3 ... 300 »

Sort Packages

 Optimal Popularity Quality Maintenance

mysql exact match

A node.js driver for mysql. It is written in JavaScript, does not require compiling, and is 100% MIT licensed.



dougwilson published 2.18.1 • 5 years ago

mysql2

Fast mysql driver. Implements core protocol, prepared statements, ssl and compression in native JS



sidorares published 3.11.3 • 9 days ago

keyv

Simple key-value storage with support for multiple backends



key



value



store



cache



ttl



key-value



storage



backend



adapter



redis



mongodb



sqlite



mysql



postgresql View more



jaredwray published 5.0.3 • 2 days ago

sequelize

Sequelize is a database library for Node.js that allows you to work with MySQL, PostgreSQL, SQLite, Oracle, MongoDB, Redis, and Elasticsearch.

Módulo mysql2 possui
melhorias em relação
ao módulo mysql

Express Admin - SP mysql2 - npm

npmjs.com/package/mysql2

Pro Teams Pricing Documentation

npm Search packages Sign Up Sign In

mysql2 ts

3.11.3 • Public • Published 9 days ago

Readme

Code

Beta

9 Dependencies

4.889 Dependents

184 Versions

MySQL2

npm v3.11.3 downloads 11M/month node >= 8.0 CI passing coverage 88% license MIT

English | 简体中文 | Português (BR)

MySQL client for Node.js with focus on performance. Supports prepared statements, non-utf8 encodings, binary log protocol, compression, ssl **much more.**

Table of Contents

- History and Why MySQL2
- Installation
- Documentation
- Acknowledgements

Install

`> npm i mysql2`

Repository

❖ github.com/sidorares/node-mysql2

Homepage

🔗 sidorares.github.io/node-mysql2/docs

Weekly Downloads

2.664.171



Version

3.11.3

License

MIT

```
inputmask#3.3.11 bower_components\inputmask
└── jquery#3.7.1

bootstrap-colorpicker#2.5.3 bower_components\bootstrap-colorpicker

jquery#3.7.1 bower_components\jquery

raphael#2.3.0 bower_components\raphael
└── eve-raphael#0.5.0

mocha#1.17.1 bower_components\mocha

eve-raphael#0.5.0 bower_components\eve-raphael

bootstrap-datepicker#1.10.0 bower_components\bootstrap-datepicker
└── jquery#3.7.1

bootstrap#3.4.1 bower_components\bootstrap
└── jquery#3.7.1

fullcalendar#3.10.5 bower_components\fullcalendar
└── jquery#3.7.1
└── moment#2.30.1

select2#4.0.13 bower_components\select2

jquery-ui#1.11.4 bower_components\jquery-ui
└── jquery#3.7.1

moment#2.30.1 bower_components\moment

font-awesome#4.7.0 bower_components\font-awesome

Ionicons#2.0.1 bower_components\Ionicons

ckeditor#4.25.0 bower_components\ckeditor

C:\Users\Administrador\Desktop\projeto\saboroso\public\admin
```

No cmder ...



```
raphael#2.3.0 bower_components\raphael
└── eve-raphael#0.5.0

mocha#1.17.1 bower_components\mocha

eve-raphael#0.5.0 bower_components\eve-raphael

bootstrap-datepicker#1.10.0 bower_components\bootstrap-datepicker
└── jquery#3.7.1

bootstrap#3.4.1 bower_components\bootstrap
└── jquery#3.7.1

fullcalendar#3.10.5 bower_components\fullcalendar
└── jquery#3.7.1
└── moment#2.30.1

select2#4.0.13 bower_components\select2

jquery-ui#1.11.4 bower_components\jquery-ui
└── jquery#3.7.1

moment#2.30.1 bower_components\moment

font-awesome#4.7.0 bower_components\font-awesome

Ionicons#2.0.1 bower_components\Ionicons

ckeditor#4.25.0 bower_components\ckeditor

C:\Users\Administrador\Desktop\projeto\saboroso\public\admin
λ cd ../

C:\Users\Administrador\Desktop\projeto\saboroso\public
λ cd ../

C:\Users\Administrador\Desktop\projeto\saboroso
λ
```

Iremos até a pasta raiz do projeto



```
mocha#1.17.1 bower_components\mocha
eve-raphael#0.5.0 bower_components\eve-raphael
bootstrap-datepicker#1.10.0 bower_components\bootstrap-datepicker
└── jquery#3.7.1
bootstrap#3.4.1 bower_components\bootstrap
└── jquery#3.7.1
fullcalendar#3.10.5 bower_components\fullcalendar
└── jquery#3.7.1
└── moment#2.30.1
select2#4.0.13 bower_components\select2
jquery-ui#1.11.4 bower_components\jquery-ui
└── jquery#3.7.1
moment#2.30.1 bower_components\moment
font-awesome#4.7.0 bower_components\font-awesome
Ionicons#2.0.1 bower_components\Ionicons
ckeditor#4.25.0 bower_components\ckeditor
C:\Users\Administrador\Desktop\projeto\saboroso\public\admin
λ cd ../
C:\Users\Administrador\Desktop\projeto\saboroso\public
λ cd ../
C:\Users\Administrador\Desktop\projeto\saboroso
λ ls
app.js  bin/  node_modules/  package.json  package-lock.json  public/  routes/  views/
```

Listaremos os diretórios internos

```
mocha#1.17.1 bower_components\mocha  
eve-raphael#0.5.0 bower_components\eve-raphael  
bootstrap-datepicker#1.10.0 bower_components\bootstrap-datepicker  
└── jquery#3.7.1
```

```
bootstrap#3.4.1 bower_components\bootstrap  
└── jquery#3.7.1
```

```
fullcalendar#3.10.5 bower_components\fullcalendar  
└── jquery#3.7.1  
└── moment#2.30.1
```

```
select2#4.0.13 bower_components\select2
```

```
jquery-ui#1.11.4 bower_components\jquery-ui  
└── jquery#3.7.1
```

```
moment#2.30.1 bower_components\moment
```

```
font-awesome#4.7.0 bower_components\font-awesome
```

```
Ionicons#2.0.1 bower_components\Ionicons
```

```
ckeditor#4.25.0 bower_components\ckeditor
```

```
C:\Users\Administrador\Desktop\projeto\saboroso\public\admin  
λ cd ..\
```

```
C:\Users\Administrador\Desktop\projeto\saboroso\public  
λ cd ..\
```

```
C:\Users\Administrador\Desktop\projeto\saboroso  
λ ls  
app.js  bin/  node_modules/  package.json  package-lock.json  public/  routes/  views/  
C:\Users\Administrador\Desktop\projeto\saboroso
```

```
λ cls
```

Limpar a tela

C:\Users\Administrador\Desktop\projeto\saboroso
λ |



Resultado da execução anterior

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ npm install mysql2 --save |
```



Instalaremos o módulo mysql2 com –save (que adicionará no package.json)

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ npm install mysql2 --save
```

```
added 12 packages, and audited 67 packages in 2s
```

```
1 package is looking for funding
  run `npm fund` for details
```

```
7 vulnerabilities (2 moderate, 4 high, 1 critical)
```

```
To address issues that do not require attention, run:
  npm audit fix
```

```
To address all issues (including breaking changes), run:
  npm audit fix --force
```

```
Run `npm audit` for details.
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ
```

Resultado da execução anterior



Express Admin - SP mysql2 - npm

npmjs.com/package/mysql2

Search packages Search Sign Up Sign In

mysql2 TS

3.11.3 • Public • Published 9 days ago

Readme

Code

Beta

9 Dependencies

4.889 Dependents

184 Versions

MySQL2

npm v3.11.3 downloads 11M/month node >= 8.0 CI passing coverage 88% license MIT

English | 简体中文 | Português (BR)

MySQL client for Node.js with focus on performance. Supports prepared statements, non-utf8 encodings, binary log protocol, compression, ssl **much more**.

Table of Contents

- History and Why MySQL2
- Installation
- Documentation
- Acknowledgements
- Contributing

History and Why MySQL2

Install

npm i mysql2

Repository

github.com/sidorares/node-mysql2

Homepage

sidorares.github.io/node-mysql2/docs

Weekly Downloads

2.664.171



Version

3.11.3

License

MIT

Unpacked Size

503 kB

Total Files

109

npmjs.com/package/mysql2



```
npm install --save mysql2
```

If you are using TypeScript, you will need to install `@types/node`.

```
npm install --save-dev @types/node
```

For TypeScript documentation and examples, see [here](#).

Documentation

- Quickstart
 - First Query, Using Prepared Statements, Using Connection Pools and more.
- Documentation
- Examples
- FAQ

Acknowledgements

- Internal protocol is written by [@sidorares MySQL-Native](#).
- Constants, SQL parameters interpolation, Pooling, `ConnectionConfig` class taken from [Node MySQL](#).
- SSL upgrade code based on [@TooTallNate code](#).
- Secure connection / compressed connection api flags compatible to [MariaSQL](#) client.
- [Contributors](#).

Contributing



Express Admin - SP MySQL2 | Quickstart

sidorares.github.io/node-mysql2/docs#first-query

MySQL2 Docs Examples FAQ GitHub Stack Overflow Donate Search us English

Quickstart

History and Why MySQL2 Stability Badges Documentation API and Configuration Acknowledgements Contributing

First Query

To explore more queries examples, please visit the example sections [Simple Queries](#) and [Prepared Statements](#).

[Promise](#) [Callback](#)


```
// Get the client
const mysql = require('mysql2');

// Create the connection to database
const connection = mysql.createConnection({
  host: 'localhost',
  user: 'root',
  database: 'test',
});

// A simple SELECT query
connection.query(
  'SELECT * FROM `table` WHERE `name` = "Page" AND `age` > 45',
  function (err, results, fields) {
    console.log(results); // results contains rows returned by server
    console.log(fields); // fields contains extra meta data about results, if available
  }
);

// Using placeholders
connection.query(
  'SELECT * FROM `table` WHERE `name` = ? AND `age` > ?',
  ['Page', 45],
  function (err, results) {
    console.log(results);
  }
);
```

Installation First Query Using Prepared Statements Using Connection Pools Using Promise Wrapper Array Results



Quickstart[History and Why MySQL2](#)[Stability Badges](#)[Documentation >](#)[API and Configuration](#)[Acknowledgements](#)[Contributing >](#)

First Query

To explore more queries examples, please visit the example sections [Simple Queries](#) and [Prepared Statements](#).

[Promise](#) [Callback](#)

```
// Get the client
const mysql = require('mysql2');

// Create the connection to database
const connection = mysql.createConnection({
  host: 'localhost',
  user: 'root',
  database: 'test',
});

// A simple SELECT query
connection.query(
  'SELECT * FROM `table` WHERE `name` = "Page" AND `age` > 45',
  function (err, results, fields) {
    console.log(results); // results contains rows returned by server
    console.log(fields); // fields contains extra meta data about results, if available
  }
);

// Using placeholders
connection.query(
  'SELECT * FROM `table` WHERE `name` = ? AND `age` > ?',
  ['Page', 45],
  function (err, results) {
    console.log(results);
  }
);
```

[Installation](#)[First Query](#)[Using Prepared Statements](#)[Using Connection Pools](#)[Using Promise Wrapper](#)[Array Results](#)

Quickstart[History and Why MySQL2](#)[Stability Badges](#)[Documentation](#)[API and Configuration](#)[Acknowledgements](#)[Contributing](#)

First Query

To explore more queries examples, please visit the example sections [Simple Queries](#) and [Prepared Statements](#).

[Promise](#) [Callback](#)

```
// Get the client
const mysql = require('mysql2');

// Create the connection to database
const connection = mysql.createConnection({
  host: 'localhost',
  user: 'root',
  database: 'test',
});

// A simple SELECT query
connection.query(
  'SELECT * FROM `table` WHERE `name` = "Page" AND `age` > 45',
  function (err, results, fields) {
    console.log(results); // results contains rows returned by server
    console.log(fields); // fields contains extra meta data about results, if available
  }
);

// Using placeholders
connection.query(
  'SELECT * FROM `table` WHERE `name` = ? AND `age` > ?',
  ['Page', 45],
  function (err, results) {
    console.log(results);
  }
);
```

[Installation](#)[First Query](#)[Using Prepared Statements](#)[Using Connection Pools](#)[Using Promise Wrapper](#)[Array Results](#)

Quickstart[History and Why MySQL2](#)[Stability Badges](#)[Documentation >](#)[API and Configuration](#)[Acknowledgements](#)[Contributing >](#)

First Query

To explore more queries examples, please visit the example sections [Simple Queries](#) and [Prepared Statements](#).

[Promise](#) [Callback](#)

```
// Get the client
const mysql = require('mysql2');

// Create the connection to database
const connection = mysql.createConnection({
  host: 'localhost',
  user: 'root',
  database: 'test',
});

// A simple SELECT query
connection.query(
  'SELECT * FROM `table` WHERE `name` = "Page" AND `age` > 45',
  function (err, results, fields) {
    console.log(results); // results contains rows returned by server
    console.log(fields); // fields contains extra meta data about results, if available
  }
);

// Using placeholders
connection.query(
  'SELECT * FROM `table` WHERE `name` = ? AND `age` > ?',
  ['Page', 45],
  function (err, results) {
    console.log(results);
  }
);
```



Installation
[First Query](#)
Using Prepared Statements
Using Connection Pools
Using Promise Wrapper
Array Results

Express Admin - SP MySQL2 | Quickstart

sidorares.github.io/node-mysql2/docs#first-query

MySQL2 Docs Examples FAQ GitHub Stack Overflow Donate Search us English

Quickstart History and Why MySQL2 Stability Badges Documentation API and Configuration Acknowledgements Contributing

First Query

To explore more queries examples, please visit the example sections [Simple Queries](#) and [Prepared Statements](#).

Promise [Callback](#)

```
// Get the client
const mysql = require('mysql2');


// Create the connection to database
const connection = mysql.createConnection({
  host: 'localhost',
  user: 'root',
  database: ''
});


// A simple connection
'SELECT
  *
FROM
  users
WHERE
  id = ?'
  , [1]
  , function (err, results) {
    console.log(results);
  }
);

// Using placeholders
connection.query(
  'SELECT * FROM `table` WHERE `name` = ? AND `age` > ?',
  ['Page', 45],
  function (err, results) {
    console.log(results);
  }
);
```


Copiar a declaração da conexão da primeira query do módulo mysql2

Copiar Ctrl+C Copiar link para o conteúdo destacado Pesquisar "const connection = mysql.createConnection({..." no Google Imprimir... Ctrl+P Abrir no modo de leitura Traduzir seleção para o português Inspecionar available

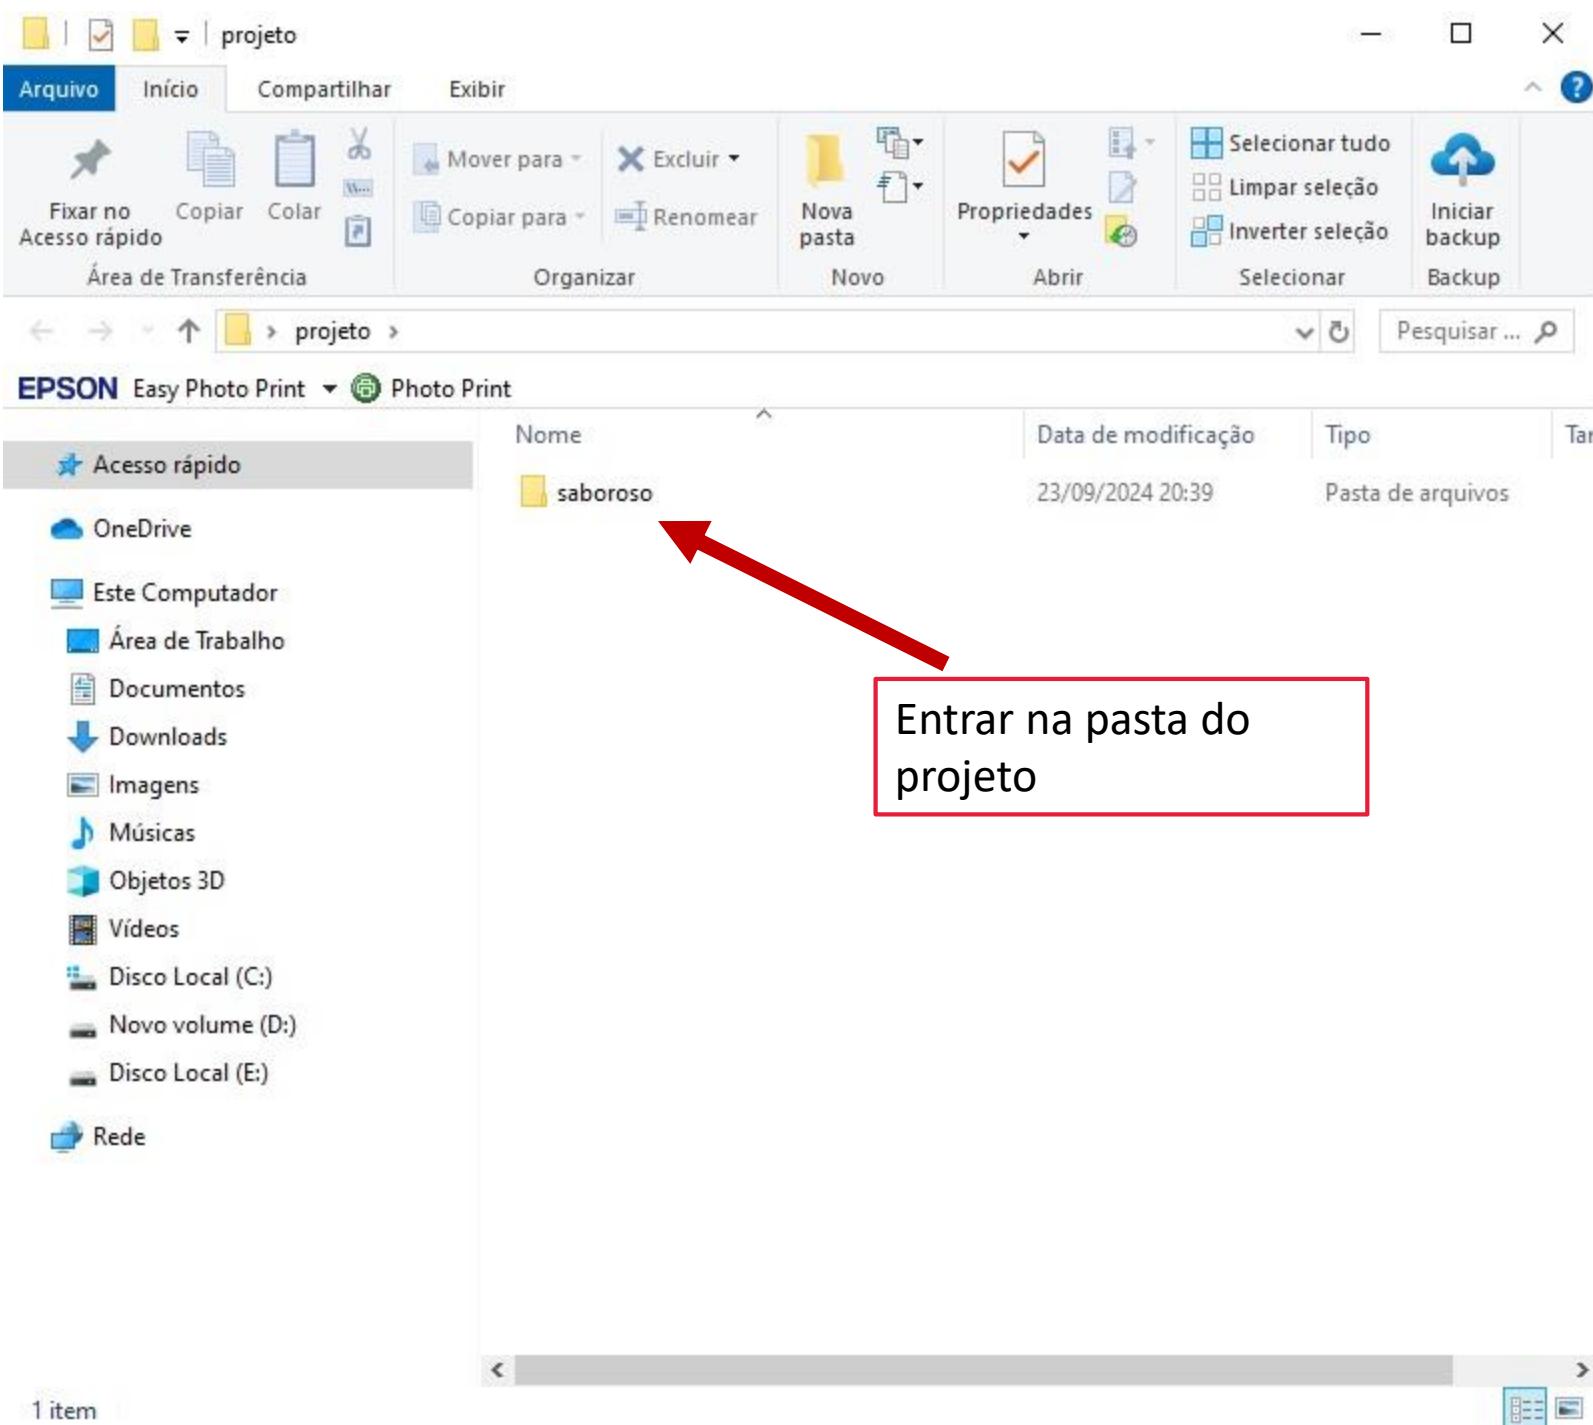

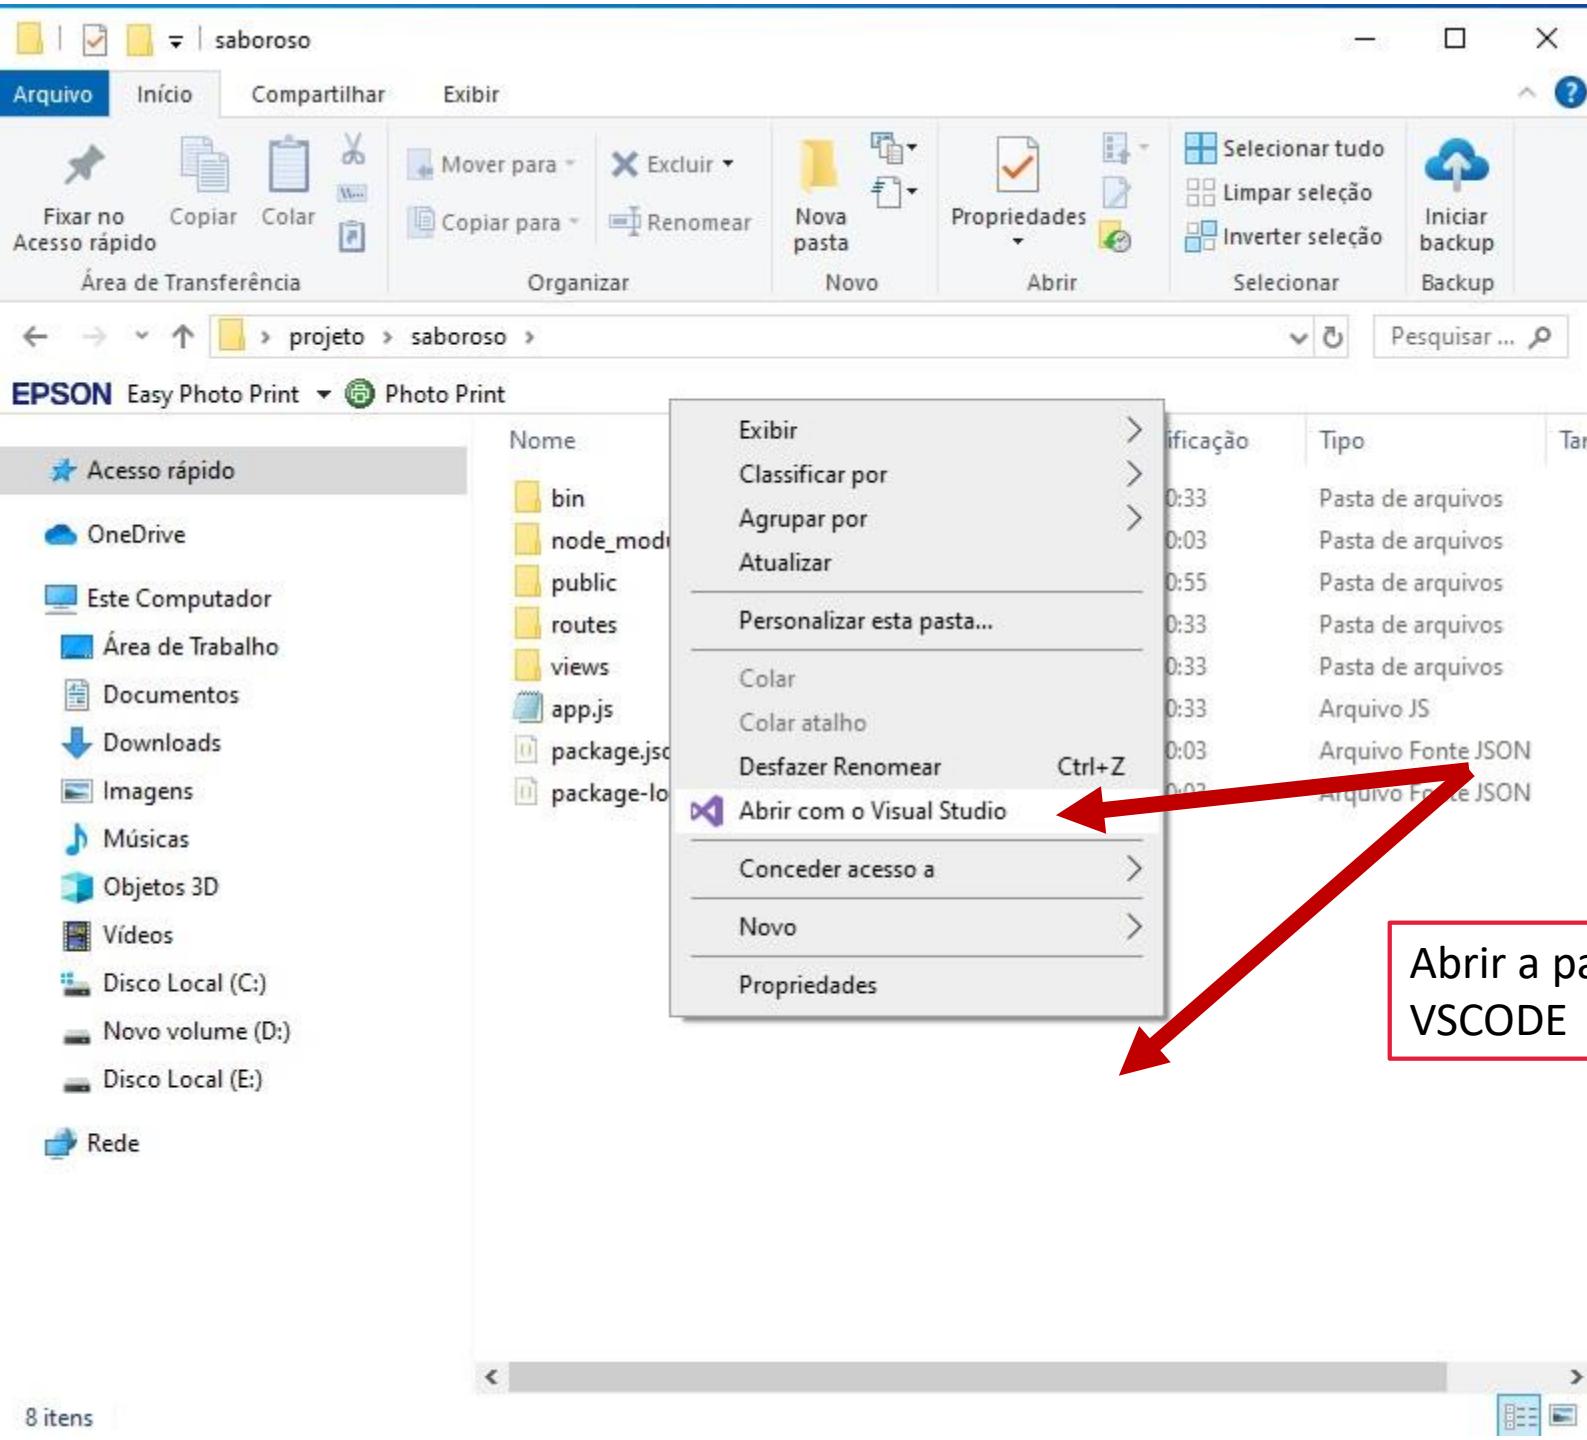

Abrir a pasta no
VS CODE

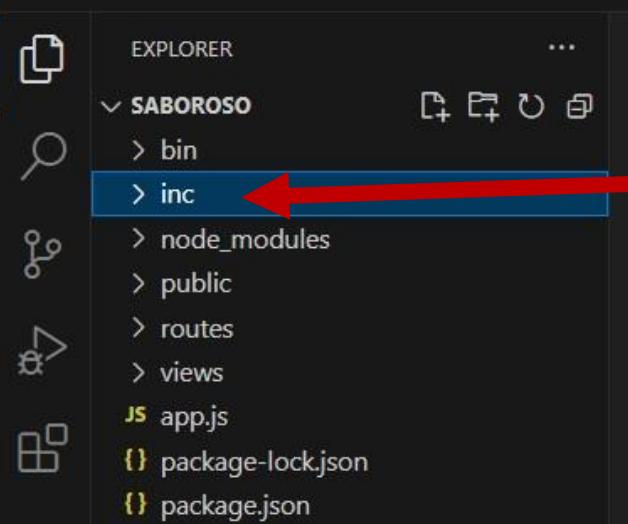

Show All Commands Ctrl + Shift + P

Go to File Ctrl + P

Find in Files Ctrl + Shift + F


Toggle Full Screen F11


Show Settings Ctrl + ,



> OUTLINE

> TIMELINE



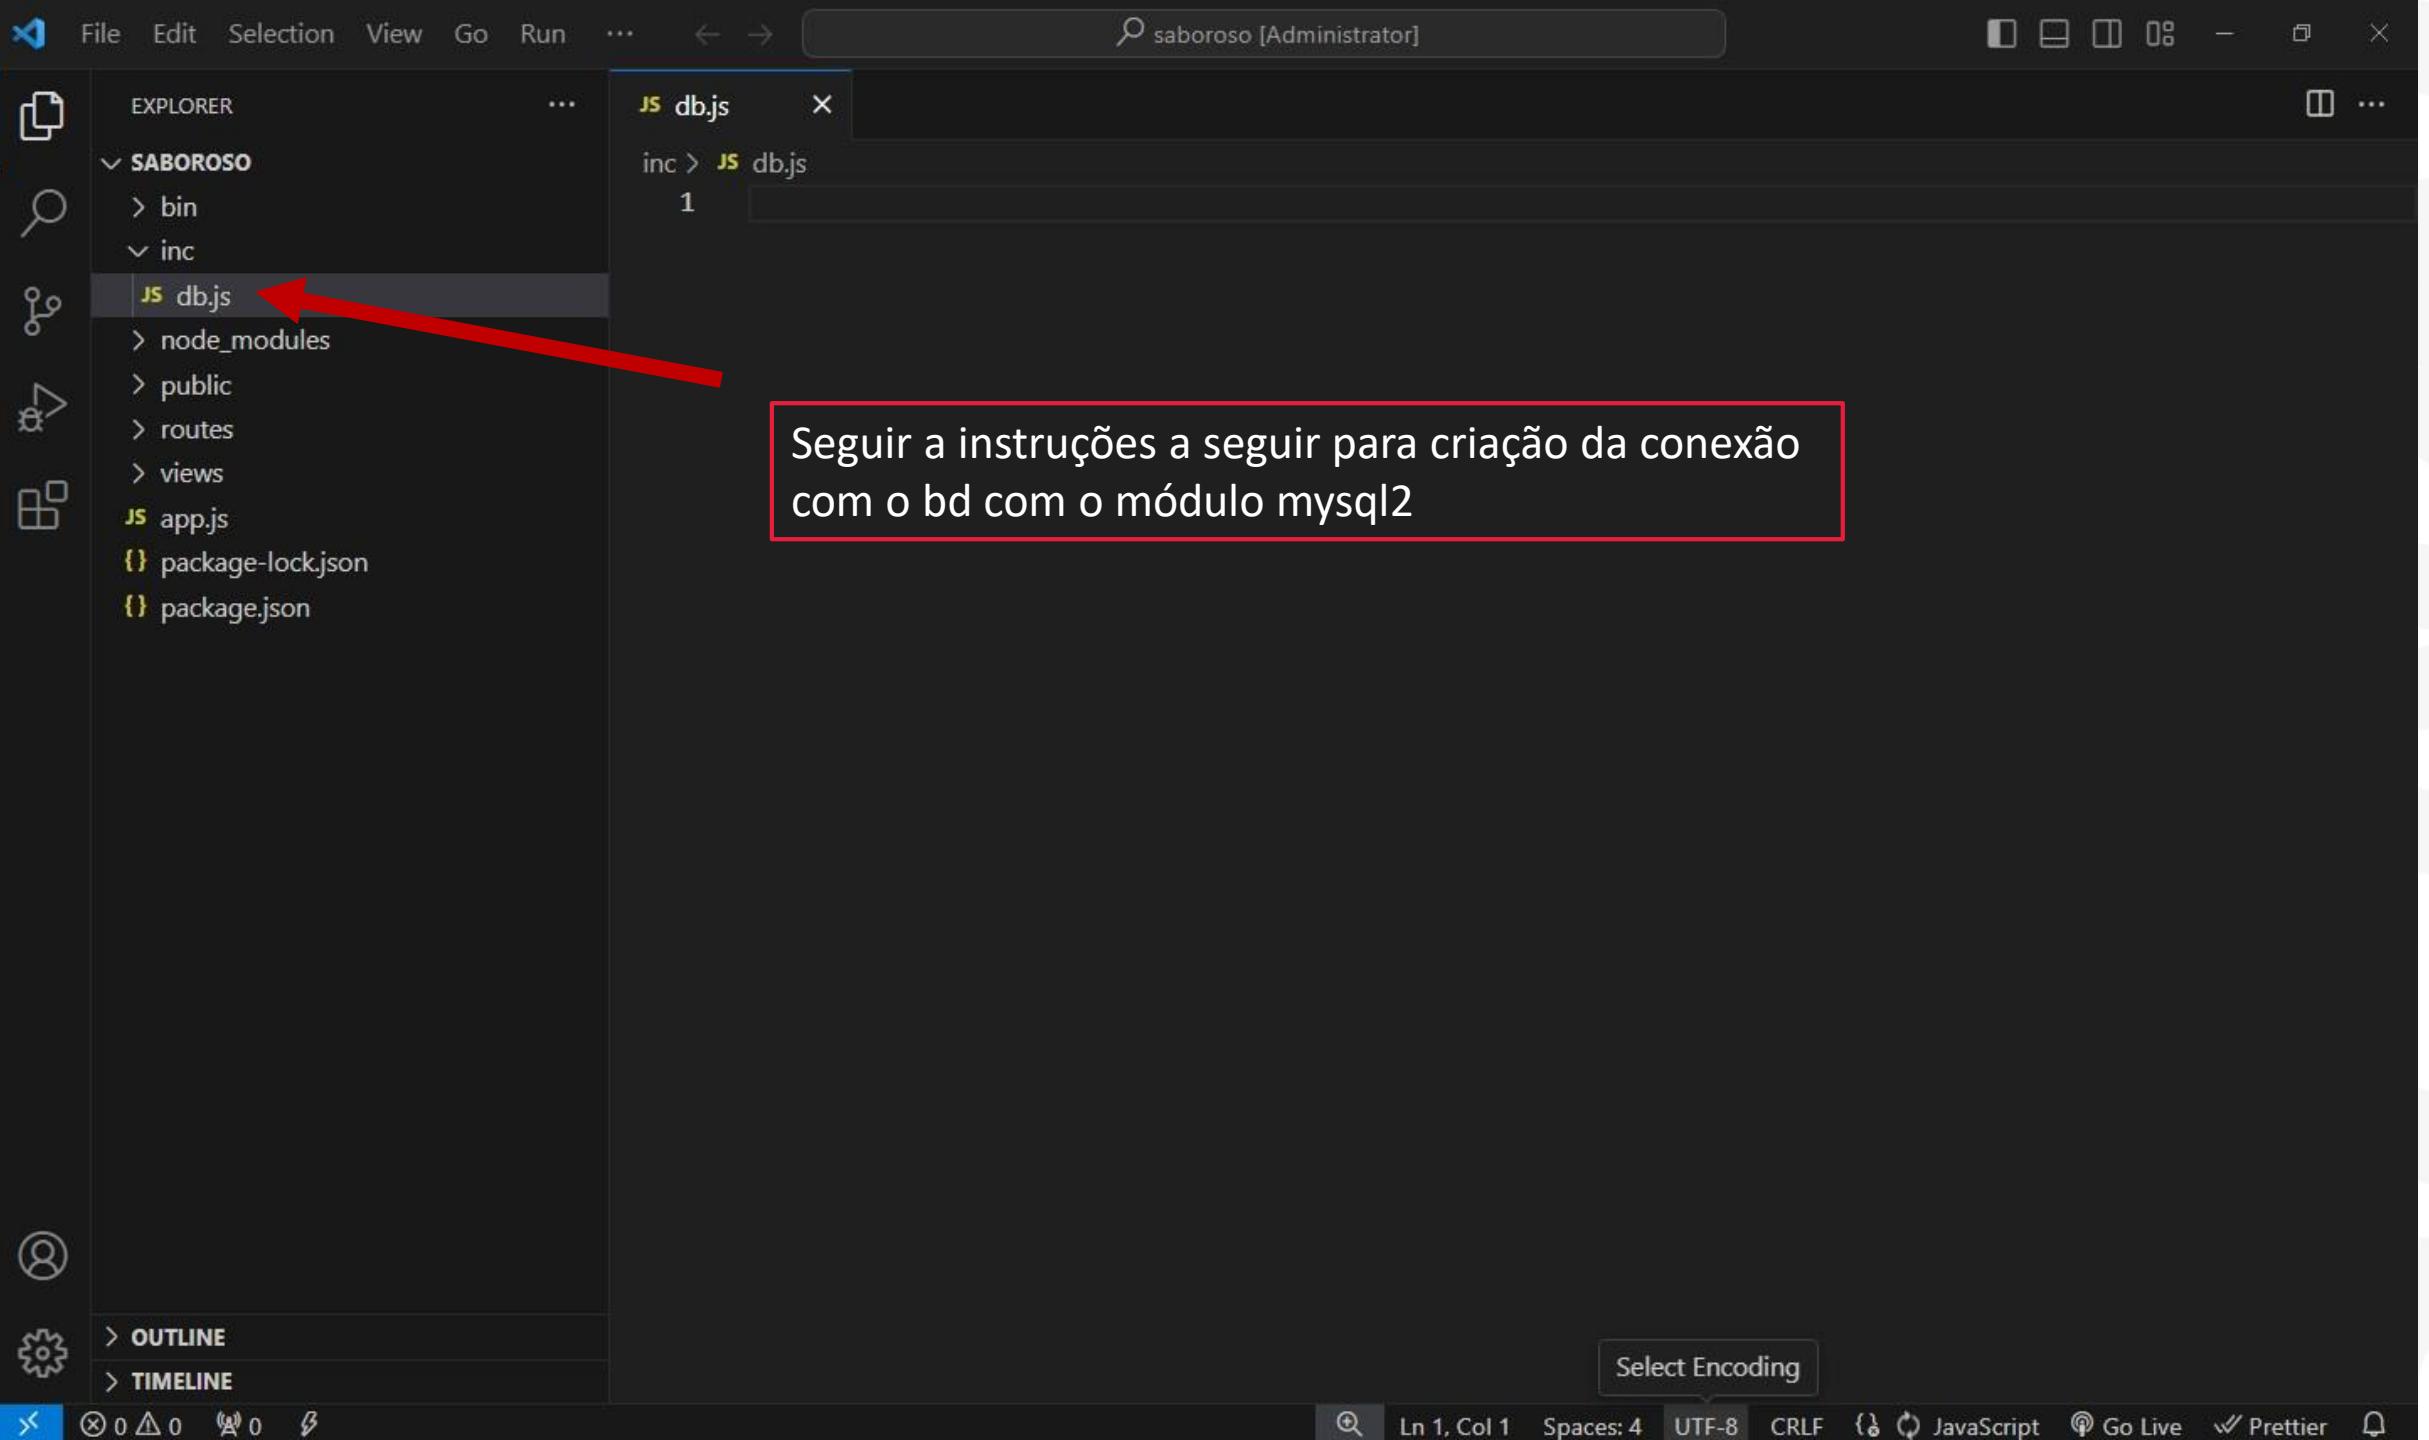

File Edit Selection View ... ← → 🔍 saboroso [Administrator] ⚡ ...

EXPLORER ... JS db.js JS users.js X

SABOROSO

- > bin
- < inc
- JS db.js
- > node_modules
- > public
- < routes
- JS index.js
- JS users.js**
- > views
- JS app.js
- { package-lock.json
- { package.json

routes > JS users.js > router.get('/').callback

```
1 var express = require('express');
2 var router = express.Router();
3
4 /* GET users listing. */
5 router.get('/', function(req, res, next) {
6   | res.send('respond with a resource');
7 });
8
9 module.exports = router;
10
```


Adicionar a rota para o index.html do site



Express

Welcome to Express

[Testar no navegador](#)

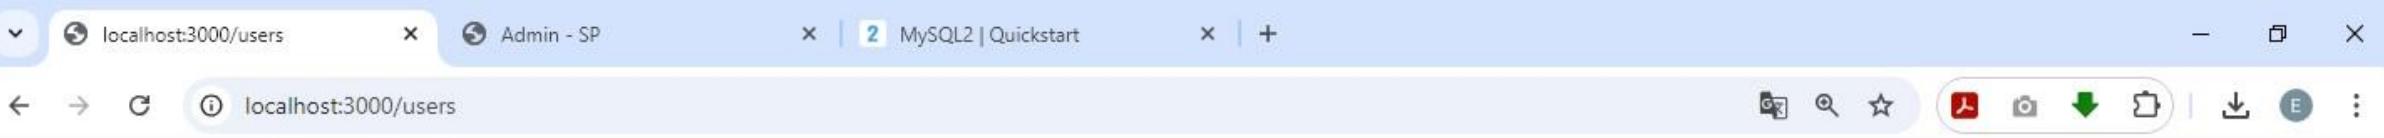

Resposta positiva da execução

A screenshot of the Microsoft Visual Studio Code interface. The Explorer sidebar on the left shows a file tree for a project named "SABOROSO". The "routes" folder contains "index.js" and "users.js", with "users.js" currently selected and highlighted in grey. The main editor area displays the contents of "users.js", which is a Node.js module using Express. A red arrow points from the status bar at the bottom right towards the code in the editor. The status bar also shows file statistics (0△0), encoding (UTF-8), and various extension icons.

File Edit Selection View ... ← → 🔎 saboroso [Administrator] ⚡ ⚡ ⚡ ⚡ - ⚡ ×

EXPLORER ... JS db.js JS users.js X

SABOROSO

- > bin
- < inc
- JS db.js
- > node_modules
- > public
- < routes
 - JS index.js
 - JS users.js**
- > views
- JS app.js
- { package-lock.json
- { package.json

routes > JS users.js > ...

```
1 var express = require('express');
2 var router = express.Router();
3
4 /* GET users listing. */
5 router.get('/', function(req, res, next) {
6   res.send('respond with a resource');
7 });
8
9 module.exports = router;
10
```

Ln 10, Col 1 Spaces: 2 UTF-8 LF { JavaScript ⚡ Go Live ⚡ Prettier ⚡

File Edit Selection View ... ← → 🔍 saboroso [Administrator] ⚡ ...

EXPLORER ... JS db.js JS users.js X

SABOROSO



- > bin
- < inc
- JS db.js
- > node_modules
- > public
- < routes
- JS index.js
- JS users.js**
- > views
- JS app.js
- { package-lock.json
- { package.json

routes > JS users.js > ...

```
1 var conn = require('../inc/db');
2 var express = require('express');
3 var router = express.Router();
4
5 /* GET users listing. */
6 router.get('/', function(req, res, next) {
7   res.send('respond with a resource');
8 });
9
10 module.exports = router;
11
```

Adicionar a conexão com db no arquivo

Ln 1, Col 1 (34 selected) Spaces: 2 UTF-8 LF { JavaScript Go Live Prettier

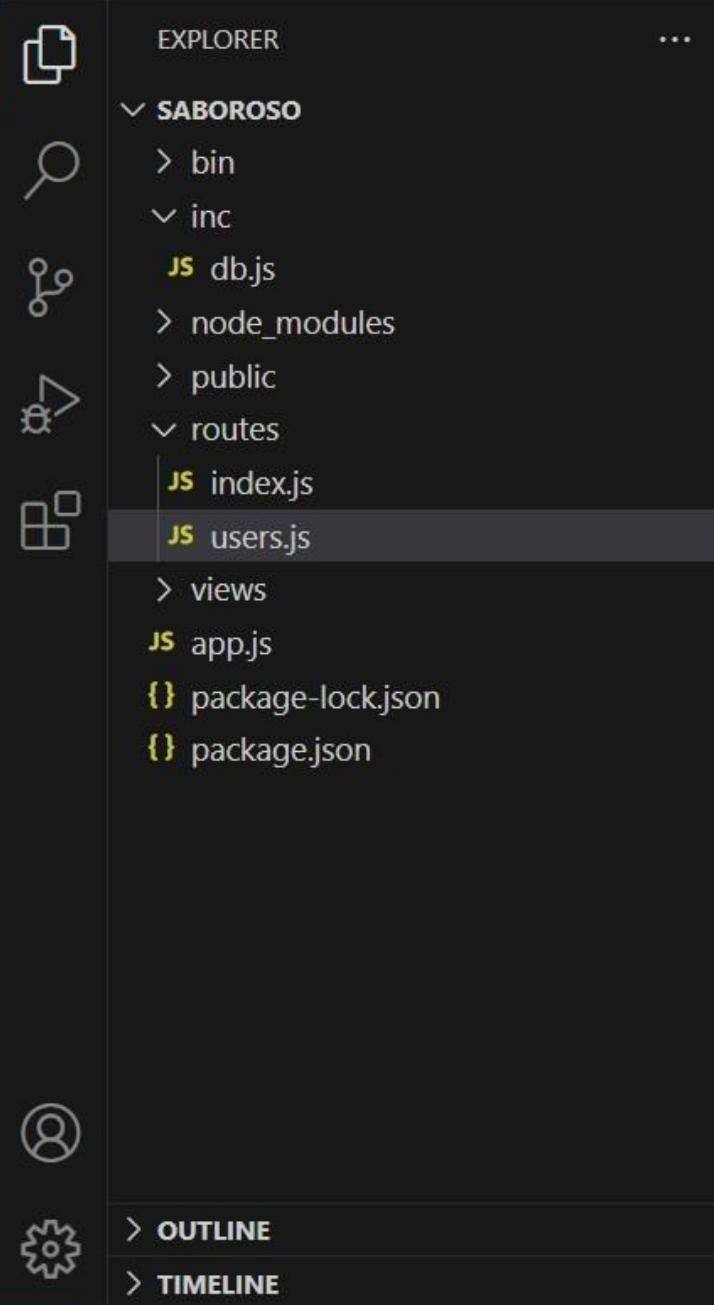

File Edit Selection View ... ← → 🔍 saboroso [Administrator] ⚡ ...

EXPLORER ... JS db.js JS users.js X

routes > JS users.js > router.get('/' callback

```
1 var conn = require('../inc/db');
2 var express = require('express');
3 var router = express.Router();
4
5 /* GET users listing. */
6 router.get('/', function(req, res, next) {
7   conn.query("SELECT * FROM tb_users ORDER BY name", (err, results) => {
8     if (err) {
9       res.send(err);
10    } else {
11      res.send(results);
12    }
13  });
14
15 });
16
17 });
18 });
19
20 module.exports = router;
21
```

> OUTLINE
> TIMELINE


Ln 8, Col 1 (160 selected) Spaces: 2 UTF-8 LF ⓘ JavaScript ⚡ Go Live ✅ Prettier

Adicionar os dados da First Query



A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the project name "saboroso [Administrator]". The left sidebar (Explorer) lists the project structure under "SABOROSO", including files like db.js, users.js, index.js, and app.js. The "package.json" file is selected in the Explorer and highlighted in the editor. The main editor area displays the contents of the package.json file:

```
1  {
2    "name": "saboroso",
3    "version": "0.0.0",
4    "private": true,
5    "scripts": {
6      "start": "node ./bin/www"
7    },
8    "dependencies": {
9      "cookie-parser": "~1.4.4",
10     "debug": "~2.6.9",
11     "ejs": "~2.6.1",
12     "express": "~4.16.1",
13     "http-errors": "~1.6.3",
14     "morgan": "~1.9.1",
15     "mysql2": "^3.11.3"
16   }
17 }
18 }
```

The status bar at the bottom shows various icons and text, including "Ln 1, Col 1", "Spaces: 2", "UTF-8", "LF", "JSON", "Go Live", and "Prettier".



```
{} package.json > {} scripts > start
1  {
2    "name": "saboroso",
3    "version": "0.0.0",
4    "private": true,
5    "scripts": {
6      "start": "node ./bin/www"
7    },
8    "dependencies": {
9      "cookie-parser": "~1.4.4",
10     "debug": "~2.6.9",
11     "ejs": "~2.6.1",
12     "express": "~4.16.1",
13     "http-errors": "~1.6.3",
14     "morgan": "~1.9.1",
15     "mysql2": "^3.11.3"
16   }
17 }
18 }
```

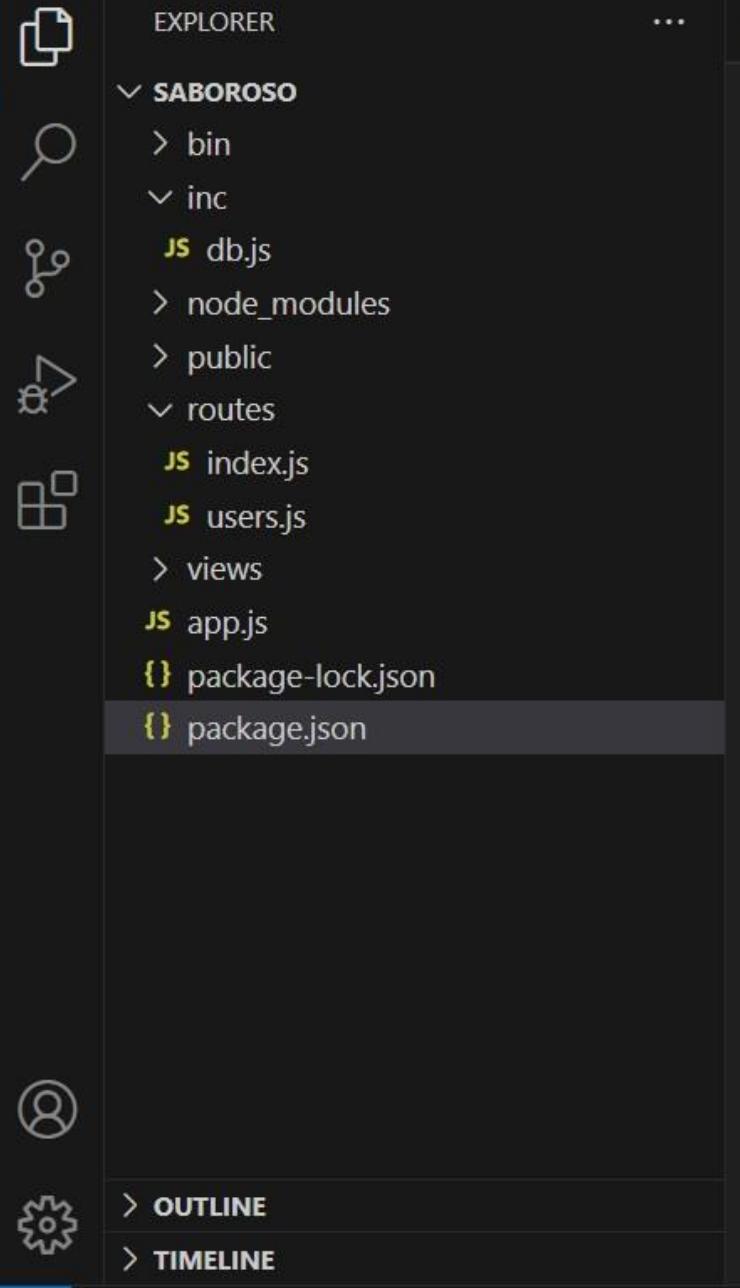

A screenshot of the Visual Studio Code interface. The title bar shows the window is titled "saboroso [Administrator]". The left sidebar (Explorer) shows a project structure for a Node.js application named "SABOROSO". The "package.json" file is selected in the Explorer. The main editor area displays the contents of the "package.json" file:

```
1  {
2    "name": "saboroso",
3    "version": "0.0.0",
4    "private": true,
5    "scripts": {
6      "start": "nodemon ./bin/www"
7    },
8    "dependencies": {
9      "cookie-parser": "~1.4.4",
10     "debug": "~2.6.9",
11     "ejs": "~2.6.1",
12     "express": "~4.16.1",
13     "http-errors": "~1.6.3",
14     "morgan": "~1.9.1",
15     "mysql2": "^3.11.3"
16   }
17 }
18
```

A red arrow points from a callout bubble containing the text "Adicionar nodemon no package.json" to the "start" script line in the JSON file.

```
C:\Users\Administrador\Desktop\projeto\saboroso
```

```
λ npm install mysql2 --save
```

```
added 12 packages, and audited 67 packages in 2s
```

```
1 package is looking for funding  
  run `npm fund` for details
```

```
7 vulnerabilities (2 moderate, 4 high, 1 critical)
```

```
To address issues that do not require attention, run:
```

```
  npm audit fix
```

```
To address all issues (including breaking changes), run:
```

```
  npm audit fix --force
```

```
Run `npm audit` for details.
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
```

```
λ |
```



```
C:\Users\Administrador\Desktop\projeto\saboroso
λ npm install mysql2 --save

added 12 packages, and audited 67 packages in 2s

1 package is looking for funding
  run `npm fund` for details


7 vulnerabilities (2 moderate, 4 high, 1 critical)

To address issues that do not require attention, run:
  npm audit fix

To address all issues (including breaking changes), run:
  npm audit fix --force

Run `npm audit` for details.
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ npm install nodemon -g
```

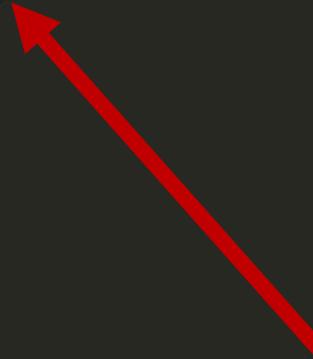

Instalar o nodemon no projeto

```
C:\Users\Administrador\Desktop\projeto\saboroso
```

```
λ npm install mysql2 --save
```

```
added 12 packages, and audited 67 packages in 2s
```

```
1 package is looking for funding  
  run `npm fund` for details
```

```
7 vulnerabilities (2 moderate, 4 high, 1 critical)
```

```
To address issues that do not require attention, run:
```

```
  npm audit fix
```

```
To address all issues (including breaking changes), run:
```

```
  npm audit fix --force
```

```
Run `npm audit` for details.
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
```

```
λ npm install nodemon -g
```

```
added 29 packages in 2s
```

```
4 packages are looking for funding  
  run `npm fund` for details
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
```

```
λ
```



```
C:\Users\Administrador\Desktop\projeto
λ ls
saboroso/

C:\Users\Administrador\Desktop\projeto
λ cd saboroso\

C:\Users\Administrador\Desktop\projeto\saboroso
λ ls
app.js  bin/  package.json  public/  routes/  views/

C:\Users\Administrador\Desktop\projeto\saboroso
λ npm install

added 54 packages, and audited 55 packages in 5s

7 vulnerabilities (2 moderate, 4 high, 1 critical)

To address issues that do not require attention, run:
  npm audit fix

To address all issues (including breaking changes), run:
  npm audit fix --force

Run `npm audit` for details.

C:\Users\Administrador\Desktop\projeto\saboroso
λ set DEBUG=saboroso:* & npm start
```

λ set DEBUG=saboroso:* & npm start

> saboroso@0.0.0 start
> node ./bin/www

saboroso:server Listening on port 3000 +0ms
GET / 200 19.015 ms - 207
GET /stylesheets/style.css 200 6.010 ms - 111
GET /favicon.ico 404 3.017 ms - 1173
GET /users 200 1.472 ms - 23

Iniciar o projeto

```
saboroso/
```

```
C:\Users\Administrador\Desktop\projeto
λ cd saboroso\
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ ls
app.js  bin/  package.json  public/  routes/  views/
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ npm install
```

```
added 54 packages, and audited 55 packages in 5s
```

```
7 vulnerabilities (2 moderate, 4 high, 1 critical)
```

```
To address issues that do not require attention, run:
  npm audit fix
```

```
To address all issues (including breaking changes), run:
  npm audit fix --force
```

```
Run `npm audit` for details.
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ set DEBUG=saboroso:* & npm start
```

```
> saboroso@0.0.0 start
> node ./bin/www
```

```
saboroso:server Listening on port 3000 +0ms
GET / 200 19.015 ms - 207
GET /stylesheets/style.css 200 6.010 ms - 111
GET /favicon.ico 404 3.017 ms - 1173
GET /users 200 1.472 ms - 23
Deseja finalizar o arquivo em lotes (S/N)? S
```

Finalizar a execução
para testar

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ
```

```
saboroso/
```

```
C:\Users\Administrador\Desktop\projeto
λ cd saboroso\
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ ls
app.js  bin/  package.json  public/  routes/  views/
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ npm install
```

```
added 54 packages, and audited 55 packages in 5s
```

```
7 vulnerabilities (2 moderate, 4 high, 1 critical)
```

```
To address issues that do not require attention, run:
  npm audit fix
```

```
To address all issues (including breaking changes), run:
  npm audit fix --force
```

```
Run `npm audit` for details.
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ set DEBUG=saboroso:* & npm start
```

```
> saboroso@0.0.0 start
> node ./bin/www
```

```
  saboroso:server Listening on port 3000 +0ms
GET / 200 19.015 ms - 207
GET /stylesheets/style.css 200 6.010 ms - 111
GET /favicon.ico 404 3.017 ms - 1173
GET /users 200 1.472 ms - 23
Deseja finalizar o arquivo em lotes (S/N)? S
```

```
C:\Users\Administrador\Desktop\projeto\saboroso
λ set DEBUG=saboroso:* & npm start
```

Iniciar o projeto

```
added 54 packages, and audited 55 packages in 5s  
7 vulnerabilities (2 moderate, 4 high, 1 critical)  
To address issues that do not require attention, run:  
  npm audit fix  
To address all issues (including breaking changes), run:  
  npm audit fix --force  
Run `npm audit` for details.
```

```
C:\Users\Administrador\Desktop\projeto\saboroso  
λ set DEBUG=saboroso:* & npm start  
  
> saboroso@0.0.0 start  
> node ./bin/www  
  
saboroso:server Listening on port 3000 +0ms  
GET / 200 19.015 ms - 207  
GET /stylesheets/style.css 200 6.010 ms - 111  
GET /favicon.ico 404 3.017 ms - 1173  
GET /users 200 1.472 ms - 23  
Deseja finalizar o arquivo em lotes (S/N)? S
```

```
C:\Users\Administrador\Desktop\projeto\saboroso  
λ set DEBUG=saboroso:* & npm start  
  
> saboroso@0.0.0 start  
> nodemon ./bin/www
```

```
[nodemon] 3.1.7  
[nodemon] to restart at any time, enter `rs`  
[nodemon] watching path(s): *.*  
[nodemon] watching extensions: js,mjs,cjs,json  
[nodemon] starting `node ./bin/www`  
saboroso:server Listening on port 3000 +0ms
```

Resultado positivo da execução







Resposta positiva da execução. Emitirá uma resposta em json com o usuário criado no banco de dados pelo arquivo mysql.sql




Visualização tradicional de arquivo json

UC: Projetos

Assunto:

Projeto Restaurante – BackEnd

**04 – Exibindo Dados do Banco de Dados no
EJS**

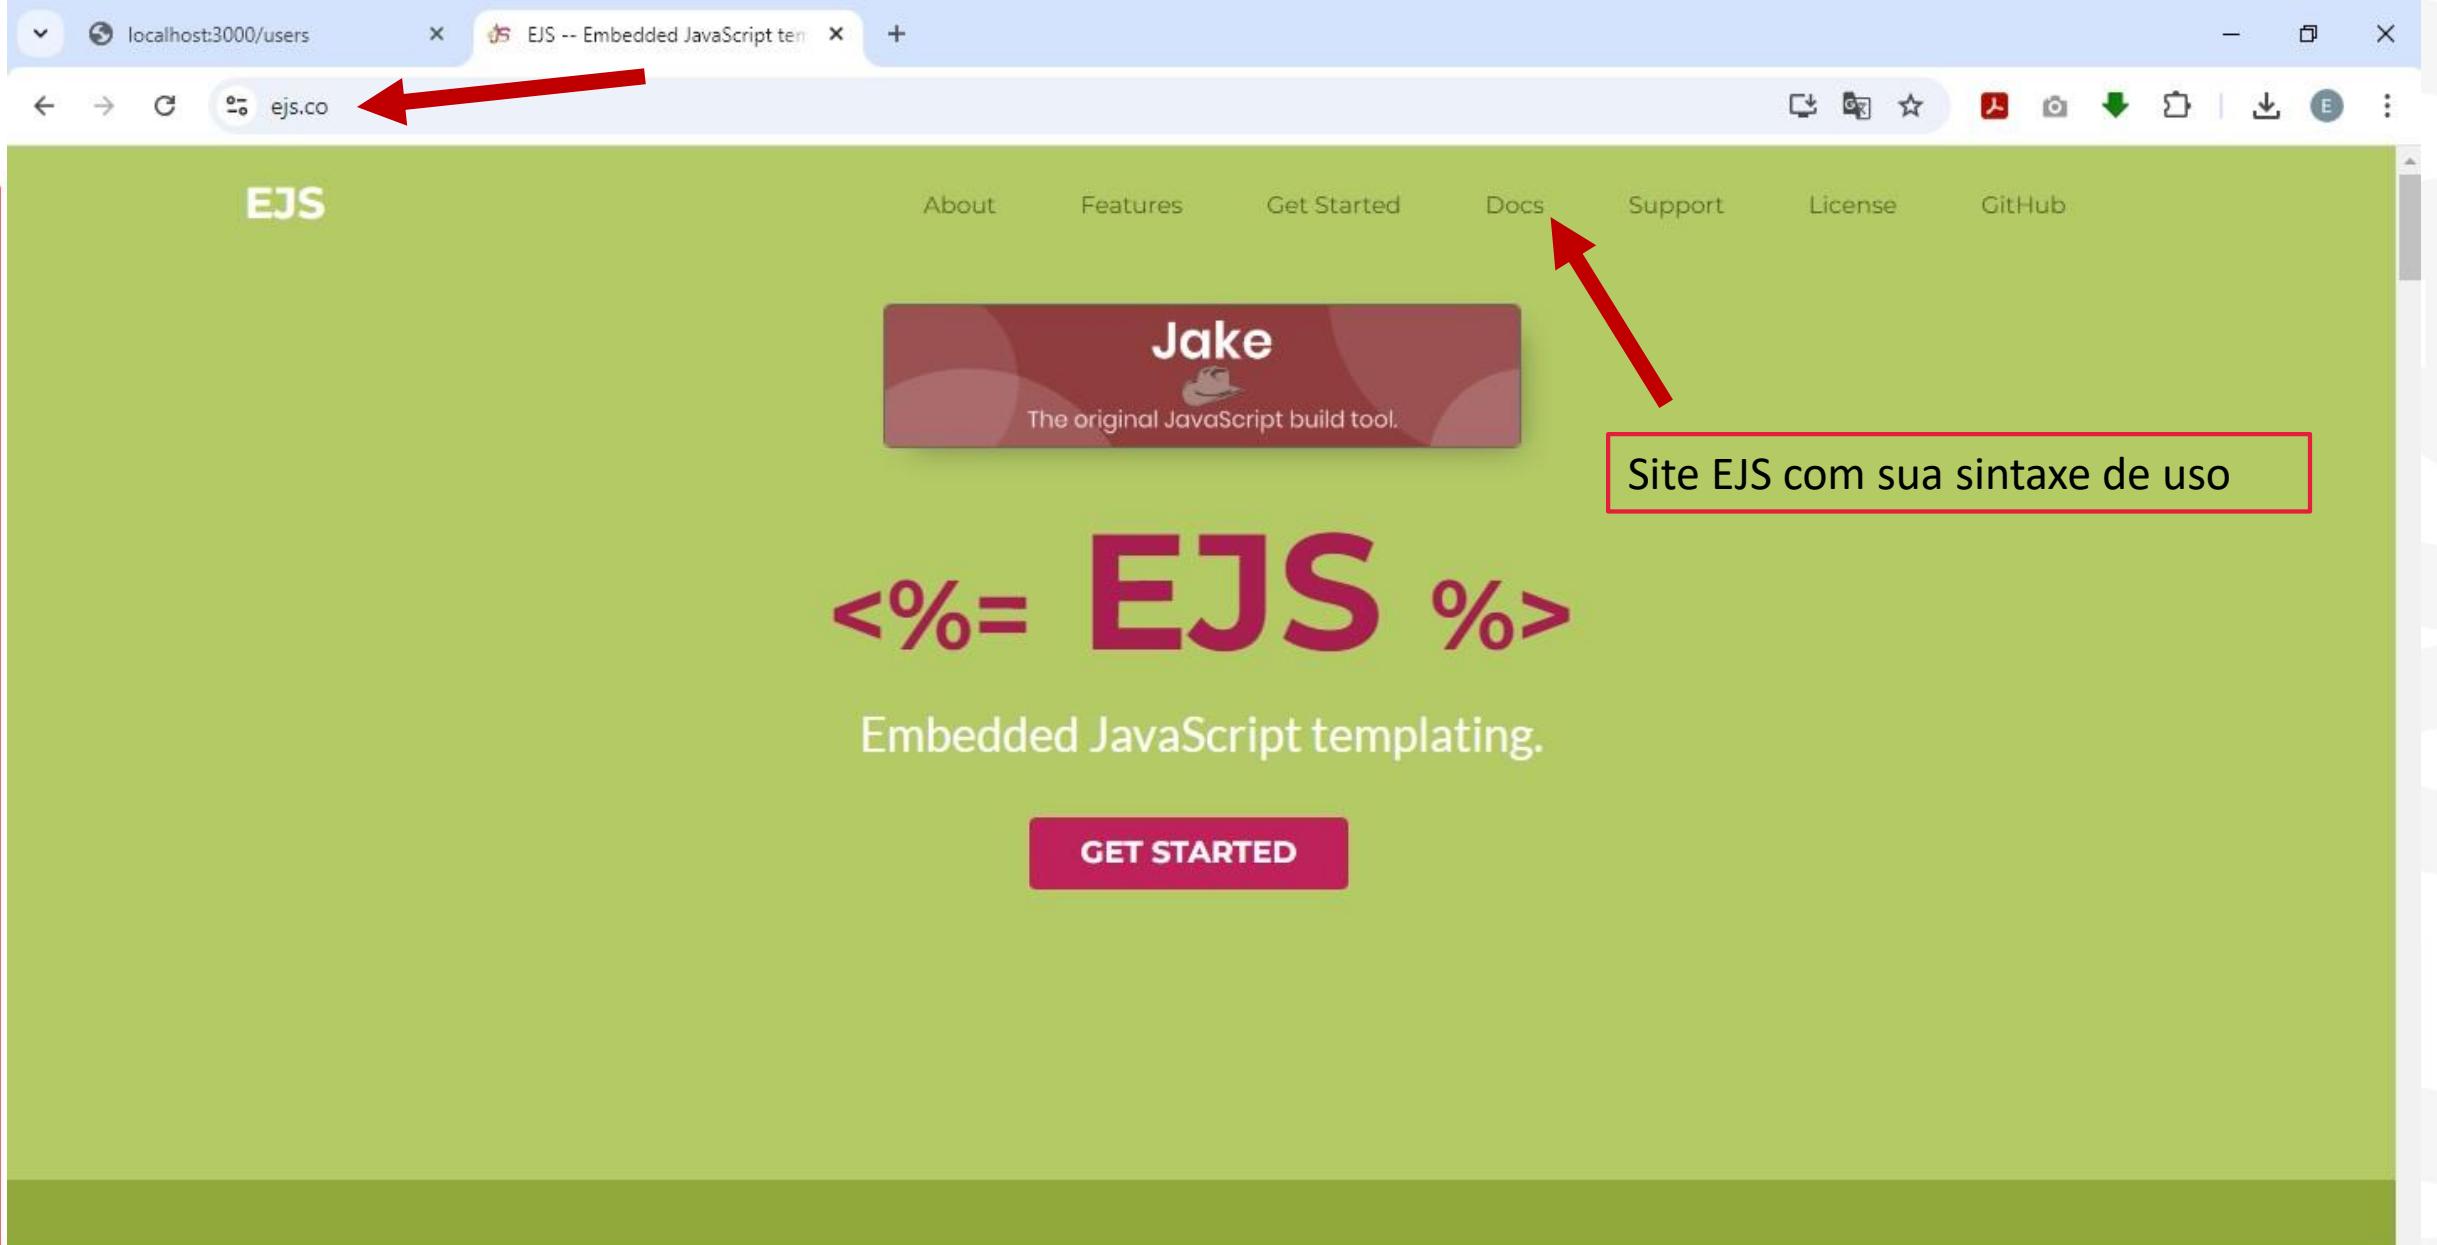

What is EJS?

localhost:3000/users x EJS -- Embedded JavaScript tem x +

ejs.co

About Features Get Started Docs Support License GitHub

Docs

Example

```
<% if (user) { %>
  <h2><%= user.name %></h2>
<% } %>
```


Usage

```
let template = ejs.compile(str, options);
template(data);
// => Rendered HTML string

ejs.render(str, data, options);
// => Rendered HTML string

ejs.renderFile(filename, data, options, function(err, str){
  // str => Rendered HTML string
});
```

Options

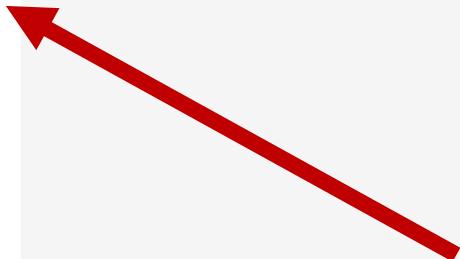

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the project name "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the folder "SABOROSO". The main editor area shows the "package.json" file, which contains the following JSON code:

```
1 {  
2   "name": "saboroso",  
3   "version": "0.0.0",  
4   "private": true,  
5   "scripts": {  
6     "start": "nodemon ./bin/www"  
7   },  
8   "dependencies": {  
9     "cookie-parser": "~1.4.4",  
10    "debug": "~2.6.9",  
11    "ejs": "~2.6.1",  
12    "express": "~4.16.1",  
13    "http-errors": "~1.6.3",  
14    "morgan": "~1.9.1",  
15    "mysql2": "^3.11.3"  
16  }  
17}  
18
```

A large red arrow points from the bottom right towards the "dependencies" object in the JSON code.

File Edit Selection View ... ⟲ ⟳ 🔎 saboroso [Administrator] ⚡

EXPLORER ... JS db.js JS users.js {} package.json X ⚡ ...

SABOROSO

- public
 - > db
 - > fonts
 - > images
 - > js
 - contact.html
 - favicon.ico
 - index.html
 - menu.html
 - reservation.html
 - services.html
- routes
 - index.js
 - users.js
- views
 - error.ejs
 - index.ejs
 - app.js

{} package.json > {} dependencies

```
1  {
2    "name": "saboroso",
3    "version": "0.0.0",
4    "private": true,
5    "scripts": {
6      "start": "nodemon ./bin/www"
7    },
8    "dependencies": {
9      "cookie-parser": "~1.4.4",
10     "debug": "~2.6.9",
11     "ejs": "~2.6.1",
12     "express": "~4.16.1",
13     "http-errors": "~1.6.3",
14     "morgan": "~1.9.1",
15     "mysql2": "^3.11.3"
16   }
17 }
18 }
```

Ln 13, Col 29 Spaces: 2 UTF-8 LF {} JSON Go Live Prettier

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Search icon, Home icon, Minimize, Maximize, Close.
- Left Sidebar (Explorer):**
 - EXPLORER
 - SABOROSO
 - public
 - db
 - fonts
 - images
 - js
 - contact.html
 - favicon.ico
 - index.html** (highlighted with a blue selection bar and a red arrow pointing to it)
 - menu.html
 - reservation.html
 - services.html
 - routes
 - index.js
 - users.js
 - views
 - error.ejs
 - index.ejs
 - app.js
 - package-lock.json
 - package.json
- Right Panel (Editor):** Shows the content of the index.html file.

```
public > index.html > ...
1 <!DOCTYPE HTML>
2 <html>
3
4 <head>
5   <meta charset="utf-8">
6   <meta http-equiv="X-UA-Compatible" content="IE=edge">
7   <title>Restaurante Saboroso!</title>
8   <meta name="viewport" content="width=device-width, initial-scale=1">
9   <meta name="description" content="Site do restaurante fictício Saboroso
desenvolvido no curso CT Desenvolvimento de Sistemas"
10  />
11  <meta name="author" content="SProviders.com.br" />
12
13  <link rel="icon" href="favicon.ico" type="image/x-icon" />
14  <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />
15
16  <meta name="theme-color" content="#FBB448">
17
18  <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700"
rel="stylesheet">
19  <link href="https://fonts.googleapis.com/css?family=Kaushan+Script"
rel="stylesheet">
20
21  <!-- Animate.css -->
22  <link rel="stylesheet" href="css/animate.css">
```
- Bottom Status Bar:** Icons for search, file operations, and tabs, followed by Ln 1, Col 1, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier, and a bell icon.

File Edit Selection View ... ← → 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO

- public
 - db
 - fonts
 - images
 - js
 - contact.html
 - favicon.ico
- index.html
- menu.html
- reservation.html
- services.html
- routes
 - index.js
 - users.js
- views
 - error.ejs
 - index.ejs
- app.js
- package-lock.json
- package.json

> OUTLINE

> TIMELINE

JS db.js JS users.js {} package.json < index.html X

public > index.html > html

```
1 <!DOCTYPE HTML>
2 <html>
3
4 <head>
5   <meta charset="utf-8">
6   <meta http-equiv="X-UA-Compatible" content="IE=edge">
7   <title>Restaurante Saboroso!</title>
8   <meta name="viewport" content="width=device-width, initial-scale=1">
9   <meta name="description" content="Site do restaurante fictício Saboroso
desenvolvido no curso CT Desenvolvimento de Sistemas">
10  />
11  <meta name="author" content="SProviders.com.br" />
12
13  <link rel="icon" href="favicon.ico" type="image/x-icon" />
14  <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />
15
16  <meta name="theme-color" content="#FBB448">
17
18  <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700"
rel="stylesheet">
19  <link href="https://fonts.googleapis.com/css?family=Kaushan+Script"
rel="stylesheet">
20
21  <!-- Animate.css -->
22  <link rel="stylesheet" href="css/animate.css">
```

Ln 474, Col 8 (15133 selected) Tab Size: 4 CRLF {} HTML ⚡ Go Live ✅ Prettier

Copiar o conteúdo

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The Explorer sidebar on the left lists the project structure under the folder "SABOROSO". The "views" folder contains files: "index.ejs" (selected and highlighted with a blue bar and a red arrow pointing to it), "error.ejs", and "index.html". Other files listed include "db.js", "users.js", "package.json", "app.js", "package-lock.json", and "package.json" (with two entries). The main editor area displays the content of the "index.ejs" file, which is an EJS template for an HTML page. The code includes DOCTYPE, HTML, HEAD, and BODY sections with embedded JavaScript code for title and styles.

```
<!DOCTYPE html>
<html>
  <head>
    <title><%= title %></title>
    <link rel='stylesheet' href='/stylesheets/style.css' />
  </head>
  <body>
    <h1><%= title %></h1>
    <p>Welcome to <%= title %></p>
  </body>
</html>
```


The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer (Left):** Shows the project structure under the folder "SABOROSO".
 - public: db, fonts, images, js, contact.html, favicon.ico.
 - views: error.ejs, index.ejs (selected).
 - routes: index.js, users.js.
- Search Bar (Top):** saboroso [Administrator]
- Tab Bar (Top):** db.js, users.js, package.json, index.ejs (active), index.ejs (closed).
- Code Editor (Main Area):** The "index.ejs" file content is displayed:

```
1 <!DOCTYPE html>
2 <html>
3   <head>
4     <title><%= title %></title>
5     <link rel='stylesheet' href='/stylesheets/style.css' />
6   </head>
7   <body>
8     <h1><%= title %></h1>
9     <p>Welcome to <%= title %></p>
10    </body>
11  </html>
```

A red arrow points from the bottom right towards the code editor area.
- Bottom Status Bar:** Ln 12, Col 1 (222 selected) Spaces: 2 UTF-8 LF HTML Go Live Prettier

Substituir esse conteúdo com o
conteúdo copiado anteriormente

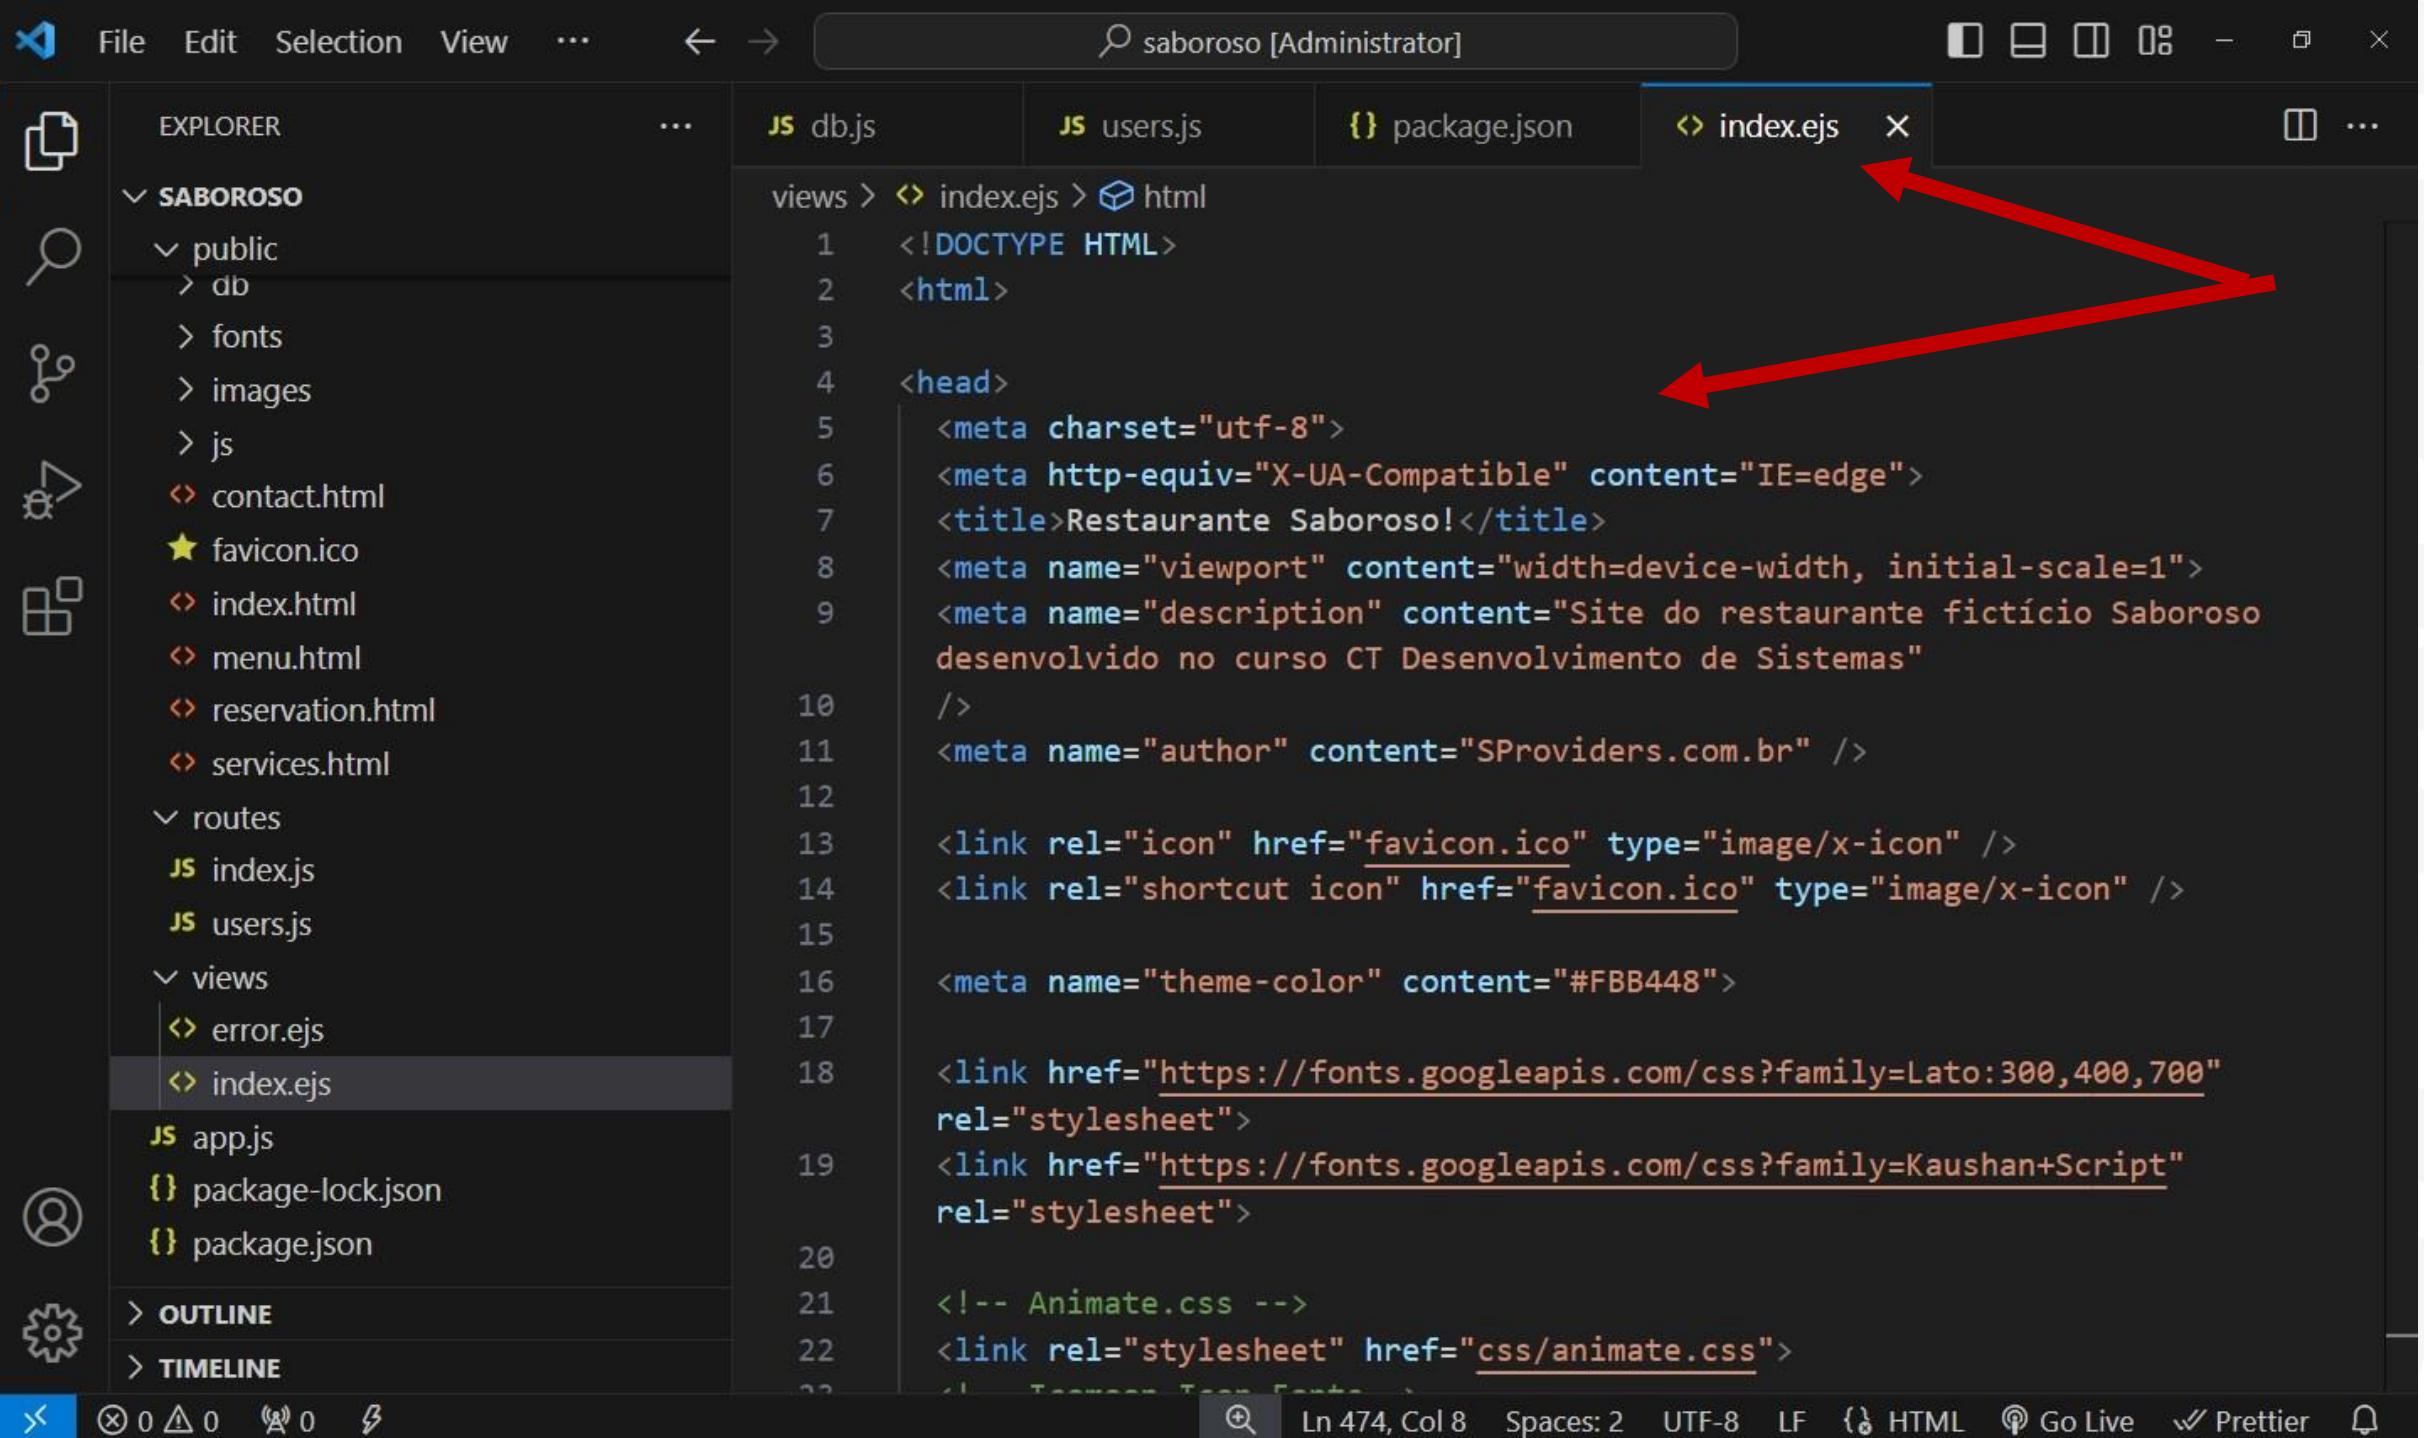

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** saboroso [Administrator]
- File Menu:** File Edit Selection View ...
- Search Bar:** search icon
- Explorer:** Shows the project structure under SABOROSO:
 - public
 - db
 - fonts
 - images
 - js
 - contact.html
 - favicon.ico
 - index.html (selected)
 - menu.html
 - reservation.html
 - services.html
 - routes
 - index.js
 - users.js
 - views
 - error.ejs
 - index.ejs (selected)
 - app.js
 - package-lock.json
 - package.json
- Editor:** The index.ejs file is open in the editor. The code includes meta tags for charset, http-equiv, title, viewport, description, author, and theme-color, as well as links to Google Fonts for Lato and Kaushan+Script. A red arrow points from the title bar towards the close button of the editor tab.
- Bottom Status Bar:** Includes icons for selection, search, and file operations, followed by Ln 474, Col 8, Spaces: 2, UTF-8, LF, HTML, Go Live, Prettier, and a bell icon.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, ...
- Search Bar:** saboroso [Administrator]
- Explorer Bar:** Shows the project structure under "SABOROSO".
- Editor Tab Bar:** JS db.js, JS users.js, {}, package.json, index.ejs (highlighted), and X.
- Editor Content:** The file index.ejs contains the following code:

```
views > index.ejs > html > head > link
13 <link rel="icon" href="favicon.ico" type="image/x-icon" />
14 <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />
15
16 <meta name="theme-color" content="#FBB448">
17
18 <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700" rel="stylesheet">
19 <link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">
20
21 <!-- Animate.css -->
22 <link rel="stylesheet" href="css/animate.css"> ← Red arrow points here
23 <!-- Icomoon Icon Fonts-->
24 <link rel="stylesheet" href="css/icomoon.css">
25 <!-- Themify Icons-->
26 <link rel="stylesheet" href="css/themify-icons.css">
27 <!-- Bootstrap -->
28 <link rel="stylesheet" href="css/bootstrap.css">
29
30 <!-- Magnific Popup -->
31 <link rel="stylesheet" href="css/magnific-popup.css">
32
33 <!-- Bootstrap DateTimePicker -->
34 <link rel="stylesheet" href="css/bootstrap-datetimepicker.min.css">
```
- Bottom Status Bar:** Line 22, Col 47 (15 selected), Spaces: 2, UTF-8, LF, HTML, Go Live, Prettier, and a bell icon.

File Edit Selection View ... ← → saboroso [Administrator] ⚡

EXPLORER SABOROSO public db fonts images js contact.html favicon.ico index.html menu.html reservation.html services.html routes index.js users.js views error.ejs index.ejs app.js package-lock.json package.json > OUTLINE > TIMELINE

db.js users.js package.json index.ejs

views > index.ejs > html > head > link

```
13 <link rel="icon" href="favicon.ico" type="image/x-icon" />
14 <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />
15
16 <meta name="theme-color" content="#FBB448">
17
18 <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700" rel="stylesheet">
19 <link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">
20
21 <!-- Animate.css -->
22 <link rel="stylesheet" href="css/animate.css">
23 <!-- Icomoon Icon Fonts-->
24 <link rel="stylesheet" href="css/icomoon.css"> ← Red arrow pointing here
25 <!-- Themify Icons-->
26 <link rel="stylesheet" href="css/themify-icons.css">
27 <!-- Bootstrap -->
28 <link rel="stylesheet" href="css/bootstrap.css">
29
30 <!-- Magnific Popup -->
31 <link rel="stylesheet" href="css/magnific-popup.css">
32
33 <!-- Bootstrap DateTimePicker -->
34 <link rel="stylesheet" href="css/bootstrap-datetimepicker.min.css">
35
```

Ln 24, Col 47 (15 selected) Spaces: 2 UTF-8 LF { HTML ⚡ Go Live ✓ Prettier

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Search, Minimize, Maximize, Close
- Explorer View:** Shows the project structure under "SABOROSO". A red arrow points to the "css" folder, which is highlighted with a blue selection bar.
- Editor View:** Displays the "index.ejs" file content. The code includes various CSS links and meta tags for theme color and fonts.
- Status Bar:** Shows file statistics (0△0), encoding (UTF-8), line count (Ln 24, Col 47 (15 selected)), and other settings.

```
<link rel="icon" href="favicon.ico" type="image/x-icon" />
<link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />

<meta name="theme-color" content="#FBB448">

<link href="https://fonts.googleapis.com/css?family=Lato:300,400,700"
rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Kaushan+Script"
rel="stylesheet">


<link rel="stylesheet" href="css/animate.css">

<link rel="stylesheet" href="css/bootstrap.css">


<link rel="stylesheet" href="css/magnific-popup.css">


<link rel="stylesheet" href="css/bootstrap-datetimepicker.min.css">
```

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** saboroso [Administrator]
- File Menu:** File Edit Selection View ...
- Search Bar:** saboroso [Administrator]
- Icons:** Explorer, Search, Open, Save, Find, Go To, Outline, Timeline.
- Explorer View:** Shows the project structure:
 - SABOROSO
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - admin
 - css (highlighted with a red arrow)
 - db
 - fonts
 - images
 - js
 - contact.html
 - favicon.ico
 - index.html
 - menu.html
 - reservation.html
 - services.html
 - routes
 - index.js
 - users.js
 - OUTLINE
 - TIMELINE
- Code Editor:** The current file is index.ejs. The code is an EJS template with embedded JavaScript. It includes links to Google Fonts for Lato, Kaushan Script, and Bootstrap, as well as stylesheets for Animate.css, Icomoon Icon Fonts, Themify Icons, and Magnific Popup. It also includes Bootstrap Datepicker styling.

```
<link rel="icon" href="favicon.ico" type="image/x-icon" />
<link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />
<meta name="theme-color" content="#FBB448">
<link href="https://fonts.googleapis.com/css?family=Lato:300,400,700" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">

<link rel="stylesheet" href="css/animate.css">
<!-- Icomoon Icon Fonts--&gt;
&lt;link rel="stylesheet" href="css/icomoon.css"&gt;
<!-- Themify Icons--&gt;
&lt;link rel="stylesheet" href="css/themify-icons.css"&gt;
<!-- Bootstrap  --&gt;
&lt;link rel="stylesheet" href="css/bootstrap.css"&gt;
<!-- Magnific Popup --&gt;
&lt;link rel="stylesheet" href="css/magnific-popup.css"&gt;
<!-- Bootstrap DateTimePicker --&gt;
&lt;link rel="stylesheet" href="css/bootstrap-datetimepicker.min.css"&gt;</pre>
```
- Bottom Status Bar:** Ln 24, Col 47 (15 selected) Spaces: 2 UTF-8 LF { HTML Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The top bar includes the standard menu (File, Edit, Selection, View, etc.) and a search bar. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar (Explorer) lists the project structure under "SABOROSO", including "public" (db, fonts, images, js), "routes" (index.js, users.js), "views" (error.ejs, index.ejs), "app.js", and "package-lock.json", "package.json". The right pane (Editor) displays the content of "index.js":

```
1 var express = require('express');
2 var router = express.Router();
3
4 /* GET home page. */
5 router.get('/', function(req, res, next) {
6   res.render('index', { title: 'Express' });
7 });
8
9 module.exports = router;
10
```

The "index.js" file is highlighted with a blue selection bar. A thick red arrow points from the "routes" section in the Explorer pane towards the "index.js" file in the Editor pane.

File Edit Selection View ... ← → 🔎 saboroso [Administrator] ⚡

EXPLORER ... JS db.js JS users.js {} package.json ↗ index.ejs JS index.js X ⌂ ...

routes > JS index.js > router.get('/') callback > title

```
1 var express = require('express');
2 var router = express.Router();
3
4 /* GET home page. */
5 router.get('/', function(req, res, next) {
6   | res.render('index', { title: 'Express' });
7 });
8
9 module.exports = router;
10
```

public > db > fonts > images > js < contact.html ★ favicon.ico < index.html < menu.html < reservation.html < services.html

routes < index.js JS users.js

views < error.ejs < index.ejs

app.js

{ package-lock.json {} package.json

> OUTLINE > TIMELINE

✖ ⊖ 0 △ 0 ⌂ 0 ⌂

Ln 6, Col 30 (5 selected) Spaces: 2 UTF-8 LF {} JavaScript ⌂ Go Live ⌂ Prettier ⌂

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the application name "saboroso [Administrator]" and standard window controls. The left sidebar contains icons for Explorer, Search, Problems, and other features. The main area displays a file named "index.ejs" which contains HTML and CSS meta tags for a restaurant website. A red arrow points from the bottom-left towards the "index.ejs" tab in the top navigation bar.

File Edit Selection ... ← → 🔍 saboroso [Administrator] ⚡

EXPLORER ... b.js JS users.js {} package.json ↗ index.ejs ✎ JS index.js ⌂ ...

SABOROSO

- public
 - favicon.ico
 - index.html
 - menu.html
 - reservation.html
 - services.html
- routes
 - index.js
 - users.js
- views
 - error.ejs
 - index.ejs

1 <!DOCTYPE HTML>
2 <html>
3
4 <head>
5 <meta charset="utf-8">
6 <meta http-equiv="X-UA-Compatible" content="IE=edge">
7 <title>Restaurante Saboroso!</title>
8 <meta name="viewport" content="width=device-width, initial-scale=1">
9 <meta name="description" content="Site do restaurante fictício
Saboroso desenvolvido no curso CT Desenvolvimento de Sistemas">
10 />
11 <meta name="author" content="SProviders.com.br" />
12
13 <link rel="icon" href="favicon.ico" type="image/x-icon" />
14 <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />
15
16 <meta name="theme-color" content="#FBB448">
17
18 <link href="https://fonts.googleapis.com/css?family=Lato:300,400,
700" rel="stylesheet">
19 <link href="https://fonts.googleapis.com/css?family=Kaushan+Script"

Ln 24, Col 49 (15 selected) Tab Size: 4 UTF-8 LF {} HTML ⚡ Go Live ✓ Prettier

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, ...
- Search Bar:** saboroso [Administrator]
- Toolbars:** Standard icons for file operations.
- Left Sidebar (EXPLORER):**
 - SABOROSO folder:
 - public folder:
 - favicon.ico
 - index.html
 - menu.html
 - reservation.html
 - services.html
 - routes folder:
 - index.js
 - users.js
 - views folder:
 - error.ejs
 - index.ejs
 - OUTLINE and TIMELINE sections.- Code Editor:** The current file is index.ejs. The code is as follows:

```
<!DOCTYPE HTML>
<html>
<head>
  <meta charset="utf-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <title><%= title %>Restaurante Saboroso!</title>
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <meta name="description" content="Site do restaurante fictício Saboroso desenvolvido no curso CT Desenvolvimento de Sistemas">
  <meta name="author" content="SProviders.com.br" />

  <link rel="icon" href="favicon.ico" type="image/x-icon" />
  <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />

  <meta name="theme-color" content="#FBB448">

  <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700" rel="stylesheet">
  <link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">
```
- Annotations:** A red arrow points from a callout box to the line `<title><%= title %>Restaurante Saboroso!</title>`. The callout box contains the text "Adicionar a variável do arquivo anterior".
- Bottom Status Bar:** Ln 7, Col 12 (10 selected) Tab Size: 4 UTF-8 LF HTML Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the window title "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the folder "SABOROSO". The main editor area shows the file "index.ejs" with the following code:

```
<!DOCTYPE HTML>
<html>
<head>
  <meta charset="utf-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <title><%= title %></title>
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <meta name="description" content="Site do restaurante fictício Saboroso desenvolvido no curso CT Desenvolvimento de Sistemas" />
  <meta name="author" content="SProviders.com.br" />

  <link rel="icon" href="favicon.ico" type="image/x-icon" />
  <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />

  <meta name="theme-color" content="#FBB448">

  <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700" rel="stylesheet">
  <link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">
```

A red arrow points from a callout box labeled "ajustar" to the "http-equiv" attribute of the meta tag at line 6.

Testar atualizando a página

SABOROSO!

FEITO POR SPROVIDERS

Restaurante Saboroso!

Home Menu Serviços Contato

Reserva

Reserva de mesa

Nome

E-mail

Pessoas

-- selecione --

Data

The screenshot shows the Visual Studio Code interface with the following details:

- Title Bar:** saboroso [Administrator]
- File Menu:** File Edit Selection ...
- Search Bar:** search icon
- Toolbar:** Minimize, Maximize, Close
- Explorer View (Left):**
 - EXPLORER
 - SABOROSO
 - public
 - favicon.ico
 - index.html
 - menu.html
 - reservation.html
 - services.html
 - routes
 - index.js** (highlighted with a red arrow)
 - users.js
 - views
 - error.ejs
 - index.ejs
 - app.js
 - package-lock.json
 - package.json
 - OUTLINE
 - TIMELINE
- Code Editor (Right):**
 - File tabs: b.js, users.js, package.json, index.ejs, **index.js** (highlighted with a red arrow)
 - Code content:

```
routes > index.js > router.get('/') callback > title
1 var express = require('express');
2 var router = express.Router();
3
4 /* GET home page. */
5 router.get('/', function(req, res, next) {
6   | res.render('index', { title: 'Express' });
7 });
8
9 module.exports = router;
10
```
 - Status bar at the bottom: Ln 6, Col 40 (7 selected), Spaces: 2, UTF-8, LF, JavaScript, Port : 5500, Prettier

File Edit Selection ... ← → 🔍 saboroso [Administrator] ⚡

EXPLORER ... b.js JS users.js {} package.json ↗ index.ejs ✖ JS index.js ⏮ ...

SABOROSO

public

- favicon.ico
- index.html
- menu.html
- reservation.html
- services.html

routes

- index.js
- users.js

views

- error.ejs
- index.ejs

app.js

package-lock.json

package.json

OUTLINE

TIMELINE

views > ↗ index.ejs > html > head > title > ?

```
1  <!DOCTYPE HTML>
2  <html>
3
4  <head>
5      <meta charset="utf-8">
6      <meta http-equiv="X-UA-Compatible" content="IE=edge">
7      <title><%= title %></title>
8      <meta name="viewport" content="width=device-width, initial-scale=1">
9      <meta name="description" content="Site do restaurante fictício
Saboroso desenvolvido no curso CT Desenvolvimento de Sistemas"
10     />
11     <meta name="author" content="SProviders.com.br" />
12
13     <link rel="icon" href="favicon.ico" type="image/x-icon" />
14     <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />
15
16     <meta name="theme-color" content="#FBB448">
17
18     <link href="https://fonts.googleapis.com/css?family=Lato:300,400,
19         700" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Kaushan+Script"
```

Ln 7, Col 24 (12 selected) Tab Size: 4 UTF-8 LF {} HTML ⚡ Port: 5500 ✅ Prettier 📰


The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, ...
- Search Bar:** saboroso [Administrator]
- Icons:** Minimize, Maximize, Close, etc.
- Explorer Sidebar:** Shows the project structure under 'SABOROSO':
 - inc
 - node_modules
 - public
 - admin
 - css
 - db
 - fonts
 - images
 - js
 - contact.html
 - favicon.ico
 - index.html** (highlighted with a red arrow)
 - menu.html
 - reservation.html
 - services.html
- Code Editor:** The 'index.ejs' file is open, showing EJS template code. The title tag is currently empty: <title><%= title %></title>. The code also includes meta tags for charset, viewport, and author, and links to 'favicon.ico' and Google fonts.
- Bottom Status Bar:** Ln 7, Col 24 (12 selected) Tab Size: 4 UTF-8 LF { HTML Port : 5500 ✓ Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar (Explorer) lists the project structure under "SABOROSO". The "routes" folder contains "index.js" (selected), "users.js", and "error.ejs". The "views" folder contains "index.ejs". Other files listed include "public" (images, js, contact.html), "favicon.ico", "index.html", "menu.html", "reservation.html", and "services.html". The main editor area displays the "index.js" file content:

```
routes > JS index.js > ...
1 var express = require('express');
2 var router = express.Router();
3
4 // GET home page. */
5 router.get('/', function(req, res, next) {
6   res.render('index', { title: 'Express' });
7 }
8
9 module.exports = router;
```

The code editor shows syntax highlighting for JavaScript. A red arrow points from the "index.js" entry in the Explorer sidebar to the corresponding line in the editor. Another red arrow points from the "index.js" tab in the top navigation bar to the same line in the editor.

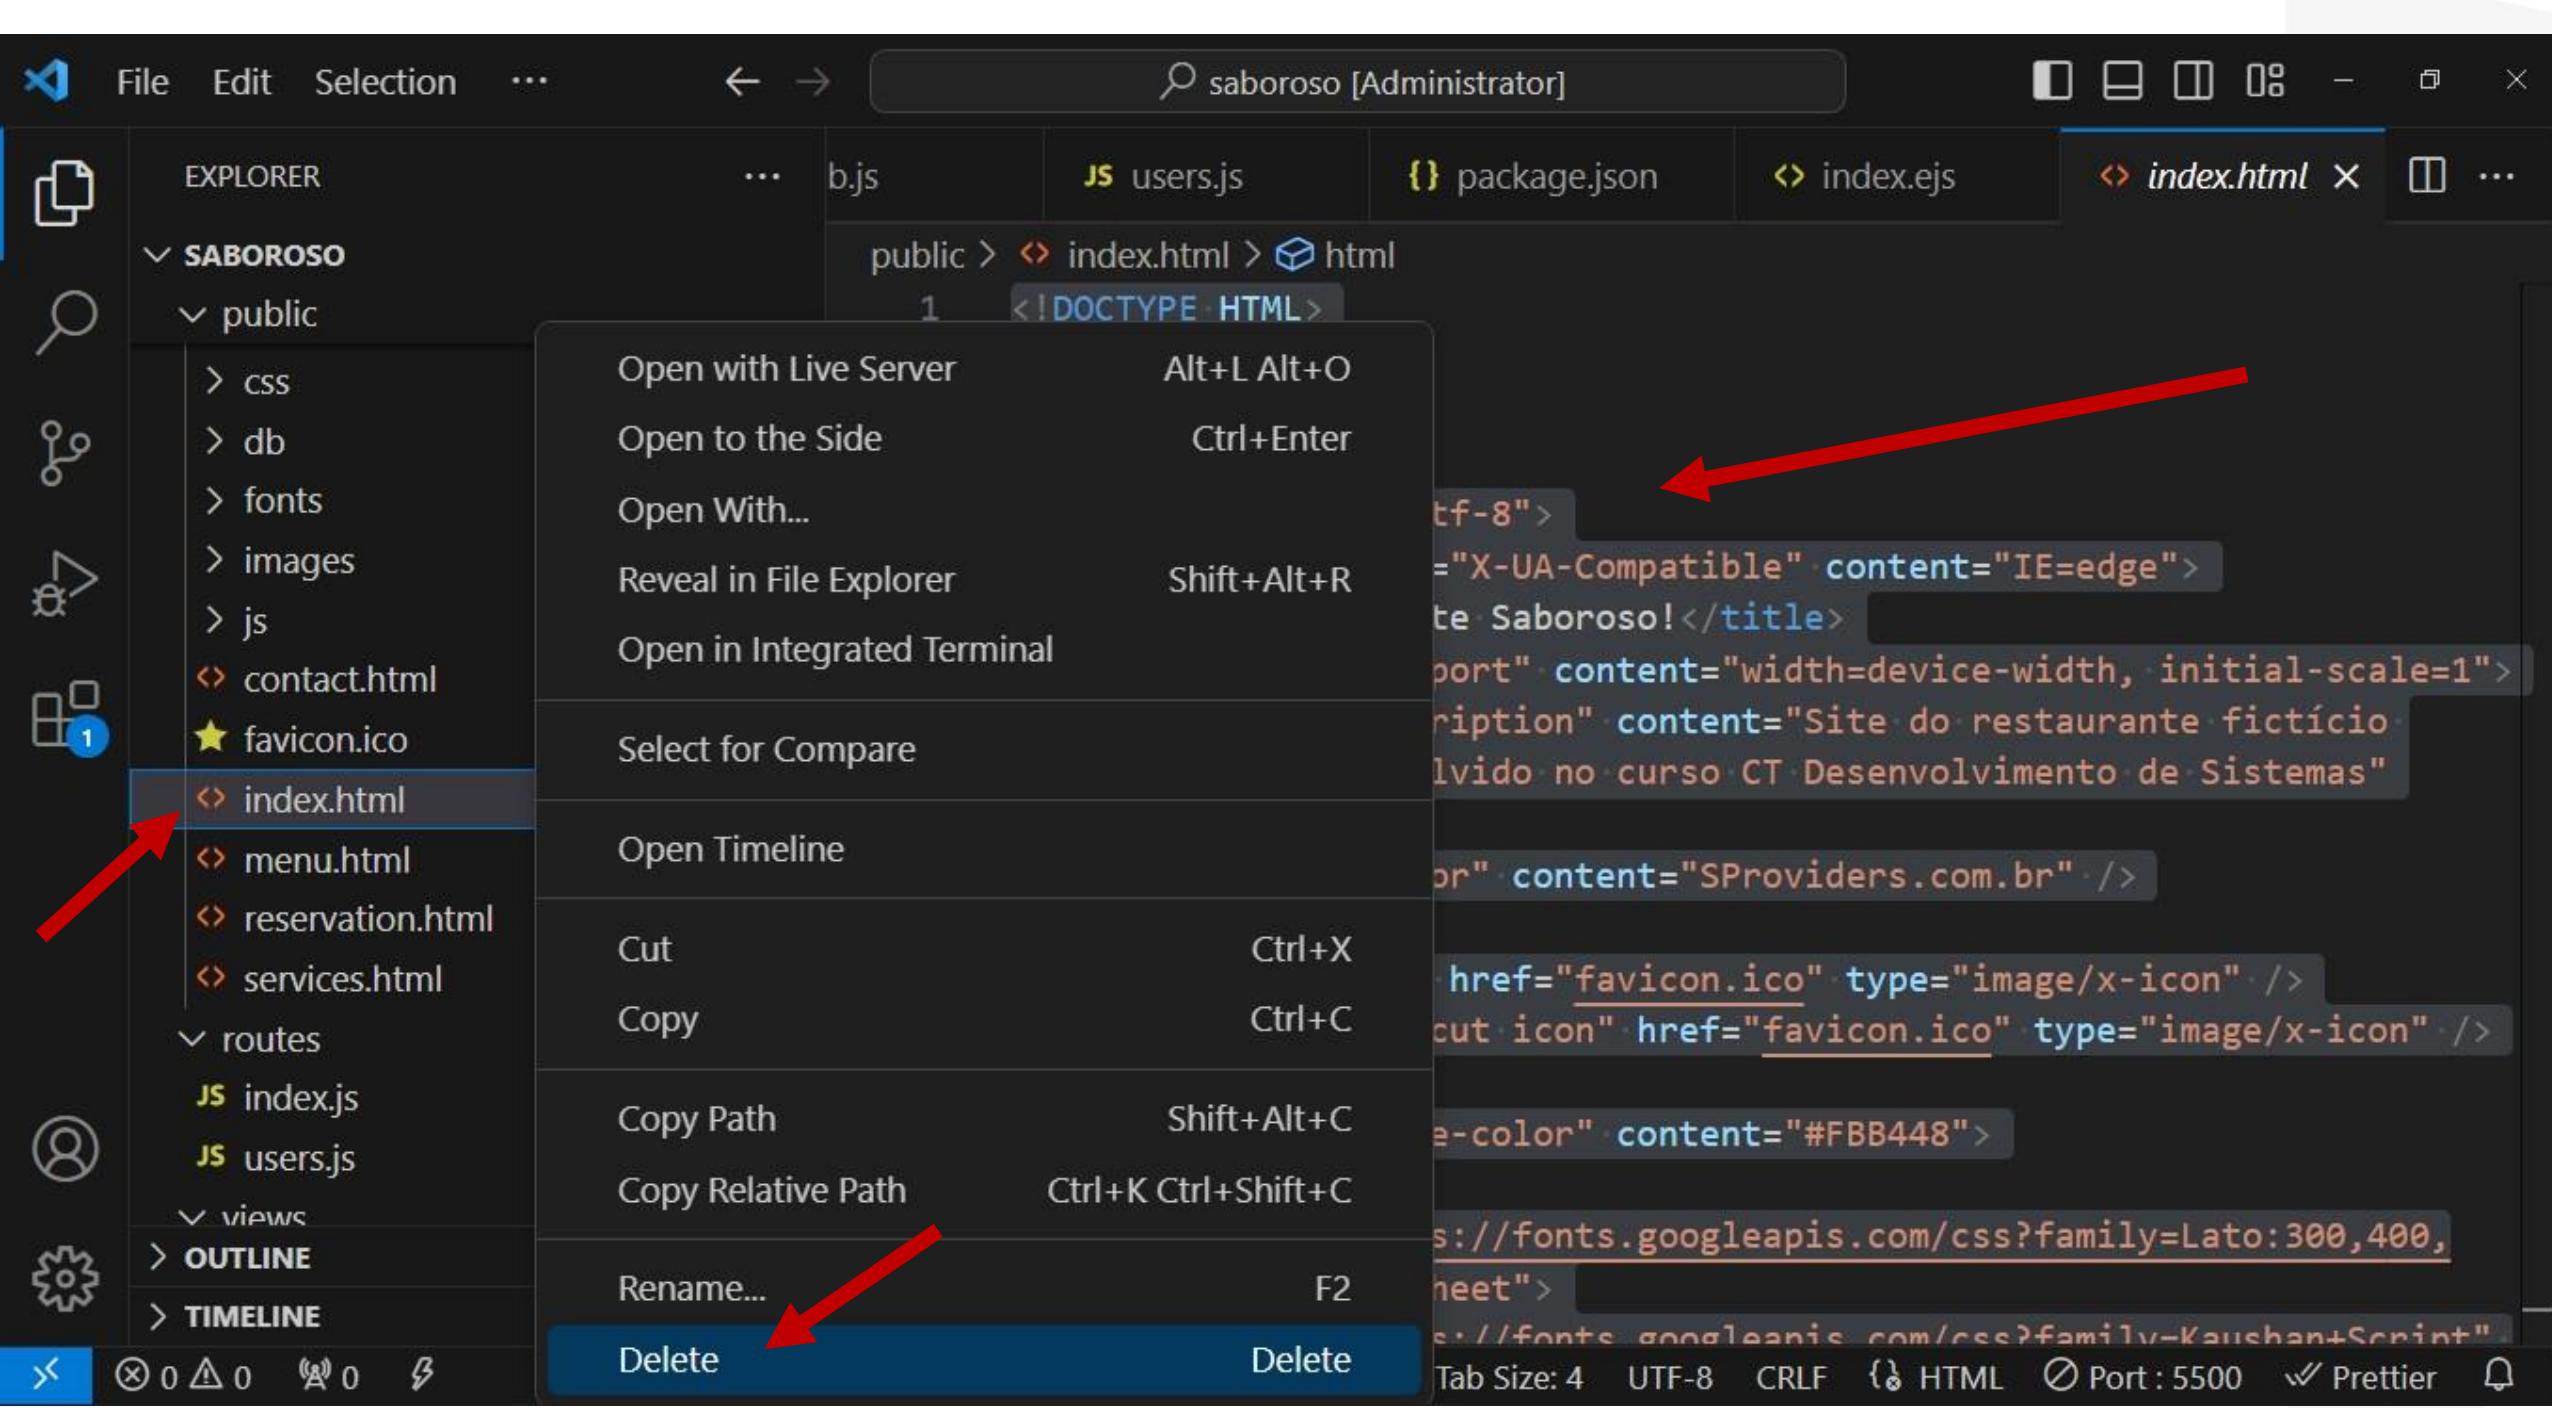

A screenshot of the Visual Studio Code interface. The title bar shows the file path: saboroso [Administrator]. The left sidebar has icons for Explorer, Search, Problems, and others. The Explorer view shows a folder structure under SABOROSO/public, including files like b.js, users.js, package.json, index.ejs, and index.html. A red arrow points to the index.html file in the list. A context menu is open over the index.html file, listing options such as Open with Live Server, Open to the Side, Open With..., Reveal in File Explorer, Open in Integrated Terminal, Select for Compare, Open Timeline, Cut, Copy, Copy Path, Copy Relative Path, Rename..., and Delete. The Delete option is highlighted with a red arrow. The status bar at the bottom shows tabs for b.js, users.js, package.json, index.ejs, index.html (which is active), and index.html (another tab). It also displays settings for Tab Size: 4, Encoding: UTF-8, End of Line: CRLF, and other extensions like Prettier.


```
<!DOCTYPE HTML>
<html>
  <head>
    <meta charset="UTF-8">
    <meta name="X-UA-Compatible" content="IE=edge">
    <title>Saboroso!</title>
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <meta name="description" content="Site do restaurante fictício criado no curso CT Desenvolvimento de Sistemas">
    <link rel="icon" href="favicon.ico" type="image/x-icon">
    <link rel="apple-touch-icon" href="favicon.ico" type="image/x-icon">
    <style>
      body {
        color: #333;
        font-family: 'Lato', sans-serif;
        margin: 0;
        padding: 0;
      }
      &#color" content="#FBB448">
      <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700&subset=latin-ext" rel="stylesheet">
      <link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">
    </style>
  </head>
  <body>
    <div class="container">
      <h1>Saboroso!</h1>
      <p>Site do restaurante fictício criado no curso CT Desenvolvimento de Sistemas</p>
      <ul class="list-group">
        <li><a href="#">Home</a></li>
        <li><a href="#">About</a></li>
        <li><a href="#">Menu</a></li>
        <li><a href="#">Reservation</a></li>
        <li><a href="#">Services</a></li>
      </ul>
      <div class="text-center">
        
        <small>Site do restaurante fictício criado no curso CT Desenvolvimento de Sistemas</small>
      </div>
    </div>
  </body>
</html>
```


A screenshot of the Visual Studio Code (VS Code) interface. The Explorer sidebar on the left shows a file tree for a project named "SABOROSO". The "index.js" file under the "routes" folder is selected, indicated by a red arrow pointing to it. The main editor area displays the "index.js" file content:

```
routes > JS index.js > router.get('/').callback > title
1 var express = require('express');
2 var router = express.Router();
3
4 /* GET home page. */
5 router.get('/', function(req, res, next) {
6   |   res.render('index', { title: 'Express' });
7 });
8
9 module.exports = router;
10
```

The word "Express" in the template string of the render call is highlighted with a yellow selection. A red arrow points from this highlighted text to the status bar at the bottom right, which shows "✓ Prettier".

The status bar at the bottom also displays other information: "Ln 6, Col 40 (7 selected)", "Spaces: 2", "UTF-8", "LF", "JavaScript", "Port : 5500", and "✓ Prettier".

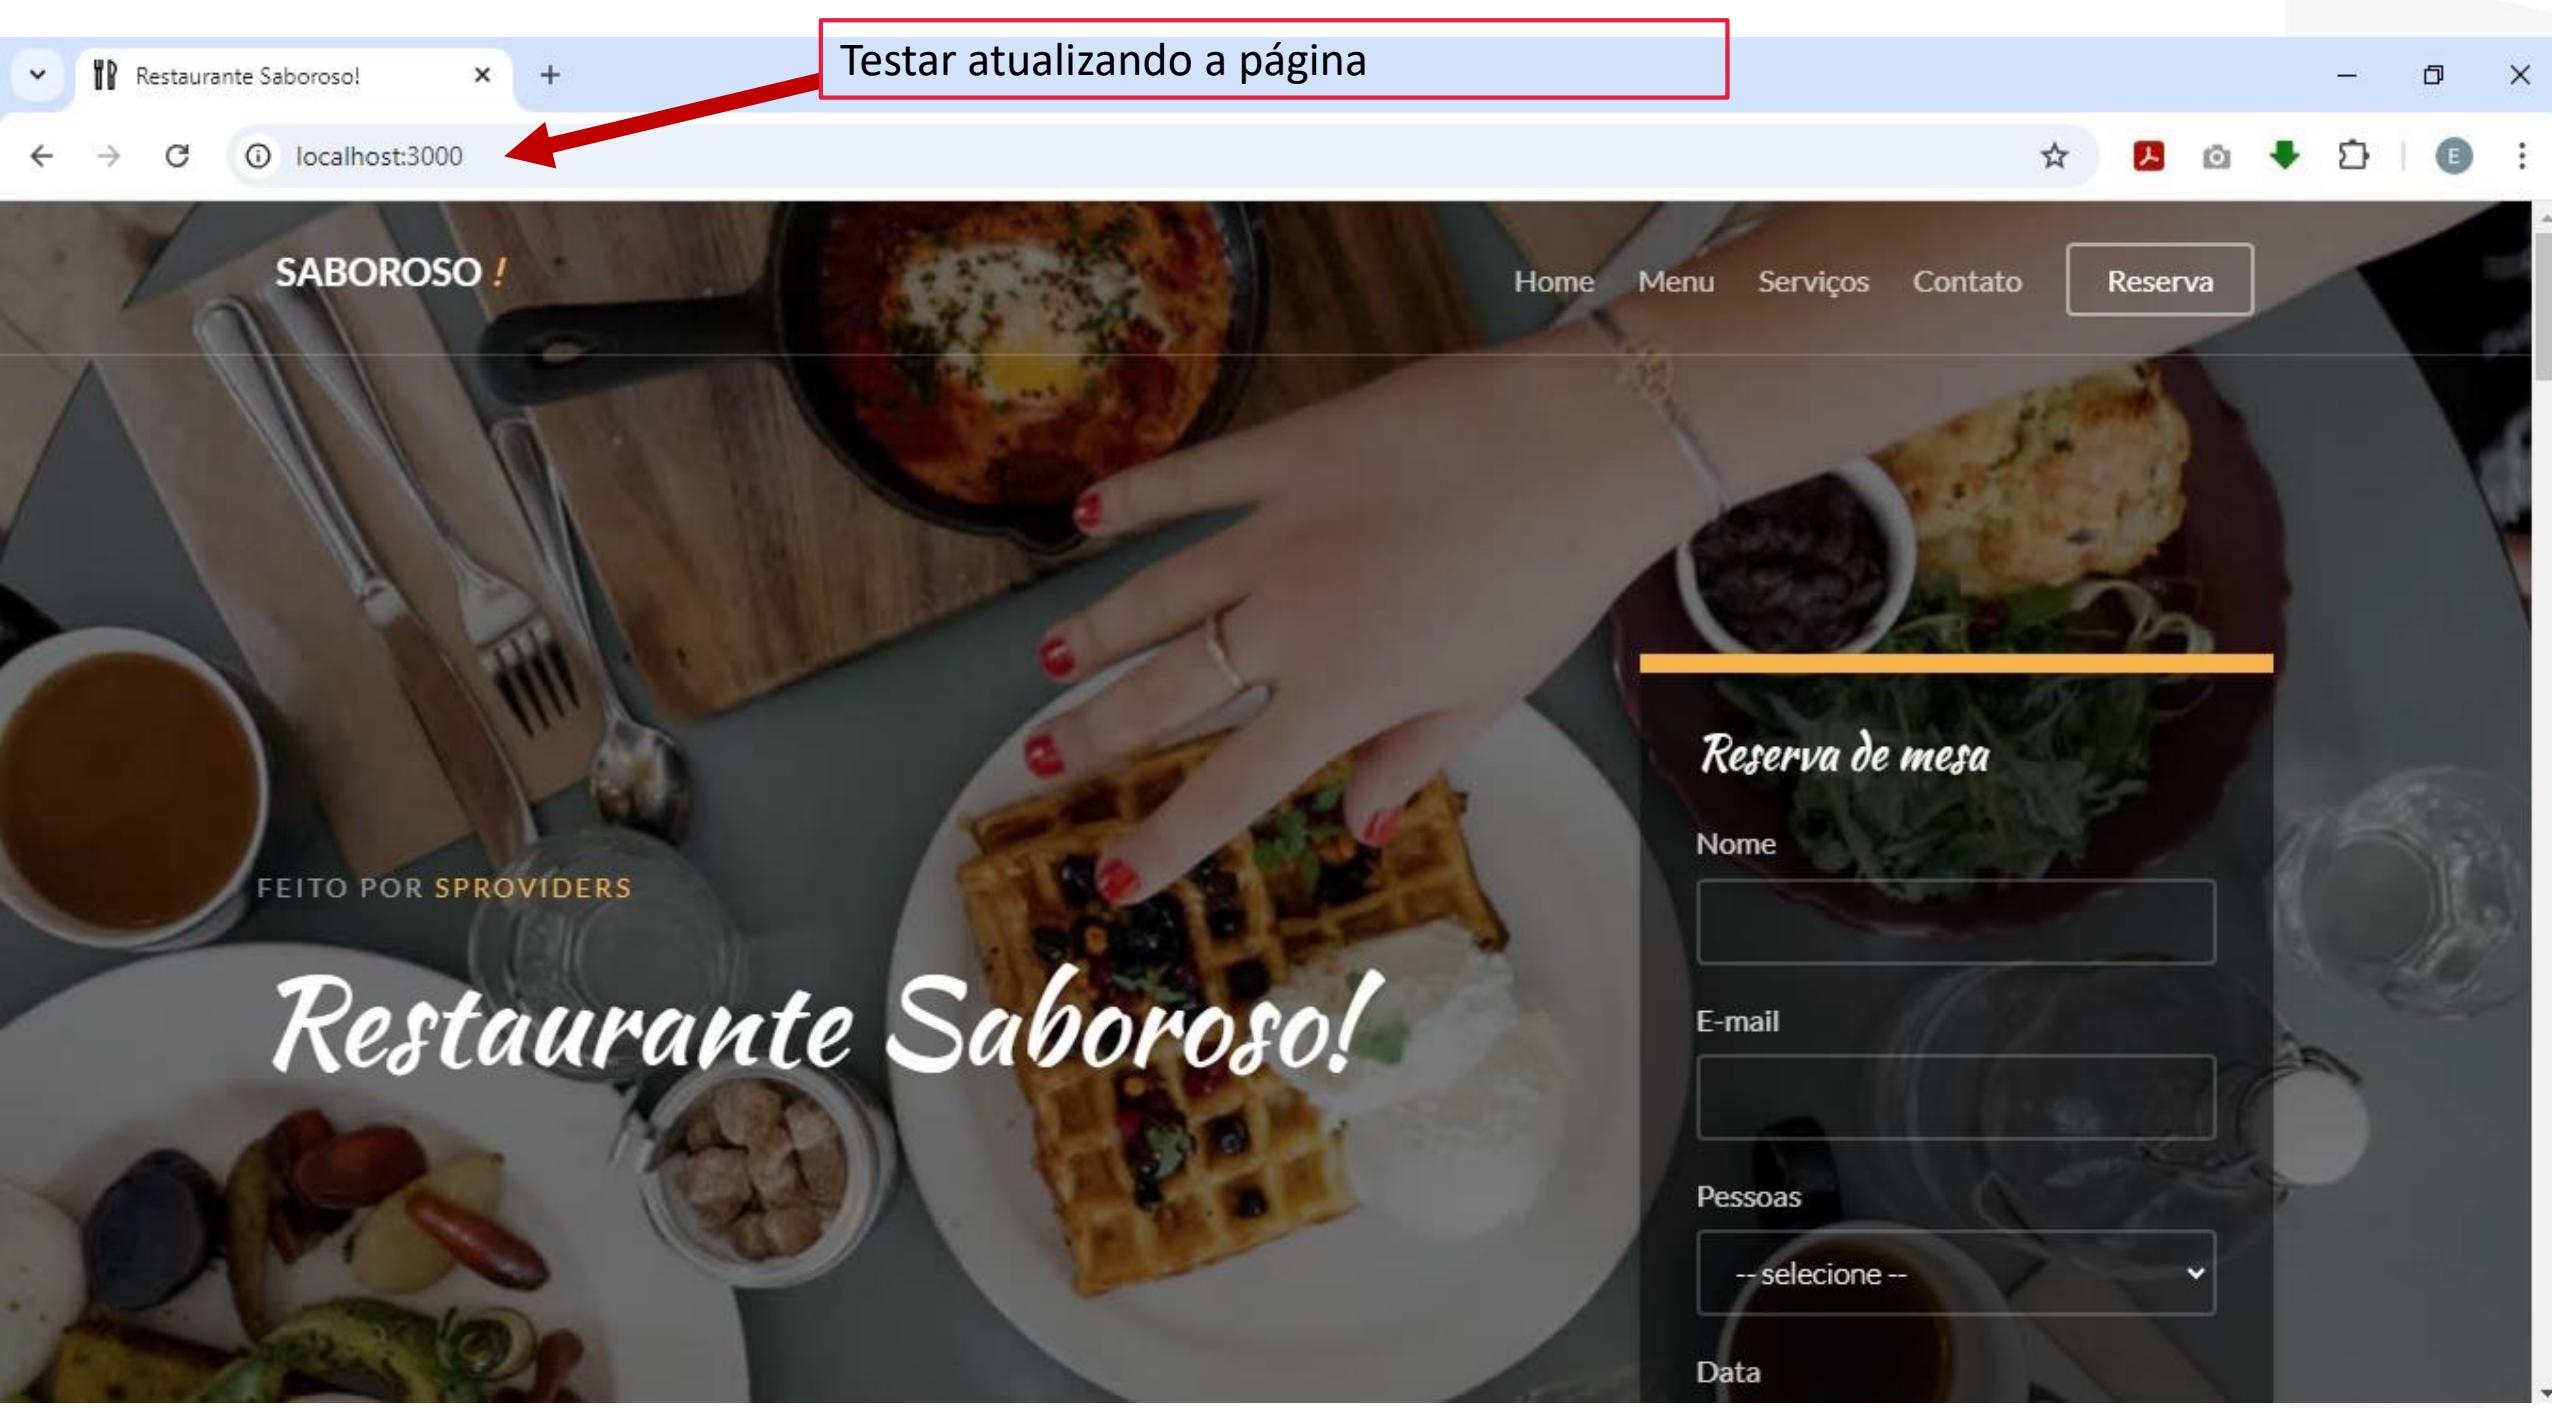

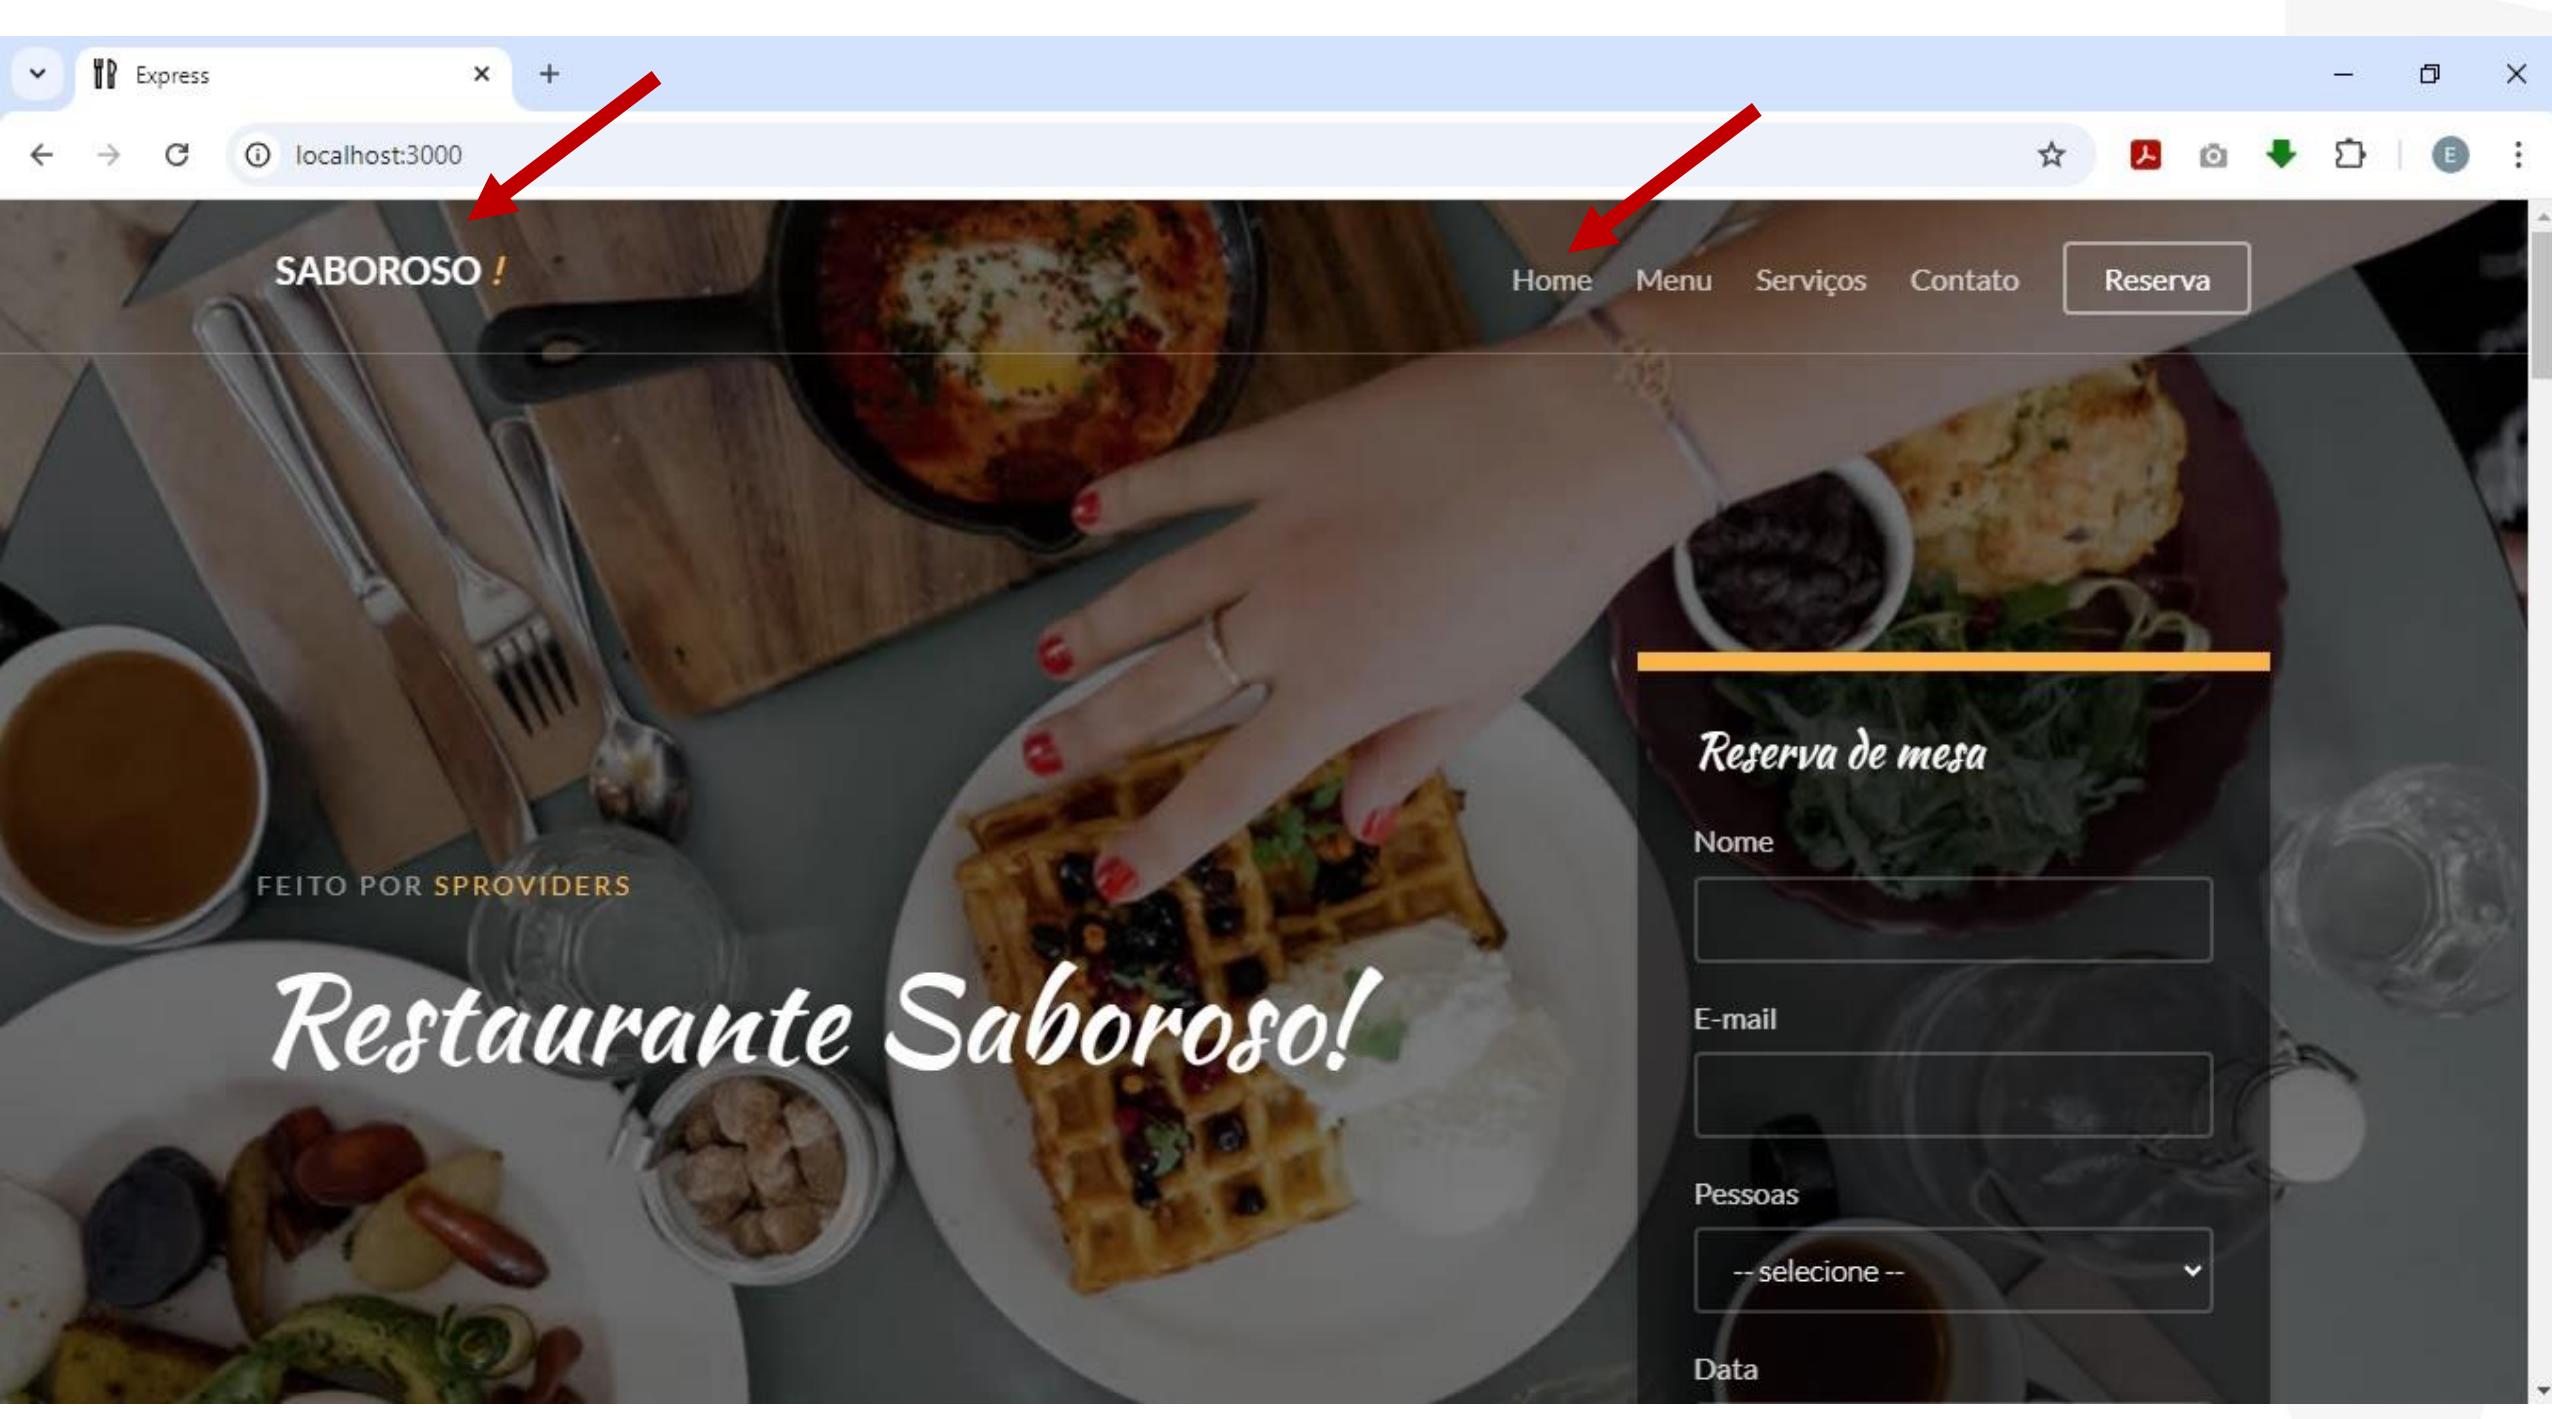

A screenshot of a code editor interface, likely Visual Studio Code, showing a file named `index.js`. The code is written in JavaScript and defines a router for the root path ('/'). The title of the rendered page is set to 'Express'. A red arrow points to the word 'Express' in the code, which is also highlighted with a red box. A tooltip box with a red border contains the text 'Ajustar o texto na aba do navegador' (Adjust the text in the browser tab). The code editor has a dark theme with syntax highlighting for different programming constructs.


```
routes > JS index.js > router.get('/').callback > title
1 var express = require('express');
2 var router = express.Router();
3
4 /* GET home page. */
5 router.get('/', function(req, res, next) {
6   |   res.render('index', { title: 'Express' });
7 });
8
9 module.exports = router;
10
```

Ajustar o texto na
aba do navegador

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows "saboroso [Administrator]". The left sidebar (Explorer) lists the project structure under "SABOROSO", including "inc", "node_modules", "public" (with subfolders "admin", "css", "db", "fonts", "images", "js"), and files like "contact.html", "favicon.ico", "menu.html", "reservation.html", and "services.html". The "routes" folder contains "index.js", which is currently selected and shown in the main editor area. The code in "index.js" is:

```
routes > JS index.js > router.get('/') callback > title
1 var express = require('express');
2 var router = express.Router();
3
4 /* GET home page. */
5 router.get('/', function(req, res, next) {
6   |   res.render('index', { title: 'Restaurante Saboroso!' });
7 }
8
9 module.exports = router;
10
```

A red arrow points to the string "Restaurante Saboroso!" in the code, indicating the target of the selection.

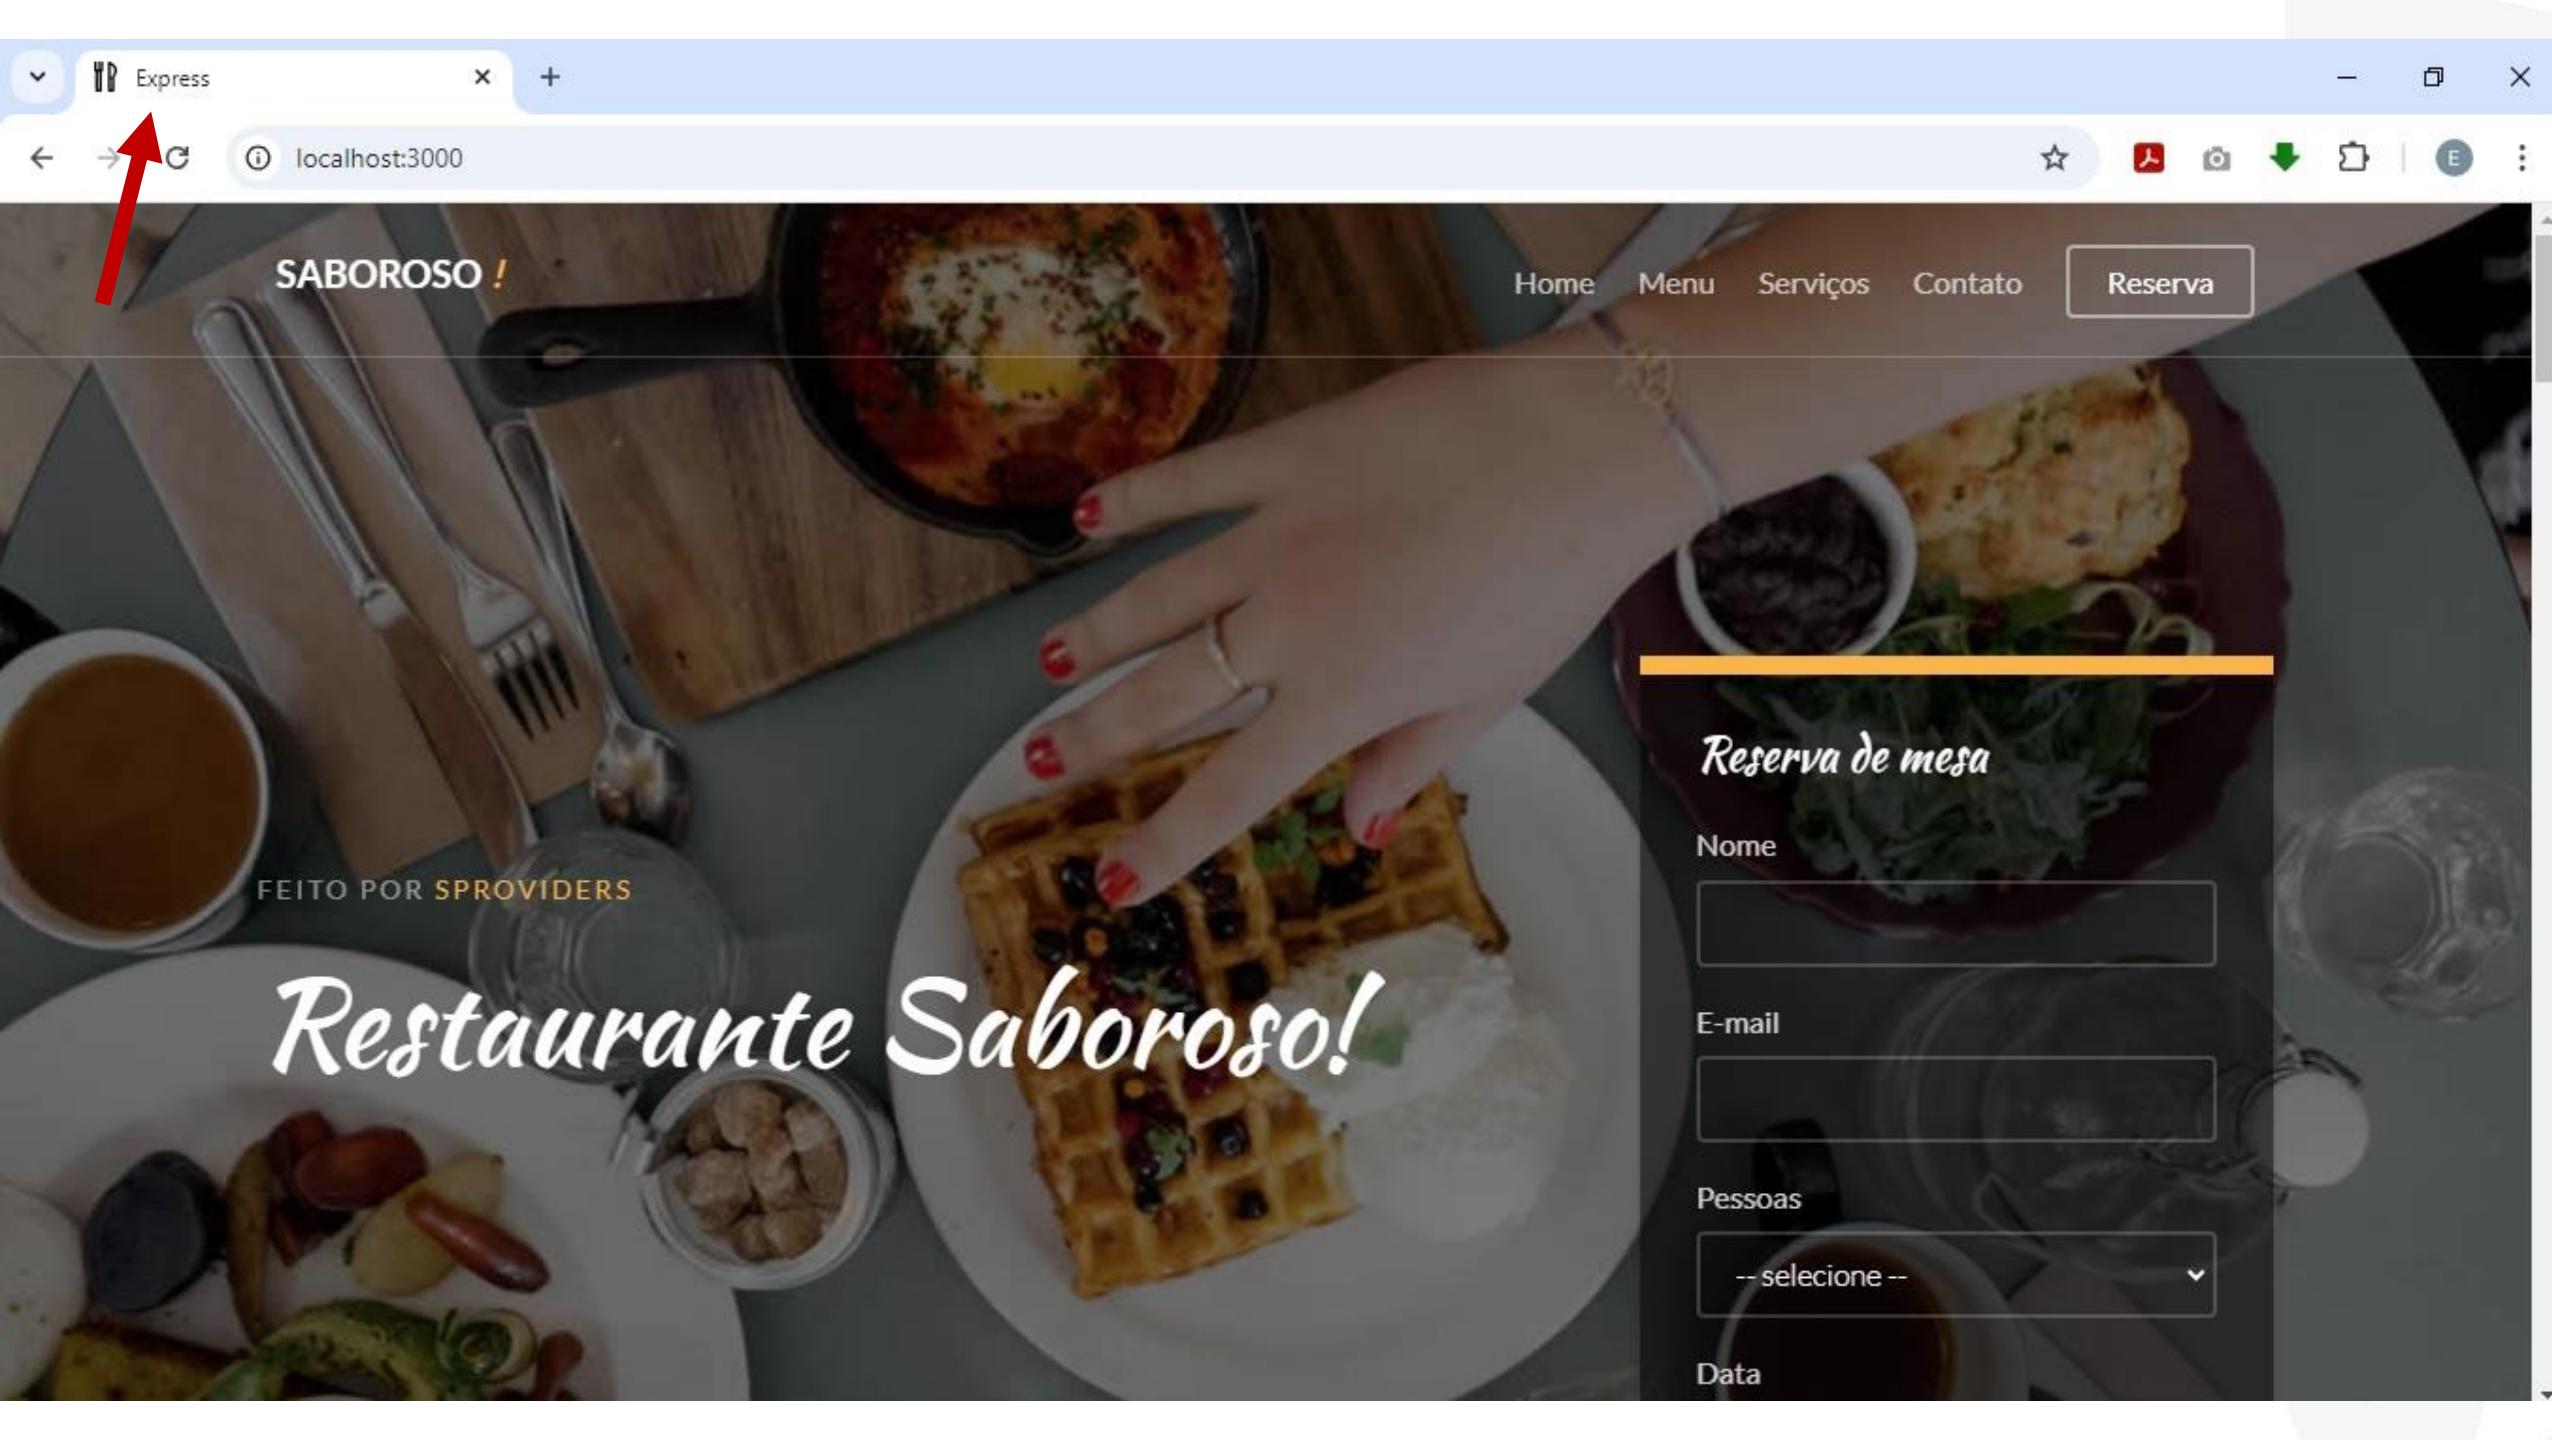

Home Menu Serviços Contato

Reserva


Reserva de mesa

Nome

E-mail

Pessoas

Data

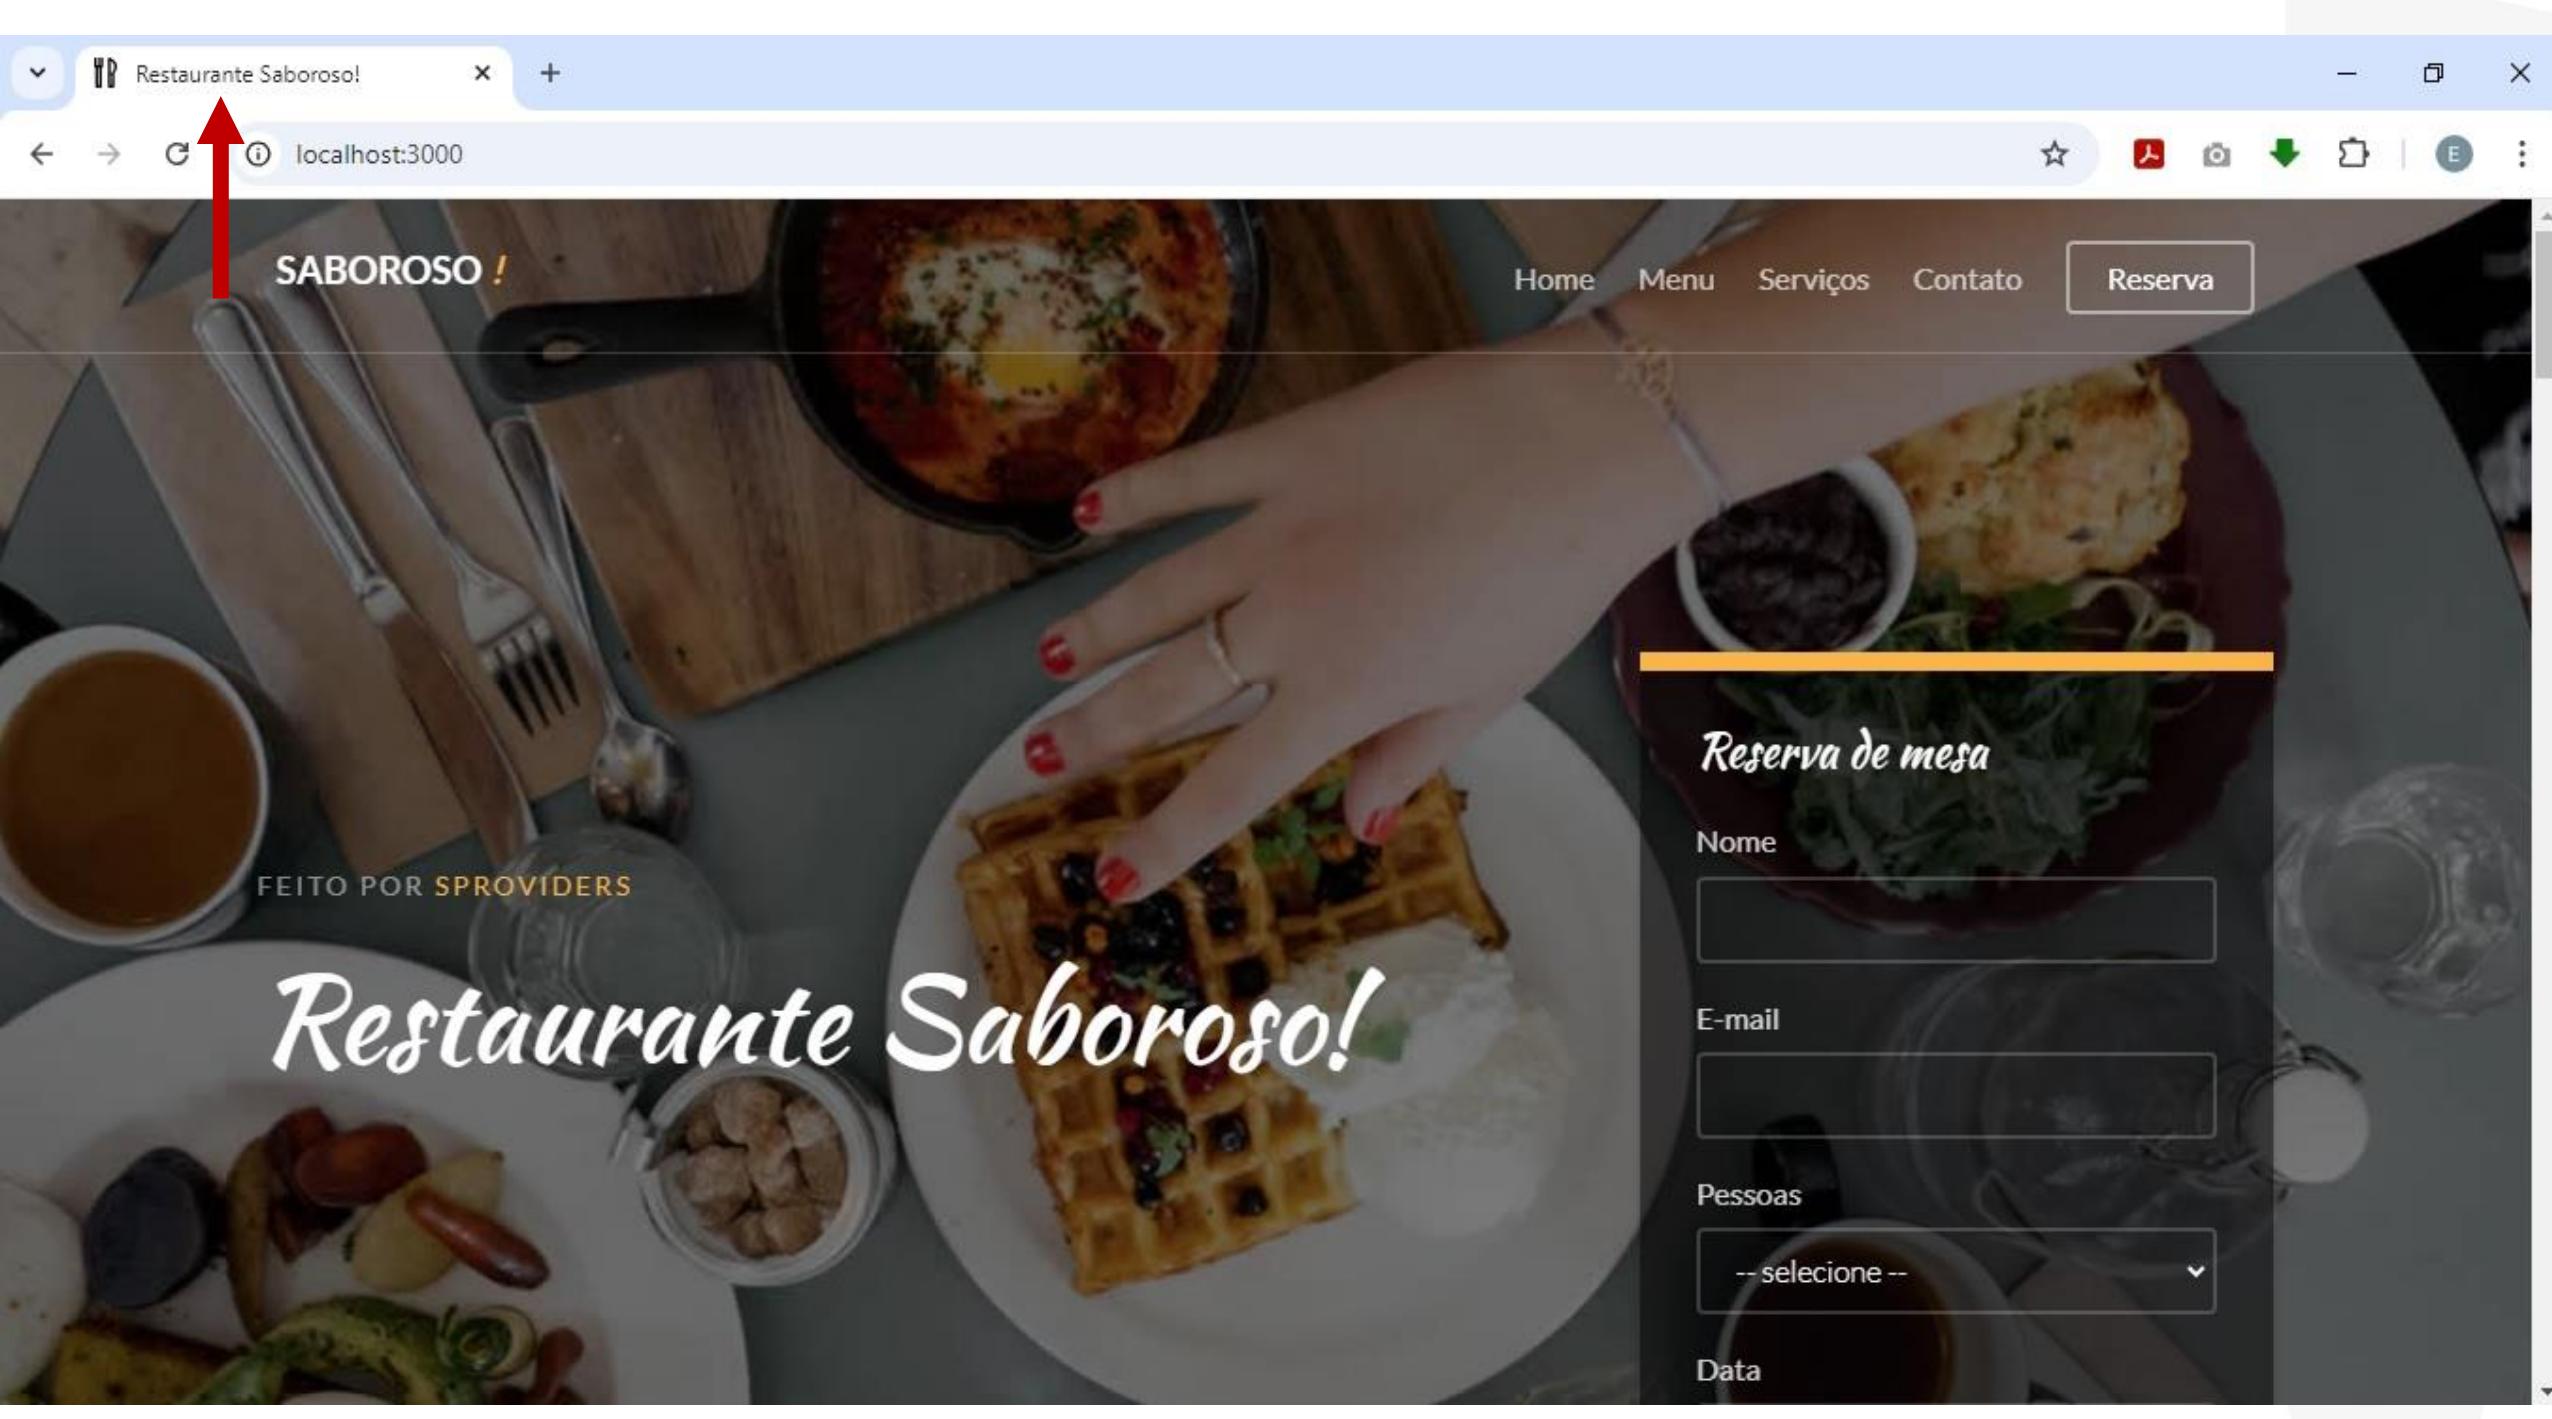

```
saboroso:server Listening on port 3000 +0ms
GET / 200 18.964 ms - 14682
GET /css/animate.css 304 4.646 ms - -
GET /css/icomoon.css 304 5.460 ms - -
GET /css/themify-icons.css 304 3.755 ms - -
GET /css/bootstrap.css 304 5.587 ms - -
GET /css/owl.carousel.min.css 304 6.077 ms - -
GET /css/owl.theme.default.min.css 304 9.554 ms - -
GET /css/magnific-popup.css 304 4.514 ms - -
GET /css/bootstrap-datetimepicker.min.css 304 5.809 ms - -
GET /css/style.css 304 2.362 ms - -
GET /js/modernizr-2.6.2.min.js 304 3.693 ms - -
GET /images/img_1.jpg 304 5.332 ms - -
GET /images/img_2.jpg 304 7.113 ms - -
GET /images/img_5.jpg 304 0.930 ms - -
GET /js/jquery.min.js 304 0.591 ms - -
GET /js/jquery.easing.1.3.js 304 1.400 ms - -
GET /js/bootstrap.min.js 304 4.398 ms - -
GET /js/jquery.waypoints.min.js 304 2.554 ms - -
GET /js/owl.carousel.min.js 304 3.896 ms - -
GET /js/jquery.countTo.js 304 5.296 ms - -
GET /js/jquery.stellar.min.js 304 7.385 ms - -
GET /js/jquery.magnific-popup.min.js 304 8.680 ms - -
GET /js/magnific-popup-options.js 304 2.500 ms - -
GET /js/moment.min.js 304 3.986 ms - -
GET /js/bootstrap-datetimepicker.min.js 304 5.494 ms - -
GET /js/main.js 304 7.066 ms - -
GET /images/loader.gif 304 9.516 ms - -
GET /images/img_bg_1.jpg 304 3.096 ms - -
GET /fonts/themify-icons/themify.woff?-fvbane 304 1.102 ms - -
GET /fonts/icomoon/icomoon.ttf?srf3rx 304 2.770 ms - -
GET /favicon.ico 304 0.581 ms - -
```

Interações das rotas
dentro do servidor

Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de denguis. Quem num gosta di mé, boa gentis num é.

Na seção dos pratos populares



Bife de Costela com molho

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

R\$35,69



Hambúrguer com Fritas

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

R\$22,80



Chilli com Carne

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

R\$29,40



MySQL Workbench

Local instance MySQL80 X

File Edit View Query Database Server Tools Scripting Help

SQL Editor

Navigator

SCHEMAS

Filter objects

saboroso

- Tables
 - tb_contacts
 - tb_emails
 - tb_menus
 - tb_reservations
 - tb_users
- Views
- Stored Procedures
- Functions

sakila

sys

world

Administration Schemas

No object selected

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|---|------|--------|---------|------------------|
|---|------|--------|---------|------------------|

Object Info Session

No banco de dados

The screenshot shows the MySQL Workbench interface. A red arrow points from the text "No banco de dados" in the central pane to the "Tables" section of the Navigator pane, specifically highlighting the "saboroso" schema. The "saboroso" schema is expanded, showing tables like tb_contacts, tb_emails, tb_menus, tb_reservations, and tb_users.

MySQL Workbench

Local instance MySQL80 X

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

saboroso

- Tables
 - tb_contacts
 - tb_emails
 - tb_menus
 - tb_reservation
 - tb_users
- Views
- Stored Procedures
- Functions

sakila

sys

world

Administration Schemas

Information

Table: tb_menus

Columns:

| id | int AI P |
|-------------|-----------|
| title | varchar |
| description | varchar |
| price | decimal |
| photo | varchar |
| register | timestamp |

Criar um SELECT

Select Rows - Limit 1000

Table Inspector

Copy to Clipboard

Table Data Export Wizard

Table Data Import Wizard

Send to SQL Editor

Create Table...

Create Table Like...

Alter Table...

Table Maintenance...

Drop Table...

Truncate Table...

Search Table Data...

Refresh All

Output

Action Output

Time Action Message Duration / Fetch

Object Info Session

The screenshot shows the MySQL Workbench interface with the 'saboroso' schema selected in the Navigator. The 'tb_menus' table is currently selected. A context menu is open over the table, with the first item 'Criar um SELECT' highlighted by a red box and two red arrows pointing to it from the text 'Criar um SELECT' above the menu.

MySQL Workbench

Local instance MySQL80 X

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

saboroso

Tables

- tb_contacts
- tb_emails
- tb_menus
- tb_reservations
- tb_users

Views

Stored Procedures

Functions

sakila

sys

world

Administration Schemas

Information

Table: tb_menus

Columns:

| | id | title | description | price | photo | register |
|---|-----------|---------------------------|---|--------------|------------------|---------------------|
| ▶ | 1 | Bife de Costela com molho | Vide electram sadipscing et per. Aenean aliqua... | 35.69 | images/img_1.jpg | 2018-09-12 16:48:58 |
| ▶ | 2 | Hambúrguer com Fritas | Vide electram sadipscing et per. Aenean aliqua... | 29.80 | images/img_2.jpg | 2018-09-12 16:48:58 |
| ▶ | 3 | Chilli com Carne | Vide electram sadipscing et per. Aenean aliqua... | 29.40 | images/img_3.jpg | 2018-09-12 16:48:58 |
| * | NULL | NULL | NULL | NULL | NULL | NULL |

tb_menus x

1 • SELECT * FROM saboroso.tb_menus;

Limit to 1000 rows

Ver as informações do menu

Result Grid

Filter Rows:

Edit: Export/Import: Wrap Cell Content:

| # | Time | Action | Message | Duration / Fetch |
|---|----------|---|-------------------|-----------------------|
| 1 | 21:10:51 | SELECT * FROM saboroso.tb_menus LIMIT 0, 1000 | 3 row(s) returned | 0.016 sec / 0.000 sec |

Object Info Session

A screenshot of the Visual Studio Code (VS Code) interface. The top bar includes the standard menu (File, Edit, Selection, ...), back/forward navigation, a search bar containing "saboroso [Administrator]", and window control buttons. The left sidebar (Explorer) shows a file tree for a project named "SABOROSO". The "routes" folder contains an "index.js" file, which is currently selected and highlighted with a red arrow pointing to it. Other files in the routes folder include "b.js", "users.js", "package.json", and "index.ejs". The main editor area displays the content of the "index.js" file, which is a Node.js script using Express to handle a GET request for the root path, rendering a template named "index" with the title "Restaurante Saboroso!". The status bar at the bottom shows various icons and status messages, including "Ln 10, Col 1", "Spaces: 2", "UTF-8", "LF", "JavaScript", "Port : 5500", "Prettier", and a bell icon.

```
routes > JS index.js > ...
1  var express = require('express');
2  var router = express.Router();
3
4  /* GET home page. */
5  router.get('/', function(req, res, next) {
6    |   res.render('index', { title: 'Restaurante Saboroso!' });
7  });
8
9  module.exports = router;
10
```

The screenshot shows a Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Home, Find, Replace, Save, Close, Minimize, Maximize, Close All.
- Explorer View (Left):** Shows the project structure under 'SABOROSO':
 - inc
 - node_modules
 - public
 - admin
 - css
 - db
 - fonts
 - images
 - js
 - contact.html
 - favicon.ico
 - menu.html
 - reservation.html
 - services.html
 - routes
 - index.js
- Editor View (Center):** The 'index.js' file is open in the editor.

```
routes > JS index.js > ...
1 var conn = require('../inc/db')
2 var express = require('express');
3 var router = express.Router();
4
5 /* GET home page. */
6 router.get('/', function(req, res, next) {
7   res.render('index', { title: 'Restaurante Saboroso!' });
8 });
9
10 module.exports = router;
11
```
- Callout:** A red arrow points from the text 'Adicionar a conexão com bd' to the line 'var conn = require('../inc/db')'.
- Bottom Status Bar:** Shows file statistics (0 errors, 0 warnings), line/col info (Ln 1, Col 1 (33 selected)), encoding (UTF-8), line separator (LF), language (JavaScript), port (Port : 5500), and Prettier status.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer Bar:** Shows the project structure under "SABOROSO".
 - inc
 - node_modules
 - public
 - admin
 - css
 - db
 - fonts
 - images
 - js
 - contact.html
 - favicon.ico
 - menu.html
 - reservation.html
 - services.html
 - routes
 - index.js (selected)
 - users.js
 - views
 - error.ejs
 - index.ejs
 - app.js
- Code Editor:** The "index.js" file is open, showing the following code:

```
routes > JS index.js > router.get('/') callback
1 var conn = ...
2 var express = require('express');
3 var router = express.Router();
4
5 /* GET home page. */
6 router.get('/', function(req, res, next) {
7
8   conn.query(
9     'SELECT * FROM tb_menus ORDER BY title
10   , (err, results)=> {
11
12     if (err) {
13       console.log(err);
14     }
15
16     res.render('index', {
17       title: 'Restaurante Saboroso!',
18       menus: results
19     });
20
21   });
22
23 });
24
25 module.exports = router;
```

A red arrow points from the "index.js" entry in the Explorer bar to the code editor.
- Right Panel:** A red box highlights the text "Visualizar a query" (View query) located near the bottom right of the editor area.
- Bottom Status Bar:** Shows file status (0 changes), line 21, column 6, spaces: 2, encoding (UTF-8), line separator (LF), file type (JavaScript), port (5500), and Prettier status.

The screenshot shows a code editor interface with the following details:

- File Explorer (Left):** Shows the project structure under the folder "SABOROSO". Key files listed include db.js, users.js, package.json, index.ejs, and index.js.
- Code Editor (Center):** The file "index.ejs" is open. The code is a template with the following structure:

```
<div>
  <div>
    <div>
      <div>
        <div>
          <div>
            <div>
              <div>
                <div>
                  <div>
                    <div>
                      <div>
                        <div>
                          <div>
                            <div>
                              <div>
                                <div>
                                  <div>
                                    <div>
                                      <div>
                                        <div>
                                          <div>
                                            <div>
                                              <div>
                                                <div>
                                                  <div>
                                                    <div>
                                                      <div>
                                                        <div>
                                                          <div>
                                                            <div>
                                                              <div>
                                                                <div>
                                                                  <div>
                                                                    <div>
                                                                      <div>
                                                                        <div>
                                                                          <div>
                                                                            <div>
                                                                              <div>
                                                                                <div>
                                                                                  <div>
                                                                                    <div>
                                                                                      <div>
                                                                                        <div>
                                                                                            <div>
                                                                                              <div>
                                                                                                <div>
                                                                                                  <div>
                                                                                                    <div>
                                                                                                      <div>
                                                                                                        <div>
                                                                                                          <div>
                                                                                                            <div>
                                                                                                              <div>
                                                                                                                <div>
                                                                                                                  <div>
                                                                                                                    <div>
                                                                                                                      <div>
                                                                                                                        <div>
                                                                                                                          <div>
                                                                                                                            <div>
                                                                                                                              <div>
                                                                                                                                <div>
                                                                                                                                  <div>
                                                                                                                                    <div>
                                                                                                                                      <div>
                                                                                                                                        <div>
                                                                                                                                          <div>
                                                                                                                                            <div>
                                                                                                                                              <div>
                                                                                                                                                <div>
                                                                                                  <div>
                                                                                                    <div>
                                                                                                      <div>
                                                                                                        <div>
                                                                                                          <div>
                                                                                                            <div>
                                                                                                              <div>
                                                                                                                <div>
                                                                                                                  <div>
                                                                                                                    <div>
                                                                                                                      <div>
                                                                                                                        <div>
                                                                                                                          <div>
                                                                                                                            <div>
                                                                                                                              <div>
                                                                                                                                <div>
                                                                                                                                  <div>
                                                                                                                                    <div>
................................................................
```
- Search Bar (Top):** Displays the search term "saboroso [Administrator]".
- Status Bar (Bottom):** Shows the current line ("Ln 183, Col 80 (16 selected)"), tab size ("Tab Size: 4"), encoding ("UTF-8"), file type ("HTML"), port ("Port : 5500"), and Prettier status.

A red arrow points from the "index.ejs" entry in the Explorer sidebar to the "index.ejs" tab in the top bar. Another red arrow points from the "Pratos Populares" heading in the code editor to a callout box containing the text "Localizar a área dos pratos populares".

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS db.js JS users.js {} package.json ◊ index.ejs X JS index.js ⌂ ...

SABOROSO

- inc
- > node_modules
- public
 - > admin
 - > css
 - > db
 - > fonts
 - > images
 - > js
- < contact.html
- ★ favicon.ico
- < menu.html
- < reservation.html
- < services.html
- routes
 - JS index.js
 - JS users.js
- views
 - < error.ejs
 - < index.ejs
 - JS app.js
- > OUTLINE
- > TIMELINE

views > ◊ index.ejs > ◊ html > ◊ body > ◊ div#page > ◊ div.gtco-section > ◊ div.gtco-container > ◊ div.row

181 <div class="row"> Pratos Populares Aa ab * 1 of 1 ↑ ↓ = x
182 <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
183 <h2 class="cursive-font primary-color">Pratos Populares</h2>
184 <p>Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num
185 copo é motivis de denguis. Quem num gosta di mé, boa
186 gentis num é.</p>
187 </div>
188 <div class="row">
189 <div class="col-lg-4 col-md-4 col-sm-6">
190
191 <figure>
192 <div class="overlay">
193 <i class="ti-plus"></i>
194 </div>
195
196 </figure>
197 <div class="fh5co-text">
198 <h2>Bife de Costela com molho</h2>
199 <p>Vide electram sadipscing et per. Aenean aliquam molestie
200 leo, vitae iaculis nisl.</p>
201 <p>
202 R\$35,69
203 </p>
204 </div>

Selecionar o conteúdos dos pratos

Ln 190, Col 1 (1763 selected) Tab Size: 4 UTF-8 LF { HTML ⚡ Port : 5500 ✅ Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS db.js JS users.js {} package.json < index.ejs X JS index.js ⌂ ...

SABOROSO

inc

> node_modules

public

> admin

> css

> db

> fonts

> images

> js

< contact.html

★ favicon.ico

< menu.html

< reservation.html

< services.html

routes

JS index.js

JS users.js

views

< error.ejs

< index.ejs

JS app.js

> OUTLINE

> TIMELINE

views > < index.ejs > ⚡ html > ⚡ body > ⚡ div#page > ⚡ div.gtco-section > ⚡ div.gtco-container > ⚡ div.row

203 </p>

204 </div>

205

206 </div>

207 <div class="col-lg-4 col-md-4 col-sm-6">

208

209 <figure>

210 <div class="overlay">

211 <i class="ti-plus"></i>

212 </div>

213

214 </figure>

215 <div class="fh5co-text">

216 <h2>Hambúrguer com Fritas</h2>

217 <p>Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.</p>

218 <p>

219 R\$22,80

220 </p>

221 </div>

222

223 </div>

224 <div class="col-lg-4 col-md-4 col-sm-6">

225

226 <figure>

227 <div class="overlay">

↑ ↓ ⌂ ...

Pratos Populares Aa ab * 1 of 1


Ln 207, Col 1 (591 selected) Tab Size: 4 UTF-8 LF { HTML ⚡ Port: 5500 ✓ Prettier ⚡

```
<div class="col-lg-4 col-md-4 col-sm-6">
  <a href="images/img_3.jpg" class="fh5co-card-item image-popup">
    <figure>
      <div class="overlay">
        <i class="ti-plus"></i>
      </div>
      
    </figure>
    <div class="fh5co-text">
      <h2>Hambúrguer com Fritas</h2>
      <p>Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.</p>
      <p>
        <span class="price cursive-font">R$22,80</span>
      </p>
    </div>
  </a>
</div>
```

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbars:** Standard toolbar icons for file operations.
- Explorer:** Shows the project structure:
 - SABOROSO
 - inc
 - node_modules
 - public
 - admin
 - css
 - db
 - fonts
 - images
 - js
 - contact.html
 - favicon.ico
 - menu.html
 - reservation.html
 - services.html
 - routes
 - index.js
 - users.js
 - views
 - error.ejs
 - index.ejs
 - ann.is
- Code Editor:** The file `index.ejs` is open, showing EJS template code. A red arrow points to the line:

```
238 <span class="price cursive-font">R$29,40</span>
```
- Bottom Status Bar:** Ln 242, Col 27 (1173 selected) Tab Size: 4 UTF-8 LF { HTML Port : 5500 Prettier

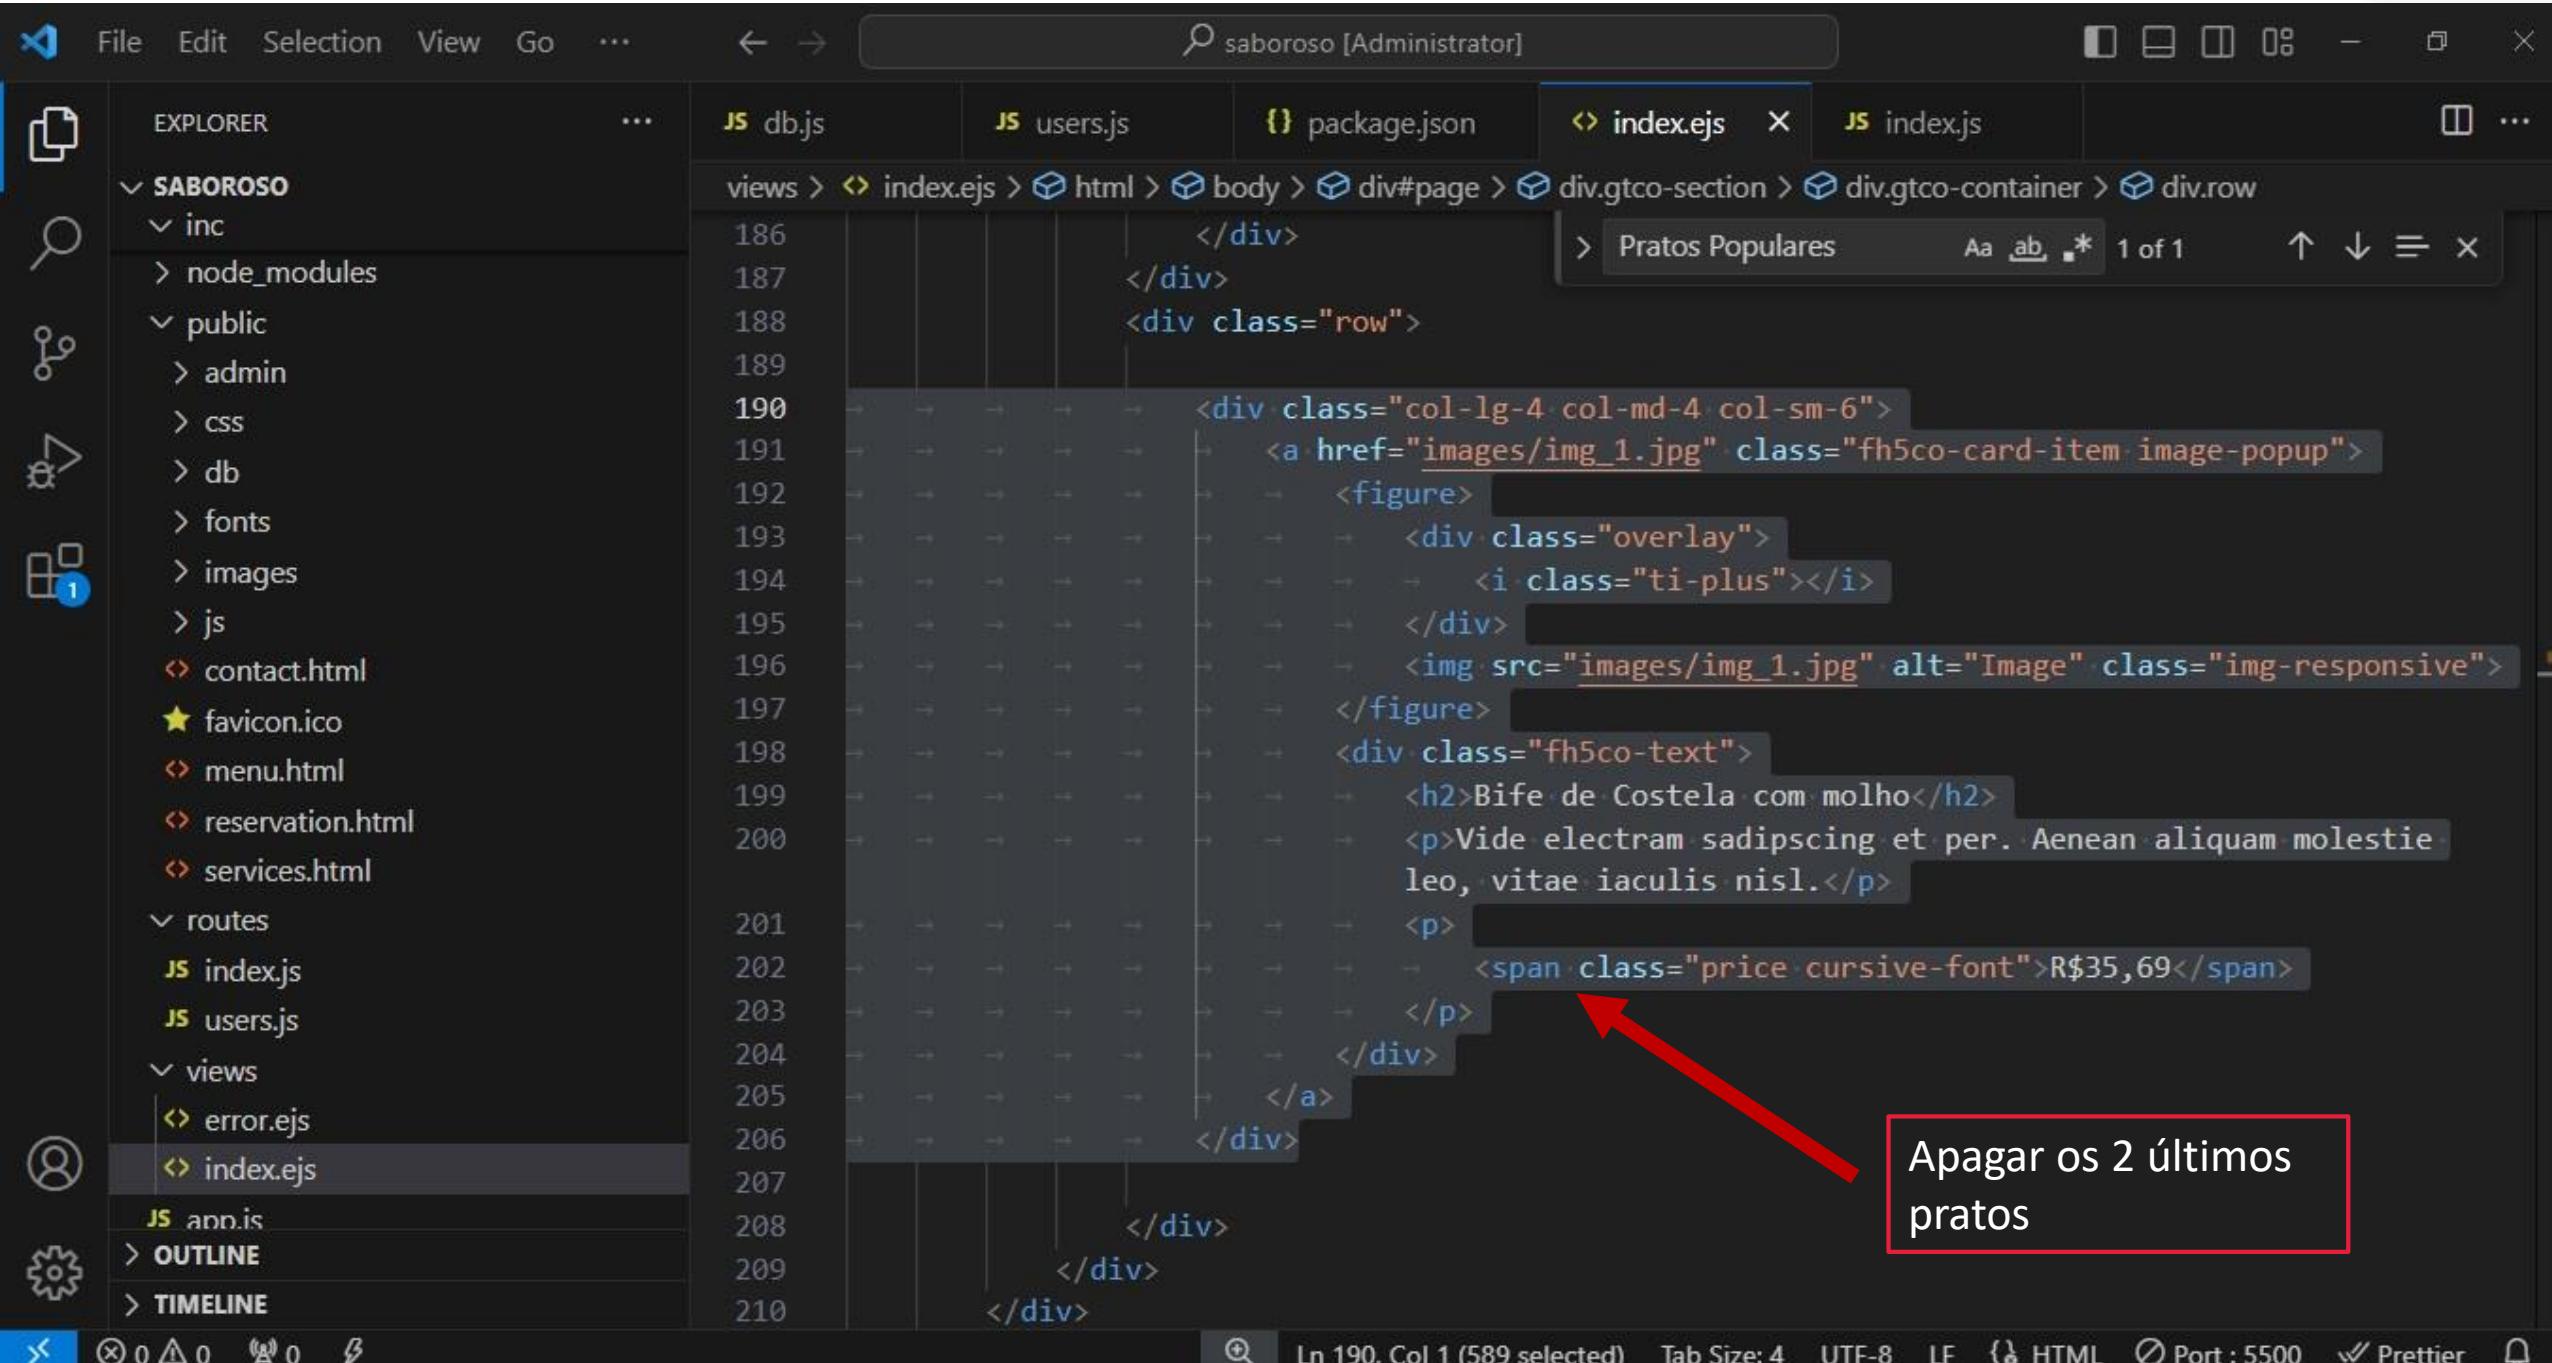

Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de denguis. Quem num gosta di mé, boa gentis num é.

atualizar



Bife de Costela com molho

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

R\$35,69



Hambúrguer com Fritas

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

R\$22,80



Chilli com Carne

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

R\$29,40

Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de denguis. Quem num gosta di mé, boa gentis num é.




Bife de Costela com molho

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

R\$35,69

Resultado da execução anterior



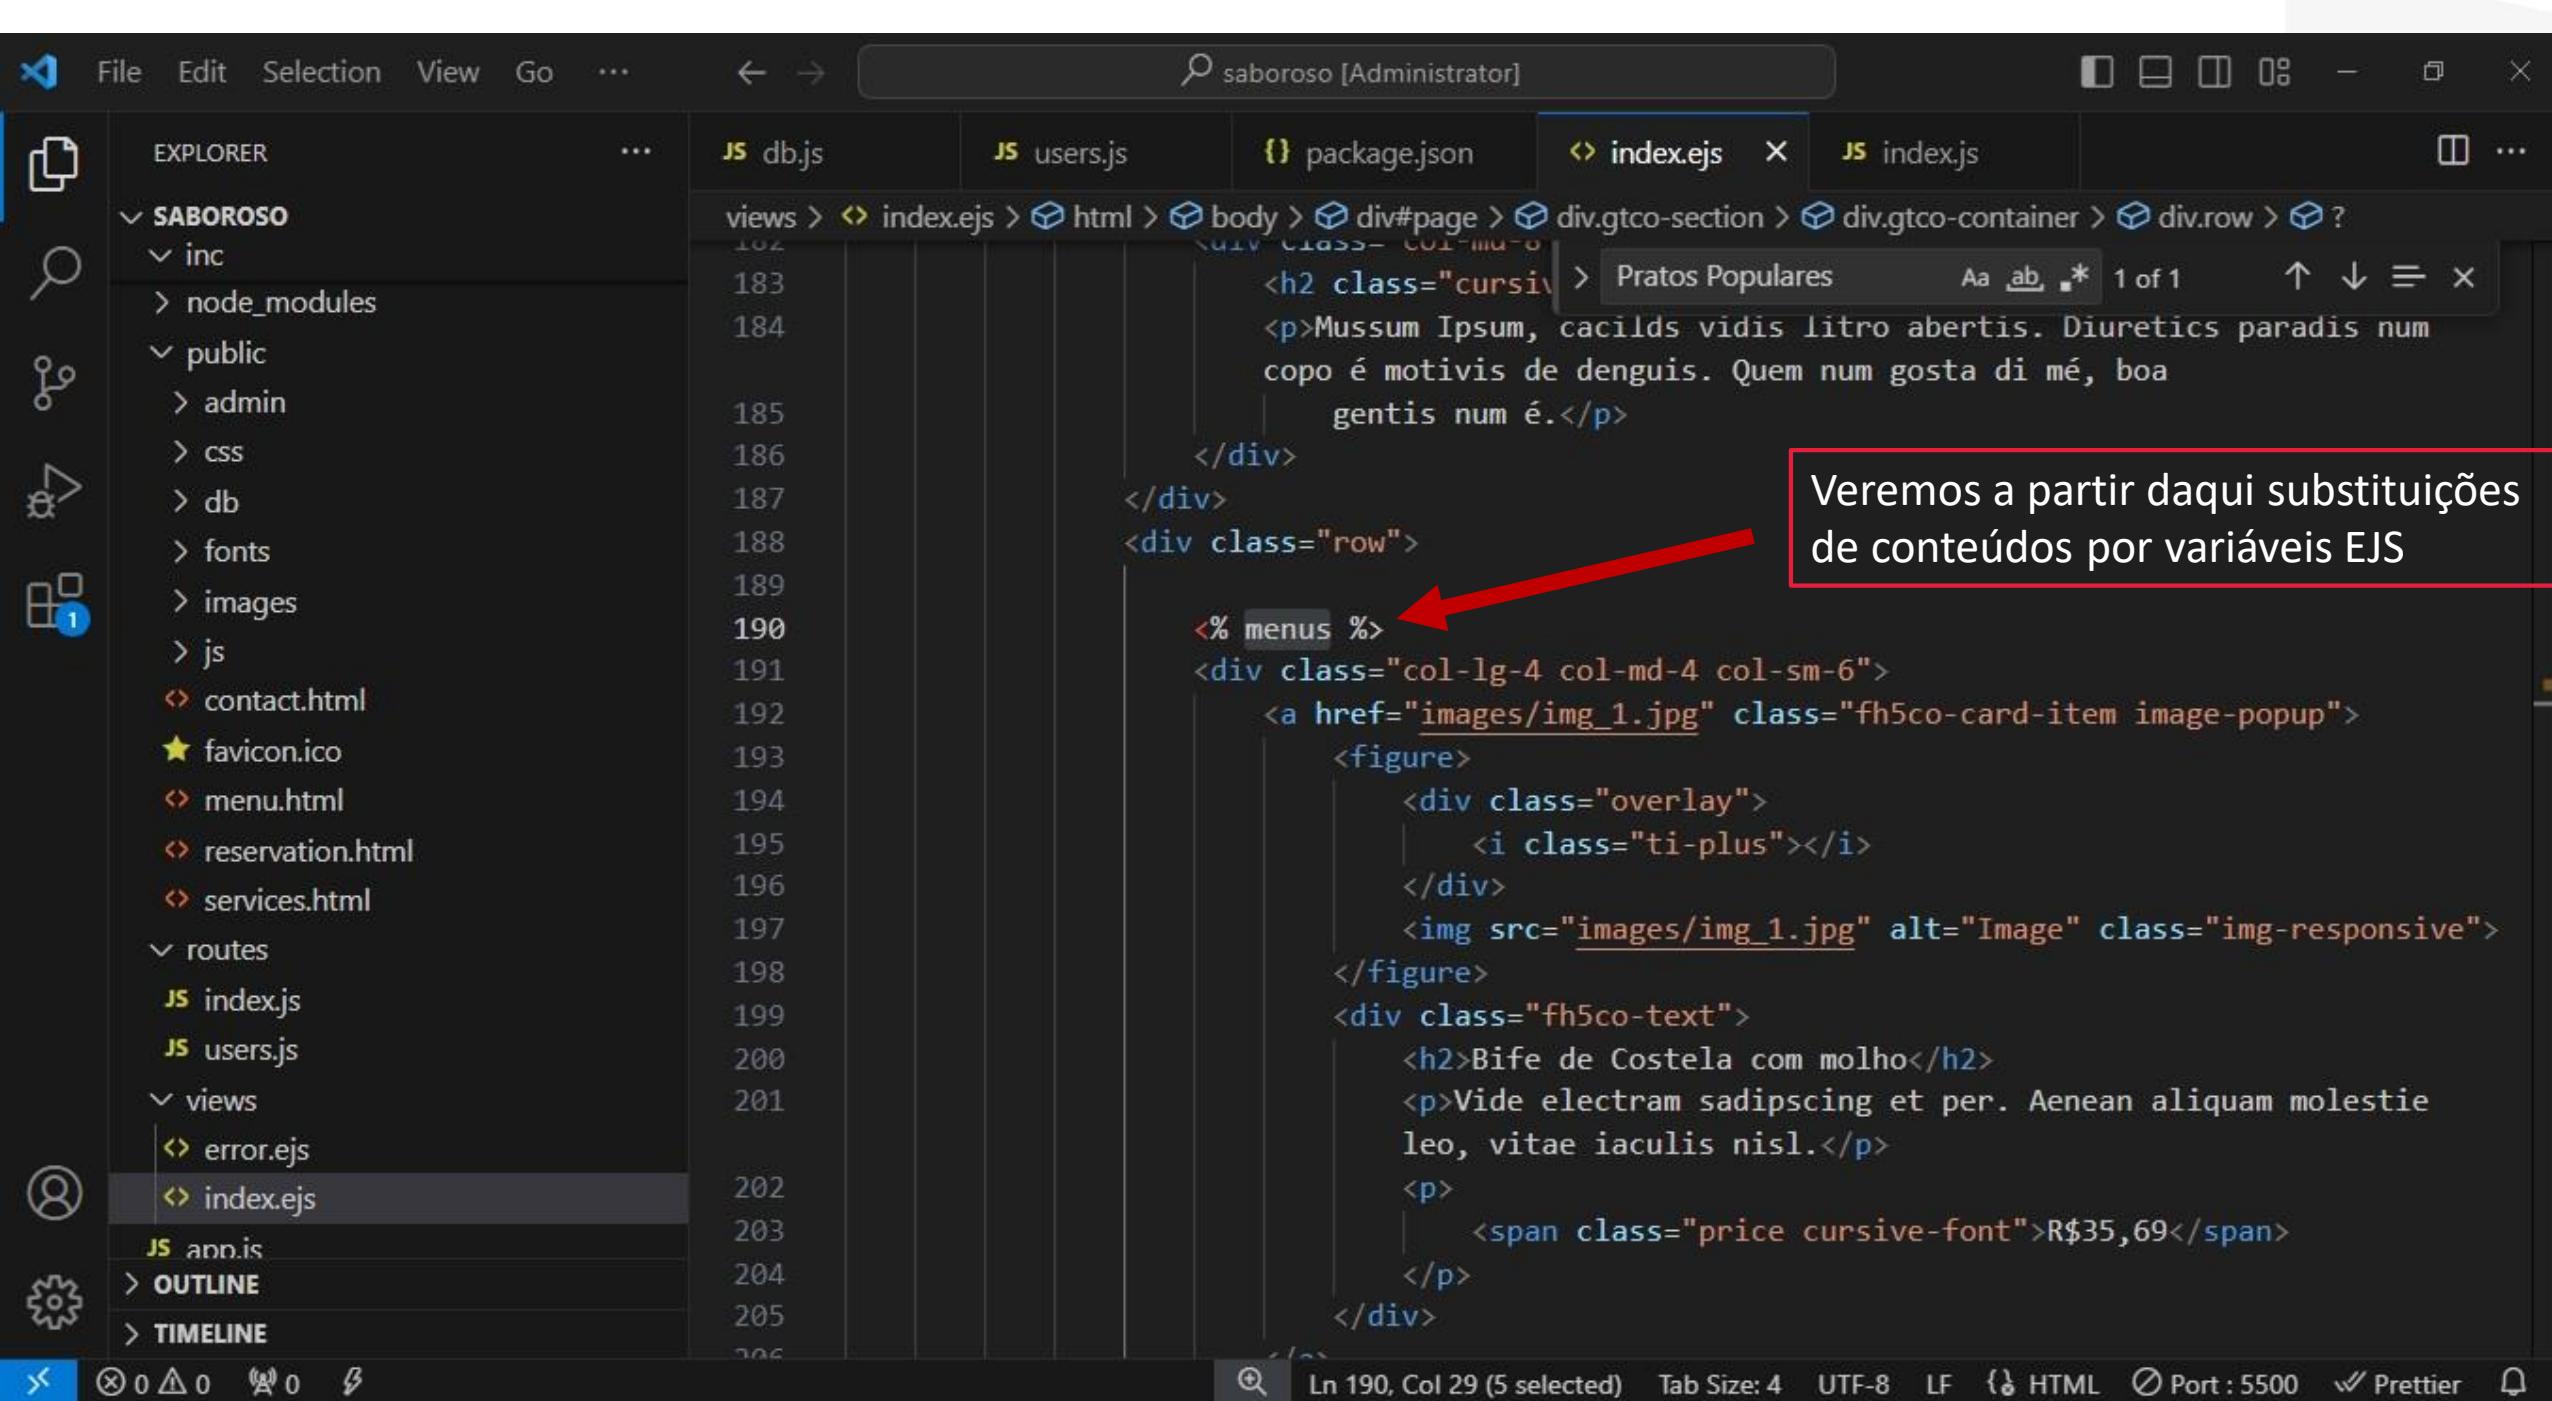

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS db.js JS users.js {} package.json ⟲ index.ejs JS index.js X

SABOROSO

- inc
- node_modules
- public
 - admin
 - css
 - db
 - fonts
 - images
 - js
- contact.html
- favicon.ico
- menu.html
- reservation.html
- services.html
- routes
 - index.js
 - users.js
- views
 - error.ejs
 - index.ejs
- app.js

OUTLINE

TIMELINE

routes > JS index.js > router.get('/')

```
1 var conn = require('../inc/db')
2 var express = require('express');
3 var router = express.Router();
4
5 /* GET home page. */
6 router.get('/', function(req, res, next) {
7
8   conn.query(`SELECT * FROM tb_menus ORDER BY title
9   , (err, results)=> {
10
11     if (err) {
12       console.log(err);
13     }
14
15     res.render('index', {
16       title: 'Restaurante Saboroso!',
17       menus: results
18     });
19
20   });
21
22   });
23
24 module.exports = router;
```


Pratos Populares Aa ab * No results ↑ ↓ ≡ X

Ln 9, Col 27 (5 selected) Spaces: 2 UTF-8 LF { JavaScript ⚡ Port : 5500 ✓ Prettier

The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer (Left):** Shows the project structure under the folder "SABOROSO". The "views" folder is expanded, showing files like "error.ejs", "index.ejs", and "index.html". A red arrow points from the "index.ejs" entry in the file list towards the code editor.
- Code Editor (Right):** The tab bar shows "index.ejs" is the active file. The code editor displays the content of "index.ejs", which includes EJS templating code for rendering a menu of dishes. A red arrow points from the opening tag of the loop `<% menus.forEach(function(row){ %>` towards the code.
- Status Bar:** At the bottom, it shows "Ln 190, Col 21 (34 selected)" and other settings like "Tab Size: 4", "UTF-8", "LF", "HTML", "Port : 5500", and "Prettier".

```
<% menus.forEach(function(row){ %>
<div class="col-lg-4 col-md-4 col-sm-6">
  <a href="images/img_1.jpg" class="fh5co-card-item image-popup">
    <figure>
      <div class="overlay">
        <i class="ti-plus"></i>
      </div>
      
    </figure>
    <div class="fh5co-text">
      <h2>Bife de Costela com molho</h2>
      <p>Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.</p>
      <p> <span class="price cursive-font">R$35,69</span>
    </div>
  </a>
</div>
<% }); %>
</div>
</div>
```

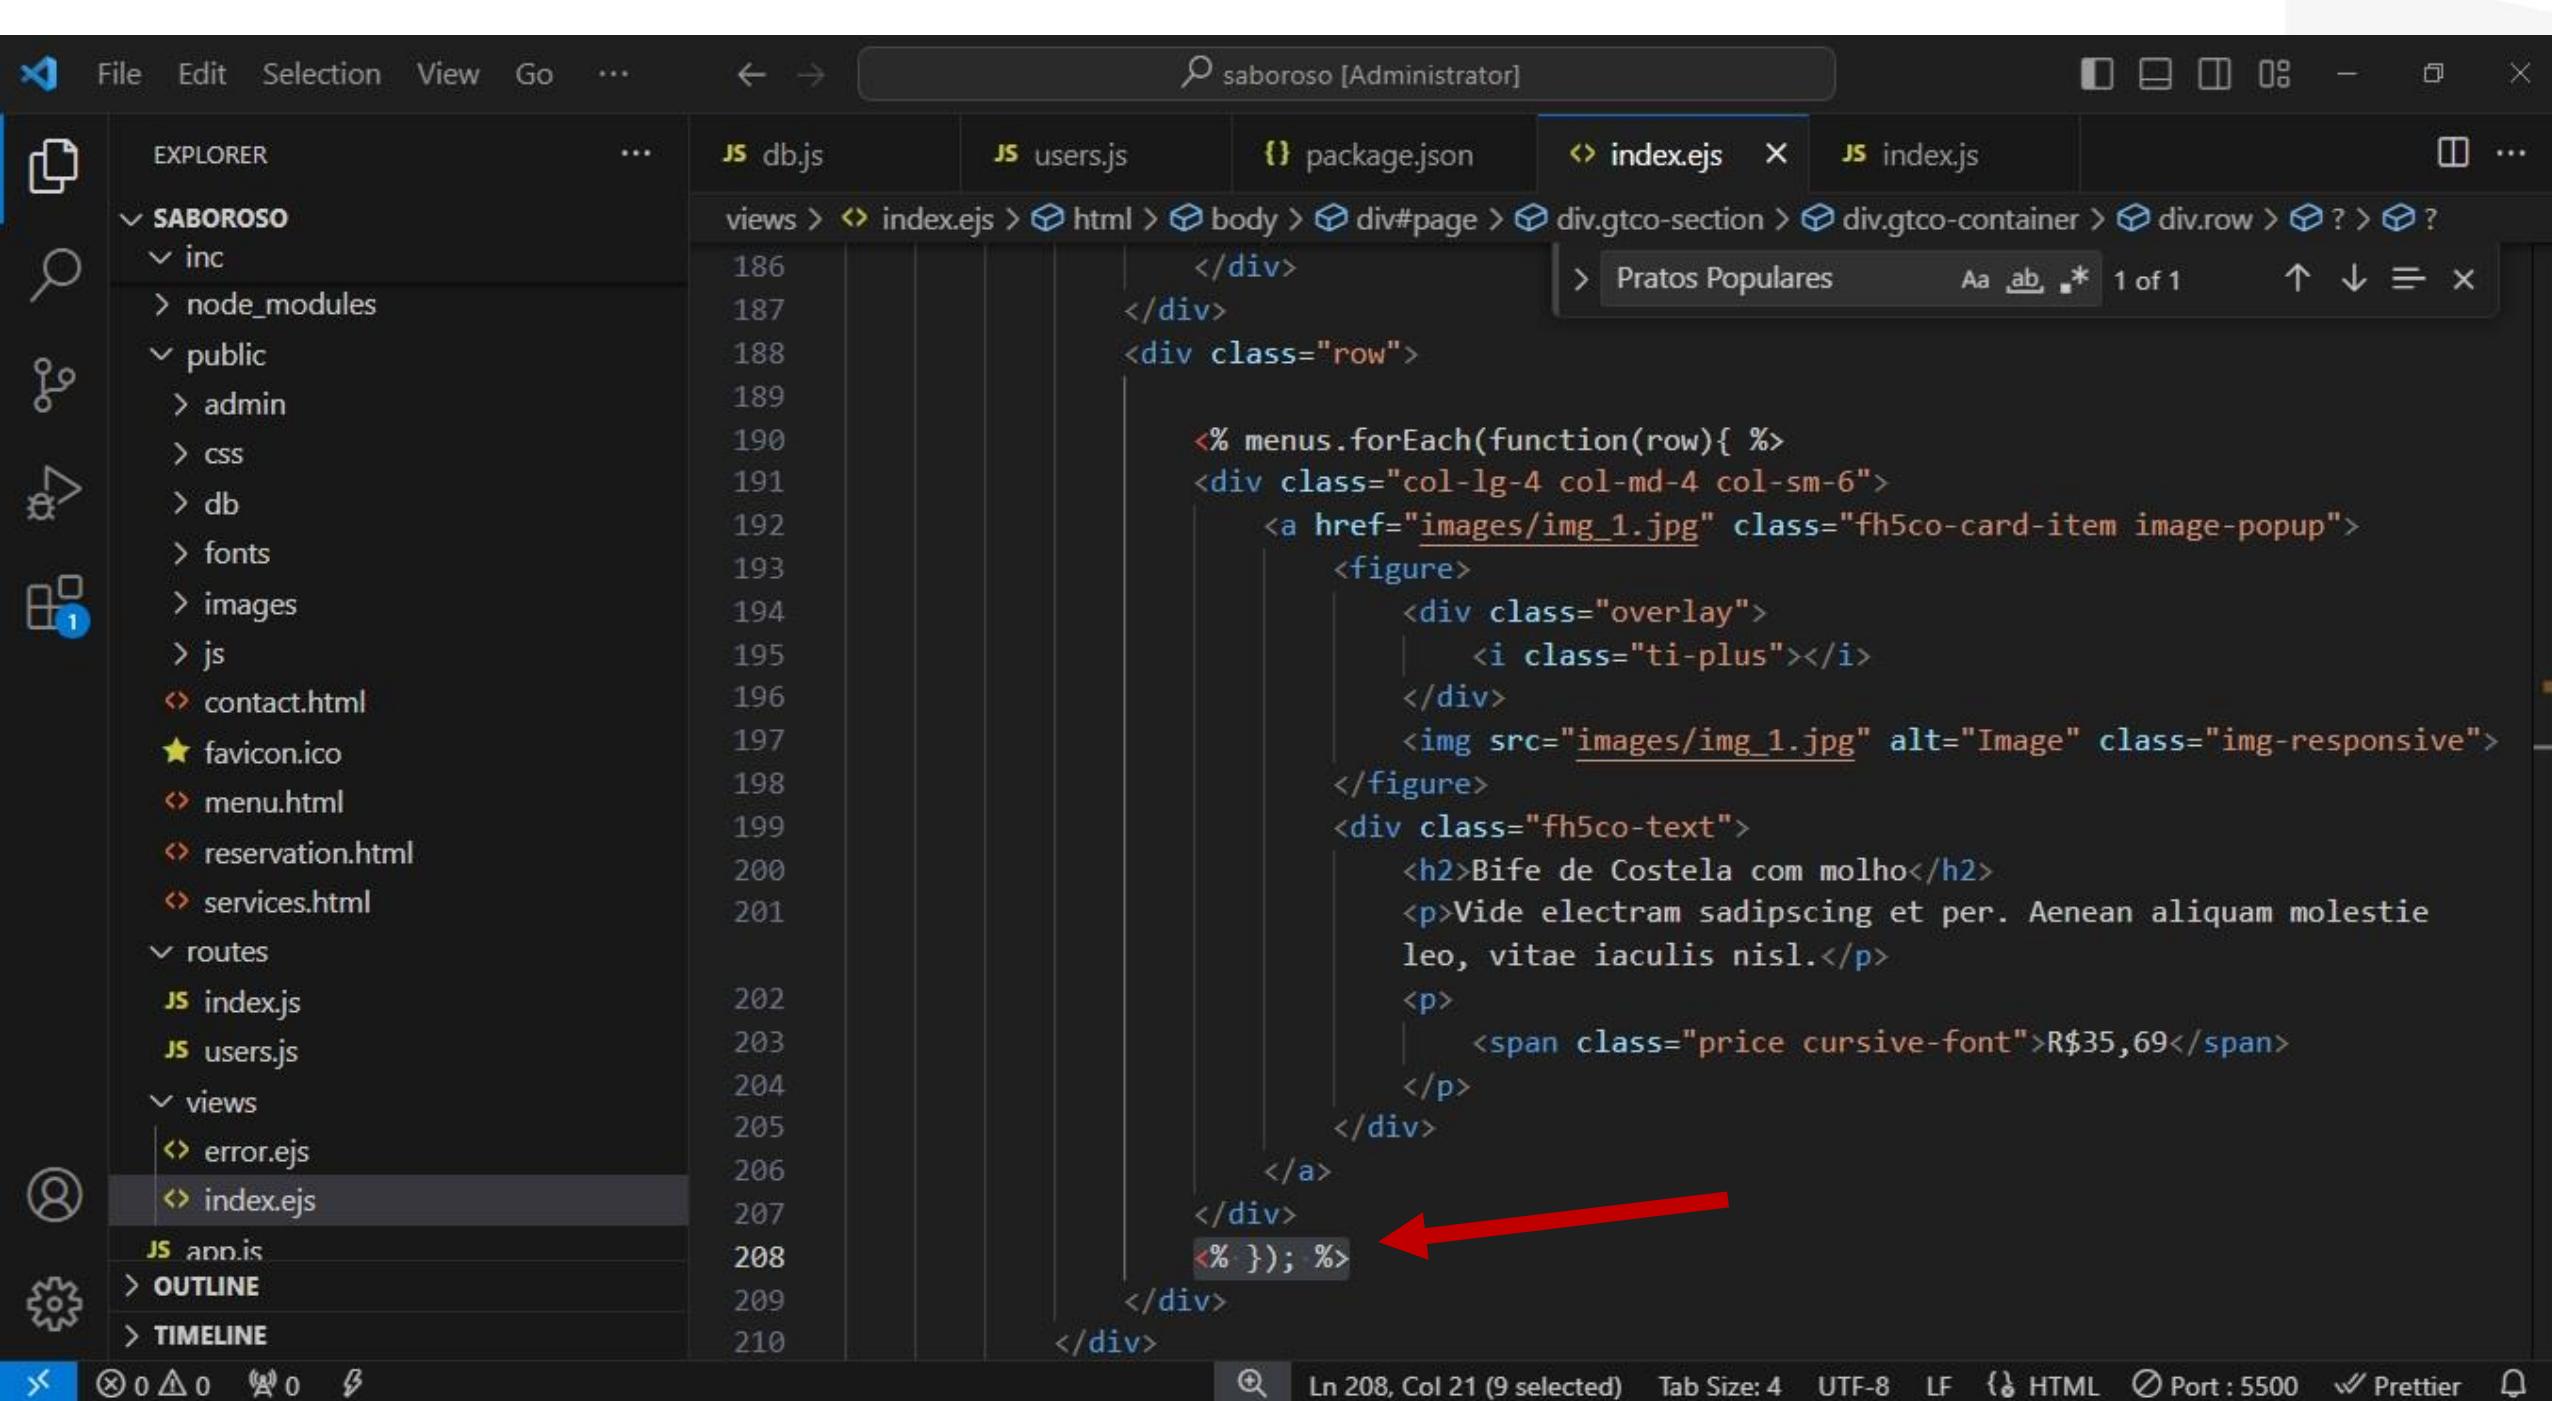

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

Navigator tb_menus ×

SCHEMAS Filter objects

saboroso

- Tables
 - tb_contacts
 - tb_emails
 - tb_menus
 - tb_reservations
 - tb_users
- Views
- Stored Procedures
- Functions

sakila

sys

world

Administration Schemas

Information

Table: tb_menus

Columns:

| | id | title | description | price | photo | register |
|---|-----------|---------------------------|---|--------------|------------------|---------------------|
| ▶ | 1 | Bife de Costela com molho | Vide electram sadipscing et per. Aenean aliqua... | 35.69 | images/img_1.jpg | 2018-09-12 16:48:58 |
| ▶ | 2 | Hambúrguer com Fritas | Vide electram sadipscing et per. Aenean aliqua... | 29.80 | images/img_2.jpg | 2018-09-12 16:48:58 |
| ▶ | 3 | Chilli com Carne | Vide electram sadipscing et per. Aenean aliqua... | 29.40 | images/img_3.jpg | 2018-09-12 16:48:58 |
| * | NULL | NULL | NULL | NULL | NULL | NULL |

tb_menus 1 ×

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|---|----------|---|-------------------|-----------------------|
| 1 | 21:10:51 | SELECT * FROM saboroso.tb_menus LIMIT 0, 1000 | 3 row(s) returned | 0.016 sec / 0.000 sec |

Object Info Session

A red arrow points to the "Wrap Cell Content" button in the toolbar of the Result Grid panel.

MySQL Workbench

Local instance MySQL80 X

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

saboroso

- Tables
 - tb_contacts
 - tb_emails
 - tb_menus
 - tb_reservations
 - tb_users
- Views
- Stored Procedures
- Functions

sakila

sys

world

Administration Schemas

Information

Table: tb_menus

Columns:

| id | title | description | price | photo | register |
|----|---------------------------|---|-------|------------------|---------------------|
| 1 | Bife de Costela com molho | Vide electram sadipscing et per. Aenean aliqua... | 35.69 | images/img_1.jpg | 2018-09-12 16:48:58 |
| 2 | Hambúrguer com Fritas | Vide electram sadipscing et per. Aenean aliqua... | 29.80 | images/img_2.jpg | 2018-09-12 16:48:58 |
| 3 | Chilli com Carne | Vide electram sadipscing et per. Aenean aliqua... | 29.40 | images/img_3.jpg | 2018-09-12 16:48:58 |
| * | NULL | NULL | NULL | NULL | NULL |

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content: | Result Grid | Form Editor |

tb_menus 1 X

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|---|----------|---|-------------------|-----------------------|
| 1 | 21:10:51 | SELECT * FROM saboroso.tb_menus LIMIT 0, 1000 | 3 row(s) returned | 0.016 sec / 0.000 sec |

Object Info Session

File Edit Selection View Go ... ← → saboroso [Administrator] ⚡

EXPLORER ... JS db.js JS users.js {} package.json ⟲ index.ejs X JS index.js ⌂ ...

SABOROSO

- inc
- > node_modules
- public
 - > admin
 - > css
 - > db
 - > fonts
 - > images
 - > js
- contact.html
- favicon.ico
- menu.html
- reservation.html
- services.html
- routes
 - JS index.js
 - JS users.js
- views
 - ↳ error.ejs
 - ↳ index.ejs
- JS app.js

OUTLINE

TIMELINE

je > div.gtco-section > div.gtco-container > div.row > ? > div.col-lg-4.col-md-4.col-sm-6 > a.fh5co-card-item.image-popup

186 </div>

187 </div>

188 <div class="row">

189

190 <% menus.forEach(function(row){ %>

191 <div class="col-lg-4 col-md-4 col-sm-6">

192

193 <div>

194

195 </div>

196 <div class="overlay">

197 <i class="ti-plus"></i>

198 </div>

199 <div class="fh5co-text">

200 <h2>Bife de Costela com molho</h2>

201 <p>Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.</p>

202 <p>

203 R\$35,69

204 </p>

205 </div>

206

207 </div>

208 <% }); %>


209 </div>


210 </div>

Pratos Populares Aa ab * 1 of 1 ↑ ↓ = X

Ln 192, Col 34 (16 selected) Tab Size: 4 UTF-8 LF { HTML ⚡ Port : 5500 ✓ Prettier

Two red arrows point to the href and src attributes of the anchor tag in line 192, highlighting the image URL "images/img_1.jpg".

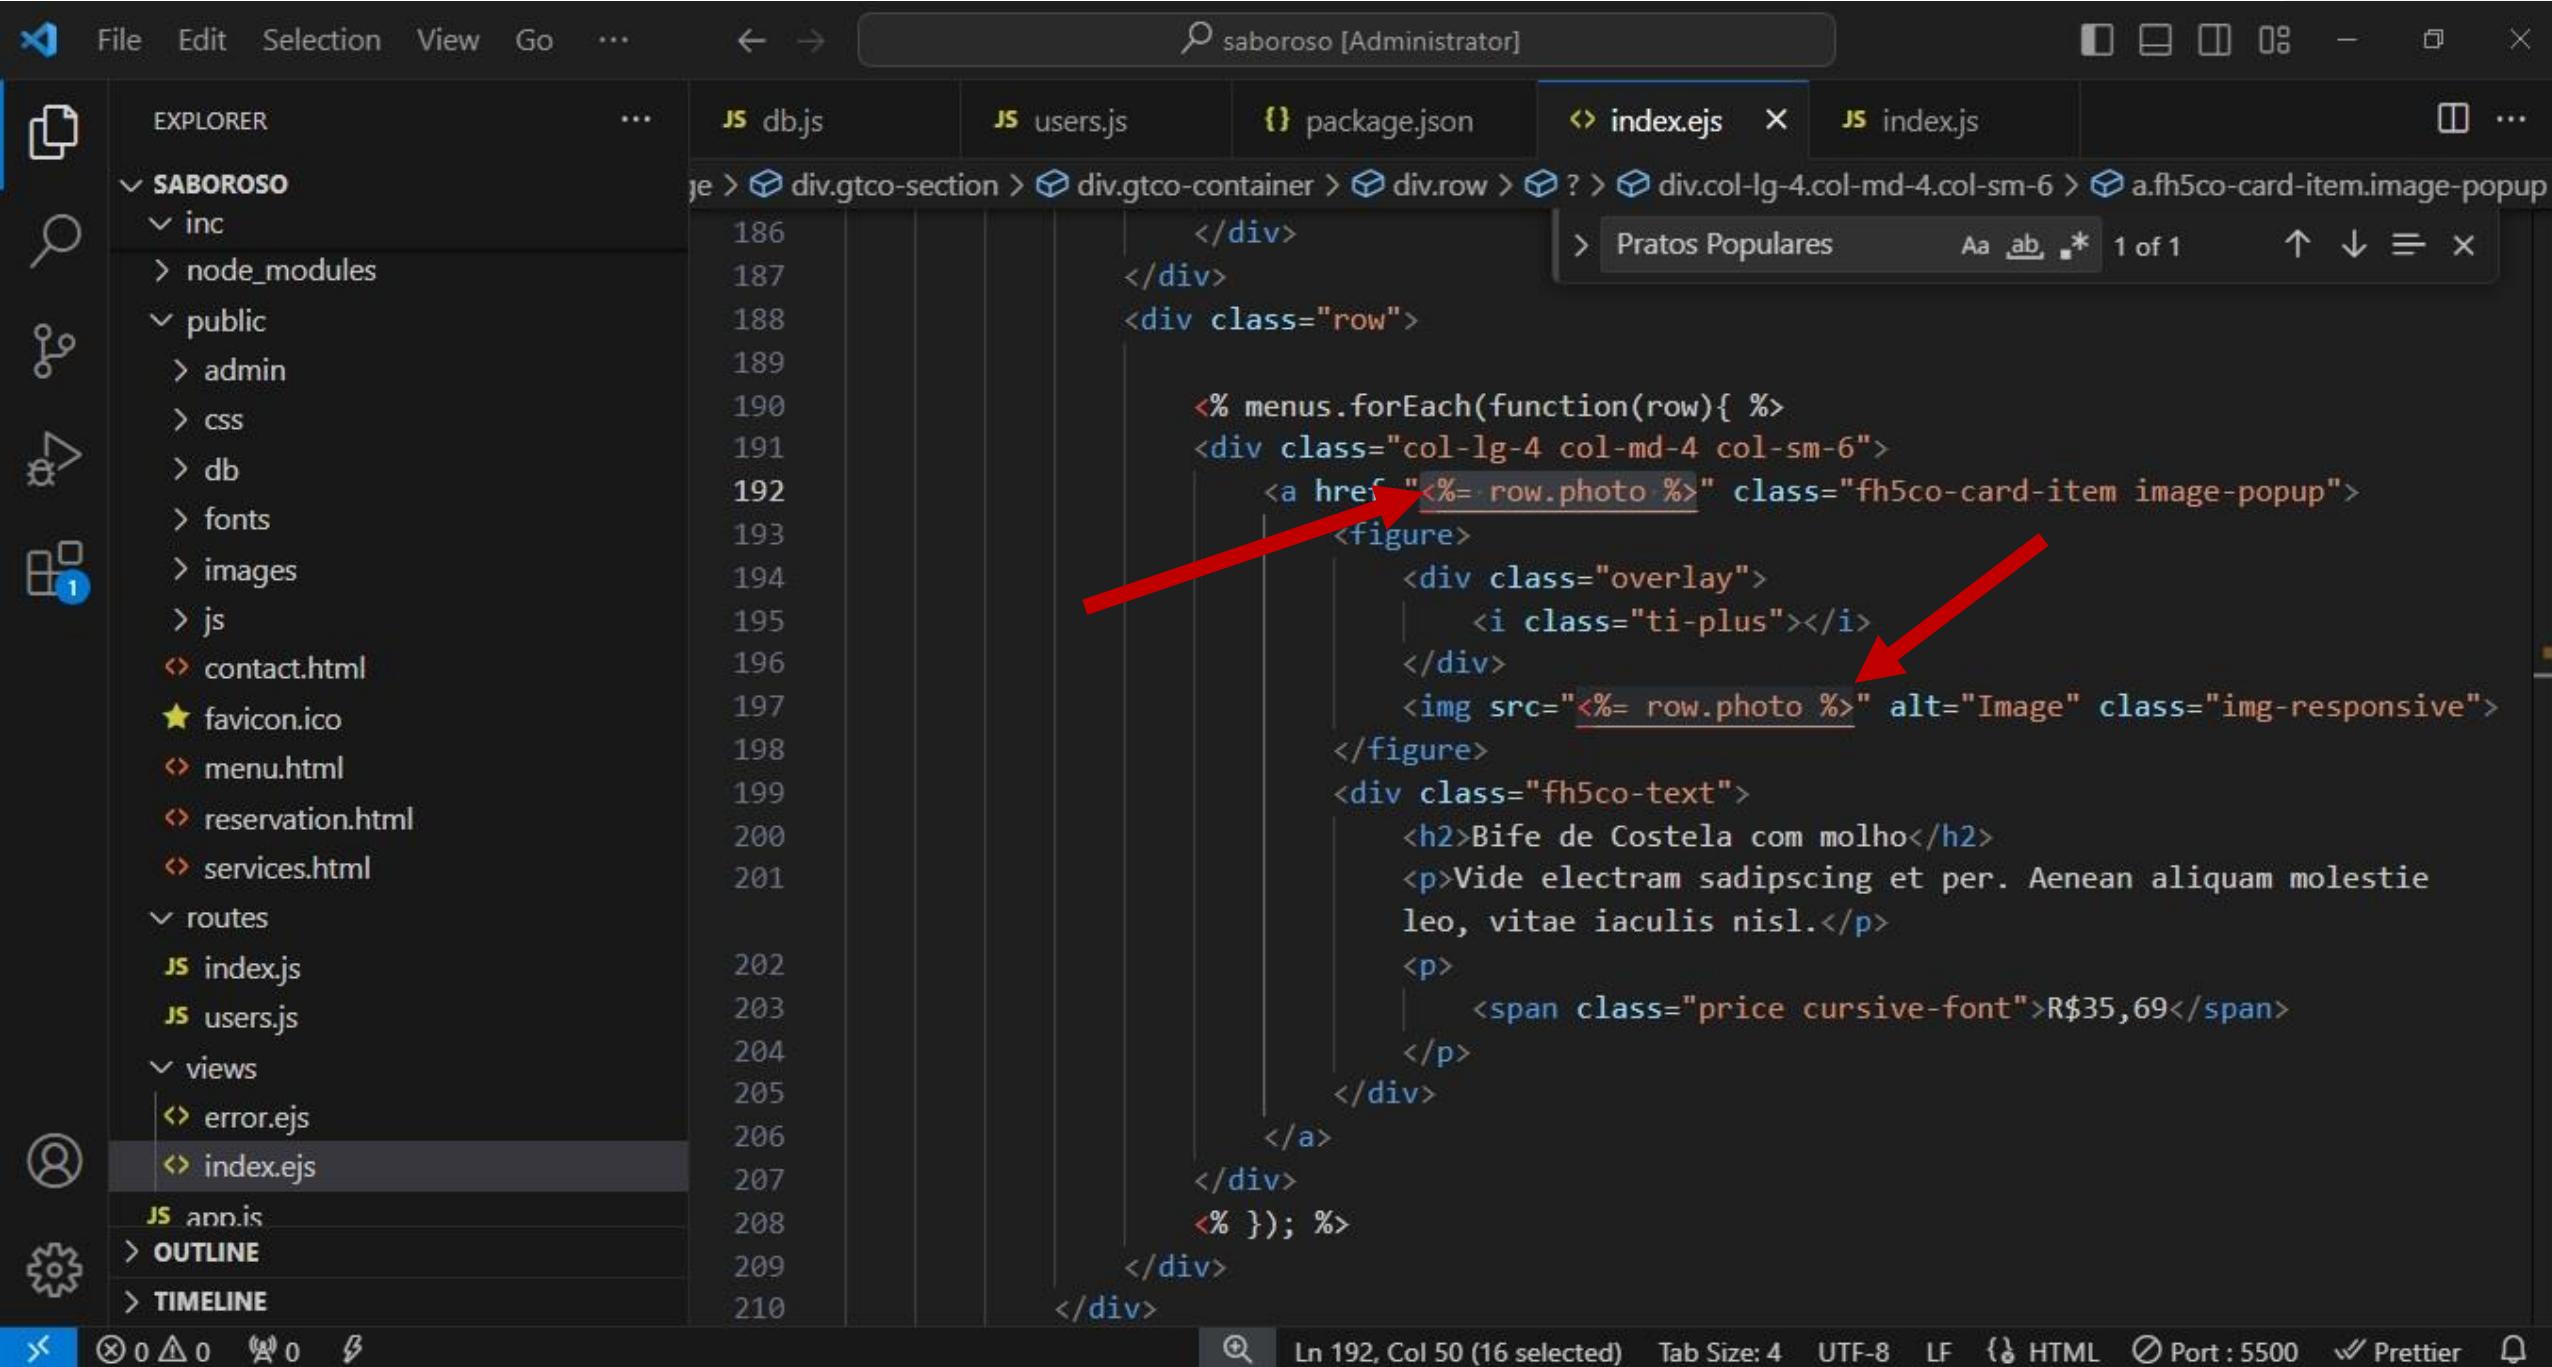

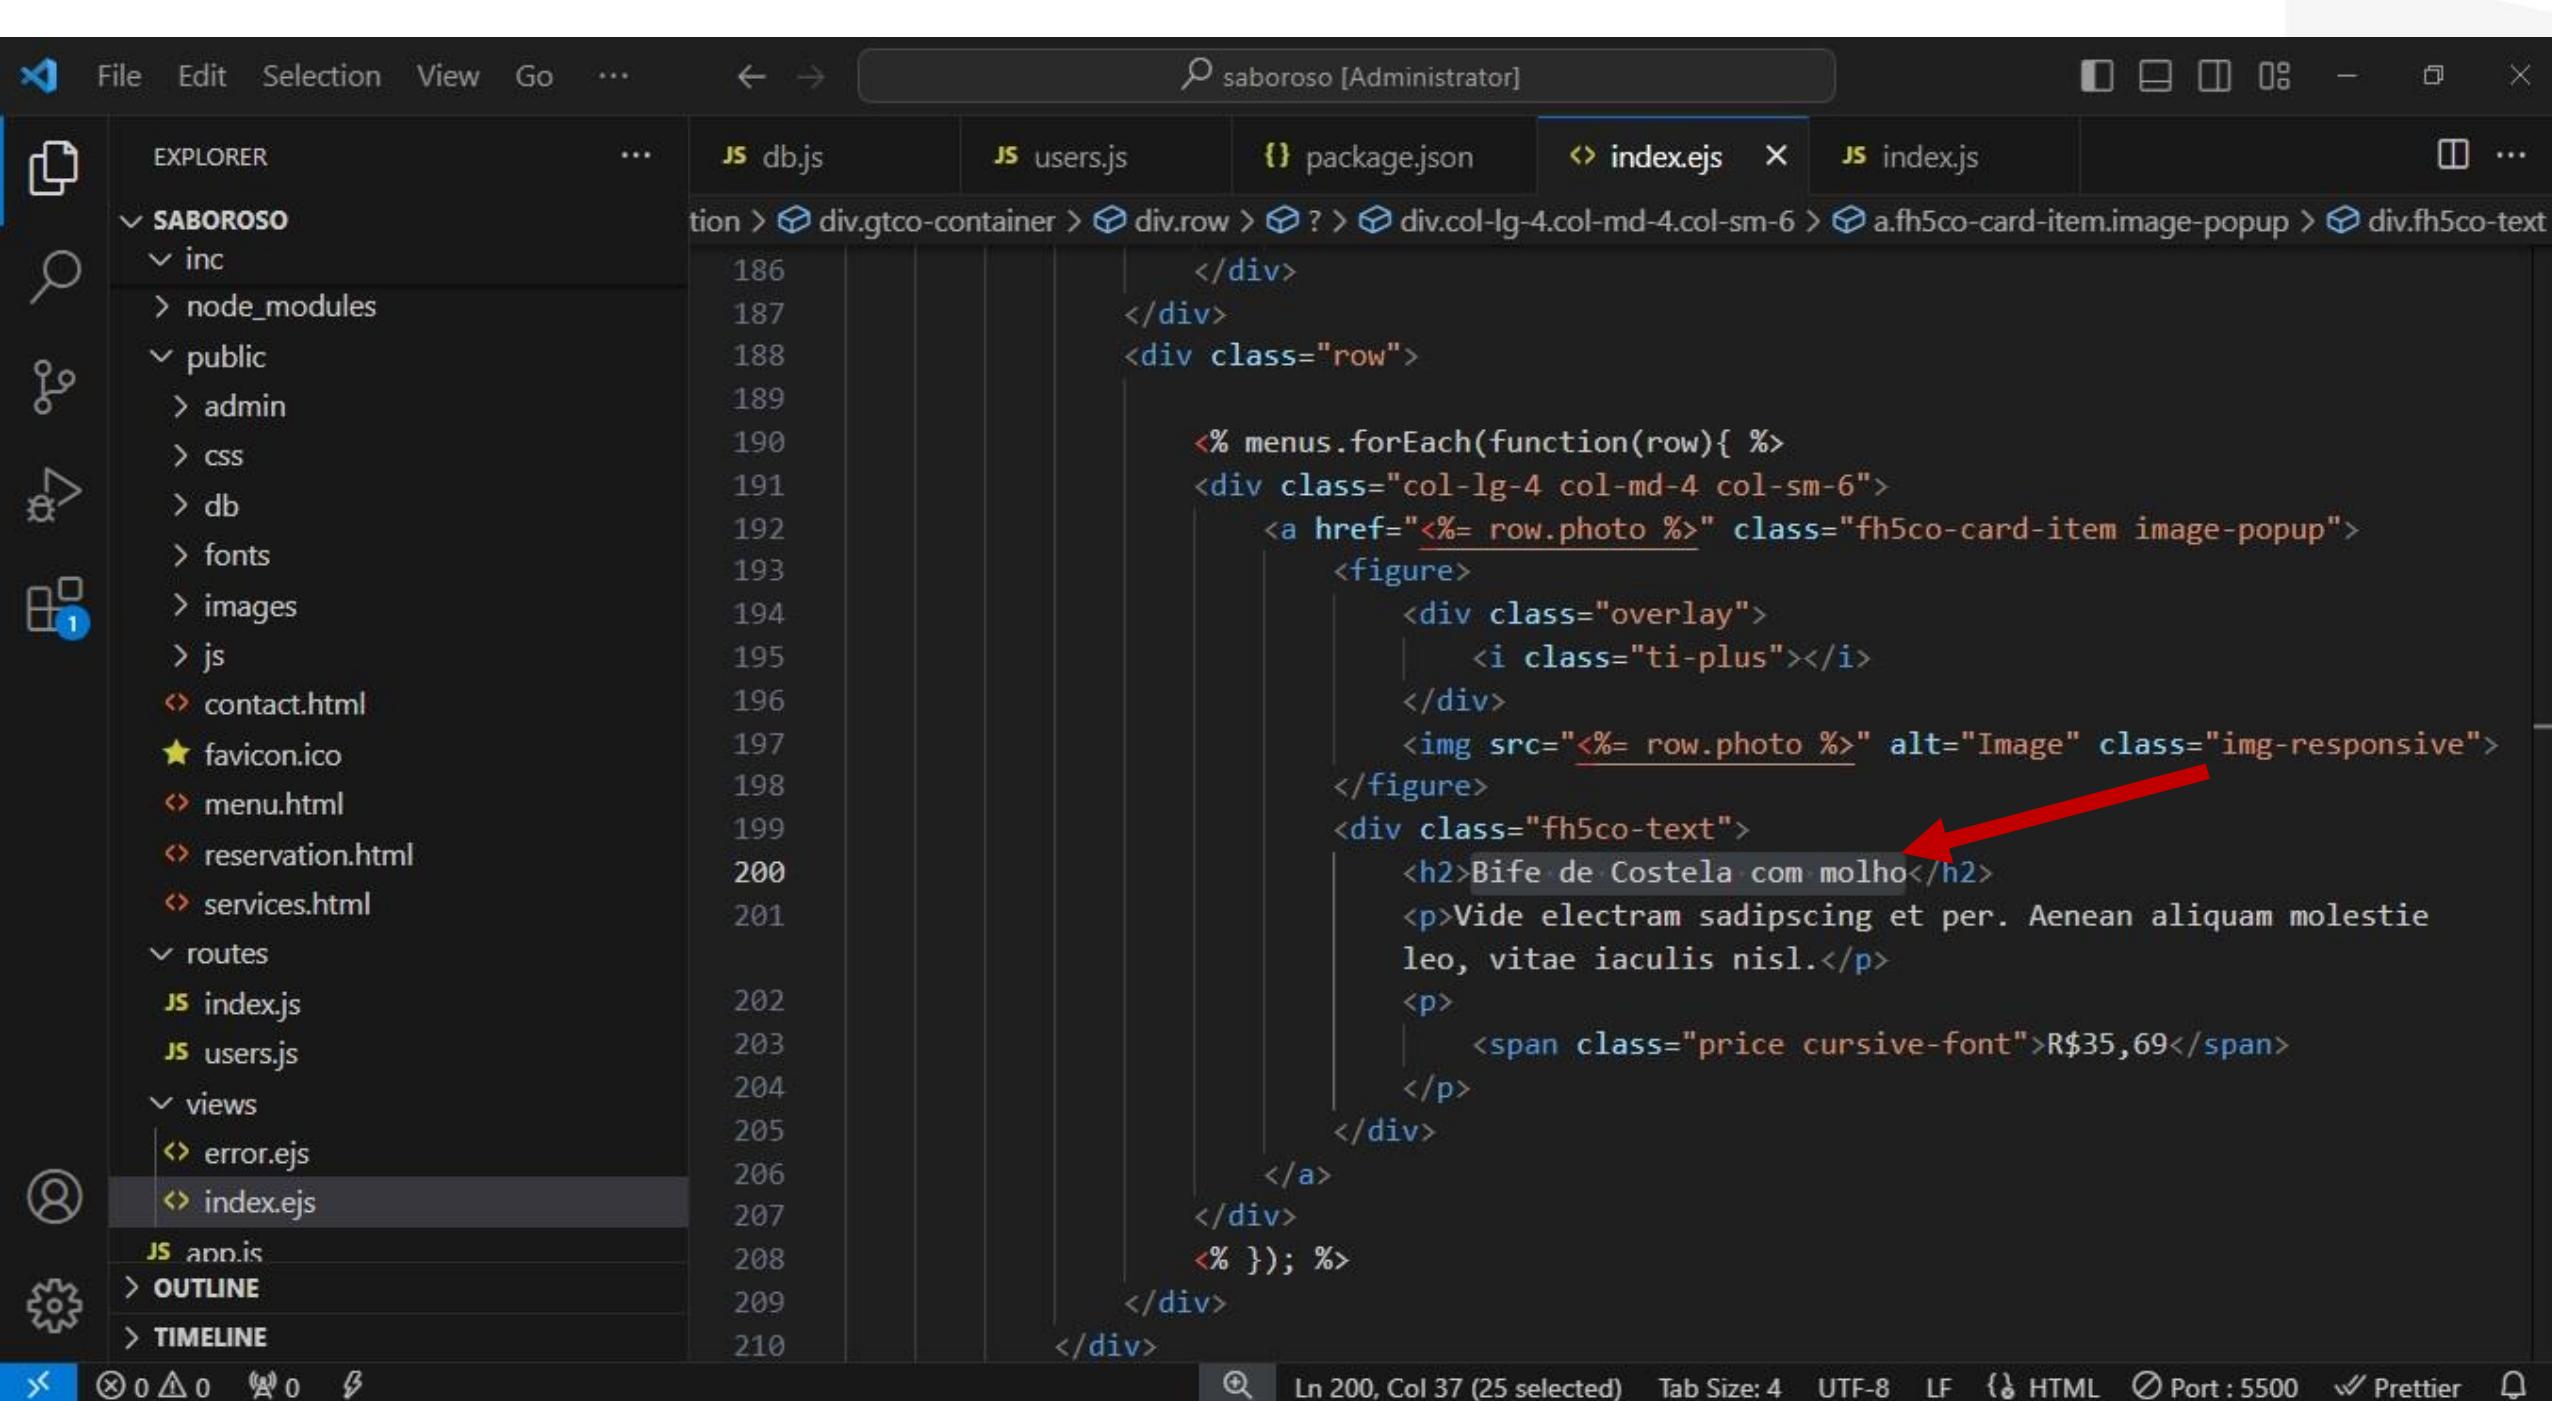

File Edit Selection View Go ... ← → saboroso [Administrator] ⚡

EXPLORER ... JS db.js JS users.js {} package.json ⟲ index.ejs X JS index.js ⌂ ...

SABOROSO

inc

> node_modules

public

> admin

> css

> db

> fonts

> images

> js

contact.html

favicon.ico

menu.html

reservation.html

services.html

routes

JS index.js

JS users.js

views

↳ error.ejs

↳ index.ejs

JS app.js


> OUTLINE

> TIMELINE

co-container > div.row > ? > div.col-lg-4.col-md-4.col-sm-6 > a.fh5co-card-item.image-popup > div.fh5co-text > h2 > ?

```
186           </div>
187           </div>
188       <div class="row">
189
190           <% menus.forEach(function(row){ %>
191           <div class="col-lg-4 col-md-4 col-sm-6">
192               <a href="<% row.photo %>" class="fh5co-card-item image-popup">
193                   <figure>
194                       <div class="overlay">
195                           <i class="ti-plus"></i>
196                       </div>
197                       
198                   </figure>
199                   <div class="fh5co-text"> ←
200                       <h2><% row.title %</h2>
201                           <p>Vide electram sadipscing et per. Aenean aliquam molestie
202                               leo, vitae iaculis nisl.</p>
203                               <p>
204                                   <span class="price cursive-font">R$35,69</span>
205                               </p>
206                       </div>
207               </a>
208           <% }); %>
209       </div>
210   </div>
```

Ln 200, Col 37 (16 selected) Tab Size: 4 UTF-8 LF { HTML ⚡ Port : 5500 ✓ Prettier

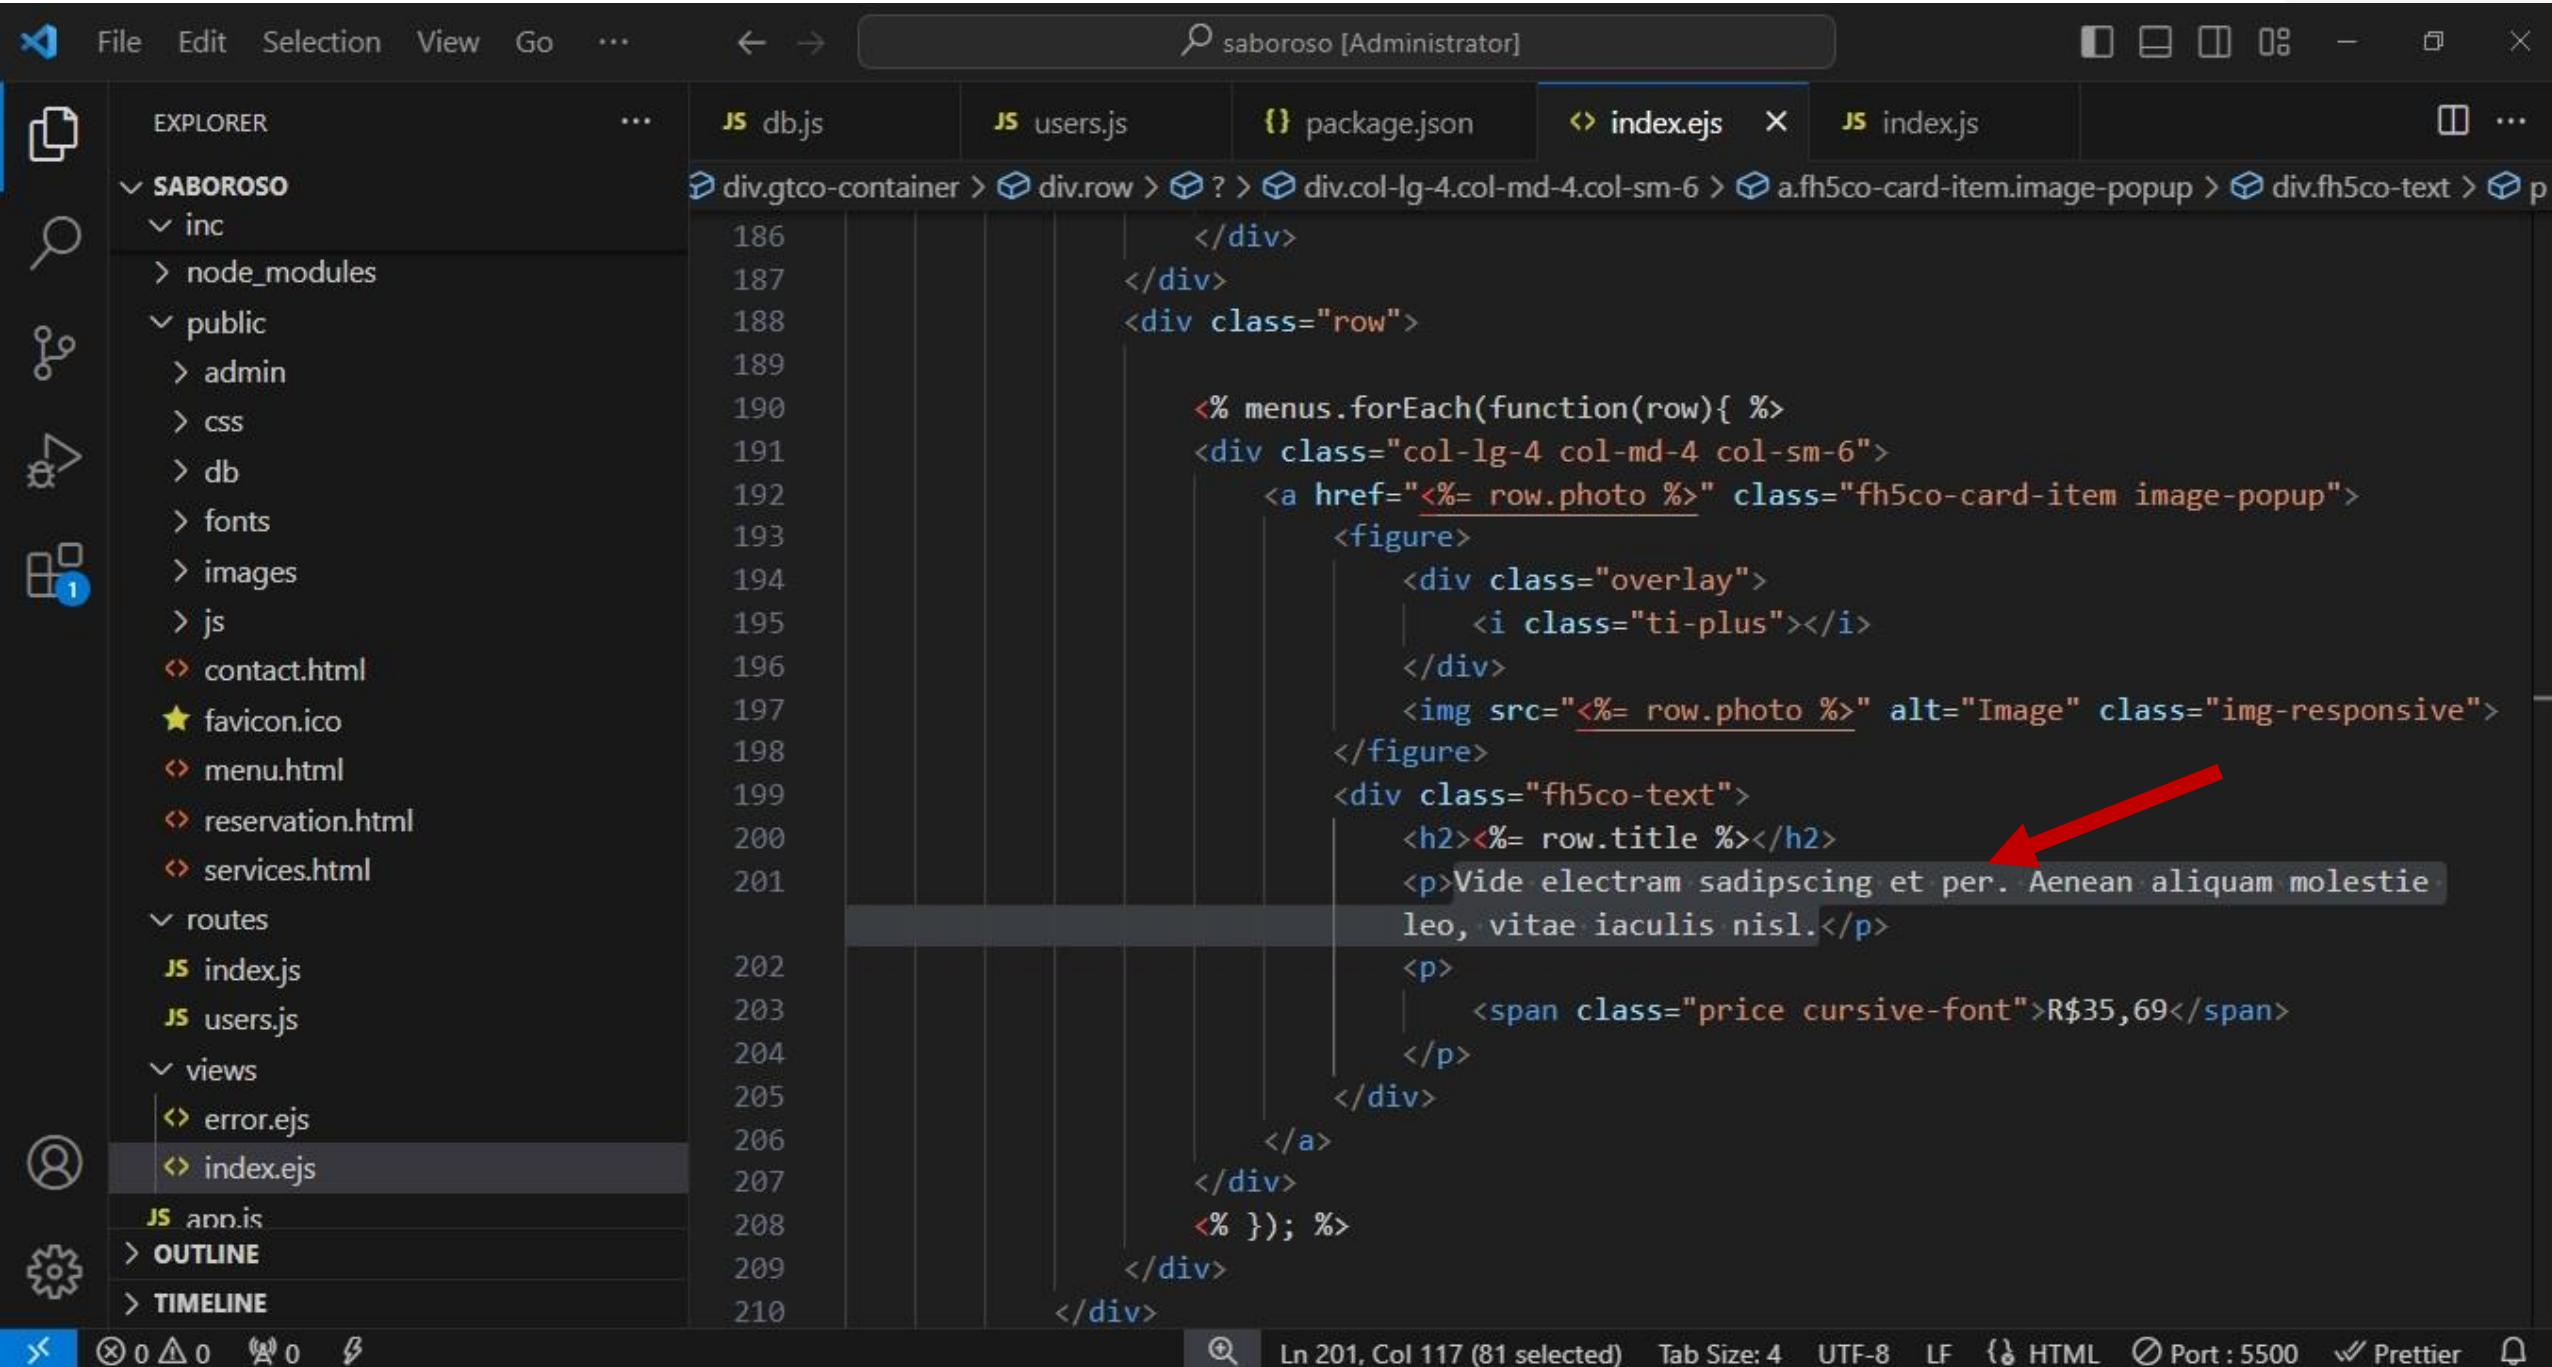

Screenshot of a code editor showing a file named `index.ejs` with EJS templating syntax.

```
tco-container > div.row > ? > div.col-lg-4.col-md-4.col-sm-6 > a.fh5co-card-item.image-popup > div.fh5co-text > p > ?  
186 </div>  
187 </div>  
188 <div class="row">  
189  
190 <% menus.forEach(function(row){ %>  
191 <div class="col-lg-4 col-md-4 col-sm-6">  
192 <a href="<% row.photo %>" class="fh5co-card-item image-popup">  
193 <figure>  
194 <div class="overlay">  
195 <i class="ti-plus"></i>  
196 </div>  
197   
198 </figure>  
199 <div class="fh5co-text">  
200 <h2>  
201 <%= row.title %>  
202 </h2>  
203 <p>  
204 <%= row.description %>  
205 </p>  
206 <span class="price cursive-font">R$35,69</span>  
207 </p>  
208 </div>  
209 <% }); %>  
210 </div>  
211 </div>
```

A red arrow points to the line `<p><%= row.description %></p>`, which is highlighted in blue.

File Explorer sidebar:

- SABOROSO**
 - inc
 - node_modules
 - public
 - admin
 - css
 - db
 - fonts
 - images
 - js
 - contact.html
 - favicon.ico
 - menu.html
 - reservation.html
 - services.html
 - routes
 - index.js
 - users.js
 - views
 - error.ejs
 - index.ejs
- app.js
- OUTLINE
- TIMELINE

Bottom status bar:

- Ln 201, Col 36 (22 selected)
- Tab Size: 4
- UTF-8
- LF
- HTML
- Port : 5500
- Prettier

File Edit Selection View Go ... ← → 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS db.js JS users.js {} package.json ↗ index.ejs X JS index.js ⌂ ...

SABOROSO

- inc
- > node_modules
- public
 - > admin
 - > css
 - > db
 - > fonts
 - > images
 - > js
- <> contact.html
- ★ favicon.ico
- <> menu.html
- <> reservation.html
- <> services.html
- routes
 - JS index.js
 - JS users.js
- views
 - <> error.ejs
 - <> index.ejs
- JS app.js

OUTLINE


TIMELINE

tco-container > div.row > ? > div.col-lg-4.col-md-4.col-sm-6 > a.fh5co-card-item.image-popup > div.fh5co-text > p > span

```
186           </div>
187           </div>
188       <div class="row">
189
190           <% menus.forEach(function(row){ %>
191           <div class="col-lg-4 col-md-4 col-sm-6">
192               <a href="<%= row.photo %>" class="fh5co-card-item image-popup">
193                   <figure>
194                       <div class="overlay">
195                           <i class="ti-plus"></i>
196                       </div>
197                       
198                   </figure>
199                   <div class="fh5co-text">
200                       <h2><%= row.title %></h2>
201                       <p><%= row.description %></p>
202                       <p>
203                           <span class="price cursive-font">R$35,69</span>
204                       </p>
205                   </div>
206               </a>
207           </div>
208           <% }); %>
209       </div>
210   </div>
211 </div>
```

Ln 203, Col 77 (7 selected) Tab Size: 4 UTF-8 LF { HTML ⚡ Port : 5500 ✅ Prettier



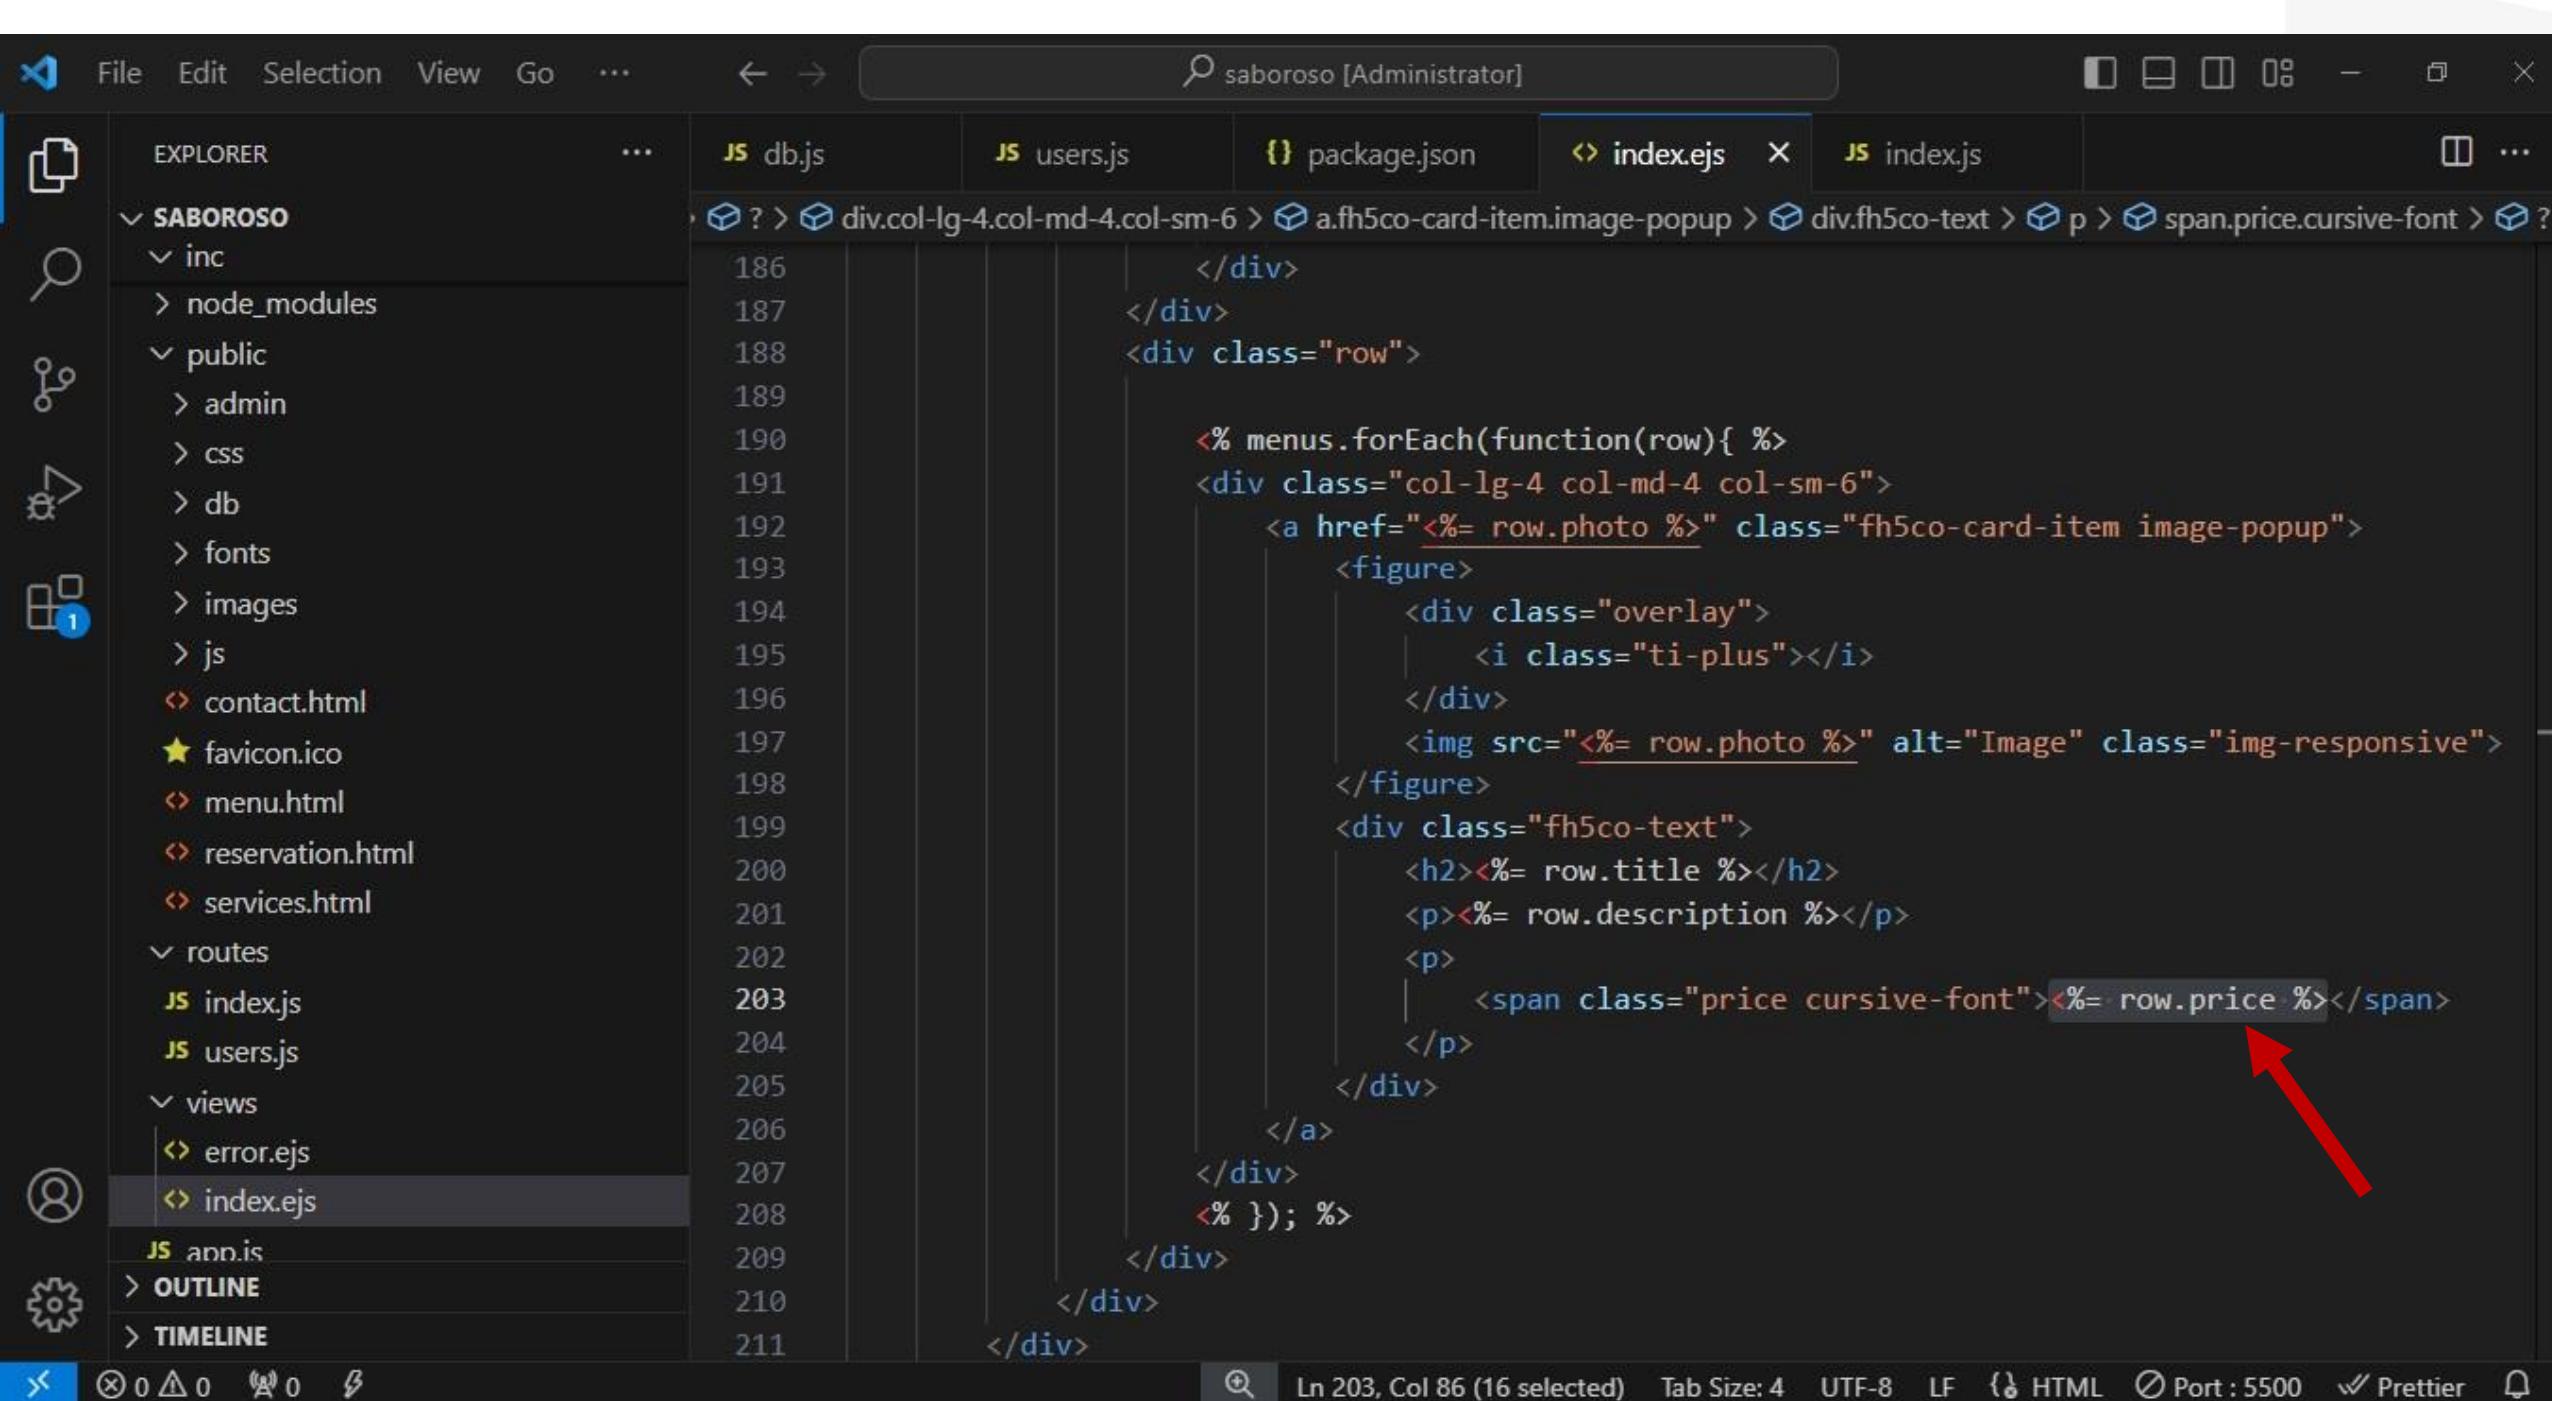

Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de
denguis. Quem num gosta di mé, boa gentis num é.



Bife de Costela com molho

Vide electram sadipscing et per. Aenean
aliquam molestie leo, vitae iaculis nisl.

R\$35,69

Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de
denguis. Quem num gosta di mé, boa gentis num é.



Bife de Costela com molho

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

35.69



Chilli com Carne

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.40



Hambúrguer com Fritas

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.80

Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de
denguis. Quem num gosta di mé, boa gentis num é.



Bife de Costela com molho

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

35.69



Chilli com Carne

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.40



Hambúrguer com Fritas

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.80

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQL SQL Editor Database Browser Scripting Help

Navigator tb_menus ×

SCHEMAS Filter objects

saboroso

- Tables
 - tb_contacts
 - tb_emails
 - tb_menus
 - tb_reservations
 - tb_users
- Views
- Stored Procedures
- Functions

sakila

sys

world

Administration Schemas

Information

Table: tb_menus

Columns:

| id | title | description | price | photo | register |
|----|---------------------------|---|-------|------------------|---------------------|
| 1 | Bife de Costela com molho | Vide electram sadipscing et per. Aenean aliqua... | 35.69 | images/img_1.jpg | 2018-09-12 16:48:58 |
| 2 | Hambúrguer com Fritas | Vide electram sadipscing et per. Aenean aliqua... | 29.80 | images/img_2.jpg | 2018-09-12 16:48:58 |
| 3 | Chilli com Carne | Vide electram sadipscing et per. Aenean aliqua... | 29.40 | images/img_3.jpg | 2018-09-12 16:48:58 |
| * | NULL | NULL | NULL | NULL | NULL |

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content: |

tb_menus 1 ×

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|---|----------|---|-------------------|-----------------------|
| 1 | 21:10:51 | SELECT * FROM saboroso.tb_menus LIMIT 0, 1000 | 3 row(s) returned | 0.016 sec / 0.000 sec |

Object Info Session



MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQL SQL Editor Database Browser Object Navigator

Navigator tb_menus ×

SCHEMAS Filter objects

saboroso

- Tables
 - tb_contacts
 - tb_emails
 - tb_menus
 - tb_reservations
 - tb_users
- Views
- Stored Procedures
- Functions

sakila

sys

world

Administration Schemas

Information

Table: tb_menus

Columns:

| id | title | description | price | photo | register |
|----|---------------------------|---|-------|------------------|---------------------|
| 1 | Bife de Costela com molho | Vide electram sadipscing et per. Aenean aliqua... | 45.35 | images/img_1.jpg | 2018-09-12 16:48:58 |
| 2 | Hambúrguer com Fritas | Vide electram sadipscing et per. Aenean aliqua... | 29.80 | images/img_2.jpg | 2018-09-12 16:48:58 |
| 3 | Chilli com Carne | Vide electram sadipscing et per. Aenean aliqua... | 29.40 | images/img_3.jpg | 2018-09-12 16:48:58 |
| * | NULL | NULL | NULL | NULL | NULL |

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content: |

tb_menus 1 ×


Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|---|----------|---|-------------------|-----------------------|
| 1 | 21:10:51 | SELECT * FROM saboroso.tb_menus LIMIT 0, 1000 | 3 row(s) returned | 0.016 sec / 0.000 sec |

Apply Revert

Object Info Session

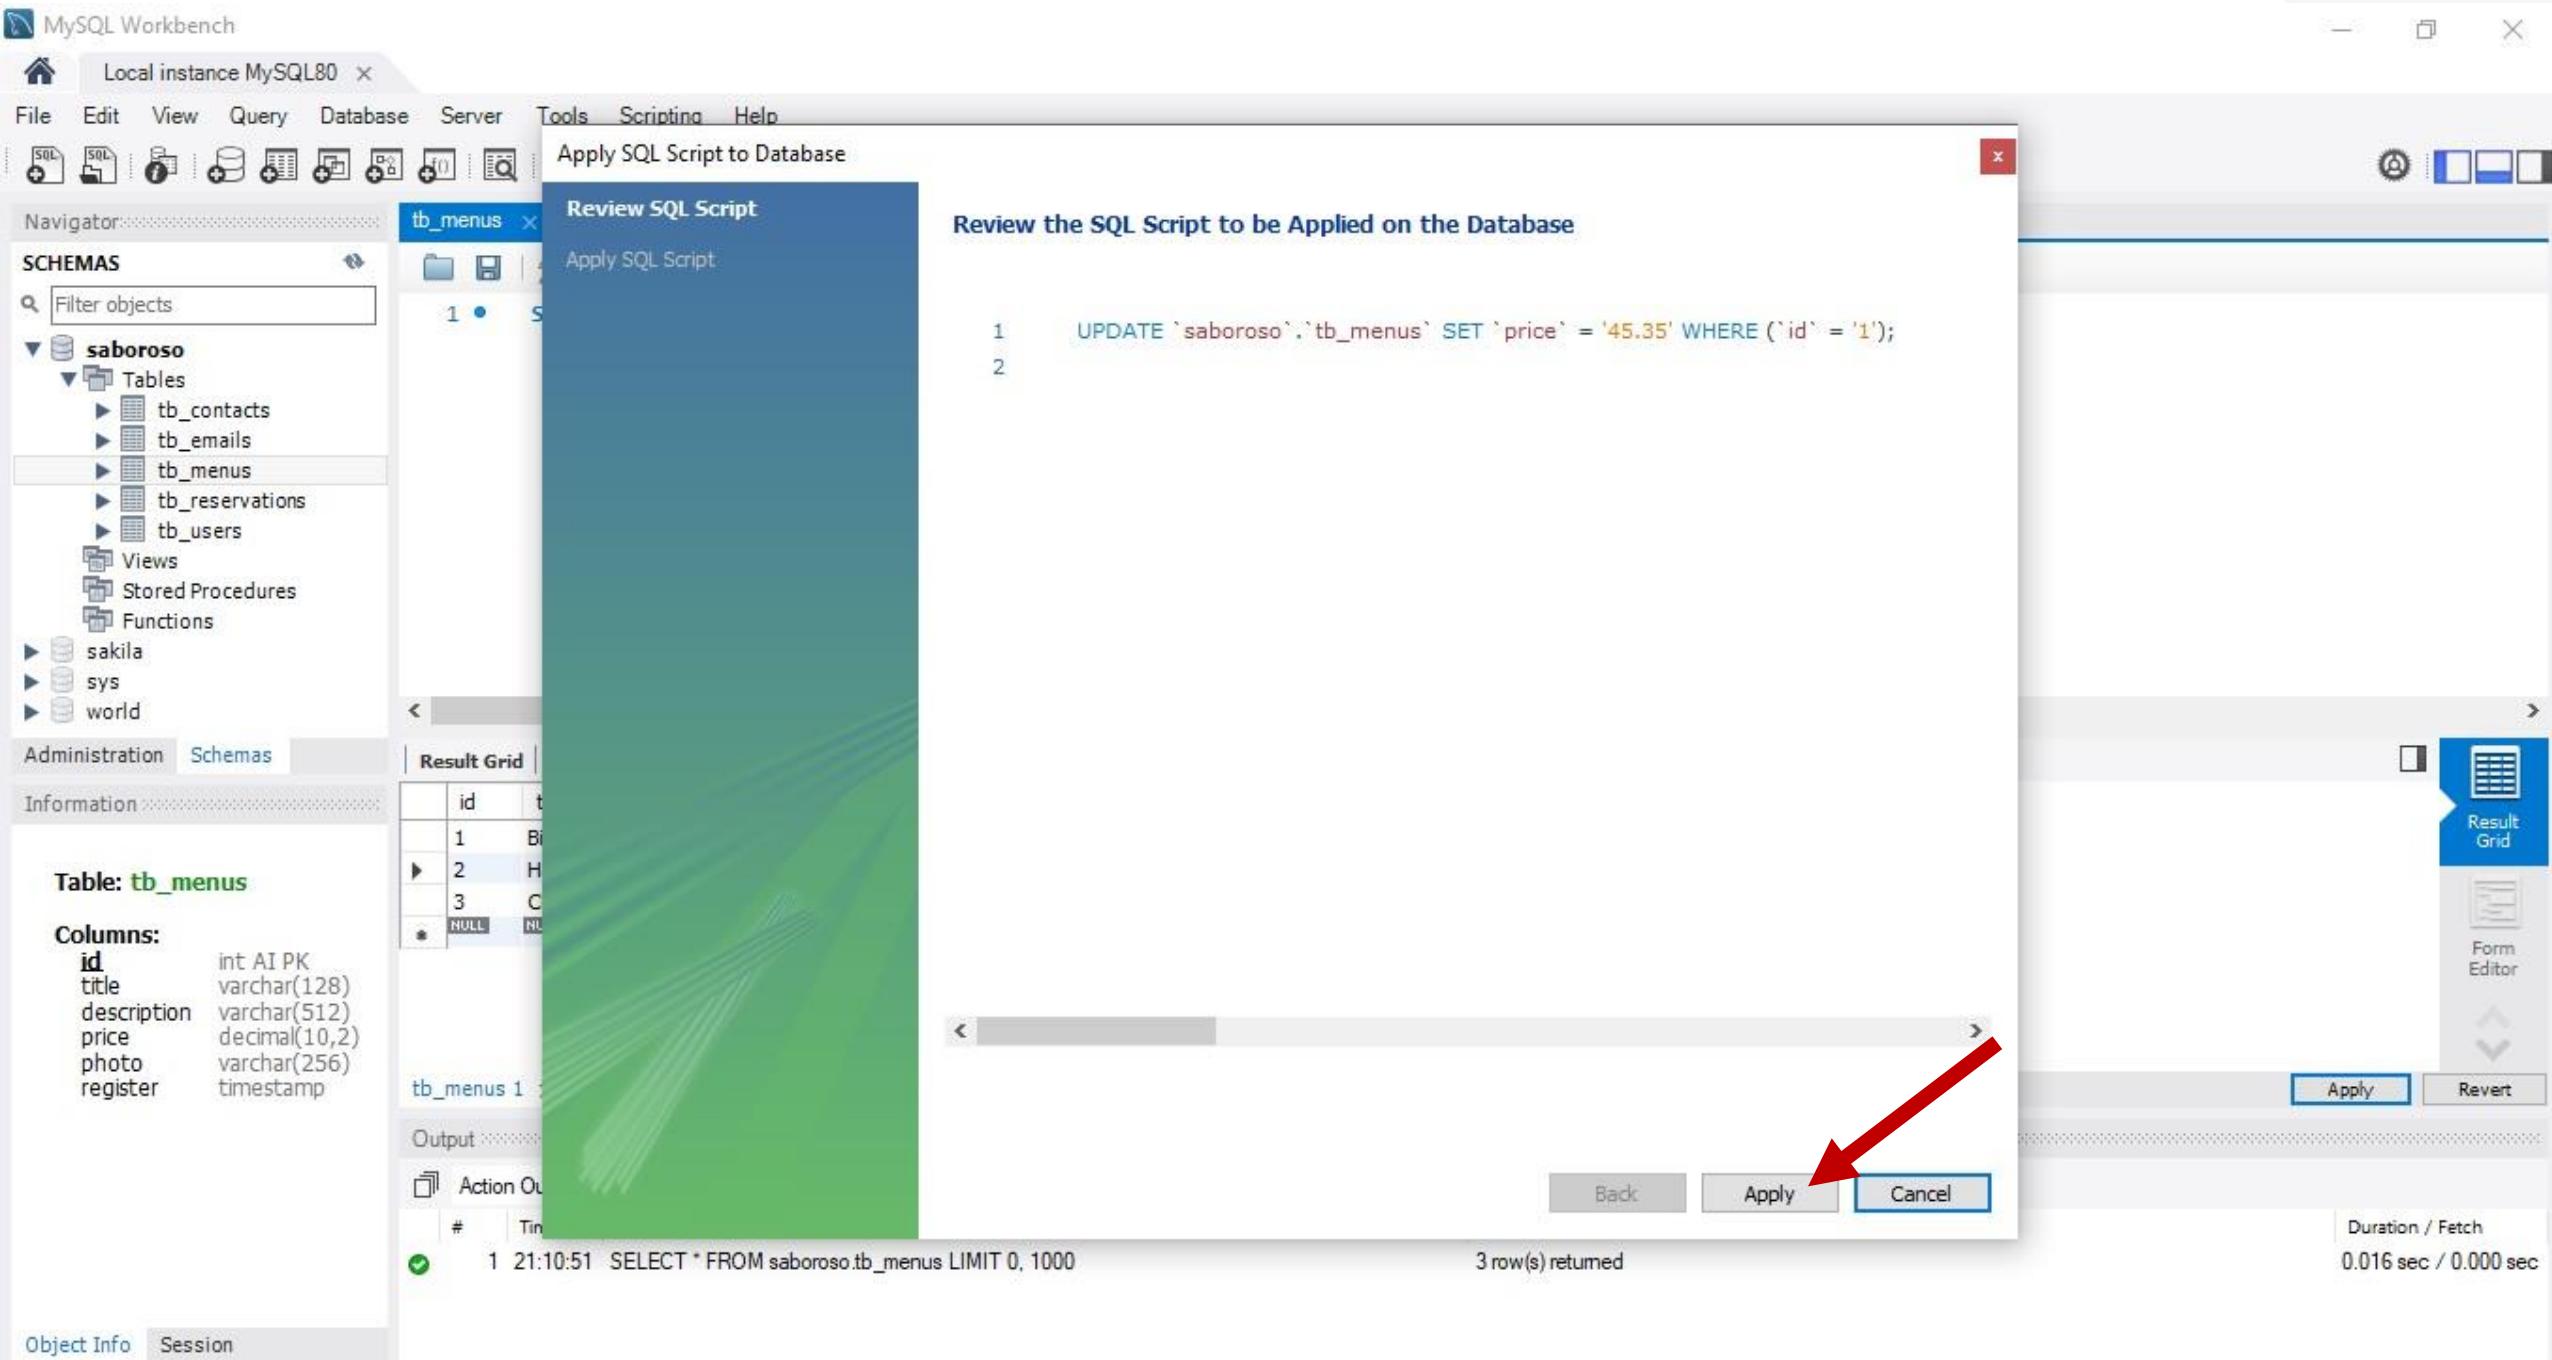



Navigator

SCHEMAS

Filter objects

saboroso

- Tables
 - tb_contacts
 - tb_emails
 - tb_menus
 - tb_reservations
 - tb_users
- Views
- Stored Procedures
- Functions

sakila

sys

world

Administration

Schemas

Information

Table: tb_menus

Columns:

| | |
|-------------|---------------|
| id | int AI PK |
| title | varchar(128) |
| description | varchar(512) |
| price | decimal(10,2) |
| photo | varchar(256) |
| register | timestamp |

Apply SQL Script to Database

Review SQL Script

Apply SQL Script

1 ● S

Applying SQL script to the database

The following tasks will now be executed. Please monitor the execution.
Press Show Logs to see the execution logs.

 Execute SQL Statements

SQL script was successfully applied to the database.

Result Grid

| | id | title |
|---|----|--------|
| ▶ | 1 | Bistro |
| ▶ | 2 | Haus |
| * | 3 | Cafe |

| | tb_menus 1 |
|--|------------|
| | |

Show Logs

Back

Finish

Cancel

Action Out

#

Time

#

MySQL Workbench

Local instance MySQL80 X

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

saboroso

- Tables
 - tb_contacts
 - tb_emails
 - tb_menus
 - tb_reservations
 - tb_users
- Views
- Stored Procedures
- Functions

sakila

sys

world

Administration Schemas

Information

Table: tb_menus

Columns:

| id | title | description | price | photo | register |
|----|---------------------------|---|-------|------------------|---------------------|
| 1 | Bife de Costela com molho | Vide electram sadipscing et per. Aenean aliqua... | 45.35 | images/img_1.jpg | 2018-09-12 16:48:58 |
| 2 | Hambúrguer com Fritas | Vide electram sadipscing et per. Aenean aliqua... | 29.80 | images/img_2.jpg | 2018-09-12 16:48:58 |
| 3 | Chilli com Carne | Vide electram sadipscing et per. Aenean aliqua... | 29.40 | images/img_3.jpg | 2018-09-12 16:48:58 |
| * | NULL | NULL | NULL | NULL | NULL |

tb_menus 1 X

Output

Action Output

| # | Time | Action | Message | Duration / Fetch |
|---|----------|---|-------------------|-----------------------|
| 1 | 21:10:51 | SELECT * FROM saboroso.tb_menus LIMIT 0, 1000 | 3 row(s) returned | 0.016 sec / 0.000 sec |

Object Info Session

Result Grid

Filter Rows:

Edit: Export/Import: Wrap Cell Content:

Result Grid

Form Editor

Apply Revert

A red arrow points to the 'photo' column in the Result Grid table, highlighting the image file paths.

```
1 •  SELECT * FROM saboroso.tb_menus;
```

Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de
denguis. Quem num gosta di mé, boa gentis num é.



Bife de Costela com molho

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

35.69



Chilli com Carne

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.40



Hambúrguer com Fritas

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.80




Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de
denguis. Quem num gosta di mé, boa gentis num é.



Bife de Costela com molho

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

45.35



Chilli com Carne

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.40



Hambúrguer com Fritas

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.80

UC: Projetos

Assunto:

Projeto Restaurante – BackEnd

05 – EJS Include

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Top Tabs:** db.js, users.js, package.json, index.ejs (highlighted), index.js
- Left Sidebar (EXPLORER):**
 - SABOROSO
 - inc
 - node_modules
 - public
 - admin
 - css
 - db
 - fonts
 - images
 - js
 - contact.html
 - favicon.ico
 - menu.html
 - reservation.html
 - services.html
 - routes
 - index.js
 - users.js
 - views
 - error.ejs
 - index.ejs (highlighted)
 - app.js
 - OUTLINE
 - TIMELINE
- Code Area:** The content of the index.ejs file is displayed, which includes HTML and CSS meta tags for a restaurant website.
- Bottom Status Bar:** Ln 205, Col 35, Tab Size: 4, UTF-8, LF, HTML, Port : 5500, Prettier

A screenshot of the Visual Studio Code interface. The left sidebar shows a file tree with a project named 'SABOROSO' containing 'inc', 'node_modules', 'public' (with subfolders 'admin', 'css', 'db', 'fonts', 'images', 'js'), 'contact.html', 'favicon.ico', 'menu.html', 'reservation.html', 'services.html', 'routes' (with files 'index.js' and 'users.js'), and 'views' (with files 'error.ejs', 'index.ejs', and 'ann.is'). The 'OUTLINE' and 'TIMELINE' sections are also visible. The right side shows the code editor with the file 'index.ejs' open. A red arrow points from the file tree towards the line numbers in the code editor. The code itself is an EJS template for a head section, including meta tags for compatibility, viewport, and description, as well as links to Google fonts and local CSS files.

```
views > index.ejs > html > head
1  <!DOCTYPE HTML>
2  <html>
3
4  <head>
5    Click to collapse the range. t="utf-8"
6      <meta http-equiv="X-UA-Compatible" content="IE=edge">
7      <title><%= title %></title>
8      <meta name="viewport" content="width=device-width, initial-scale=1">
9      <meta name="description" content="Site do restaurante fictício Saboroso desenvolvido no
10     curso CT Desenvolvimento de Sistemas"
11   />
12   <meta name="author" content="SProviders.com.br" />
13
14   <link rel="icon" href="favicon.ico" type="image/x-icon" />
15   <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />
16
17   <meta name="theme-color" content="#FBB448">
18
19   <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700" rel="stylesheet">
20   <link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">
21
22   <!-- Animate.css -->
23   <link rel="stylesheet" href="css/animate.css">
24   <!-- Icomoon Icon Fonts-->
25   <link rel="stylesheet" href="css/icomoon.css">
<!-- Themify Icons-->
```

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Search icon, Home icon, Close icon.
- Left Sidebar (EXPLORER):**
 - SABOROSO folder
 - inc
 - node_modules
 - public
 - admin
 - css
 - db
 - fonts
 - images
 - js
 - contact.html
 - favicon.ico
 - menu.html
 - reservation.html
 - services.html
 - routes
 - index.js
 - users.js
 - views
 - error.ejs
 - index.ejs
 - app.js
 - OUTLINE
 - TIMELINE
- Current File:** index.ejs (selected tab)
- Code Content:** The code is an EJS template for a landing page. It includes DOCTYPE HTML, head, body, loader, and navigation sections. The navigation section contains a logo link to index.html with the text "Saboroso!".
- Status Bar:** Line 4, Col 1 (1599 selected), Tab Size: 4, UTF-8, LF, HTML, Port : 5500, Prettier.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows "saboroso [Administrator]". The left sidebar (EXPLORER) lists the project structure under "SABOROSO", including "public", "routes", "views", and files like "index.js", "users.js", "app.js", "package-lock.json", and "package.json". The "views" folder contains "error.ejs" and "index.ejs", with "index.ejs" currently selected and highlighted in grey. The main editor area displays the contents of "index.ejs":

```
1  <!DOCTYPE HTML>
2  <html>
3
4  <body>
5
6      <div class="gtco-loader"></div>
7
8      <div id="page">
9
10         <nav class="gtco-nav" role="navigation">
11             <div class="gtco-container">
12
13                 <div class="row">
14                     <div class="col-sm-4 col-xs-12">
15                         <div id="gtco-logo">
16                             <a href="index.html">Saboroso<br/>!
17                         </a>
18                     </div>
19                 </div>
20                 <div class="col-xs-8 text-right menu-1">
21                     <ul>
22                         <li>
23                             <a href="index.html">Home</a>
24                         </li>
25                     </ul>
26                 </div>
27             </div>
28         </nav>
29     </div>
30
31     <div id="gtco-content-wrap">
32
33         <div class="gtco-section gtco-section-highlight">
34             <div class="gtco-container">
35                 <div class="row">
36                     <div class="col-md-6 col-md-push-6">
37                         <div class="gtco-section-highlight__inner">
38                             <h2>GET STARTED</h2>
39                             <p>Saboroso is a simple static site generator built with Node.js and Express. It's designed to be easy to use and extensible. You can easily add new features by writing simple JavaScript modules. Saboroso also includes a built-in API for interacting with your site's data. To get started, simply clone the repository and run the command "npm install" in the root directory. Then, run "node app.js" to start the server. You can then access your site at http://localhost:5500. If you have any questions or need help, feel free to join our community on GitHub or Stack Overflow. We're here to help!

The status bar at the bottom shows "Ln 4, Col 1" and "Tab Size: 4". There are also icons for search, file operations, and extensions.


```

The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer (Left):** Shows the project structure under "SABOROSO". Key files include "index.js", "users.js", "app.js", "package-lock.json", and "package.json". In the "views" folder, there are "inc" and "head.ejs".
- Search Bar (Top):** Displays "saboroso [Administrator]".
- Tab Bar (Top):** Includes tabs for "db.js", "users.js", "package.json", "index.ejs", "head.ejs" (highlighted in blue), and "index.js".
- Code Editor (Main Area):** Displays the content of "head.ejs". The code includes meta tags for charset, http-equiv, title, viewport, description, author, and theme-color, along with links to Google fonts and various CSS files. A red arrow points from the "head.ejs" tab in the tab bar to the opening tag of the meta block in the editor.
- Bottom Status Bar:** Shows "Ln 47, Col 8" and other status indicators like "Spaces: 4", "UTF-8", "CRLF", "HTML", "Port : 5500", and "Prettier".

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS db.js JS users.js {} package.json ⟲ index.ejs X ⟲ head.ejs JS index.js ⌂ ...

SABOROSO

public

- > db
- > fonts
- > images
- > js
- ↳ contact.html
- ★ favicon.ico
- ↳ menu.html
- ↳ reservation.html
- ↳ services.html

routes

- JS index.js
- JS users.js

views

inc

- ↳ head.ejs
- ↳ error.ejs
- ↳ index.ejs

JS app.js

{ } package-lock.json

{} package.json

OUTLINE

TIMELINE

views > ⟲ index.ejs > html

```
1  <!DOCTYPE HTML>
2  <html>
3
4
5
6  <body>
7
8    <div class="gtco-loader"></div>
9
10   <div id="page">
11
12     <nav class="gtco-nav" role="navigation">
13       <div class="gtco-container">
14
15         <div class="row">
16           <div class="col-sm-4 col-xs-12">
17             <div id="gtco-logo">
18               <a href="index.html">Saboroso
19                 <em>!</em>
20               </a>
21             </div>
22           </div>
23           <div class="col-xs-8 text-right menu-1">
24             <ul>
25               <li>
26                 <a href="index.html">Home</a>
```

Ln 4, Col 1 Tab Size: 4 UTF-8 LF {} HTML ⌂ Go Live ✓ Prettier ⌂

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the folder "SABOROSO". The main editor area shows the file "index.ejs" which contains EJS template code. A red arrow points to the line containing the include directive: `<%- include("inc/head") -%>`. The code also includes HTML and CSS elements.

```
<!DOCTYPE HTML>
<html>
<%- include("inc/head") -%>
<body>
<div class="gtco-loader"></div>
<div id="page">
<nav class="gtco-nav" role="navigation">
<div class="gtco-container">
<div class="row">
<div class="col-sm-4 col-xs-12">
<div id="gtco-logo">
<a href="index.html">Saboroso<br>!</a>
</div>
</div>
<div class="col-xs-8 text-right menu-1">
<ul>
<li>
<a href="index.html">Home</a>
```

Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de
denguis. Quem num gosta di mé, boa gentis num é.



Bife de Costela com molho

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

45.35



Chilli com Carne

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.


29.40



Hambúrguer com Fritas

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.80

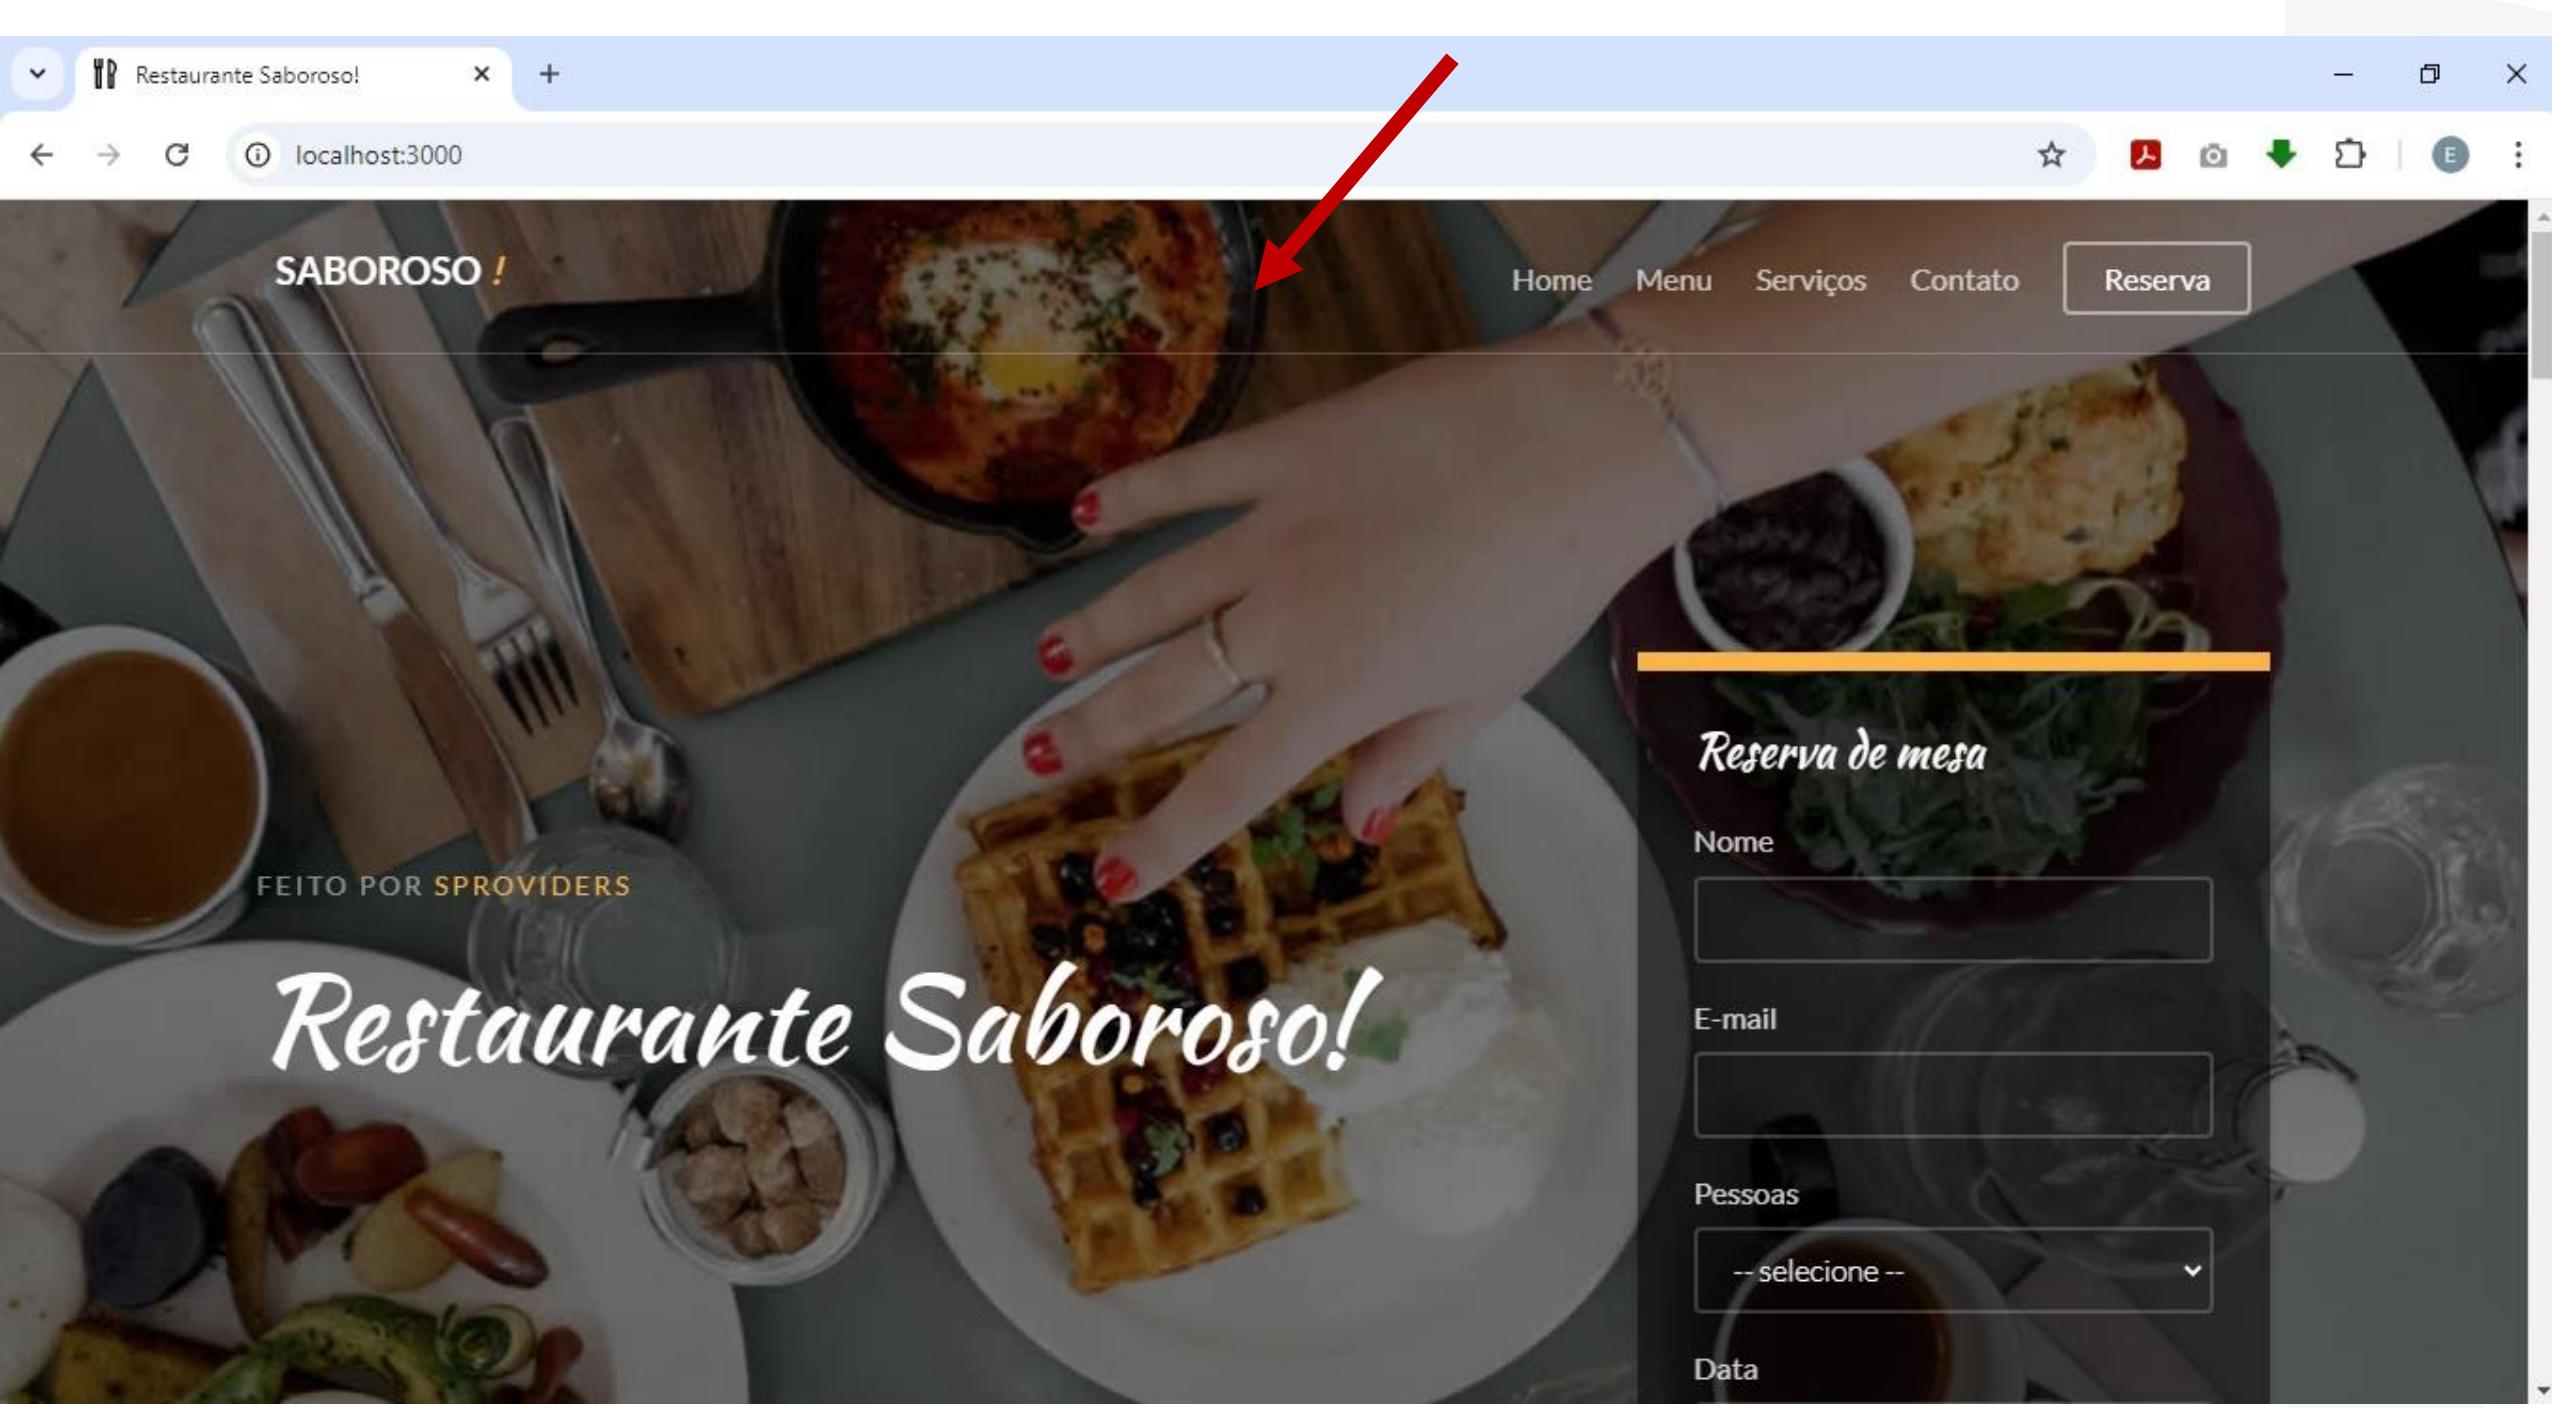

Restaurante Saboroso! x view-source:localhost:3000 x +

Quebra de linha □

```
<!DOCTYPE HTML>
<html>

<head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <title>Restaurante Saboroso!</title>
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <meta name="description" content="Site do restaurante fictício Saboroso desenvolvido no curso CT Desenvolvimento de Sistemas">
    <meta name="author" content="SProviders.com.br" />

    <link rel="icon" href="favicon.ico" type="image/x-icon" />
    <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />

    <meta name="theme-color" content="#FBB448">

    <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700" rel="stylesheet">
    <link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">

    <!-- Animate.css -->
    <link rel="stylesheet" href="css/animate.css">
    <!-- Icomoon Icon Fonts-->
    <link rel="stylesheet" href="css/icomoon.css">
    <!-- Themify Icons-->
    <link rel="stylesheet" href="css/themify-icons.css">
    <!-- Bootstrap -->
    <link rel="stylesheet" href="css/bootstrap.css">

    <!-- Magnific Popup -->
    <link rel="stylesheet" href="css/magnific-popup.css">

    <!-- Bootstrap DateTimePicker -->
    <link rel="stylesheet" href="css/bootstrap-datetimepicker.min.css">


    <!-- Owl Carousel -->
    <link rel="stylesheet" href="css/owl.carousel.min.css">
    <link rel="stylesheet" href="css/owl.theme.default.min.css">


    <!-- Theme style -->
```


A interface de usuário mostra uma janela de navegador com o título "Restaurante Saboroso!" e a URL "view-source:localhost:3000". A barra de endereço contém "view-source:localhost:3000". Um cursor de seta aponta para a barra de endereço. Outra seta aponta para a parte inferior da janela, indicando o conteúdo da página fonte.


A screenshot of the Visual Studio Code interface. The top bar shows the title "saboroso [Administrator]" and standard window controls. The left sidebar contains icons for File, Edit, Selection, View, Go, and other settings. The Explorer sidebar shows a project structure under "SABOROSO": bin, inc (with db.js), node_modules, and public. A red arrow points from the "public" folder to the context menu. The context menu for the "public" folder is open, listing options: New File..., New Folder..., Reveal in File Explorer (which is highlighted with a blue background and has a red arrow pointing to it), Open in Integrated Terminal, Find in Folder..., Cut, Copy, Paste, Copy Path, Copy Relative Path, Rename..., Delete, and OUTL/TIMELINE. The "Reveal in File Explorer" option is also associated with the keyboard shortcut Shift+Alt+R. The main editor area displays an HTML file named "index.ejs". The code includes DOCTYPE HTML, a header include, and a navigation bar with a logo link to "index.html". The status bar at the bottom shows the file path "views > index.ejs", line 4, column 22, tab size 4, and encoding UTF-8.


```
<!DOCTYPE HTML>
<html>
<%- include("inc/head") -%>
<div class="gtco-loader"></div>
<div id="page">
<nav class="gtco-nav" role="navigation">
<div class="gtco-container">
<div class="row">
<div class="col-sm-4 col-xs-12">
<div id="gtco-logo">
<a href="index.html">Saboroso
<em>!</em>
</a>
</div>
</div>
<div class="col-xs-8 text-right menu-1">
<ul>
<li>
<a href="index.html">Home</a>
```

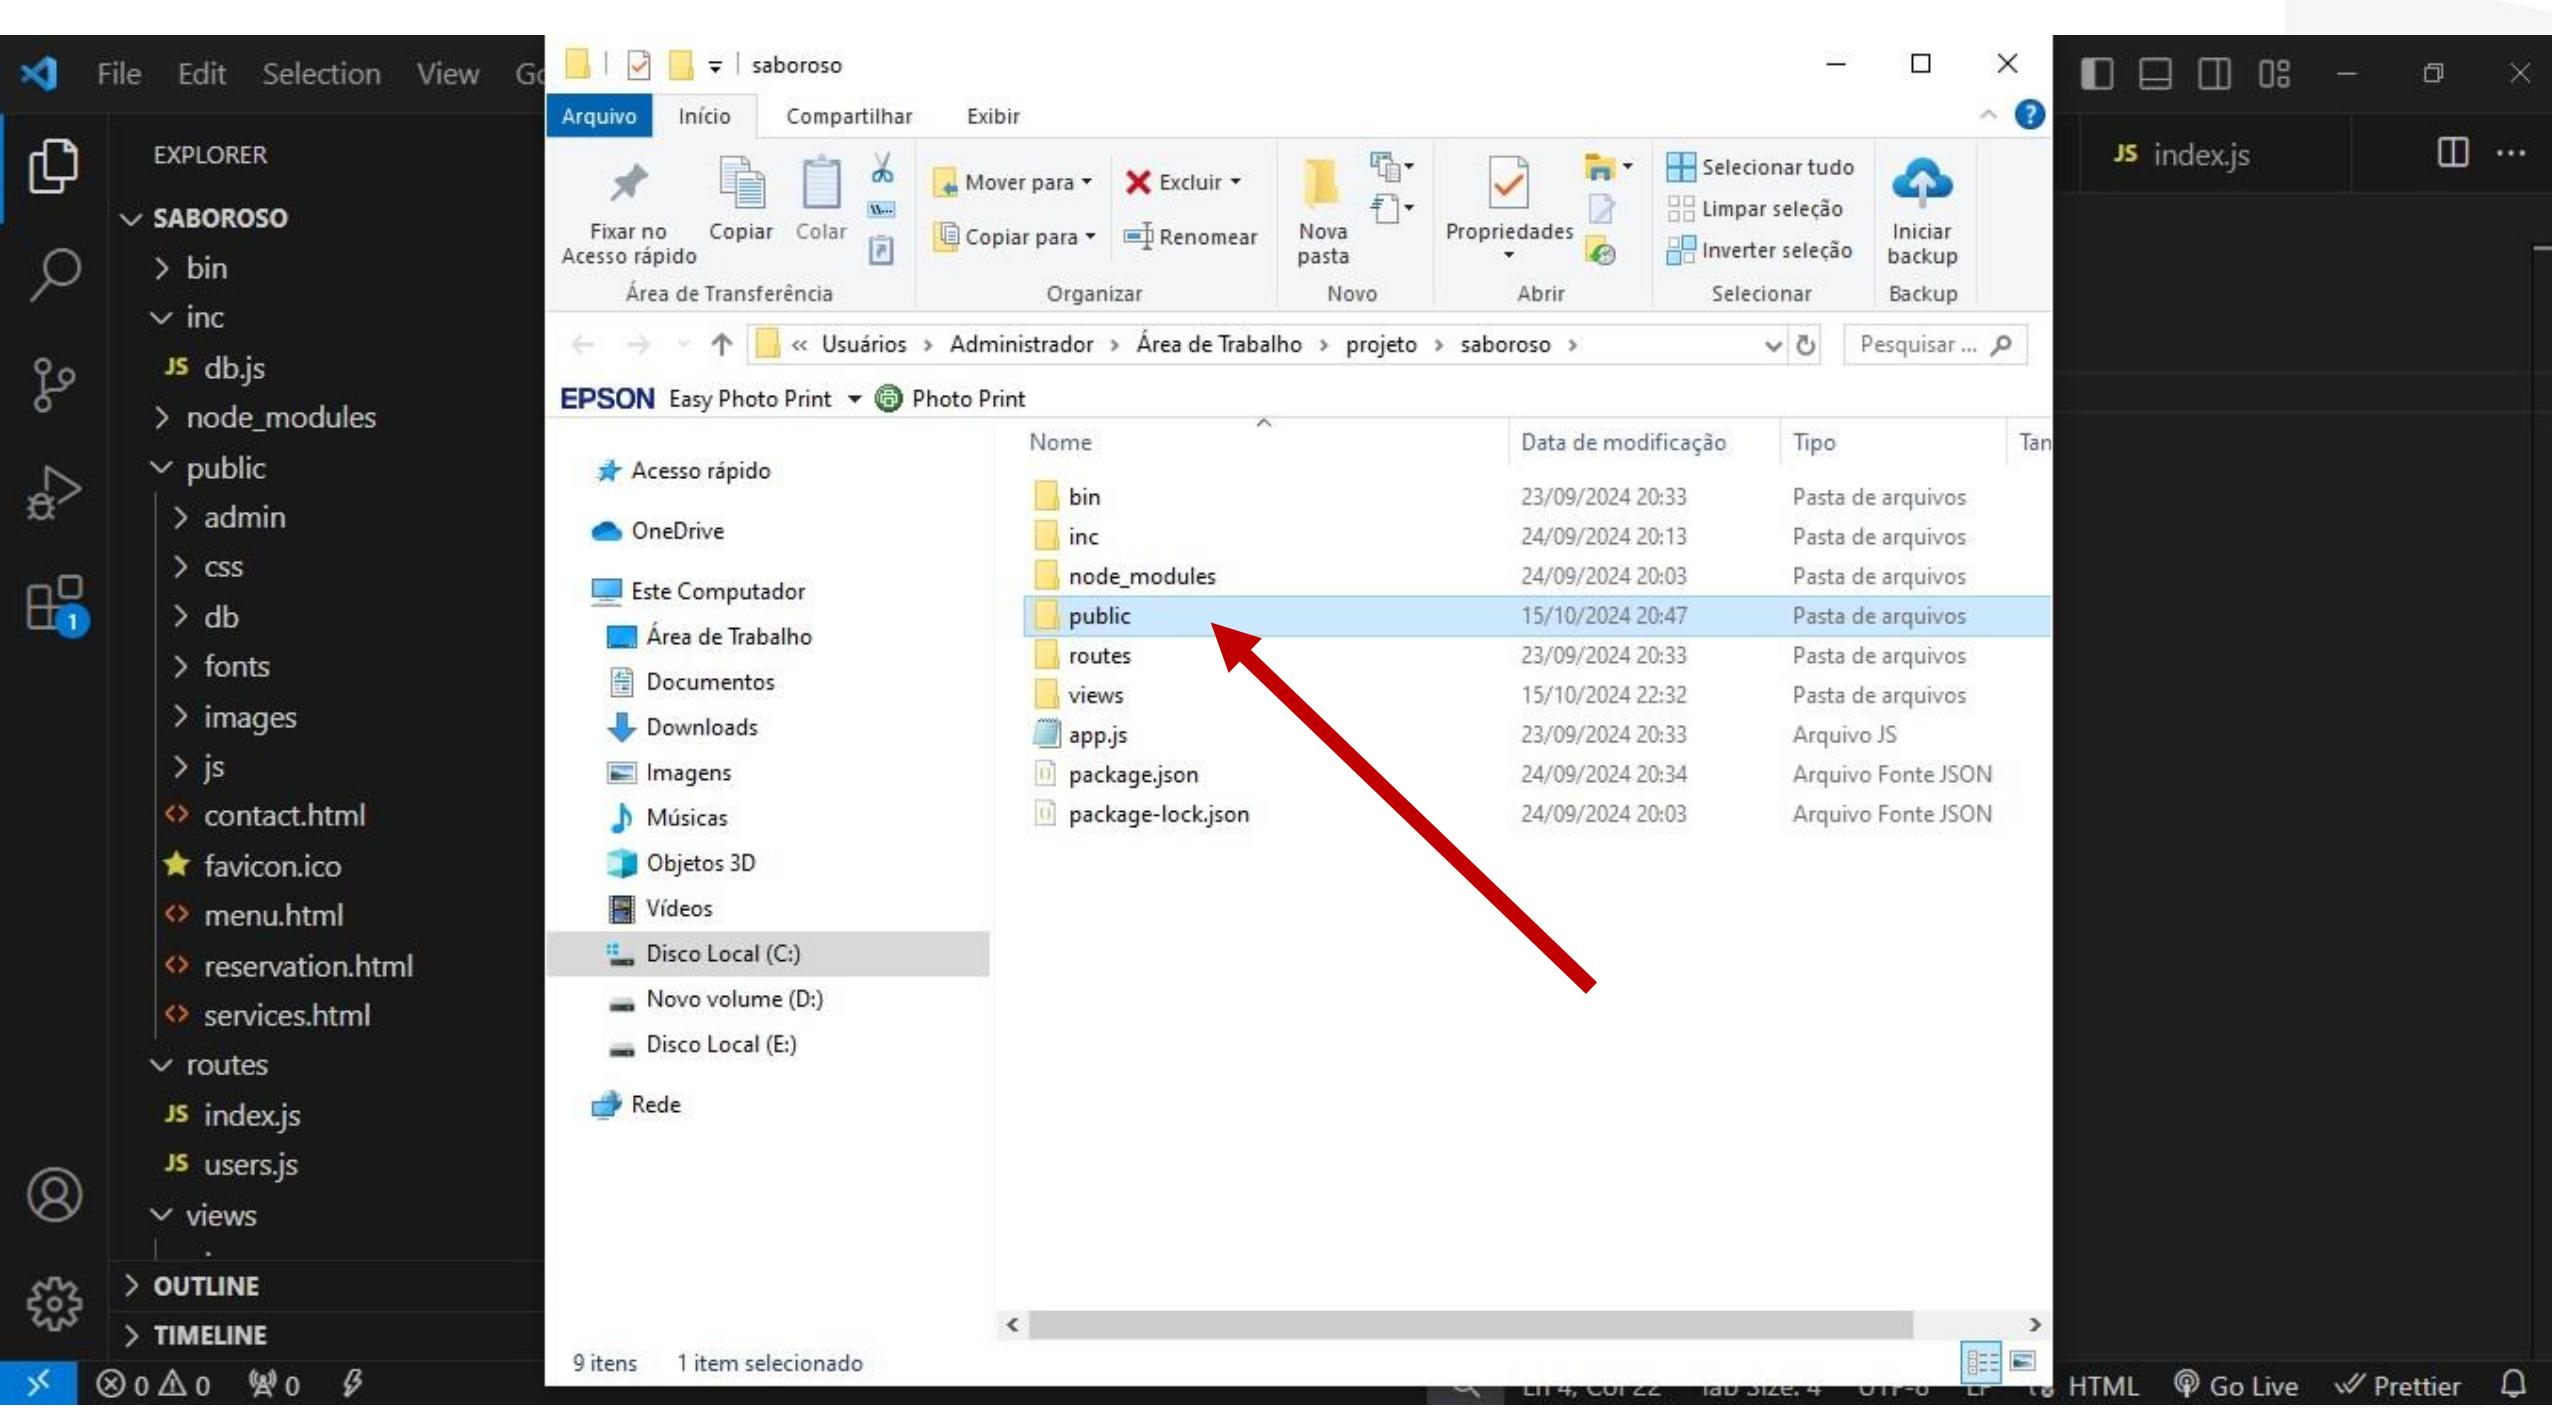


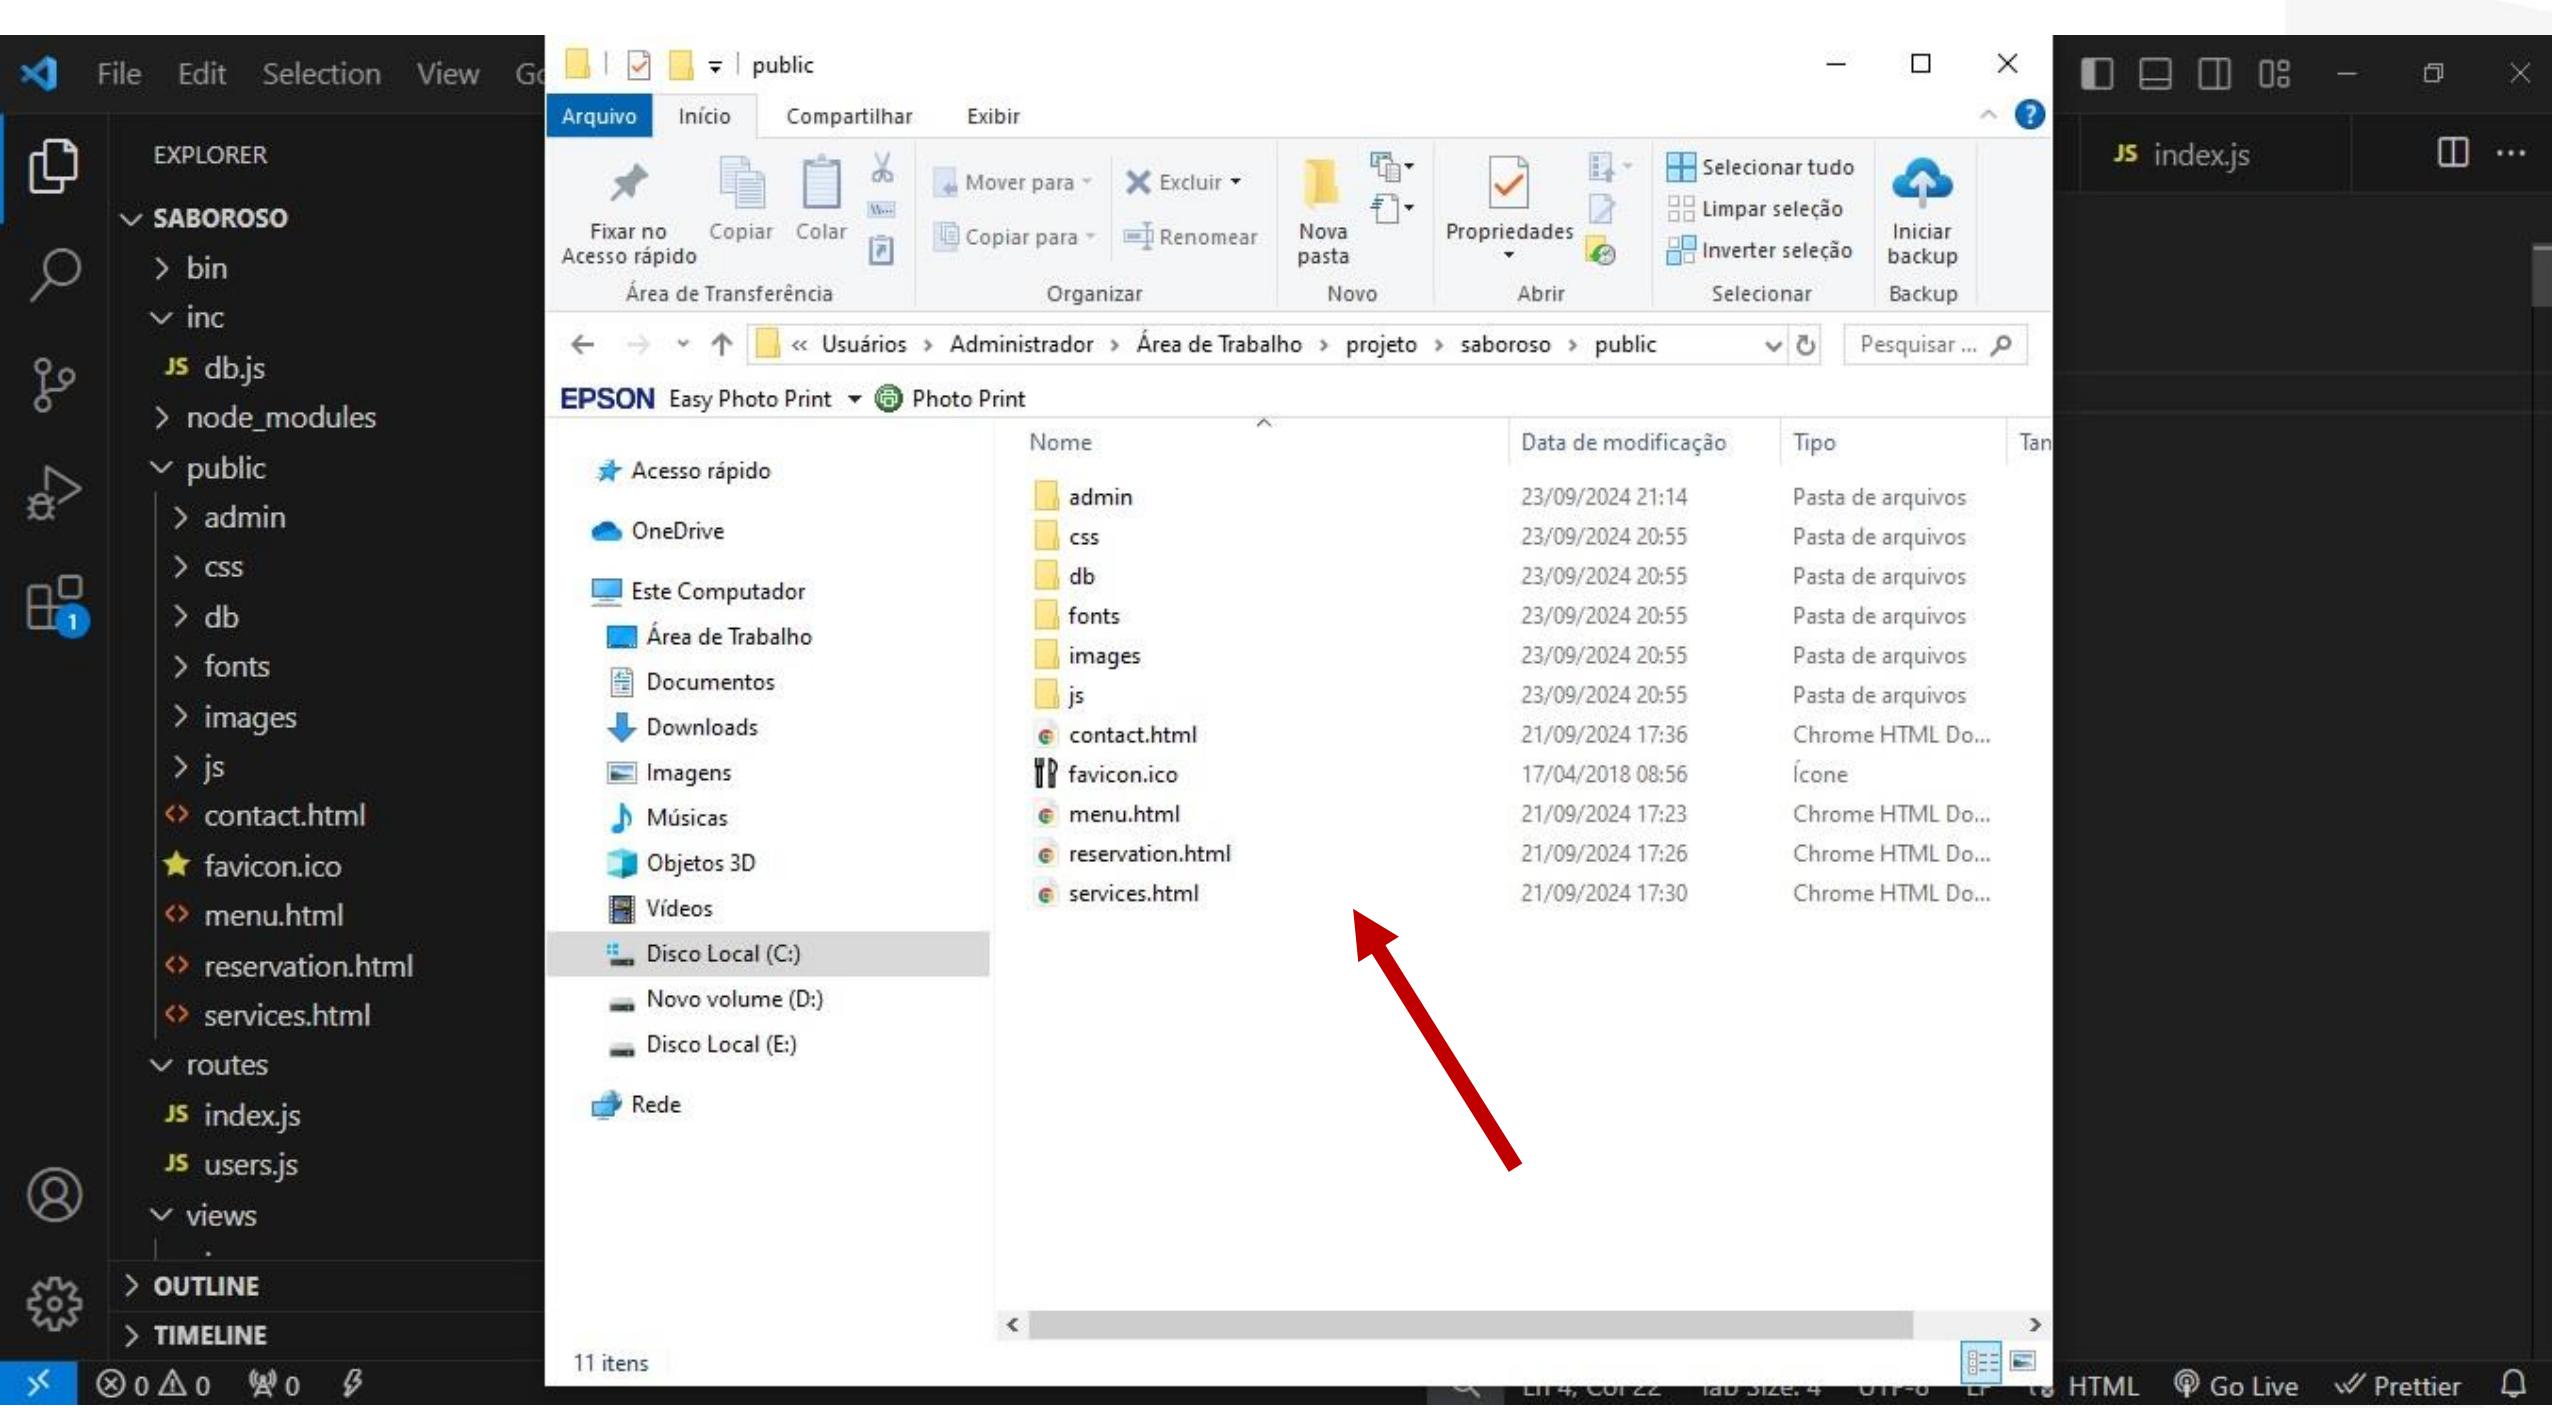


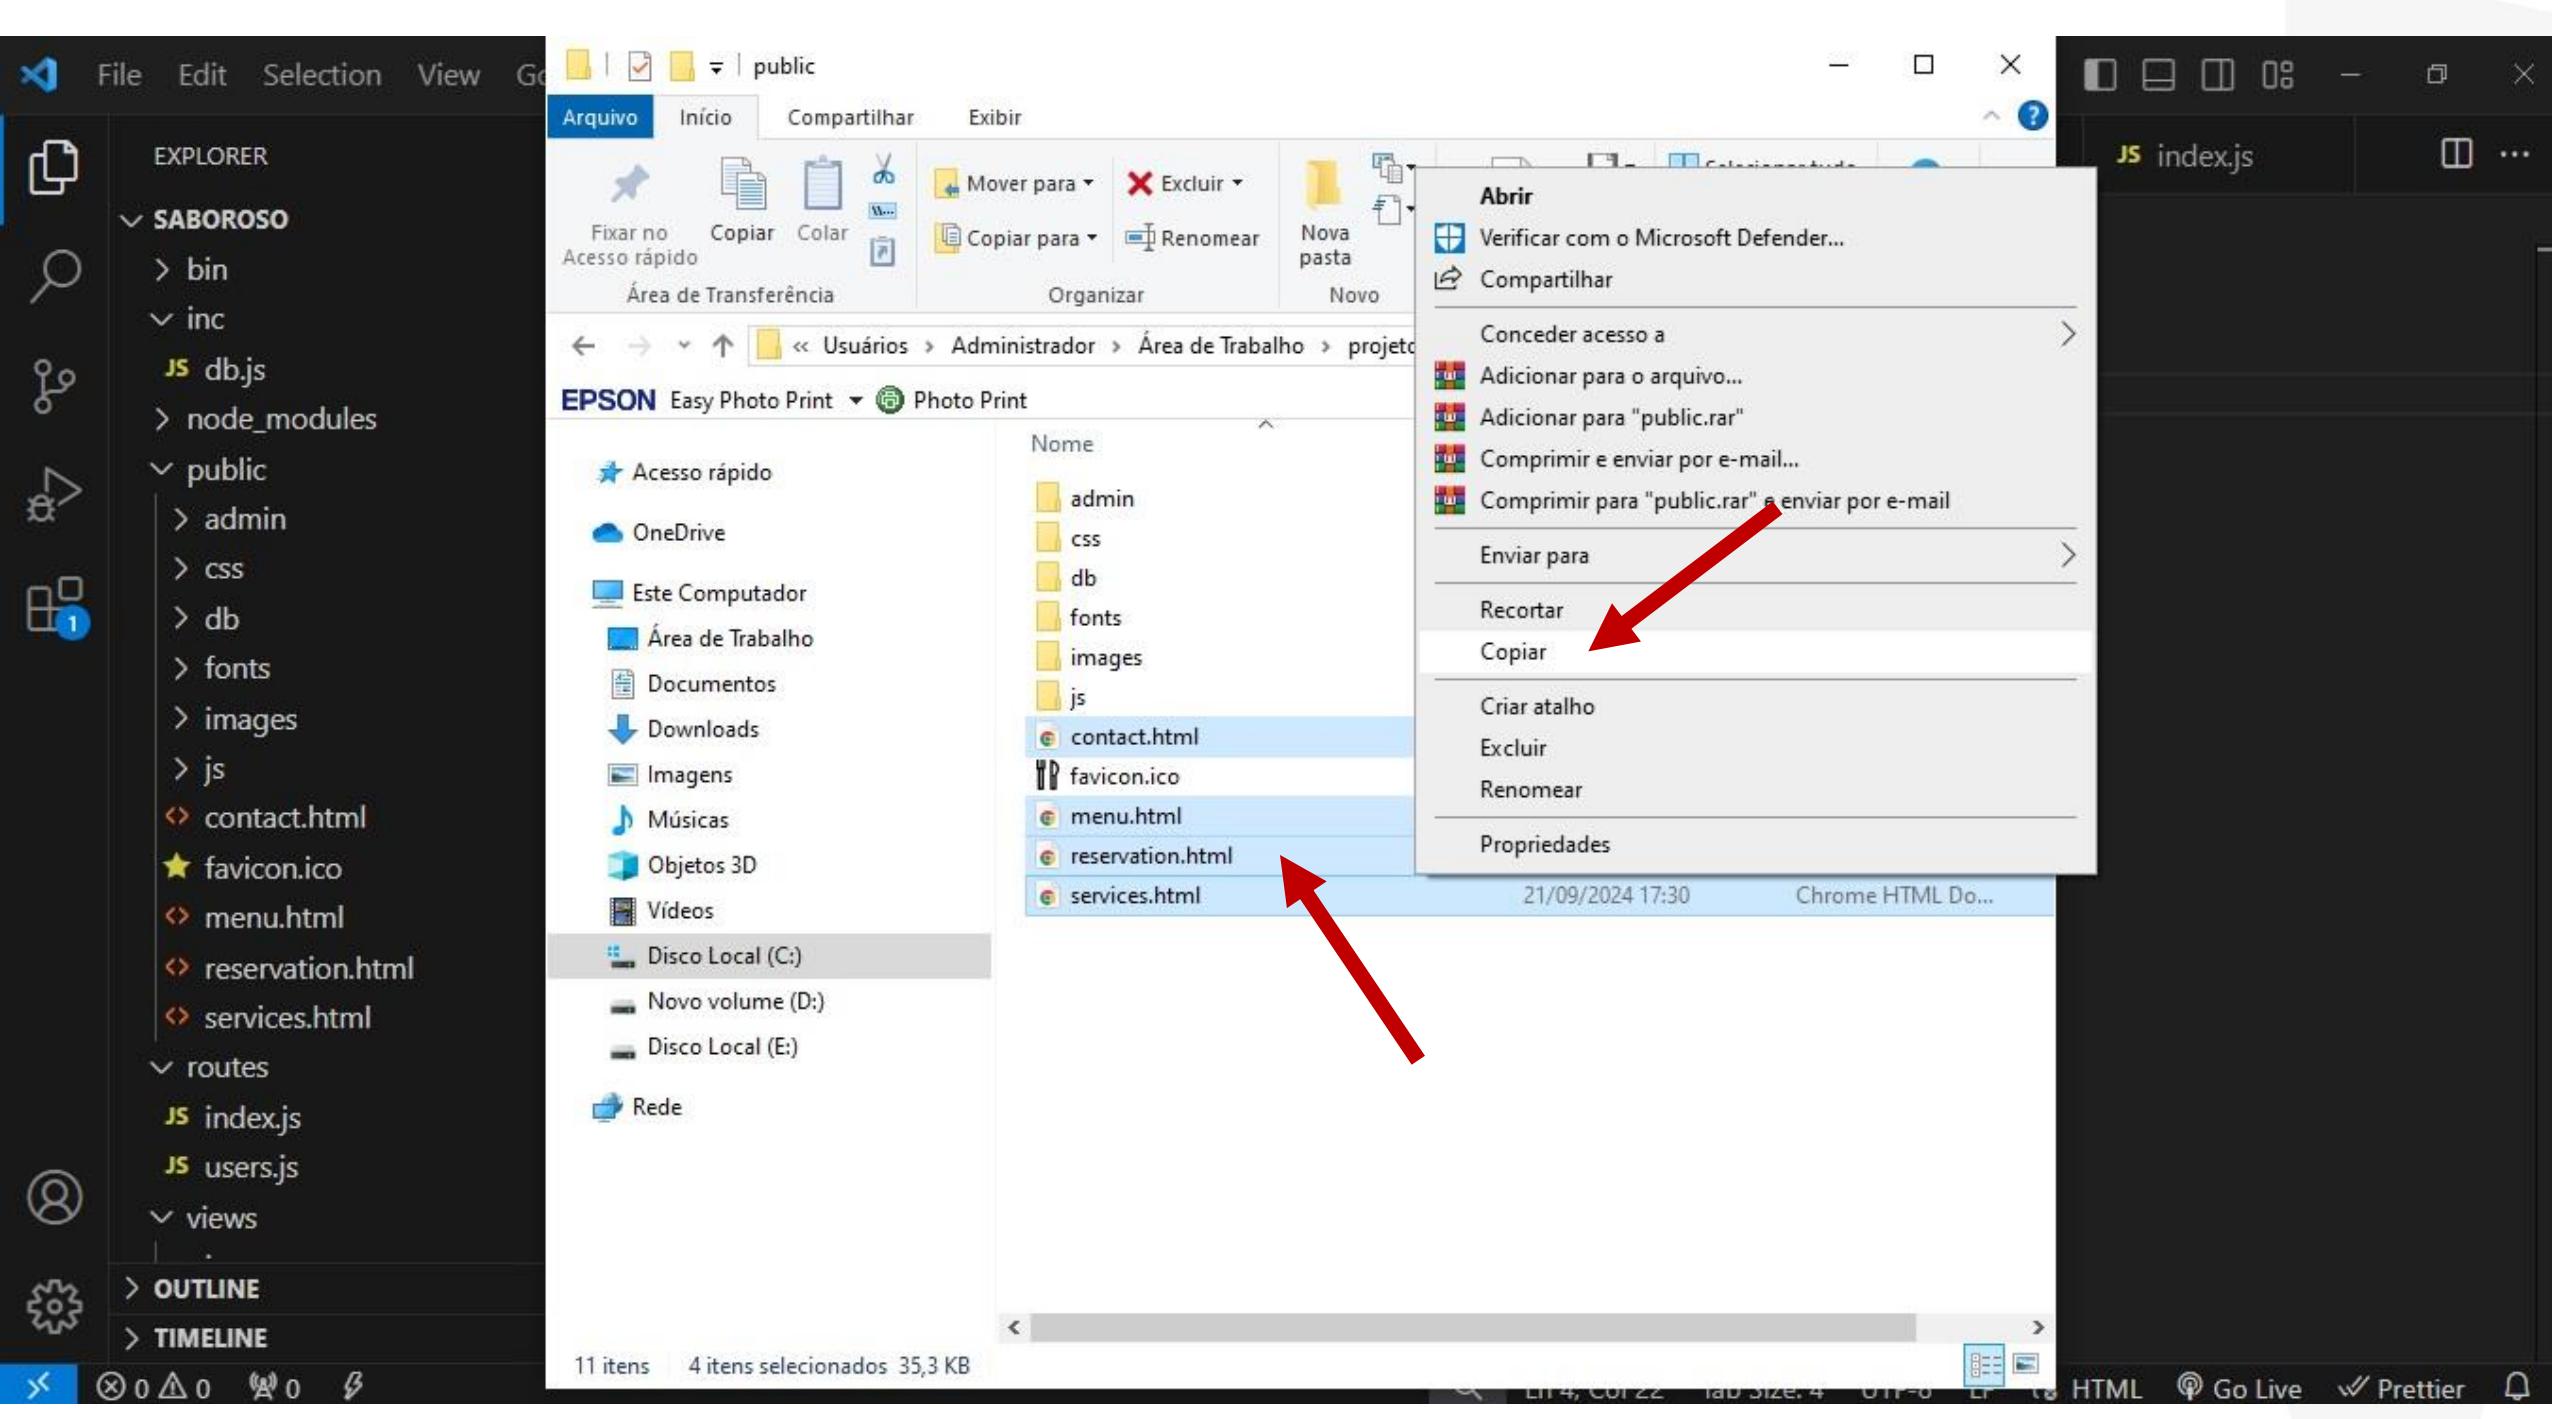

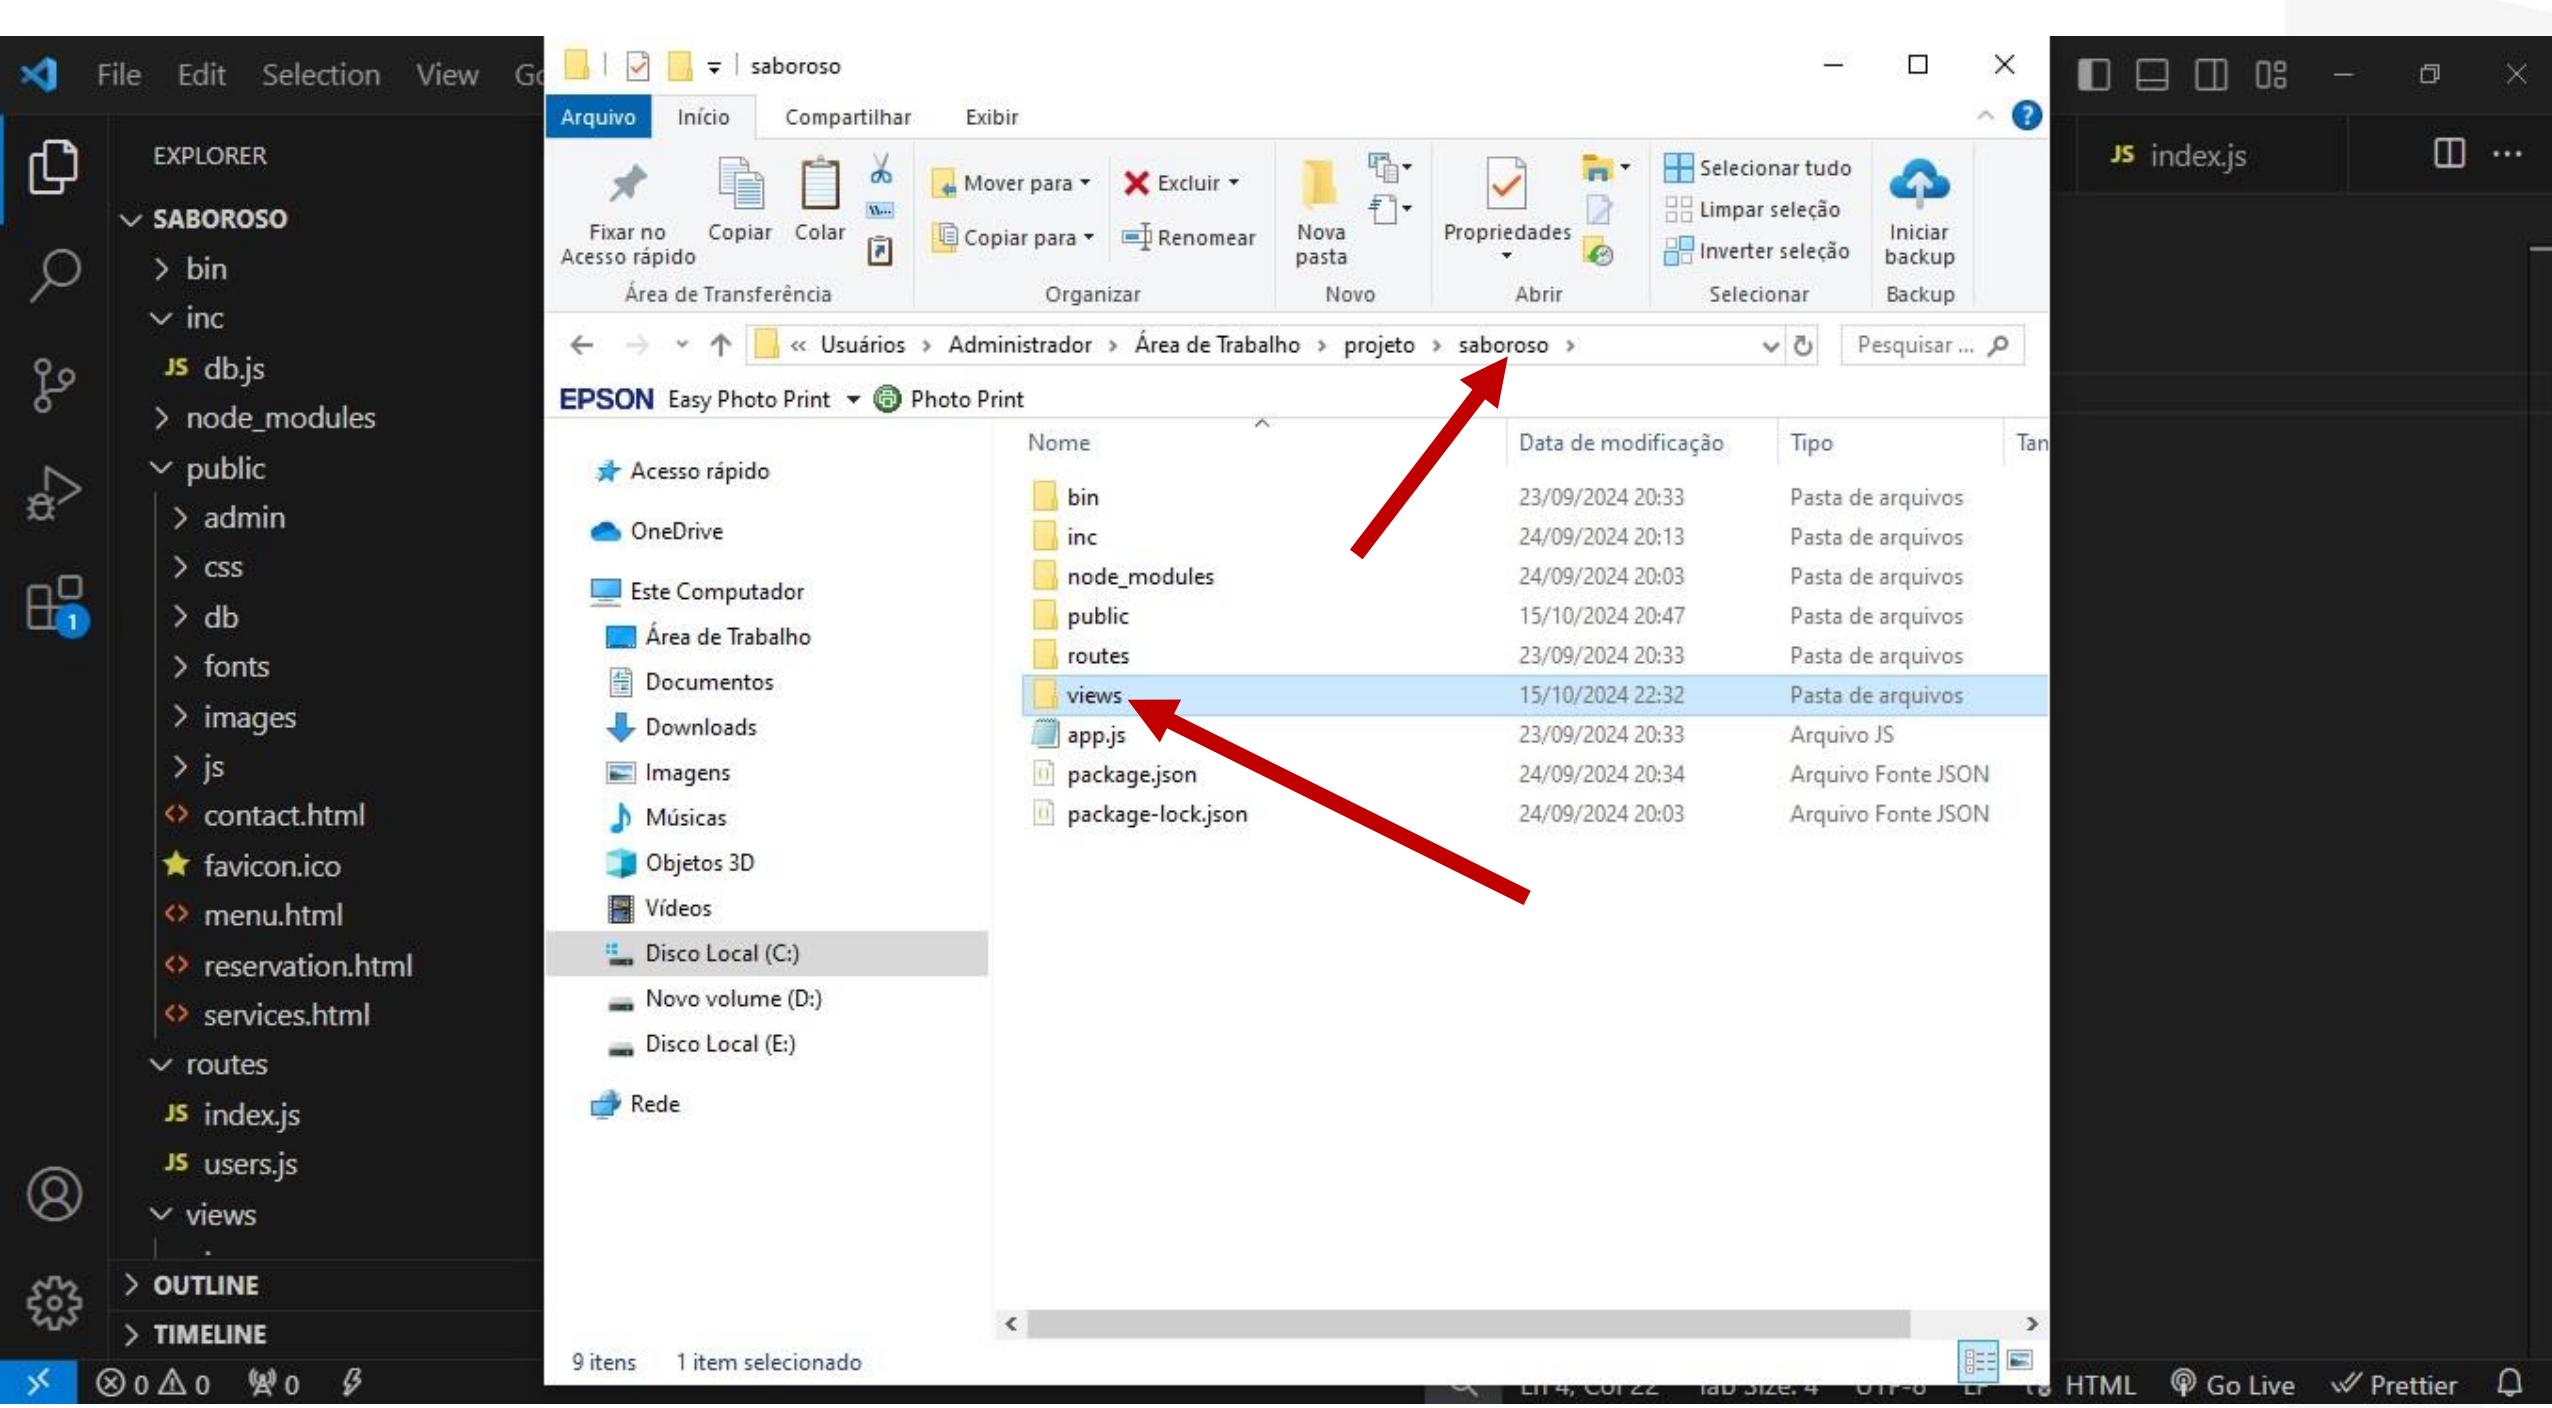

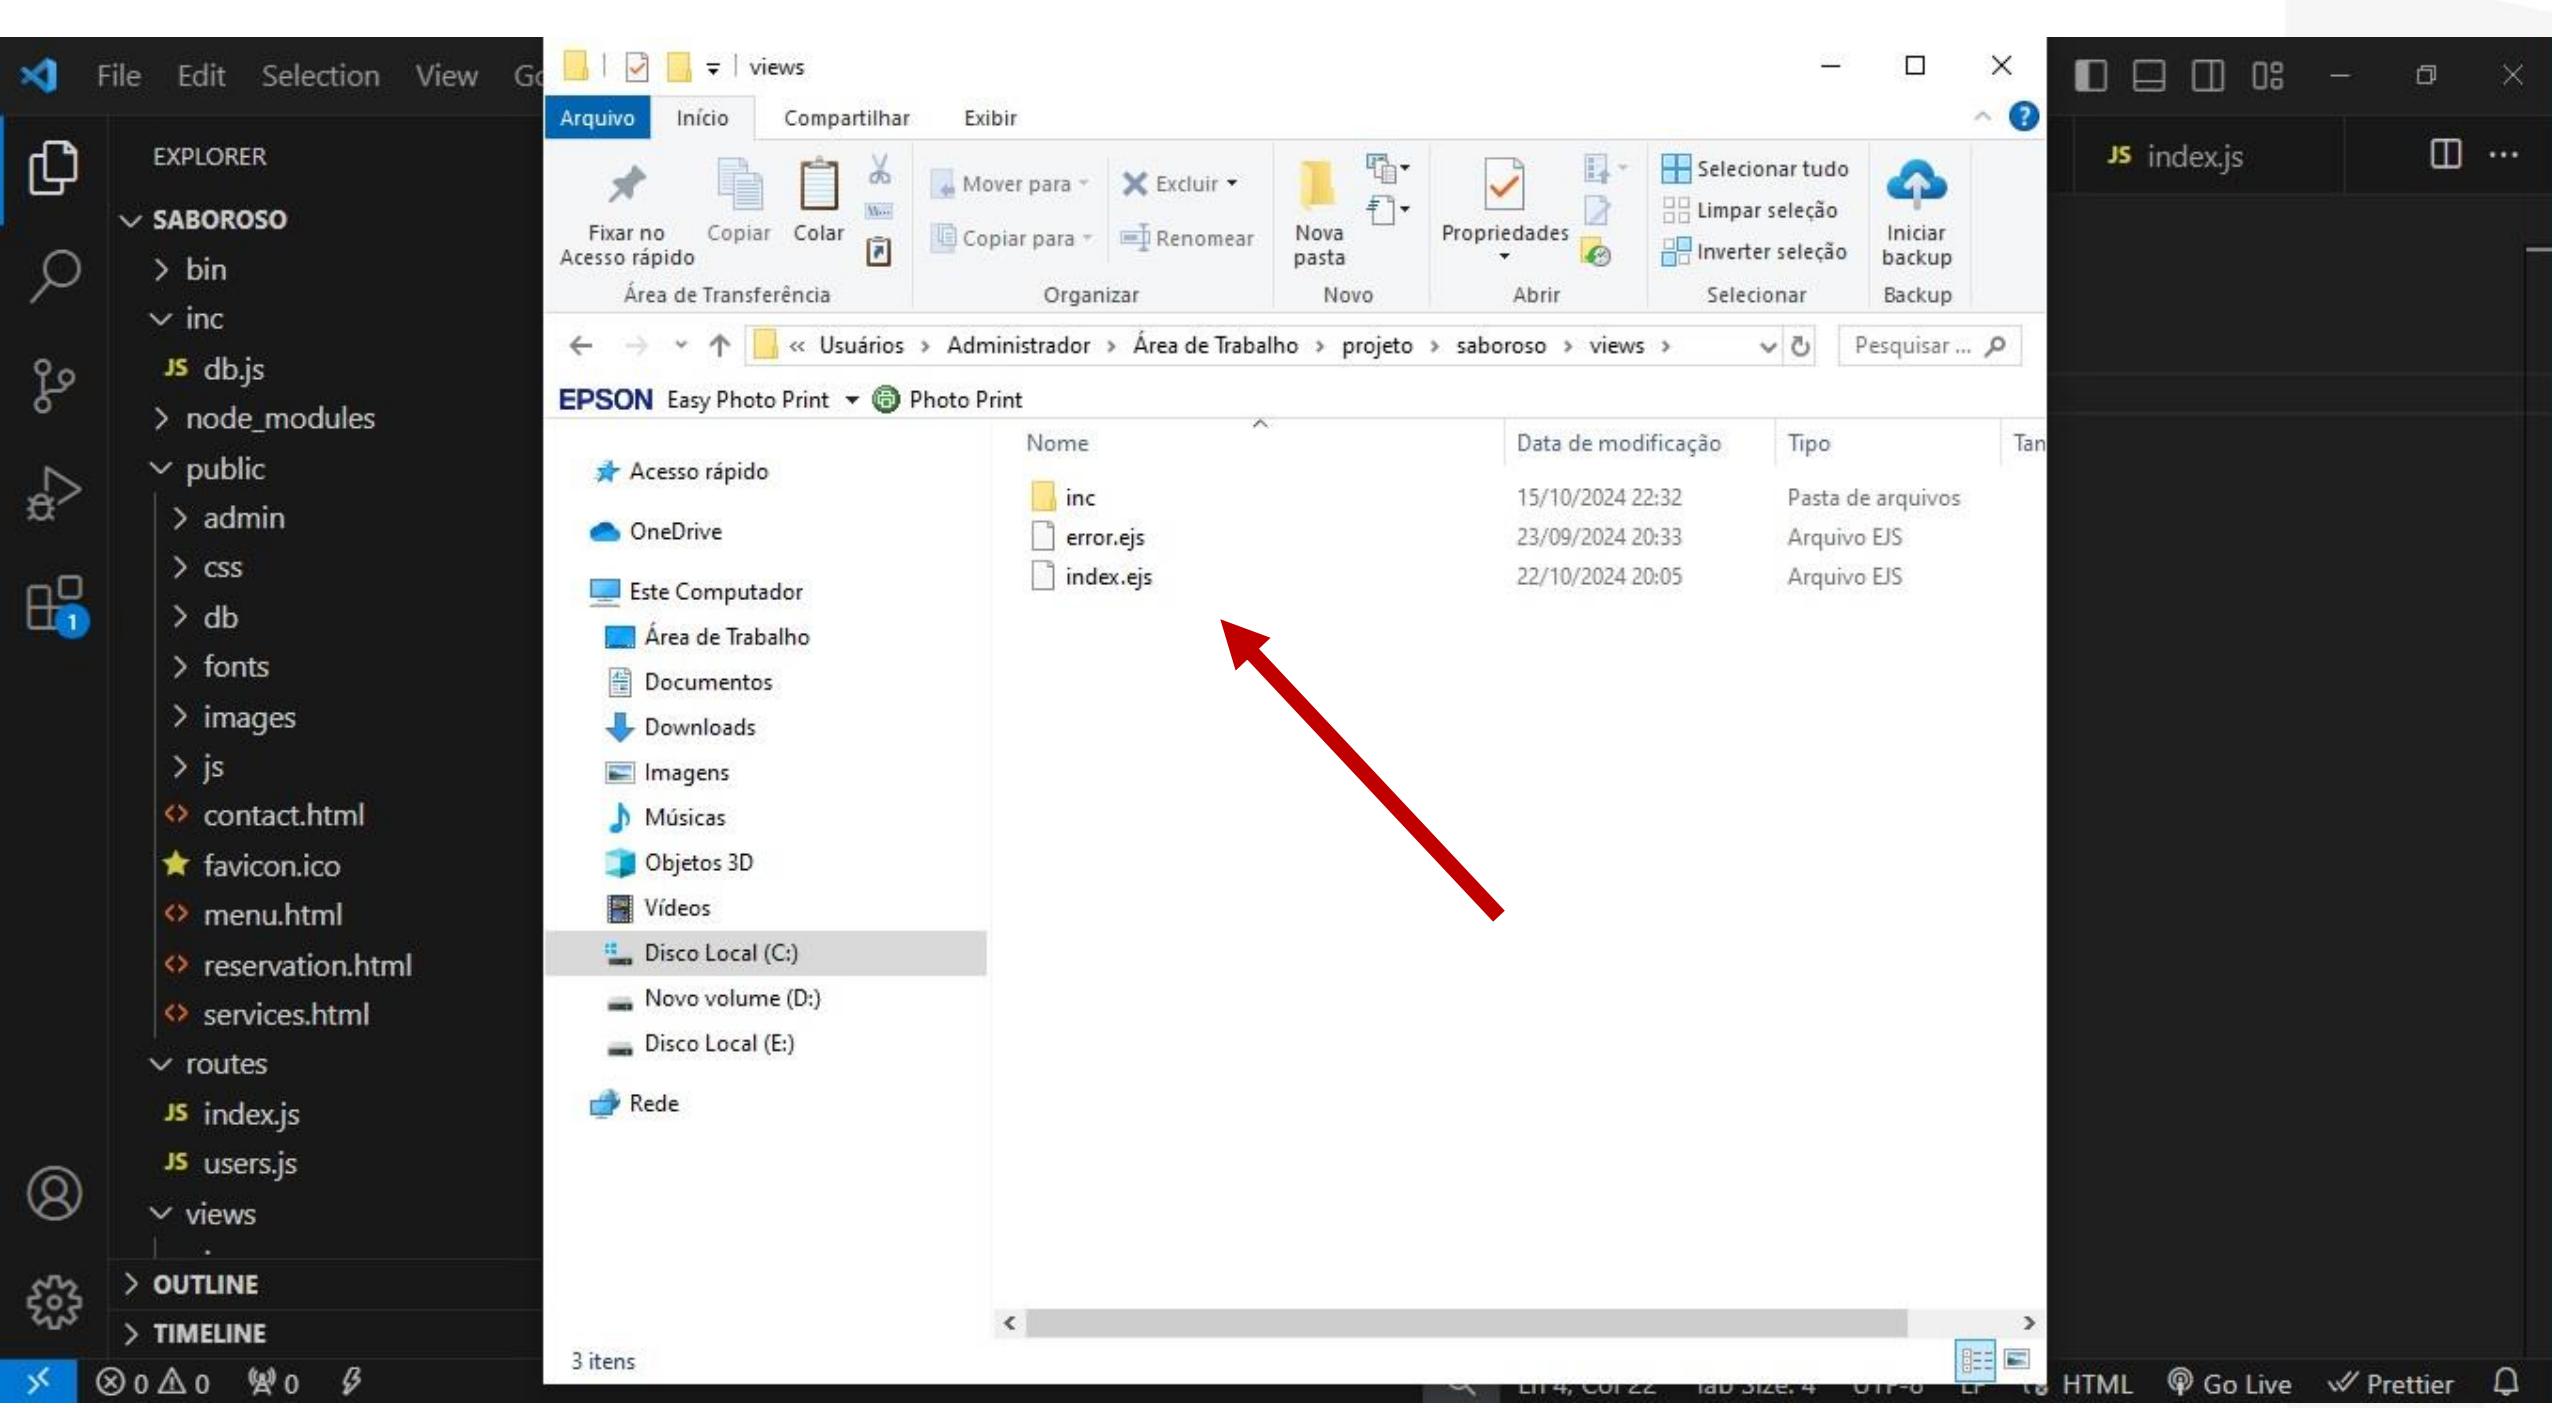

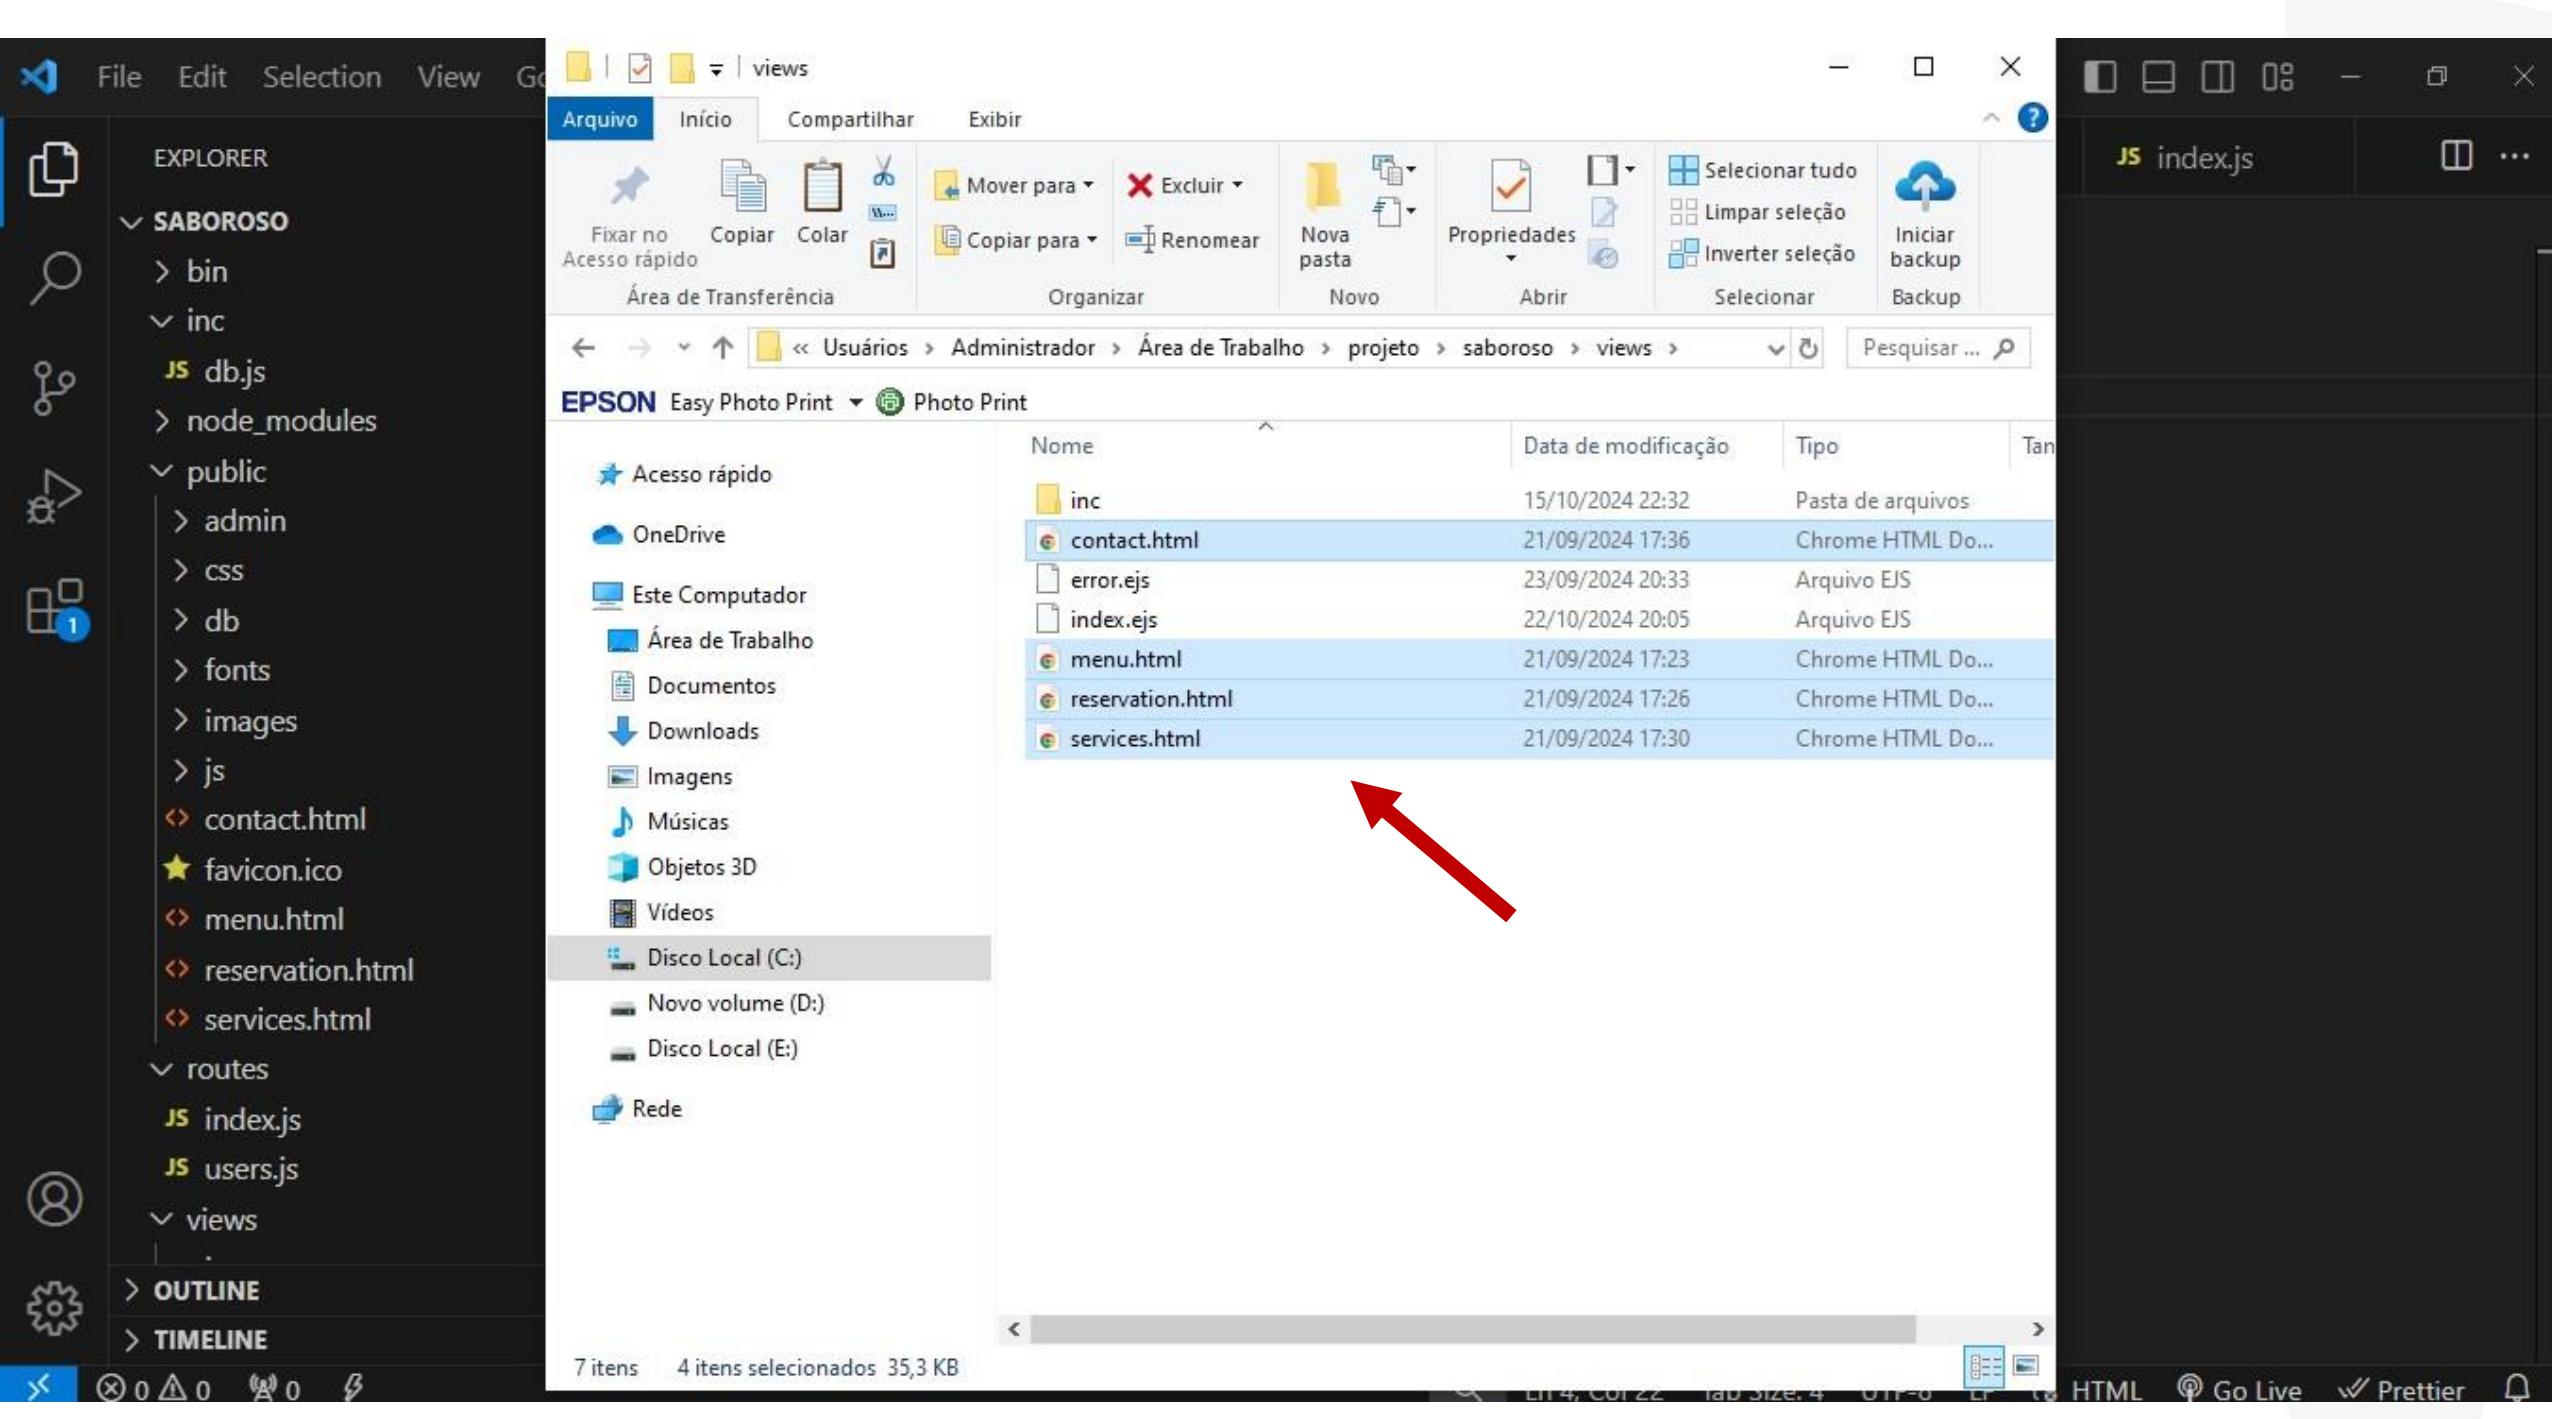

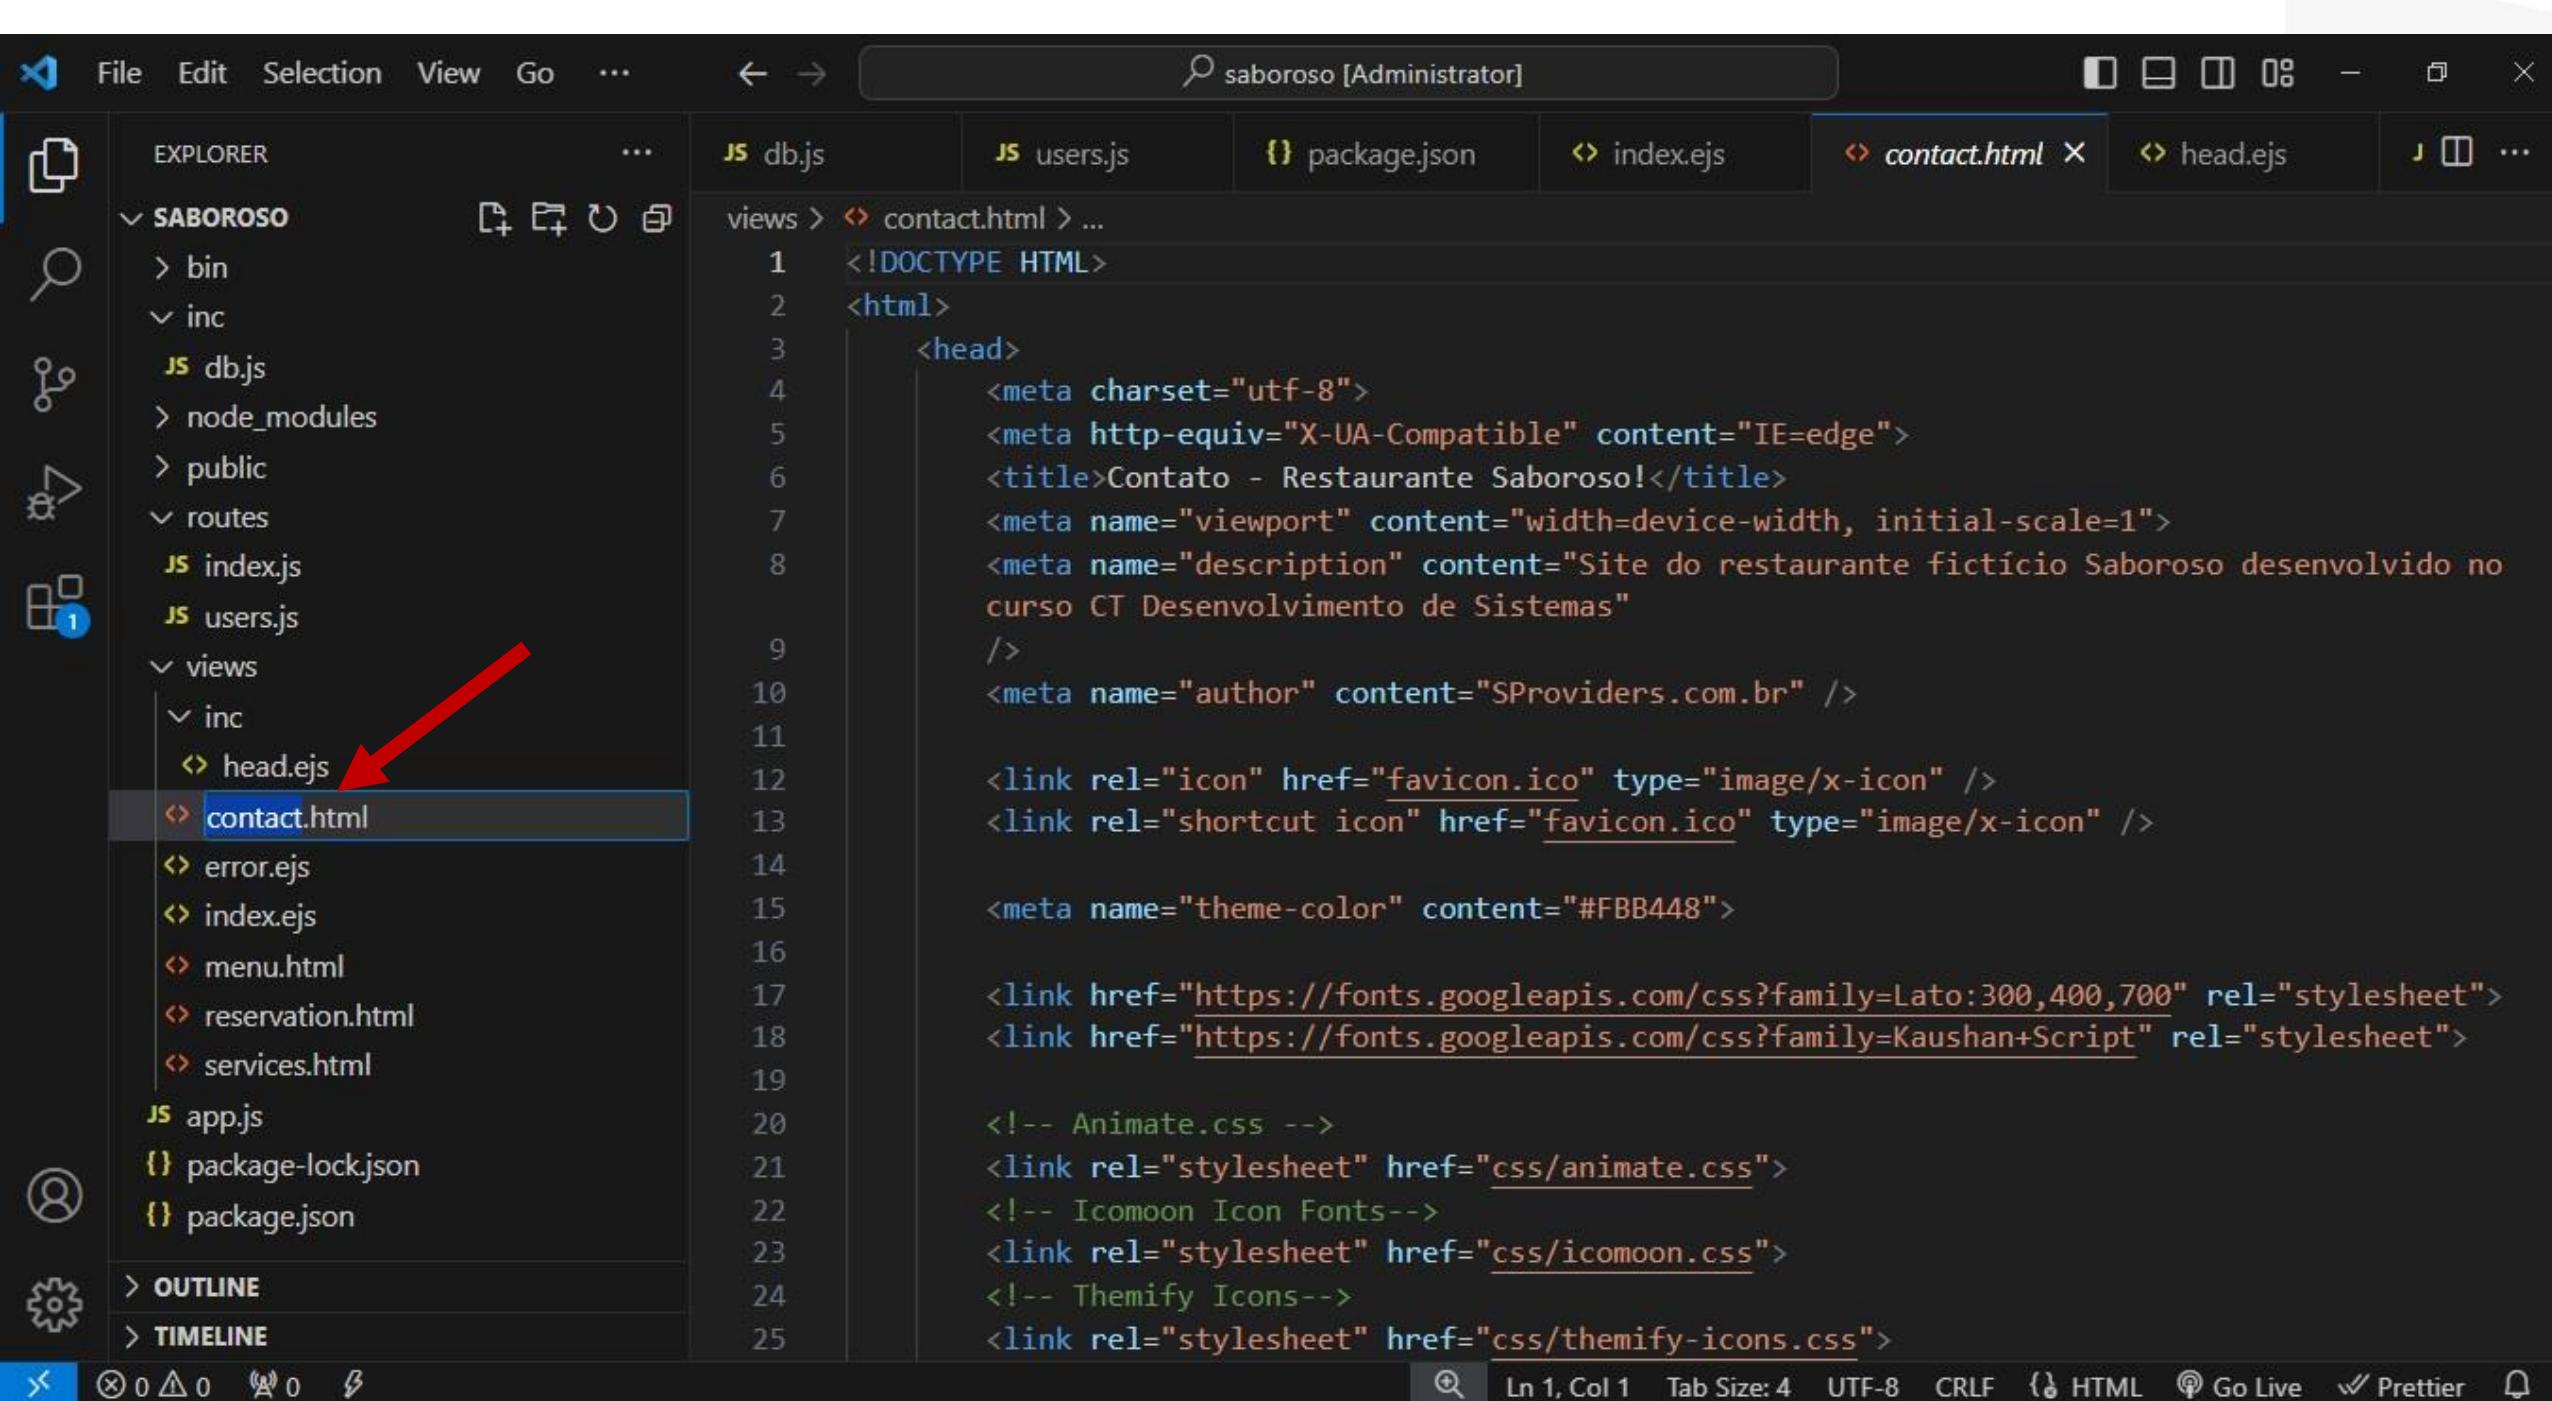

A screenshot of the Visual Studio Code (VS Code) interface. The Explorer sidebar on the left shows a file tree with a blue selection bar highlighting the 'views' folder under the 'SABOROSO' project. A red arrow points from the 'head.ejs' file in the Explorer to its corresponding tab in the top navigation bar. The top navigation bar also includes tabs for 'db.js', 'users.js', 'package.json', 'index.ejs', 'contact.ejs' (which is currently active), 'head.ejs', and '...'. The main editor area displays the 'contact.ejs' file content, which is an EJS template for a contact page. The status bar at the bottom shows various icons and text, including 'Ln 1, Col 1', 'Tab Size: 4', 'UTF-8', 'CRLF', 'HTML', 'Go Live', and 'Prettier'.

```
<!DOCTYPE HTML>
<html>
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <title>Contato - Restaurante Saboroso!</title>
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <meta name="description" content="Site do restaurante fictício Saboroso desenvolvido no curso CT Desenvolvimento de Sistemas">
  </head>
  <meta name="author" content="SProviders.com.br" />

  <link rel="icon" href="favicon.ico" type="image/x-icon" />
  <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />

  <meta name="theme-color" content="#FBB448">

  <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700" rel="stylesheet">
  <link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">

  <!-- Animate.css -->
  <link rel="stylesheet" href="css/animate.css">
  <!-- Icomoon Icon Fonts-->
  <link rel="stylesheet" href="css/icomoon.css">
  <!-- Themify Icons-->
  <link rel="stylesheet" href="css/themify-icons.css">
```

A screenshot of the Visual Studio Code (VS Code) interface. The top bar shows the title "saboroso [Administrator]" and standard window controls. The left sidebar contains icons for Explorer, Search, Open, Recent Files, and Settings. The main area displays a file named "menu.html" with the following content:

```
    charset="utf-8">
    <p-equiv="X-UA-Compatible" content="IE=edge">
    <title>Saboroso - Restaurante Saboroso!</title>
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <meta name="description" content="Site do restaurante fictício Saboroso desenvolvido no
    CT Desenvolvimento de Sistemas">
    <meta name="author" content="SProviders.com.br" />
    <link rel="icon" href="favicon.ico" type="image/x-icon" />
    <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />
    <meta name="theme-color" content="#FBB448">
    <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700" rel="stylesheet">
    <link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">
    <!-- Animate.css -->
    <link rel="stylesheet" href="css/animate.css">
    <!-- Icomoon Icon Fonts-->
    <link rel="stylesheet" href="css/icomoon.css">
    <!-- Themify Icons-->
    <link rel="stylesheet" href="css/themify-icons.css">
```

A context menu is open over the "menu.html" tab, listing options: "Open with Live Server" (Alt+L Alt+O), "Open to the Side" (Ctrl+Enter), "Open With..." (Shift+Alt+R), "Reveal in File Explorer", "Open in Integrated Terminal", "Select for Compare", "Open Timeline", "Cut" (Ctrl+X), "Copy" (Ctrl+C), "Copy Path" (Shift+Alt+C), "Copy Relative Path" (Ctrl+K Ctrl+Shift+C), "Rename..." (F2), and "Delete". The "Delete" option is highlighted with a red arrow pointing to it from the bottom-left.

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer Sidebar:** Shows the project structure under "SABOROSO".
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - head.ejs
 - contact.ejs
 - error.ejs
 - index.ejs
 - menu.ejs
 - reservation.html
 - services.html
 - app.js
 - package-lock.json
 - package.json
- Current File:** menu.ejs (highlighted with a red arrow)
- Code Editor:** Displays the content of the menu.ejs file.

```
<!DOCTYPE HTML>
<html>
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <title>Menu - Restaurante Saboroso!</title>
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <meta name="description" content="Site do restaurante fictício Saboroso desenvolvido no curso de CT Desenvolvimento de Sistemas">
  </head>
  <meta name="author" content="SProviders.com.br" />

  <link rel="icon" href="favicon.ico" type="image/x-icon" />
  <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />

  <meta name="theme-color" content="#FBB448">

  <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700" rel="stylesheet">
  <link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">

  <!-- Animate.css -->
  <link rel="stylesheet" href="css/animate.css">
  <!-- Icomoon Icon Fonts-->
  <link rel="stylesheet" href="css/icomoon.css">
  <!-- Themify Icons-->
  <link rel="stylesheet" href="css/themify-icons.css">
```
- Bottom Status Bar:** Ln 1, Col 1, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier

A screenshot of the Visual Studio Code interface. The top bar shows the title "saboroso [Administrator]" and standard window controls. On the left is the Explorer sidebar with a tree view of a project structure under "SABOROSO". The main area shows an HTML file "reservation.html" with some code. A context menu is open over the file, with the "Rename..." option highlighted by a red arrow. Other options in the menu include "Open with Live Server", "Open to the Side", "Open With...", "Reveal in File Explorer", "Open in Integrated Terminal", "Select for Compare", "Open Timeline", "Cut", "Copy", "Copy Path", "Copy Relative Path", and "Delete".

```
<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
<meta name="X-UA-Compatible" content="IE=edge">
<title>Restaurante Saboroso!</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<meta name="description" content="Site do restaurante ficticio Saboroso desenvolvido no ambiente de Sistemas">
<link rel="icon" href="favicon.ico" type="image/x-icon" />
<link rel="apple-touch-icon" href="favicon.ico" type="image/x-icon" />
<style>:color: #FBB448">
<link href="https://fonts.googleapis.com/css?family=Lato:300,400,700" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">
<!-- Animate.css -->
<link rel="stylesheet" href="css/animate.css">
<!-- Icomoon Icon Fonts-->
<link rel="stylesheet" href="css/icomoon.css">
<!-- Themify Icons-->
<link rel="stylesheet" href="css/themify-icons.css">
```

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚙️ 🔍 index.ejs 🔍 reservation.html ✎ head.ejs ⌂ ...

EXPLORER

SABOROSO

- bin
- inc
 - db.js
- node_modules
- public
- routes
 - index.js
 - users.js
- views
 - inc
 - head.ejs
 - contact.ejs
 - error.ejs
 - index.ejs
 - menu.ejs
 - reservation.html
 - services.html
- app.js
- package-lock.json
- package.json

OUTLINE

TIMELINE

Open with Live Server Alt+L Alt+O

Open to the Side Ctrl+Enter

Open With... Shift+Alt+R

Reveal in File Explorer

Open in Integrated Terminal

Select for Compare

Open Timeline

Cut Ctrl+X

Copy Ctrl+C

Copy Path Shift+Alt+C

Copy Relative Path Ctrl+K Ctrl+Shift+C

Rename... F2

Delete

Ln 1, Col 1 Tab Size: 4 UTF-8 CRLF ⌂ HTML ⌂ Go Live ⌂ Prettier

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Home, Refresh, Stop, Minimize, Maximize, Close.
- Left Sidebar (Explorer):**
 - SABOROSO folder:
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - head.ejs
 - contact.ejs
 - error.ejs
 - index.ejs
 - menu.ejs
 - reservation.ejs
 - services.html
 - app.js
 - package-lock.json
 - package.json
 - OUTLINE
 - TIMELINE
- Top Tabs:** db.js, users.js, package.json, index.ejs, reservation.ejs (highlighted), head.ejs
- Current View:** views > reservation.ejs
- Code Editor Content:**

```
1  <!DOCTYPE HTML>
2  <html>
3      <head>
4          <meta charset="utf-8">
5          <meta http-equiv="X-UA-Compatible" content="IE=edge">
6          <title>Contato - Restaurante Saboroso!</title>
7          <meta name="viewport" content="width=device-width, initial-scale=1">
8          <meta name="description" content="Site do restaurante fictício Saboroso desenvolvido no
9             curso CT Desenvolvimento de Sistemas"
10         />
11         <meta name="author" content="SProviders.com.br" />
12
13         <link rel="icon" href="favicon.ico" type="image/x-icon" />
14         <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />
15
16         <meta name="theme-color" content="#FBB448">
17
18         <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700" rel="stylesheet">
19         <link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">
20
21         <!-- Animate.css -->
22         <link rel="stylesheet" href="css/animate.css">
23         <!-- Icomoon Icon Fonts-->
24         <link rel="stylesheet" href="css/icomoon.css">
25         <!-- Themify Icons-->
26         <link rel="stylesheet" href="css/themify-icons.css">
```
- Bottom Status Bar:** Ln 1, Col 1, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier

The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer (Left):** Shows a tree view of the project structure under the folder "SABOROSO". Files listed include: bin, inc (db.js, index.js, users.js), routes (index.ejs, users.js), views (inc (head.ejs, contact.ejs, error.ejs, index.ejs, menu.ejs), reservation.ejs, services.html), and services.html.
- Editor Area (Right):** Displays the content of the "reservation.ejs" file, which is an EJS template for a restaurant website.
- Context Menu (Open with Command Palette):** A context menu is open over the "reservation.ejs" file, listing the following options:
 - Open with Live Server
 - Open to the Side
 - Open With...
 - Reveal in File Explorer
 - Open in Integrated Terminal
 - Select for Compare
 - Open Timeline
 - Cut (Ctrl+X)
 - Copy (Ctrl+C)
 - Copy Path (Shift+Alt+C)
 - Copy Relative Path (Ctrl+K Ctrl+Shift+C)
 - Rename...** (F2) — This option is highlighted with a red arrow.
 - Delete (Delete)
- Bottom Status Bar:** Shows the current file path (Ln 1, Col 1), tab size (Tab Size: 4), encoding (UTF-8), file type (HTML), and status indicators for Go Live and Prettier.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer:** Shows the project structure under 'SABOROSO'. The 'views' folder contains 'index.ejs', 'users.ejs', and 'services.ejs'. Other folders like 'bin', 'inc', 'public', and 'routes' also contain files.
- Editor:** The 'services.ejs' file is open. The code includes meta tags for charset, viewport, and theme-color, as well as links to Google Fonts for Lato and Kaushan+Script fonts.
- Status Bar:** Shows file count (0), line count (Ln 1, Col 1), tab size (Tab Size: 4), CRLF, HTML, Go Live, Prettier, and a status message 'Select End of Line Sequence'.

```
<!DOCTYPE HTML>
<html>
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <title>Serviços - Restaurante Saboroso!</title>
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <meta name="description" content="Site do restaurante fictício Saboroso desenvolvido no curso CT Desenvolvimento de Sistemas">
  </head>
  <meta name="author" content="SProviders.com.br" />

  <link rel="icon" href="favicon.ico" type="image/x-icon" />
  <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />

  <meta name="theme-color" content="#FBB448">

  <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700" rel="stylesheet">
  <link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">

  <!-- Animate.css -->
  <link rel="stylesheet" href="css/animate.css">
  <!-- Icomoon Icon Fonts-->
  <link rel="stylesheet" href="css/icomoon.css">
  <!-- Themify Icons-->
  <link rel="stylesheet" href="css/themify-icon
```

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS db.js JS users.js {} package.json ◊ index.ejs X ◊ services.ejs ◊ head.ejs JS ⚡

SABOROSO

bin

inc

JS db.js

node_modules

public

routes

JS index.js

JS users.js

views

inc

↳ head.ejs

↳ contact.ejs

↳ error.ejs

↳ index.ejs

↳ menu.ejs

↳ reservation.ejs

↳ services.ejs

JS app.js

{ } package-lock.json

{ } package.json

> OUTLINE

> TIMELINE

views > ◊ index.ejs > ↳ html > ↳ ?

```
1  <!DOCTYPE HTML>
2  <html>
3
4  <%- include("inc/head") -%>
5
6  <body>
7
8      <div class="gtco-loader"></div>
9
10     <div id="page">
11
12         <nav class="gtco-nav" role="navigation">
13             <div class="gtco-container">
14
15                 <div class="row">
16                     <div class="col-sm-4 col-xs-12">
17                         <div id="gtco-logo">
18                             <a href="index.html">Saboroso
19                             <em>!</em>
20                         </a>
21                     </div>
22                 </div>
23                 <div class="col-xs-8 text-right menu-1">
24                     <ul>
25                         <li>
26                             <a href="index.html">Home</a>
```

Ln 4, Col 1 (27 selected) Tab Size: 4 UTF-8 LF { } HTML ⚡ Go Live ✓ Prettier ⚡

A screenshot of the Visual Studio Code interface. The Explorer sidebar on the left shows a file tree for a project named 'SABOROSO'. The 'views' folder contains several files: 'head.ejs', 'contact.ejs', 'error.ejs', 'index.ejs', 'menu.ejs', 'reservation.ejs', 'services.ejs', 'app.js', 'package-lock.json', and 'package.json'. A red arrow points from the 'contact.ejs' file in the Explorer to its corresponding tab in the top bar. Another red arrow points from the 'head.ejs' file in the Explorer to its code in the main editor area. The Editor tab bar at the top includes tabs for 'db.js', 'users.js', 'package.json', 'index.ejs', 'contact.ejs', 'head.ejs', and '...'. The main editor area displays the content of the 'contact.ejs' file, which is an EJS template. The status bar at the bottom shows the current file is 'contact.ejs', line 3, column 1, with 1709 selected characters, and the file is saved in UTF-8.

```
<!DOCTYPE HTML>
<html>
  <head>...
  </head>
  <body>
    <div class="gtco-loader"></div>
    <div id="page">
      <nav class="gtco-nav" role="navigation">
        <div class="gtco-container">
          <div class="row">
            <div class="col-sm-4 col-xs-12">
              <div id="gtco-logo">
                <a href="index.html">Saboroso
                  <em>!</em>
                </a>
              </div>
            </div>
            <div class="col-xs-8 text-right menu-1">
              <ul>
                <li>
                  <a href="index.html">Home</a>
                </li>
              </ul>
            </div>
          </div>
        </div>
      </nav>
    </div>
  </body>
</html>
```

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar (Explorer) lists the project structure under the "SABOROSO" folder, including files like db.js, users.js, package.json, index.ejs, head.ejs, contact.ejs, error.ejs, index.ejs, menu.ejs, reservation.ejs, services.ejs, app.js, package-lock.json, and package.json. The "contact.ejs" file is currently selected and open in the main editor area. The code in the editor is an EJS template:

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>

    <div class="gtco-loader"></div>

    <div id="page">

      <nav class="gtco-nav" role="navigation">
        <div class="gtco-container">

          <div class="row">
            <div class="col-sm-4 col-xs-12">
              <div id="gtco-logo">
                <a href="index.html">Saboroso
                  <em>!</em>
                </a>
              </div>
            </div>
            <div class="col-xs-8 text-right menu-1">
              <ul>
                <li>
                  <a href="index.html">Home</a>
                </li>
              </ul>
            </div>
          </div>
        </div>
      </nav>
    </div>
  </body>
</html>
```

A red arrow points to the line containing the EJS include directive: `<%- include("inc/head") -%>`.

A screenshot of the Visual Studio Code (VS Code) interface. The top navigation bar includes File, Edit, Selection, View, Go, and other standard options. The title bar shows "saboroso [Administrator]". The Explorer sidebar on the left lists the project structure under "SABOROSO", with "menu.ejs" highlighted by a blue selection bar and a red arrow pointing to it. The main editor area displays the content of "menu.ejs", which is an EJS template for a menu page. The code includes meta tags for compatibility, a title, and links to external CSS files from Google Fonts.

```
<!DOCTYPE HTML>
<html>
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <title>Menu - Restaurante Saboroso!</title>
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <meta name="description" content="Site do restaurante fictício Saboroso desenvolvido no curso de CT Desenvolvimento de Sistemas">
    <meta name="author" content="SProviders.com.br" />

    <link rel="icon" href="favicon.ico" type="image/x-icon" />
    <link rel="shortcut icon" href="favicon.ico" type="image/x-icon" />

    <meta name="theme-color" content="#FBB448">

    <link href="https://fonts.googleapis.com/css?family=Lato:300,400,700" rel="stylesheet">
    <link href="https://fonts.googleapis.com/css?family=Kaushan+Script" rel="stylesheet">

    <!-- Animate.css -->
    <link rel="stylesheet" href="css/animate.css">
    <!-- Icomoon Icon Fonts-->
    <link rel="stylesheet" href="css/icomoon.css">
    <!-- Themify Icons-->
    <link rel="stylesheet" href="css/themify-icons.css">
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Back, Forward, Find, Replace, Save, etc.
- Explorer:** Shows the project structure under "SABOROSO". The "views" folder contains "inc" and "menu.ejs", which is currently selected and highlighted in blue.
- Code Editor:** Displays the "menu.ejs" file content:

```
<!DOCTYPE HTML>
<html>
  <head>...
  </head>
  <body>
    <div class="gtco-loader"></div>
    <div id="page">
      <nav class="gtco-nav" role="navigation">
        <div class="gtco-container">
          <div class="row">
            <div class="col-sm-4 col-xs-12">
              <div id="gtco-logo">
                <a href="index.html">Saboroso
                  <em>!</em>
                </a>
              </div>
            </div>
            <div class="col-xs-8 text-right menu-1">
              <ul>
                <li>
                  <a href="index.html">Home</a>
                </li>
              </ul>
            </div>
          </div>
        </div>
      </nav>
    </body>
  </html>
```
- Status Bar:** Ln 3, Col 1 (1709 selected) Tab Size: 4 UTF-8 CRLF { HTML Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar (Explorer) lists the project structure under the "SABOROSO" folder, including files like db.js, users.js, package.json, index.ejs, contact.ejs, menu.ejs, and reservation.ejs. The "menu.ejs" file is currently selected and open in the main editor area. The code in the editor is:

```
1  <!DOCTYPE HTML>
2  <html>
3  |   <%- include("inc/head") -%>
4  |   <body>
5
6      <div class="gtco-loader"></div>
7
8      <div id="page">
9
10
11     <nav class="gtco-nav" role="navigation">
12         <div class="gtco-container">
13
14             <div class="row">
15                 <div class="col-sm-4 col-xs-12">
16                     <div id="gtco-logo">
17                         <a href="index.html">Saboroso
18                             <em>!</em>
19                         </a>
20                     </div>
21                 </div>
22                 <div class="col-xs-8 text-right menu-1">
23                     <ul>
24                         <li>
25                             <a href="index.html">Home</a>
26                         </li>

```

A red arrow points to the line containing the EJS include directive: `<%- include("inc/head") -%>`.

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS users.js {} package.json < index.ejs < contact.ejs < menu.ejs < reservation.ejs ⚡ ...

SABOROSO

- > bin
- ✓ inc
- JS db.js
- > node_modules
- > public
- ✓ routes
- JS index.js
- JS users.js

views

- ✓ inc
 - ↳ head.ejs
 - ↳ contact.ejs
 - ↳ error.ejs
 - ↳ index.ejs
 - ↳ menu.ejs
 - ↳ reservation.ejs
- ↳ services.ejs

JS app.js

{ package-lock.json

{ package.json


> OUTLINE

> TIMELINE

Ln 3, Col 1 (1741 selected) Tab Size: 4 CRLF { HTML ⚡ Go Live ✓ Prettier ⚡

views > < reservation.ejs > html

```
1  <!DOCTYPE HTML>
2  <html>
3  >   <head>...
49  >   </head>
50   <body>
51
52     <div class="gtco-loader"></div>
53
54     <div id="page">
55
56
57       <nav class="gtco-nav" role="navigation">
58         <div class="gtco-container">
59
60           <div class="row">
61             <div class="col-sm-4 col-xs-12">
62               <div id="gtco-logo">
63                 <a href="#">Saboroso
64                   <em>!</em>
65                 </a>
66               </div>
67             </div>
68             <div class="col-xs-8 text-right menu-1">
69               <ul>
70                 <li>
71                   <a href="#">Home</a>
```

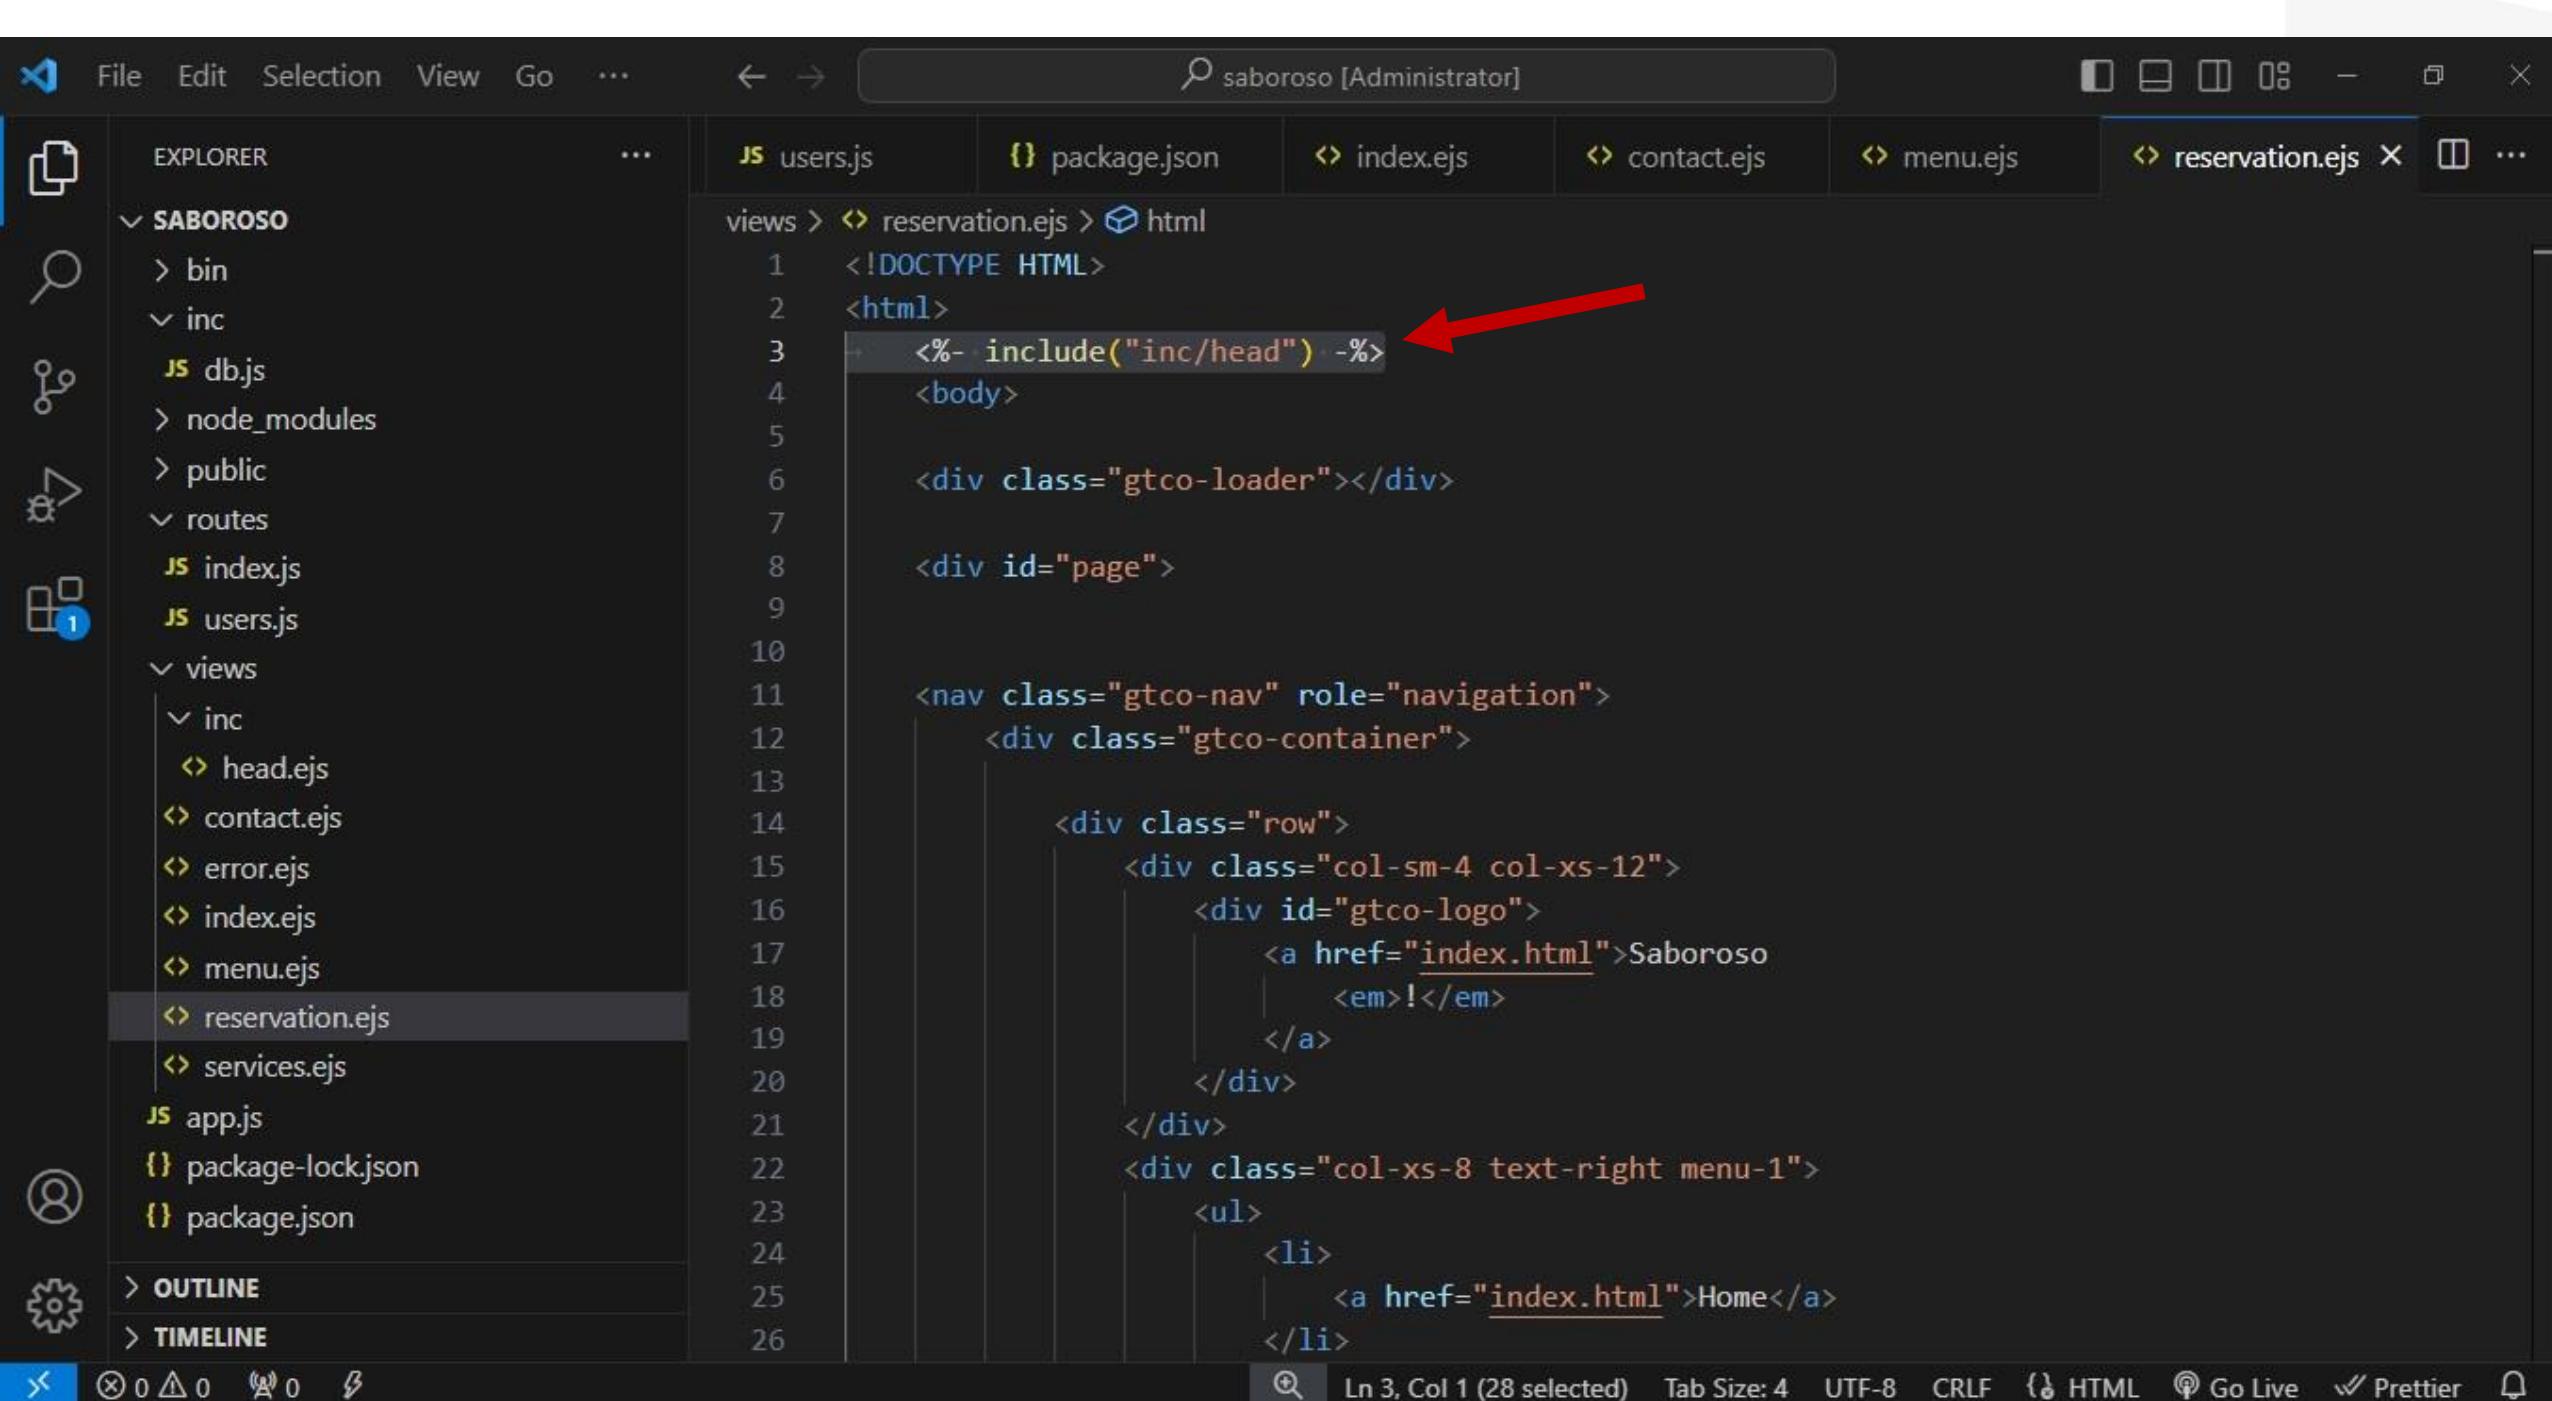

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

- > bin
- ✓ inc
- JS db.js
- > node_modules
- > public
- ✓ routes
- JS index.js
- JS users.js
- ✓ views
- ✓ inc
- ↳ head.ejs
- ↳ contact.ejs
- ↳ error.ejs
- ↳ index.ejs
- ↳ menu.ejs
- ↳ reservation.ejs
- ↳ services.ejs

views > ↳ services.ejs > ↳ html

```
1  <!DOCTYPE HTML>
2  <html>
3  >   <head>...
49  >   </head>
50   <body>
51
52     <div class="gtco-loader"></div>
53
54     <div id="page">
55
56
57       <nav class="gtco-nav" role="navigation">
58         <div class="gtco-container">
59
60           <div class="row">
61             <div class="col-sm-4 col-xs-12">
62               <div id="gtco-logo">
63                 <a href="index.html">Saboroso
64                   <em>!</em>
65                 </a>
66               </div>
67             </div>
68           <div class="col-xs-8 text-right menu-1">
69             <ul>
70               <li>
71                 <a href="index.html">Home</a>
```

Ln 3, Col 1 (1710 selected) Tab Size: 4 UTF-8 CRLF HTML Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the window title "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the "SABOROSO" folder, including files like package.json, index.ejs, contact.ejs, menu.ejs, reservation.ejs, services.ejs, app.js, package-lock.json, and package.json. The "services.ejs" file is currently selected and open in the main editor area. The code in the editor is:

```
<!DOCTYPE HTML>
<%- include("inc/head") -%>
<body>

<div class="gtco-loader"></div>


<div id="page">

<nav class="gtco-nav" role="navigation">
  <div class="gtco-container">

    <div class="row">
      <div class="col-sm-4 col-xs-12">
        <div id="gtco-logo">
          <a href="index.html">Saboroso
          |   <em>!</em>
          |   </a>
        </div>
      </div>
    </div>
    <div class="col-xs-8 text-right menu-1">
      <ul>
        <li>
          <a href="index.html">Home</a>
        </li>
        <li>
      </ul>
    </div>
  </div>
</nav>
```

A red arrow points to the line containing the EJS include directive: `<%- include("inc/head") -%>`.

The status bar at the bottom shows the current file is "Ln 2, Col 5 (27 selected)", the tab size is 4, and the encoding is UTF-8. Other icons in the status bar include CRLF, HTML, Go Live, and Prettier.

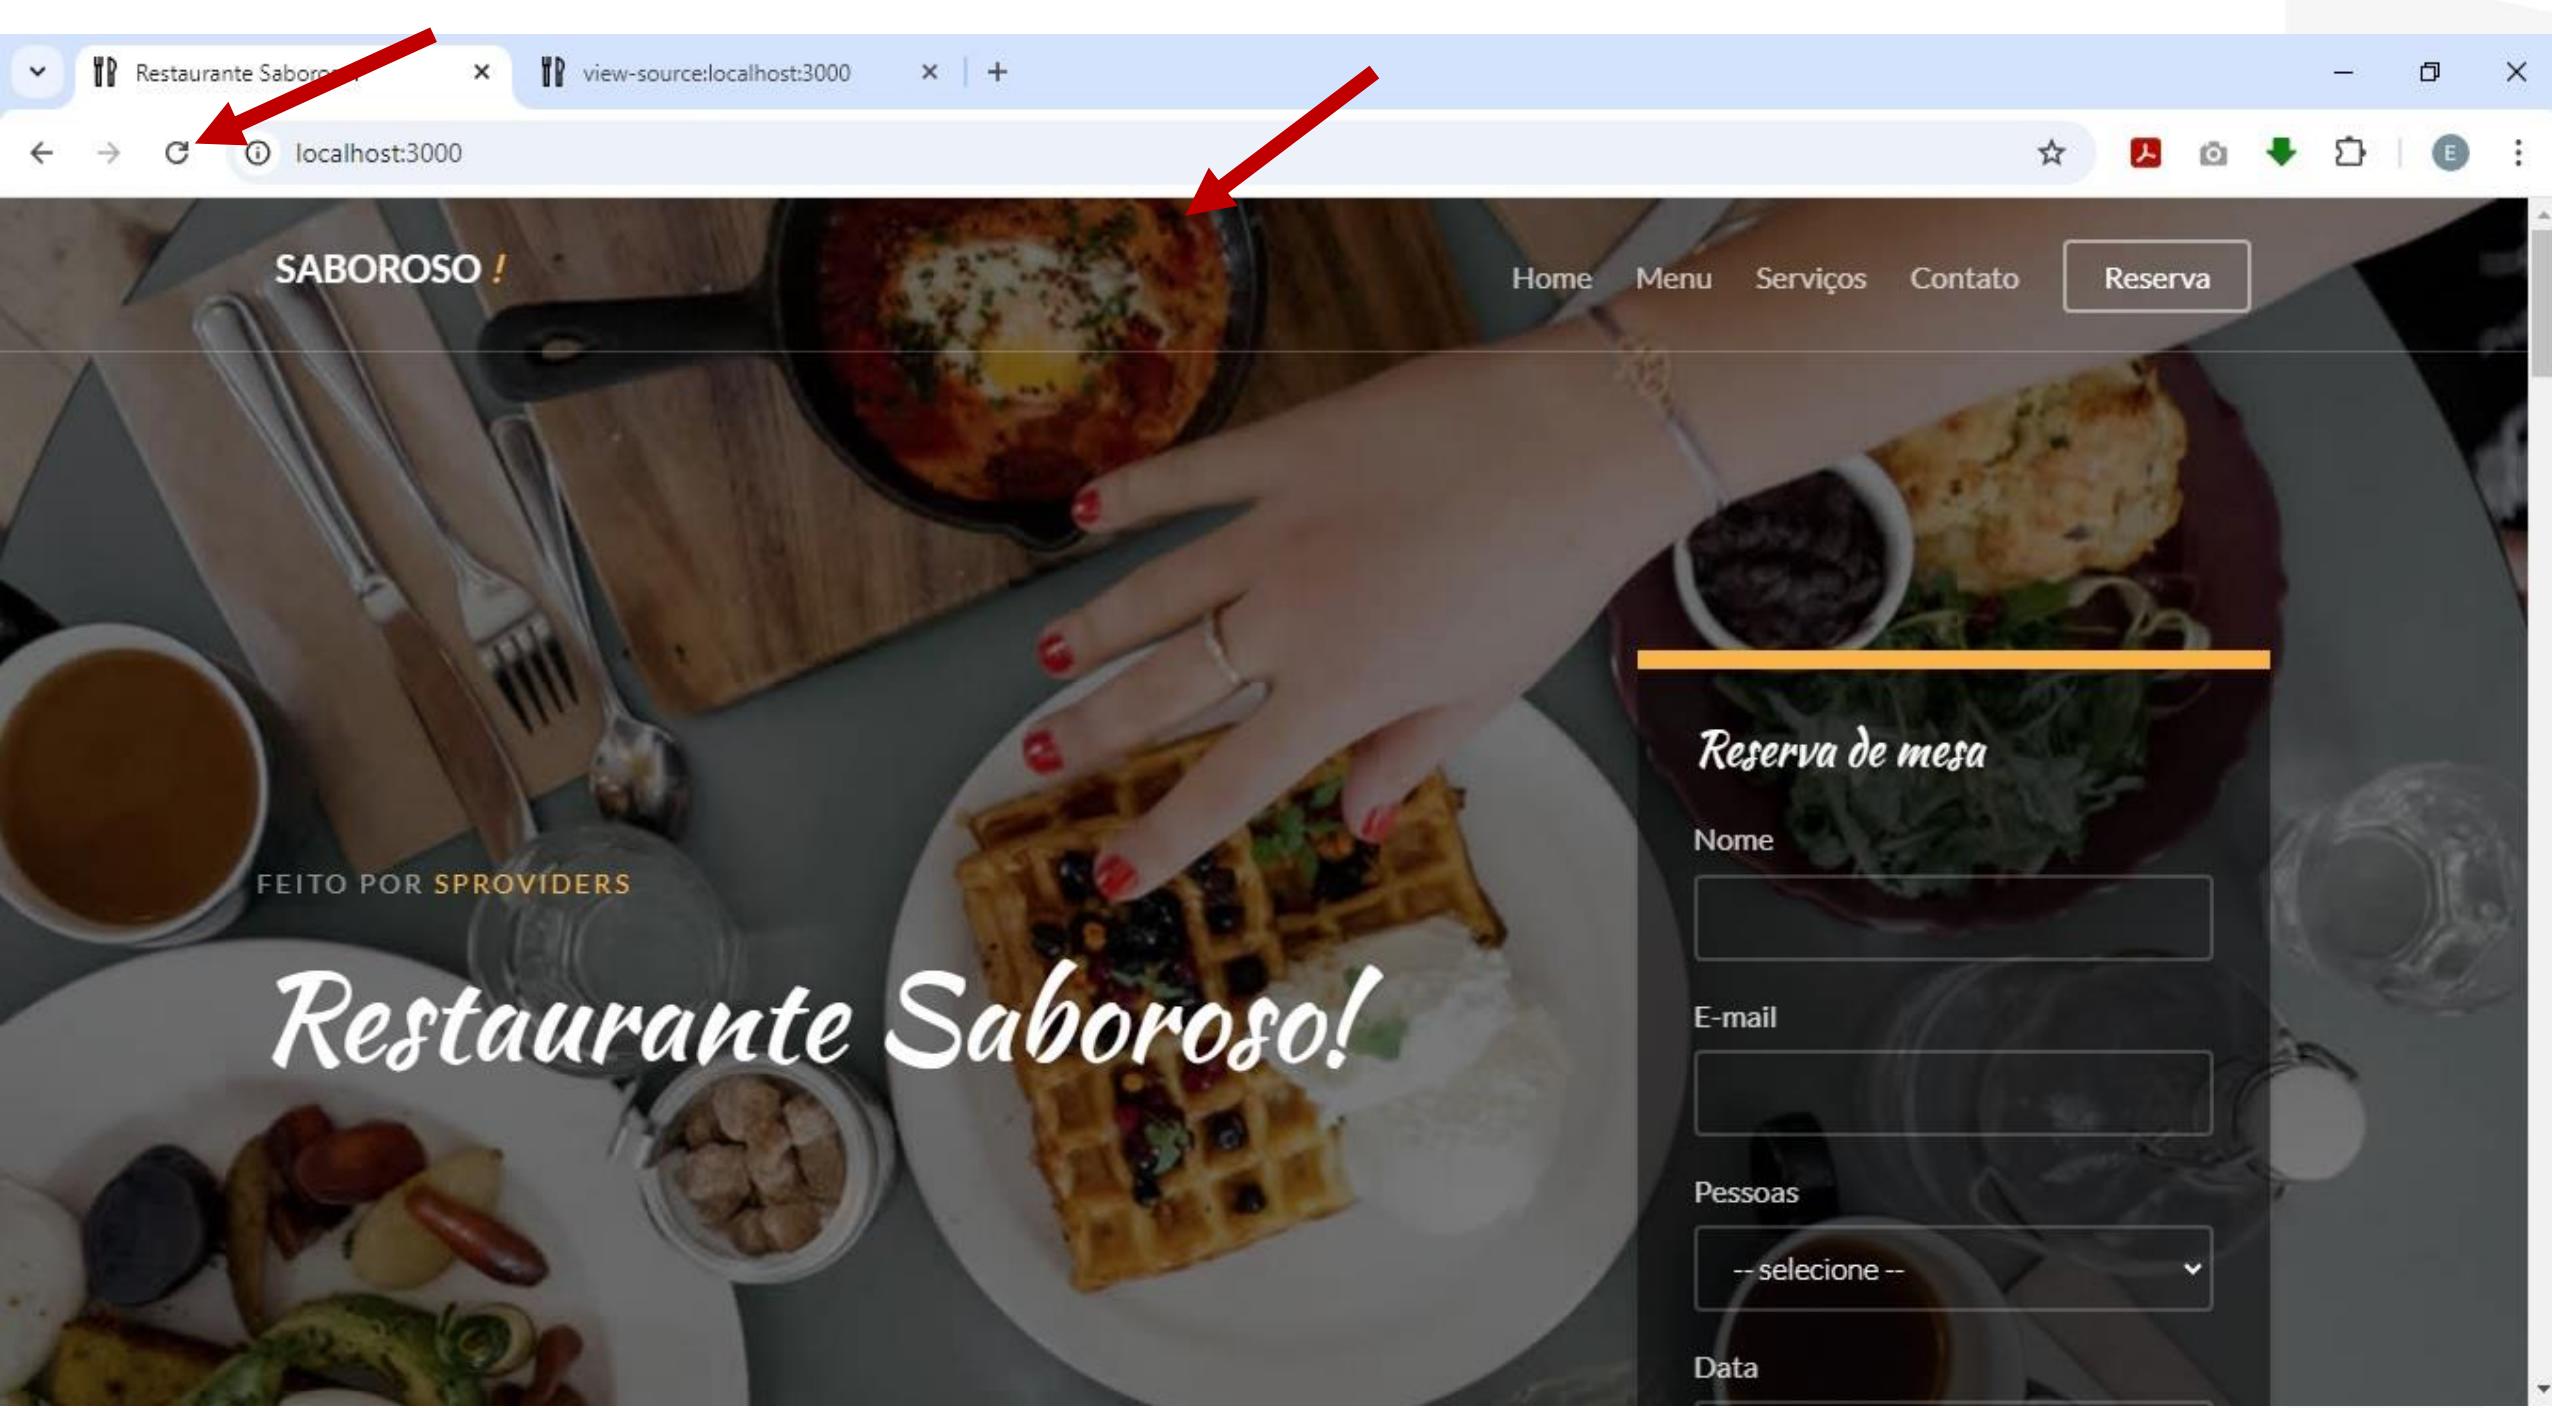

A screenshot of the Visual Studio Code (VS Code) interface. The Explorer sidebar on the left shows a file tree for a project named 'SABOROSO'. The 'index.js' file in the 'routes' folder is selected and highlighted with a red arrow. The main editor area displays the code for 'index.js', which contains Express.js route definitions. The status bar at the bottom provides information about the current file ('index.js'), including line number (Ln 6), column number (Col 15), and selection count (7 selected). It also shows file encoding (UTF-8), line separator (LF), and other settings like Prettier and Go Live.

```
routes > JS index.js > ...
1 var conn = ...
2 var express = require('express');
3 var router = express.Router();
4
5 /* GET home page. */
6 router.get('/', function(req, res, next) {
7   conn.query(
8     'SELECT * FROM tb_menus ORDER BY title',
9     , (err, results)=> {
10
11       if (err) {
12         console.log(err);
13       }
14
15       res.render('index', {
16         title: 'Restaurante Saboroso!',
17         menus: results
18       });
19
20     });
21
22   });
23
24
25 module.exports = router;
```

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The Explorer sidebar on the left lists the project structure under the folder "SABOROSO". A red arrow points to the file "index.js" in the "routes" folder. The main editor area displays the content of "index.js". The status bar at the bottom shows file statistics: 0 0 △ 0 ⌂ 0 ⌂ 0, and status information: Ln 25, Col 1, Spaces: 2, UTF-8, LF, JavaScript, Go Live, Prettier.

```
routes > JS index.js > ...
12 if (err) {
13   console.log(err);
14 }
15
16 res.render('index', {
17   title: 'Restaurante Saboroso!',
18   menus: results
19 });
20
21 });
22
23 });
24
25
26
27 module.exports = router;
28
```

File Edit Selection View Go ... ← → saboroso [Administrator] ⚡

EXPLORER ... contact.ejs menu.ejs reservation.ejs services.ejs head.ejs JS index.js ⌂ ...

SABOROSO

- bin
- inc
- db.js
- node_modules
- public
- routes
- index.js
- users.js

views

- inc
- head.ejs
- contact.ejs
- error.ejs
- index.ejs
- menu.ejs
- reservation.ejs
- services.ejs

app.js

package-lock.json

package.json

> OUTLINE

> TIMELINE

routes > JS index.js > router.get('/contacts') callback

```
12 if (err) {  
13   console.log(err);  
14 }  
15  
16   res.render('index', {  
17     title: 'Restaurante Saboroso!',  
18     menus: results  
19   });  
20 }  
21 );  
22 );  
23 );  
24  
25 router.get('/contacts', function(req, res, next) {  
26  
27   res.render('contacts');  
28  
29 );  
30  
31 module.exports = router;  
32
```

Ln 27, Col 26 Spaces: 2 UTF-8 LF JavaScript Go Live Prettier

File Edit Selection View Go ... ← → 🔍 saboroso [Administrator] ⚡ 🔍 index.js

EXPLORER ... contact.ejs menu.ejs reservation.ejs services.ejs head.ejs 🔍 index.js

SABOROSO

- > bin
- < inc
- JS db.js
- > node_modules
- > public
- < routes
- JS index.js
- JS users.js

< views

- < inc
- ↳ head.ejs
- ↳ contact.ejs
- ↳ error.ejs
- ↳ index.ejs
- ↳ menu.ejs
- ↳ reservation.ejs
- ↳ services.ejs

JS app.js

{ package-lock.json
{ package.json

> OUTLINE
> TIMELINE

routes > JS index.js > ...

```
12 if (err) {  
13   console.log(err);  
14 }  
15  
16   res.render('index', {  
17     title: 'Restaurante Saboroso!',  
18     menus: results  
19   });  
20 }  
21 );  
22  
23 );  
24  
25 router.get('/contacts', function(req, res, next) {  
26  
27   res.render('contacts');  
28  
29 };  
30  
31 module.exports = router;  
32
```

Ln 25, Col 1 (82 selected) Spaces: 2 UTF-8 LF { JavaScript Go Live ✓ Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... contact.ejs menu.ejs reservation.ejs services.ejs head.ejs index.js ⌂ ...

SABOROSO

- bin
- inc
- db.js
- node_modules
- public
- routes
- index.js
- users.js

views

- inc
- head.ejs
- contact.ejs
- error.ejs
- index.ejs
- menu.ejs
- reservation.ejs
- services.ejs

app.js

package-lock.json

package.json


OUTLINE

TIMELINE

routes > JS index.js > router.get('/menus') callback

```
23 });
24
25 router.get('/contacts', function(req, res, next) {
26
27   res.render('contacts');
28
29 });
30
31 router.get('/menus', function(req, res, next) {
32
33   res.render('menus');
34
35 });
36
37 router.get('/reservations', function(req, res, next) {
38
39   res.render('reservations');
40
41 });
42
43 router.get('/services', function(req, res, next) {
44
45   res.render('services');
46
47 });
```

Ln 33, Col 20 Spaces: 2 UTF-8 ⚡ JavaScript ⌂ Go Live ⌂ Prettier ⌂

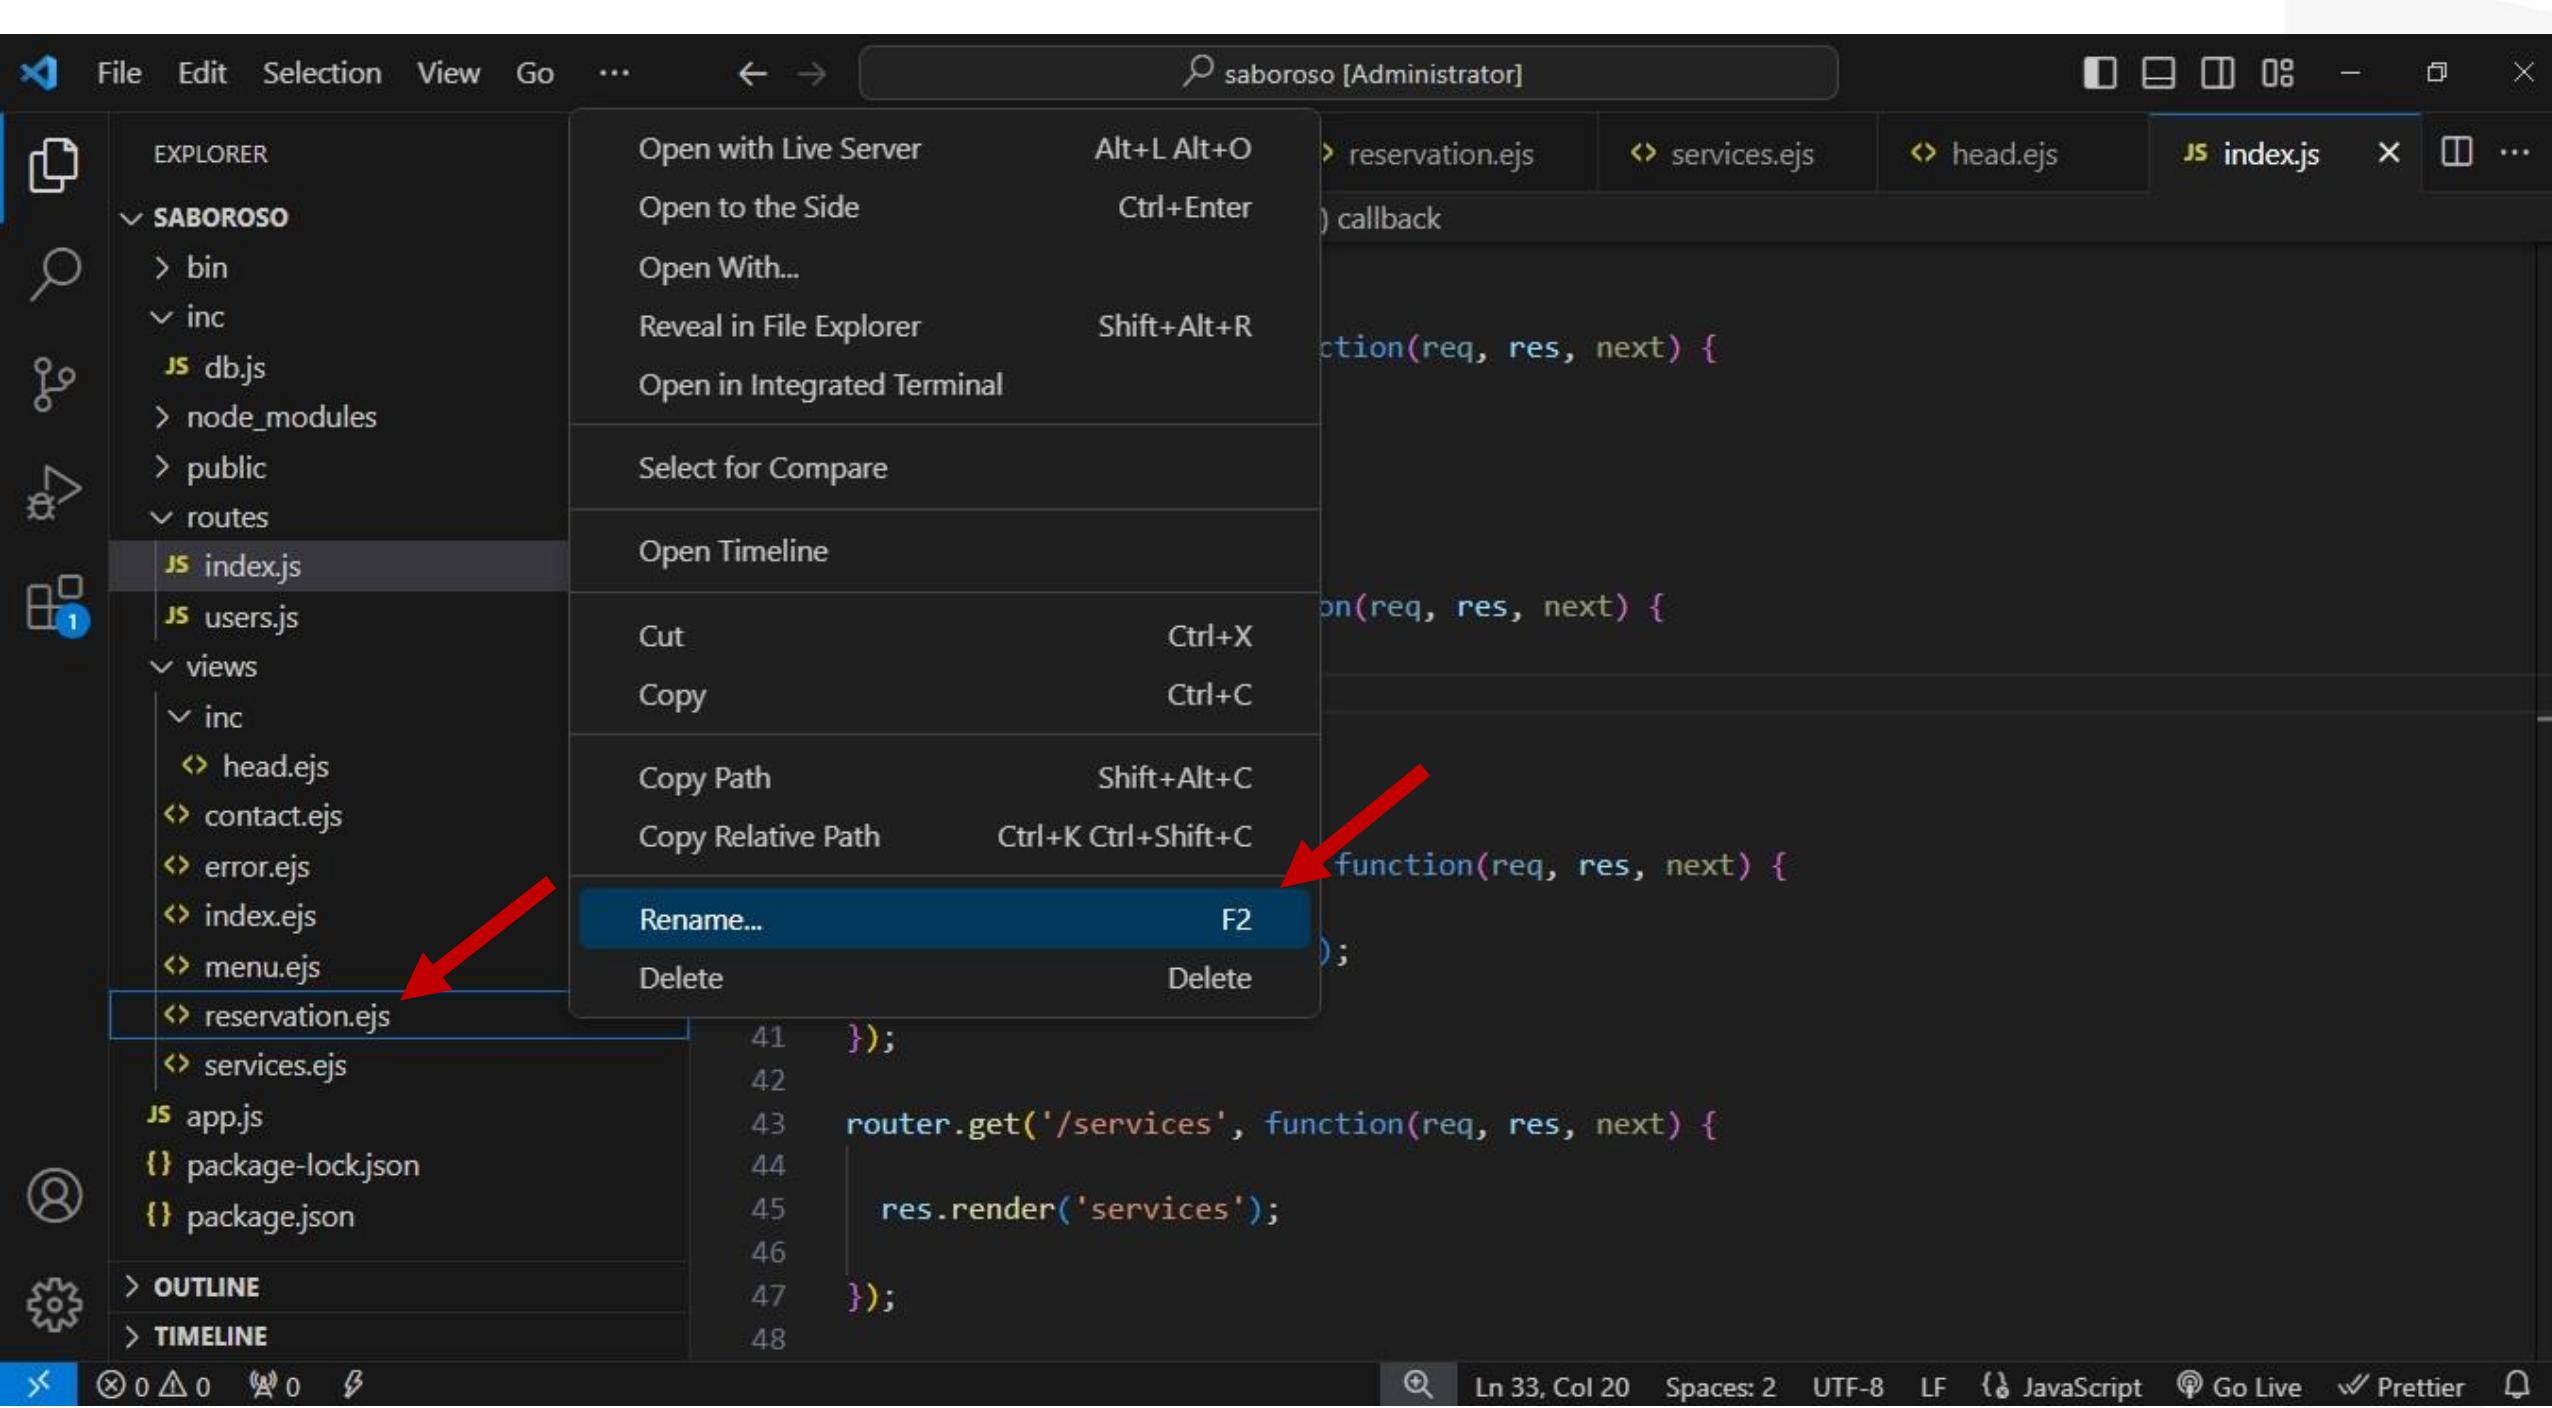

File Edit Selection View Go ... ← → saboroso [Administrator] □ □ □ □ - □ ×

EXPLORER ... contact.ejs menu.ejs reservations.ejs × services.ejs head.ejs index.js ⌂ ...

SABOROSO

- > bin
- ✓ inc
 - JS db.js
- > node_modules
- > public
- ✓ routes
 - JS index.js
 - JS users.js
- ✓ views
 - ✓ inc
 - ↳ head.ejs
 - ↳ contact.ejs
 - ↳ error.ejs
 - ↳ index.ejs
 - ↳ menu.ejs
 - ↳ reservations.ejs
 - ↳ services.ejs
- JS app.js
- { package-lock.json
- { package.json

> OUTLINE

> TIMELINE

views > reservations.ejs > html

```
1  <!DOCTYPE HTML>
2  <html>
3  <%- include("inc/head") -%>
4  <body>
5
6  <div class="gtco-loader"></div>
7
8  <div id="page">
9
10 <nav class="gtco-nav" role="navigation">
11   <div class="gtco-container">
12
13     <div class="row">
14       <div class="col-sm-4 col-xs-12">
15         <div id="gtco-logo">
16           <a href="index.html">Saboroso
17             <em>!</em>
18           </a>
19         </div>
20       </div>
21     </div>
22     <div class="col-xs-8 text-right menu-1">
23       <ul>
24         <li>
25           <a href="index.html">Home</a>
26         </li>
```

Ln 3, Col 1 (28 selected) Tab Size: 4 CRLF { HTML Go Live Prettier

A screenshot of the Visual Studio Code interface. The left sidebar shows a file tree with a folder named 'SABOROSO' containing files like 'index.js', 'users.js', and 'views'. A context menu is open over the 'menu.ejs' file in the 'views' folder. The menu items shown are 'Rename...', 'Delete', and 'F2'. A red arrow points from the top-left towards the 'Rename...' option. Another red arrow points from the bottom-left towards the 'menu.ejs' file in the list. The main editor area shows an HTML file with code related to navigation and a logo. The status bar at the bottom indicates the file is 3 lines long, 28 characters wide, and is in Tab Size: 4 mode.

```
<!-->
<lude("inc/head") -%>
<div class="gtco-loader"></div>
<div class="page">
<div class="gtco-nav" role="navigation">
<div class="gtco-container">
<div class="row">
<div class="col-sm-4 col-xs-12">
<div id="gtco-logo">
<a href="index.html">Saboroso
<em>!</em>
</a>
</div>
</div>
<div class="col-xs-8 text-right menu-1">
<ul>
<li>
<a href="index.html">Home</a>
</li>
```

A screenshot of the Visual Studio Code (VS Code) interface. The top bar includes standard menu items: File, Edit, Selection, View, Go, and a separator. To the right are icons for navigating between files, a search bar containing "saboroso [Administrator]", and window control buttons. The left sidebar features a tree view of the project structure under the heading "EXPLORER". The "SABOROSO" folder contains subfolders like "bin", "inc", and "public", and files such as "db.js", "index.js", "users.js", and several EJS files: "contact.ejs", "head.ejs", "error.ejs", "index.ejs", "menus.ejs" (which is currently selected and highlighted with a red arrow), "reservations.ejs", and "services.ejs". Below these are "app.js", "package-lock.json", and "package.json". At the bottom of the sidebar are "OUTLINE" and "TIMELINE" sections. The main editor area displays the content of the "menus.ejs" file, which is an EJS template for a navigation bar. The status bar at the bottom shows file statistics (0 0 0 0), the current line and column (Ln 20, Col 27), tab size (4), encoding (UTF-8), file type (HTML), and live preview status (Go Live). A "Prettier" button is also present.

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>
    <div class="gtco-loader"></div>
    <div id="page">
      <nav class="gtco-nav" role="navigation">
        <div class="gtco-container">
          <div class="row">
            <div class="col-sm-4 col-xs-12">
              <div id="gtco-logo">
                <a href="index.html">Saboroso
                  <em>!</em>
                </a>
              </div>
            </div>
            <div class="col-xs-8 text-right menu-1">
              <ul>
                <li>
                  <a href="index.html">Home</a>
                </li>
              </ul>
            </div>
          </div>
        </div>
      </nav>
    </div>
  </body>
</html>
```

A screenshot of the Visual Studio Code interface. The top bar shows the title "saboroso [Administrator]" and various icons. The left sidebar has sections for "EXPLORER", "SABOROSO" (with subfolders like "bin", "inc", "db.js", "node_modules", "public", "routes", "index.js", "users.js"), "views" (with "inc" and "head.ejs"), and files like "error.ejs", "index.ejs", "menus.ejs", "reservation", "services.ejs", "app.js", "package-lock.json", and "package.json". The main editor area shows an EJS file named "contact.ejs" with the following code:

```
<!DOCTYPE HTML>
<html>
<% include("inc/head") -%>
<body>
<div class="gtco-loader"></div>
```

A red arrow points from the "Rename..." option in the context menu to the "include" tag in the code. Another red arrow points from the "contact.ejs" file in the Explorer to the same "Rename..." option.

The context menu for "contact.ejs" includes the following options:

- Open with Live Server
- Open to the Side
- Open With...
- Reveal in File Explorer
- Open in Integrated Terminal
- Rename... (highlighted)
- Delete

At the bottom of the screen, there are status bars for "Ln 3, Col 5 (27 selected)", "Tab Size: 4", "UTF-8", "CRLF", "HTML", "Go Live", and "Prettier".

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

- > bin
- ✓ inc
 - JS db.js
- > node_modules
- > public
- ✓ routes
 - JS index.js
 - JS users.js
- ✓ views
 - ✓ inc
 - ↳ head.ejs
 - ↳ contacts.ejs
 - ↳ error.ejs
 - ↳ index.ejs
 - ↳ menus.ejs
 - ↳ reservations.ejs
 - ↳ services.ejs

JS app.js

{ package-lock.json

{ package.json

> OUTLINE

> TIMELINE

views > ↳ contacts.ejs > ↳ html > ↳ ?

```
1  <!DOCTYPE HTML>
2  <html>
3  |   <%- include("inc/head") -%>
4  |   <body>
5
6  |       <div class="gtco-loader"></div>
7
8  |       <div id="page">
9
10 |           <nav class="gtco-nav" role="navigation">
11 |               <div class="gtco-container">
12 |
13 |                   <div class="row">
14 |                       <div class="col-sm-4 col-xs-12">
15 |                           <div id="gtco-logo">
16 |                               <a href="index.html">Saboroso
17 |                                   <em>!</em>
18 |                               </a>
19 |                           </div>
20 |                       </div>
21 |                   </div>
22 |                   <div class="col-xs-8 text-right menu-1">
23 |                       <ul>
24 |                           <li>
25 |                               <a href="index.html">Home</a>
26 |                           </li>
```

Ln 3, Col 5 (27 selected) Tab Size: 4 CRLF { HTML Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

- > bin
- < inc
- JS db.js
- > node_modules
- > public
- < routes
- JS index.js
- JS users.js

< views

- < inc
- JS head.ejs
- JS contacts.ejs
- JS error.ejs
- JS index.ejs
- JS menus.ejs
- JS reservations.ejs
- JS services.ejs

JS app.js

{ package-lock.json

{ package.json

> OUTLINE

> TIMELINE

routes > JS index.js > router.get('/') callback > conn.query(` SELECT * FROM tb_menus ORDER BY title `) callback > title

```
3 var router = express.Router();
4
5 /* GET home page. */
6 router.get('/', function(req, res, next) {
7
8   conn.query(
9     'SELECT * FROM tb_menus ORDER BY title
10   , (err, results)=> {
11
12     if (err) {
13       console.log(err);
14     }
15
16     res.render('index', {
17       title: 'Restaurante Saboroso!',
18       menus: results
19     });
20   );
21
22 });
23
24 router.get('/contacts', function(req, res, next) {
25
26   res.render('contacts');
27 }
```

Ln 17, Col 7 (30 selected) Spaces: 2 UTF-8 LF { JavaScript Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the file path: routes > JS index.js > router.get('/contacts') callback. The code editor displays the following JavaScript code:

```
10   ` , (err, results)=> {
11
12     if (err) {
13       console.log(err);
14     }
15
16     res.render('index', {
17       title: 'Restaurante Saboroso!',
18       menus: results
19     });
20
21   });
22
23 });
24
25 router.get('/contacts', function(req, res, next) {
26
27   res.render('contacts',{
28     title: 'Contato - Restaurante Saboroso!'
29   });
30 }
31
32 router.get('/menus', function(req, res, next) {
33
34   res.render('menus');
35 }
```

A red arrow points to the line of code: `title: 'Contato - Restaurante Saboroso!'`. The code editor also shows status information at the bottom: Ln 27, Col 24 (53 selected), Spaces: 2, UTF-8, LF, JavaScript, Go Live, Prettier.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the file path "saboroso [Administrator]". The left sidebar (Explorer) lists the project structure under the folder "SABOROSO", including files like "bin", "inc", "db.js", "node_modules", "public", "routes", "index.js", "users.js", "views", "inc", "head.ejs", "contacts.ejs", "error.ejs", "index.ejs", "menus.ejs", "reservations.ejs", "services.ejs", "app.js", and "package-lock.json". The "index.js" file in the "routes" folder is currently open in the main editor area. The code in "index.js" defines routes for "/contacts", "/menus", and "/reservations", each rendering corresponding EJS templates. A red arrow points to the line of code "title: 'Menus - Restaurante Saboroso!'". The status bar at the bottom shows the current line (Ln 34, Col 23), character count (50 selected), and encoding (UTF-8 LF). There are also icons for Go Live and Prettier.

```
routes > JS index.js > router.get('/menus') callback
    17     title: 'Restaurante Saboroso!',
    18     menus: results
    19   );
    20 );
    21 );
    22 );
    23 );
    24
    25 router.get('/contacts', function(req, res, next) {
    26
    27   res.render('contacts',{
    28     title: 'Contato - Restaurante Saboroso!'
    29   });
    30 );
    31
    32 router.get('/menus', function(req, res, next) {
    33   res.render('menus', {
    34     title: 'Menus - Restaurante Saboroso!'
    35   });
    36 );
    37 );
    38
    39 router.get('/reservations', function(req, res, next) {
    40
    41   res.render('reservations');
```

A screenshot of a code editor interface, likely Visual Studio Code, showing a file named `index.js` in the center panel. The code is written in JavaScript and defines a router object with several `get` methods. A red arrow points from the bottom right towards a specific line of code in the `reservations` route handler.


```
routes > JS index.js > router.get('/reservations') callback
25   router.get('/contacts', function(req, res, next) {
26
27     res.render('contacts', {
28       title: 'Contato - Restaurante Saboroso!'
29     });
30   );
31
32   router.get('/menus', function(req, res, next) {
33
34     res.render('menus', {
35       title: 'Menus - Restaurante Saboroso!'
36     });
37   );
38
39   router.get('/reservations', function(req, res, next) {
40     ^
41     res.render('reservations', {
42       title: 'Reservas - Restaurante Saboroso!'
43     });
44   );
45 );
46
47   router.get('/services', function(req, res, next) {
48
49     res.render('services');
50   );
```

The code editor's status bar at the bottom indicates the current line and column: `Ln 41, Col 28 (53 selected)`. It also shows the file encoding as `UTF-8`, line endings as `LF`, and the current language mode as `JavaScript`.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the file path "saboroso [Administrator]". The left sidebar (Explorer) lists the project structure under "SABOROSO", including "bin", "inc", "db.js", "node_modules", "public", "routes", "index.js", "users.js", "views", "inc", "head.ejs", "contacts.ejs", "error.ejs", "index.ejs", "menus.ejs", "reservations.ejs", "services.ejs", "app.js", and "package-lock.json", "package.json". The "routes" folder is expanded, and "index.js" is selected. The main editor area displays the "index.js" file content:

```
routes > JS index.js > router.get('/services') callback
34     res.render('menus', {
35         title: 'Menus - Restaurante Saboroso!'
36     });
37 });
38
39 router.get('/reservations', function(req, res, next) {
40
41     res.render('reservations', {
42         title: 'Reservas - Restaurante Saboroso!'
43     });
44
45 });
46
47 router.get('/services', function(req, res, next) {
48     res.render('services', {
49         title: 'Serviços - Restaurante Saboroso!'
50     });
51 });
52
53 });
54
55 module.exports = router;
```

A red arrow points from the bottom right towards the line of code "title: 'Serviços - Restaurante Saboroso!'". The status bar at the bottom shows "Ln 49, Col 24 (54 selected)" and other settings like "Spaces: 2", "UTF-8", "LF", "JavaScript", "Go Live", and "Prettier".

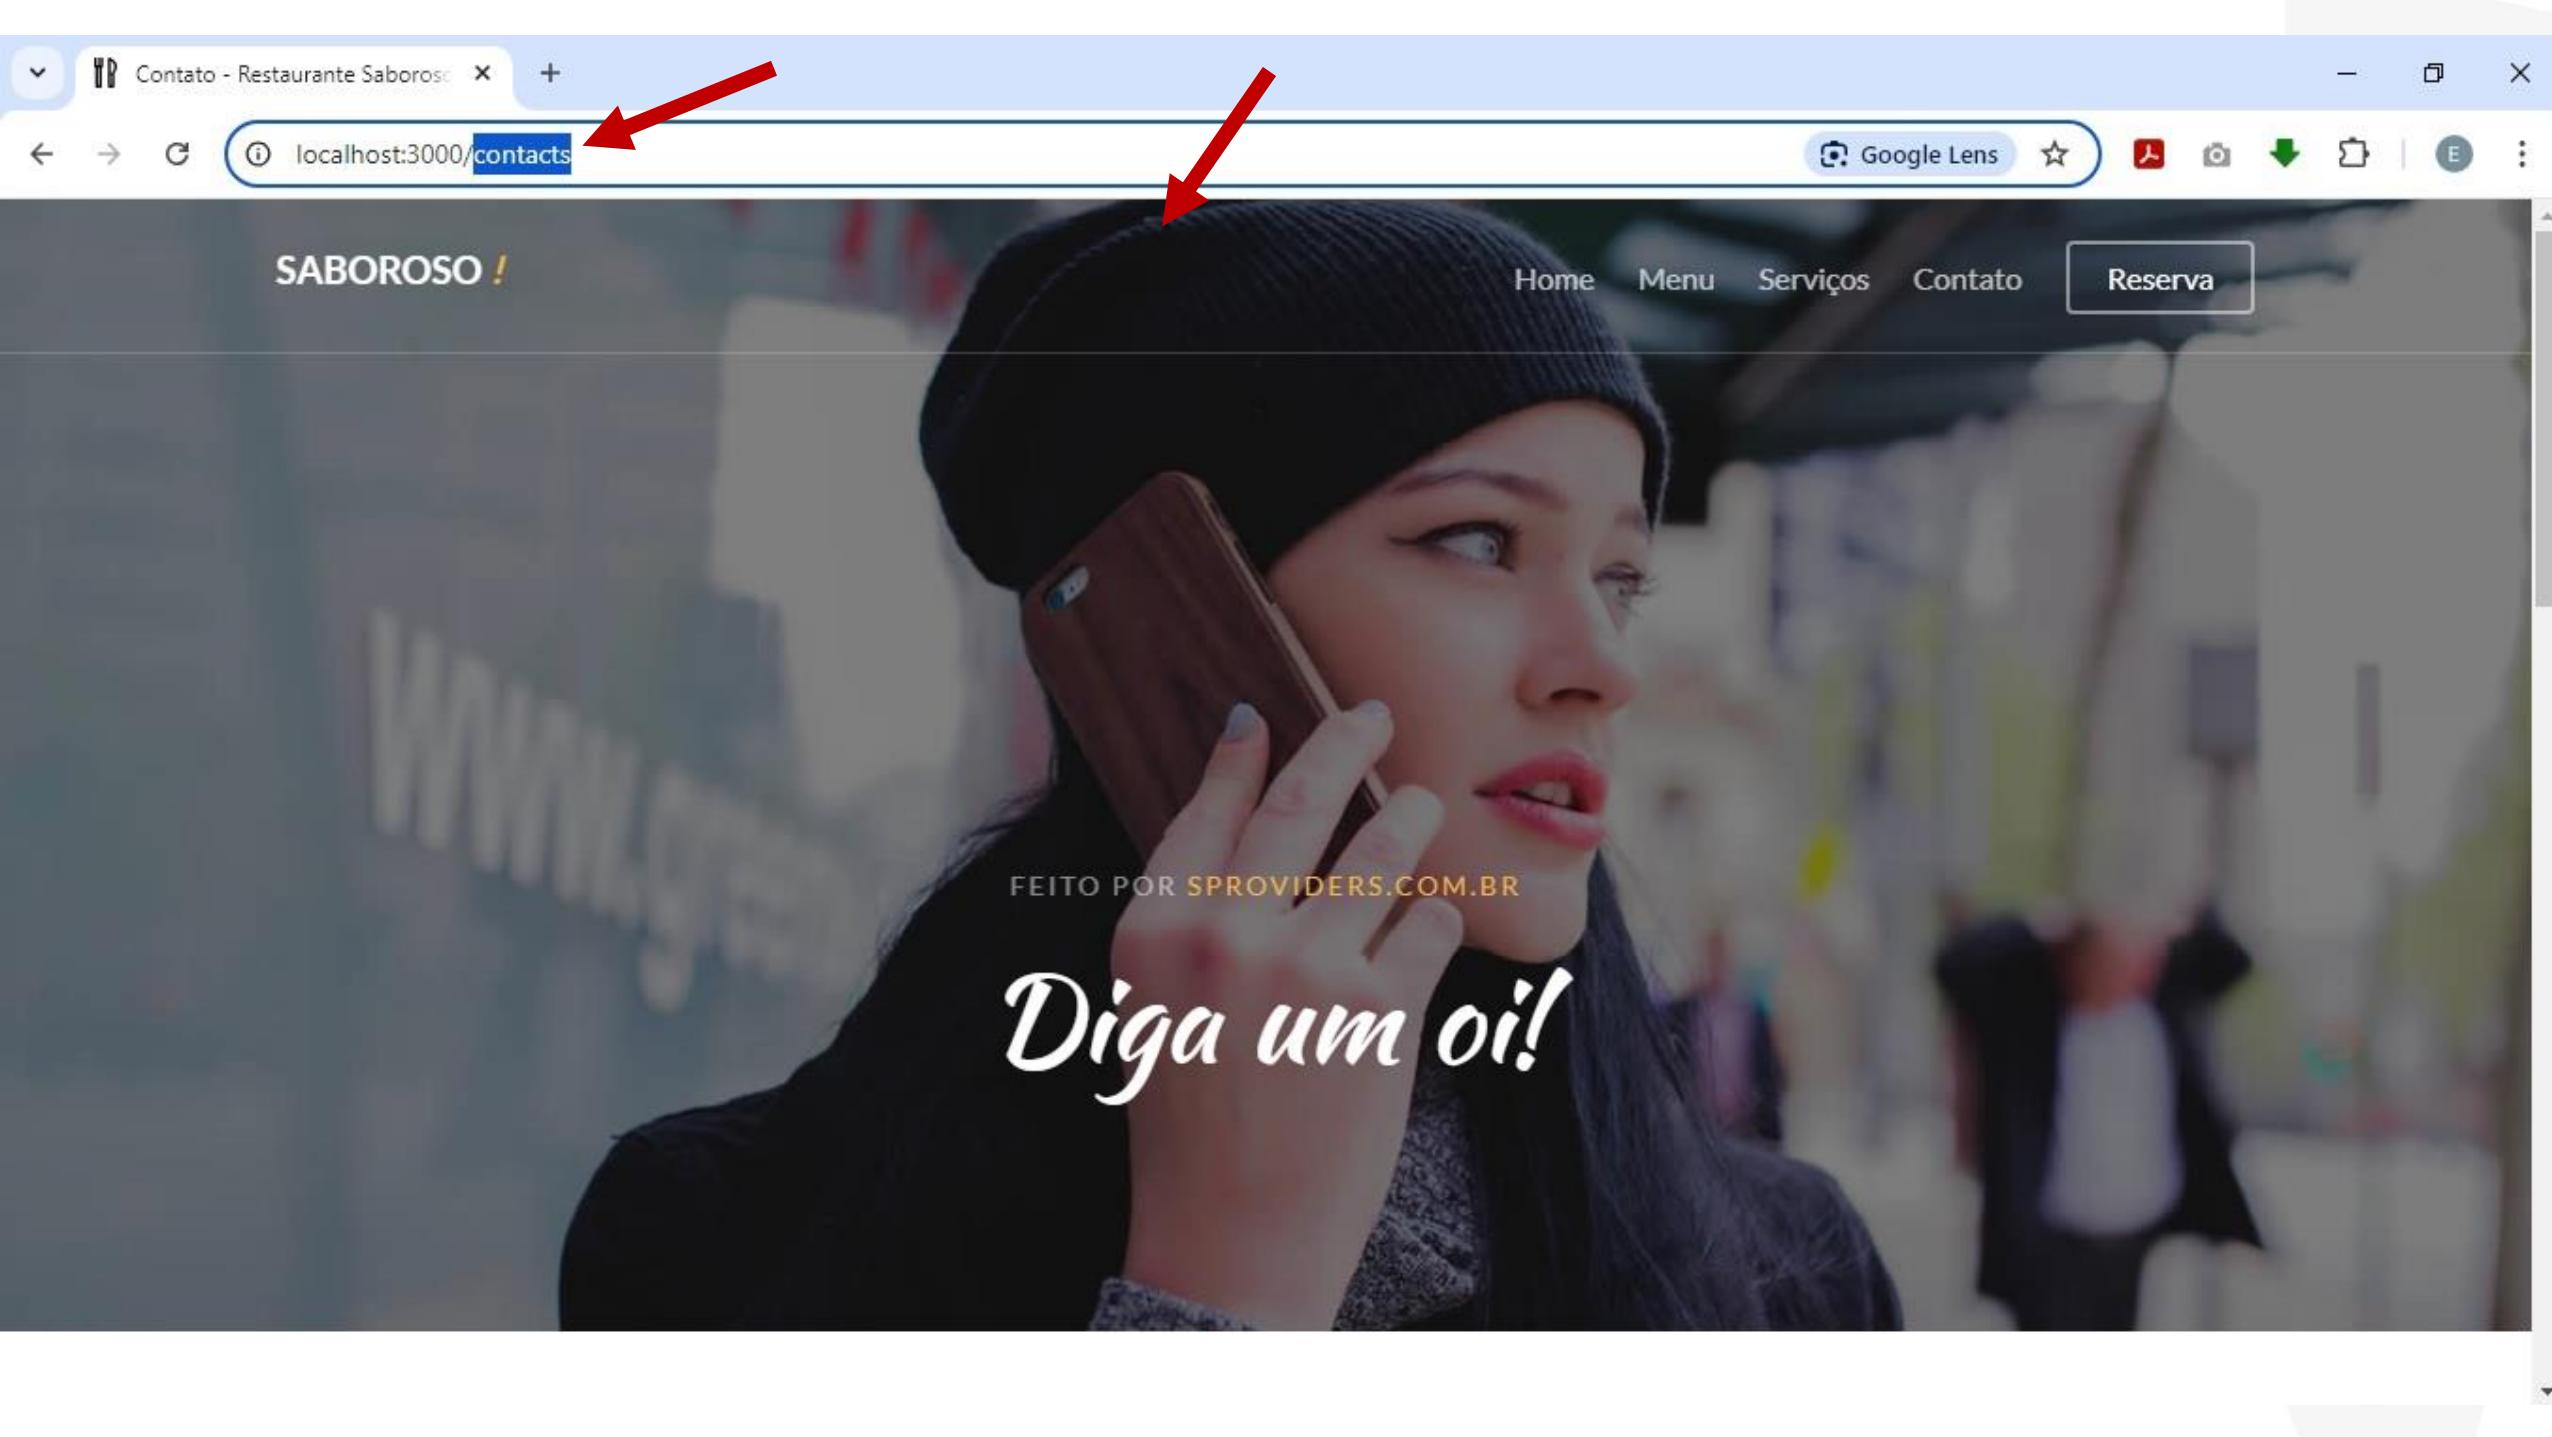

Contato - Restaurante Saboroso

localhost:3000/contacts

Google Lens


SABOROSO !

Home Menu Serviços Contato

Reserva

FEITO POR SPROVIDERS.COM.BR

Diga um oi!

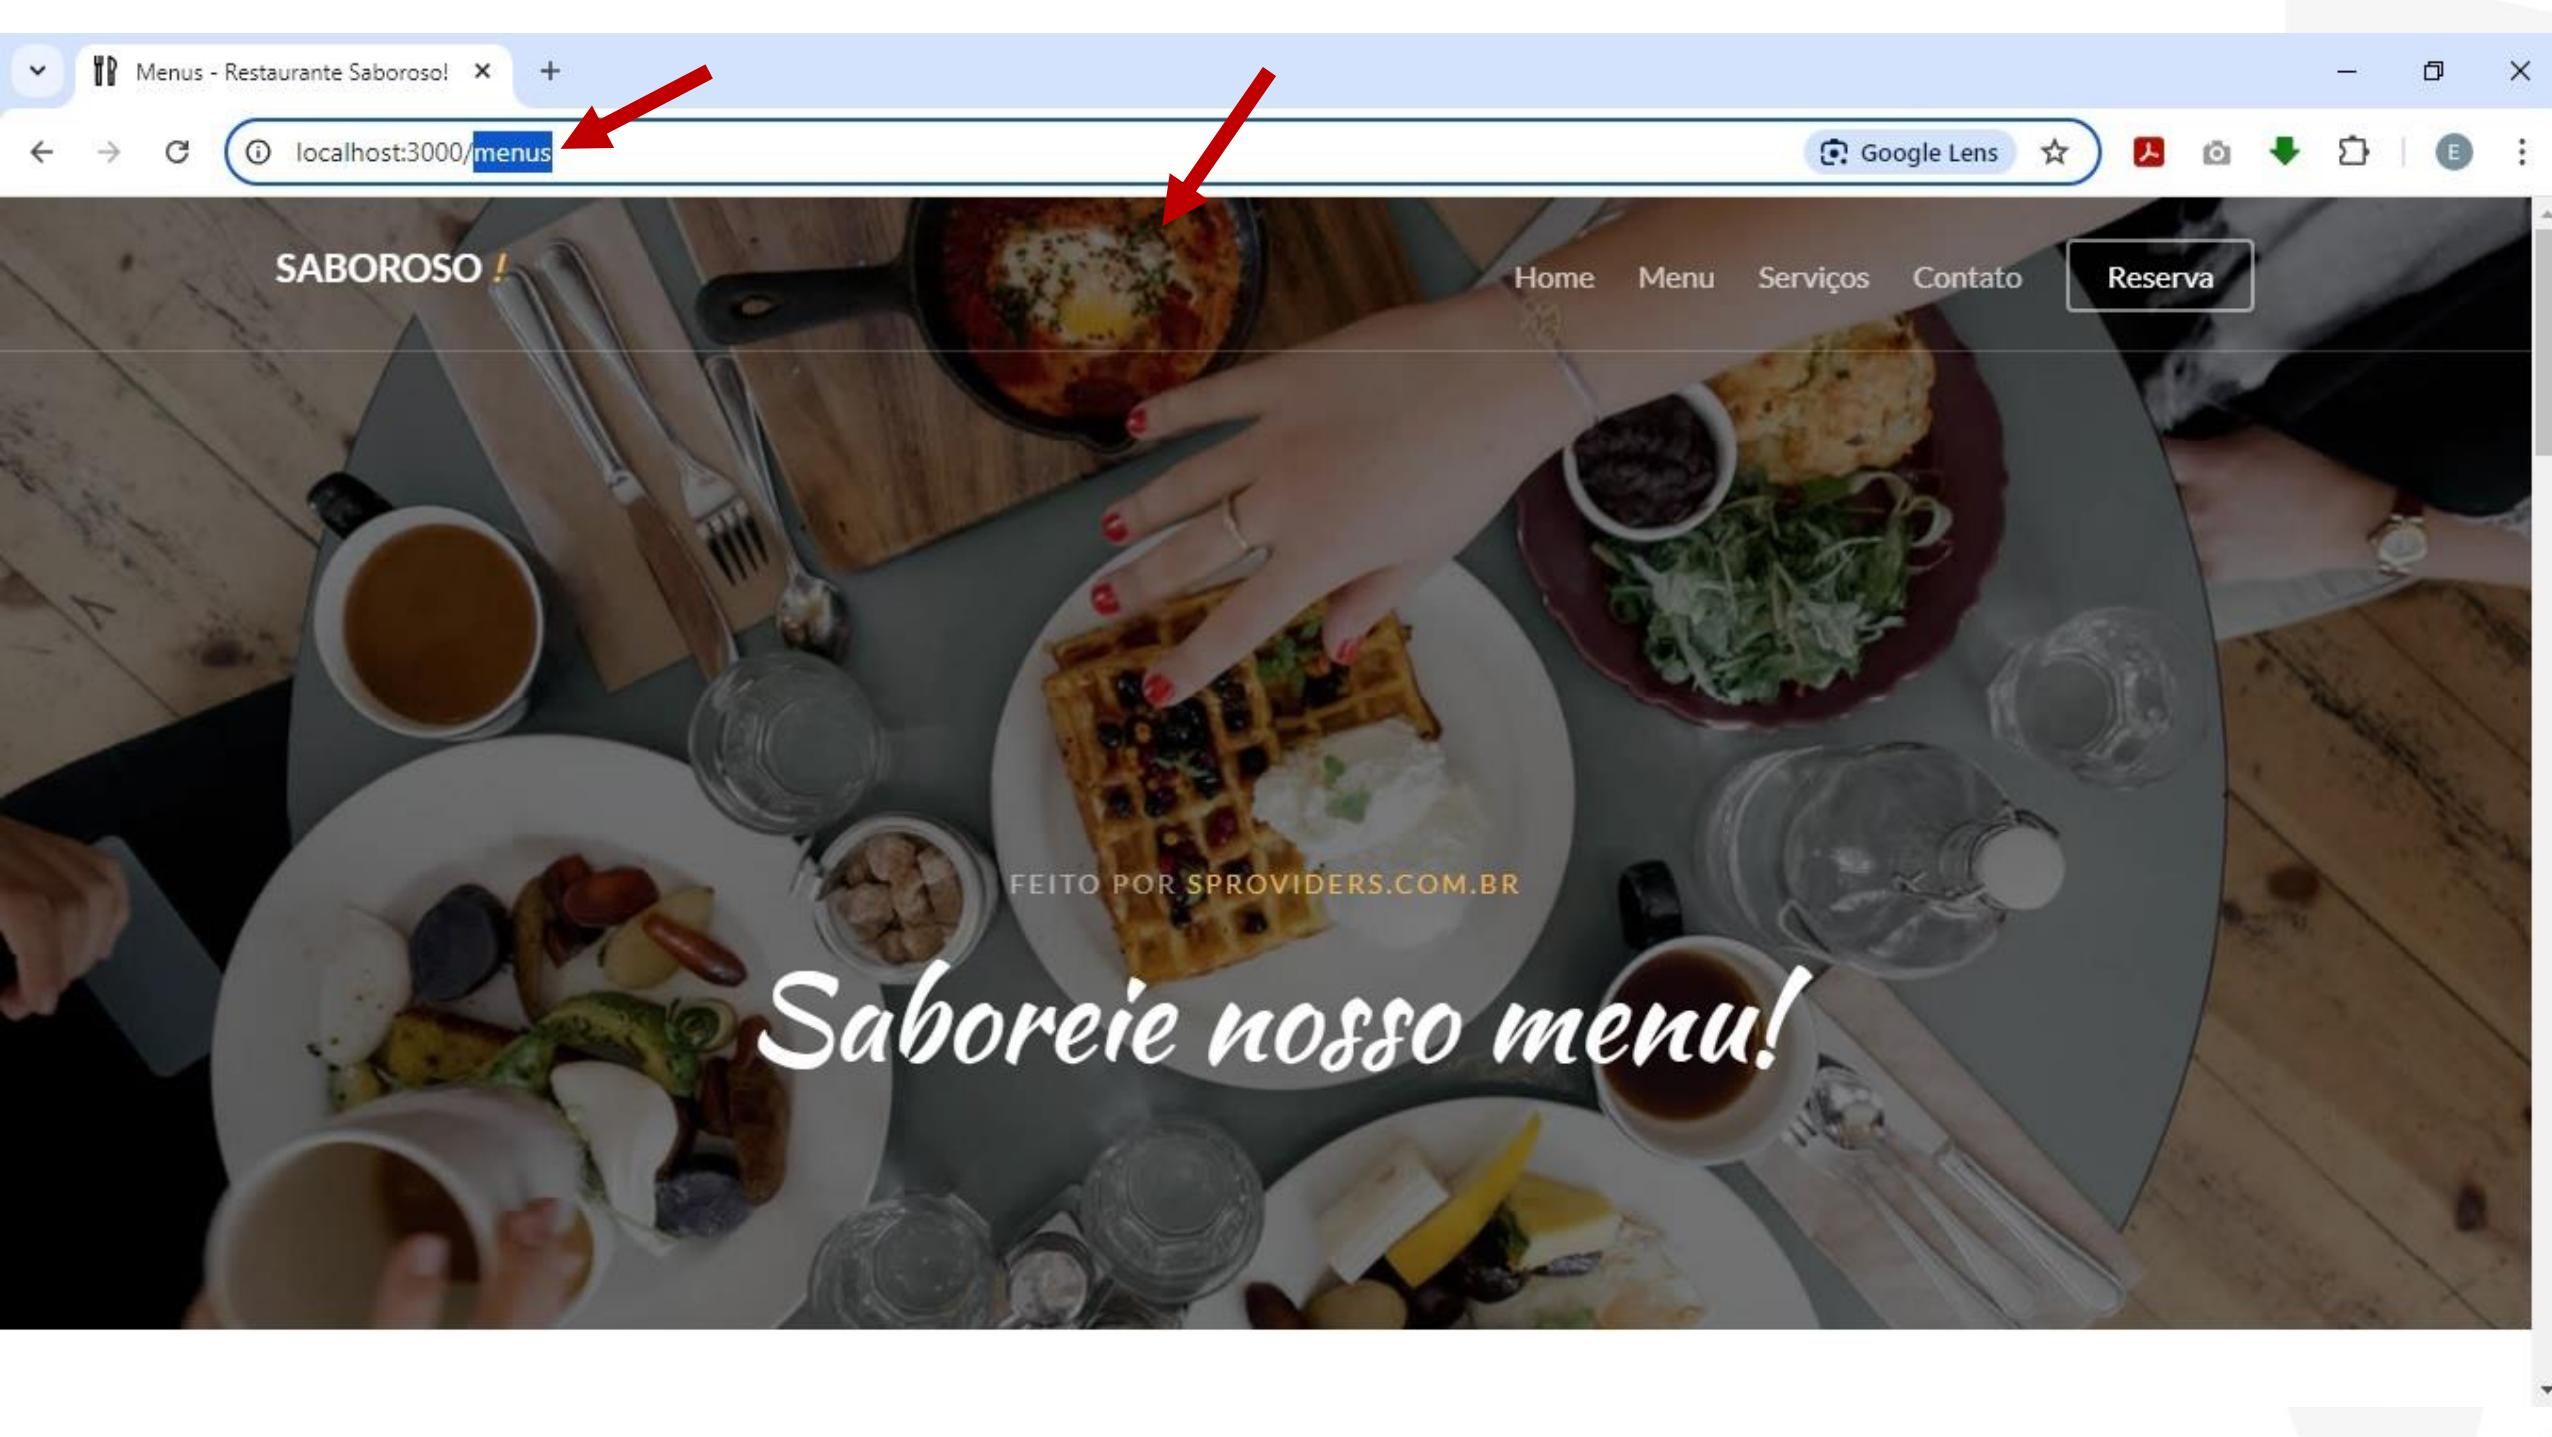

Menus - Restaurante Saboroso!

localhost:3000/menus

Google Lens

SABOROSO!

Home Menu Serviços Contato

Reserva

FEITO POR SPROVIDERS.COM.BR

Saboreie nosso menu!




SABOROSO !

Home Menu Serviços Contato

Reserva

FEITO POR SPROVIDERS.COM.BR

Reserve uma Mesa!

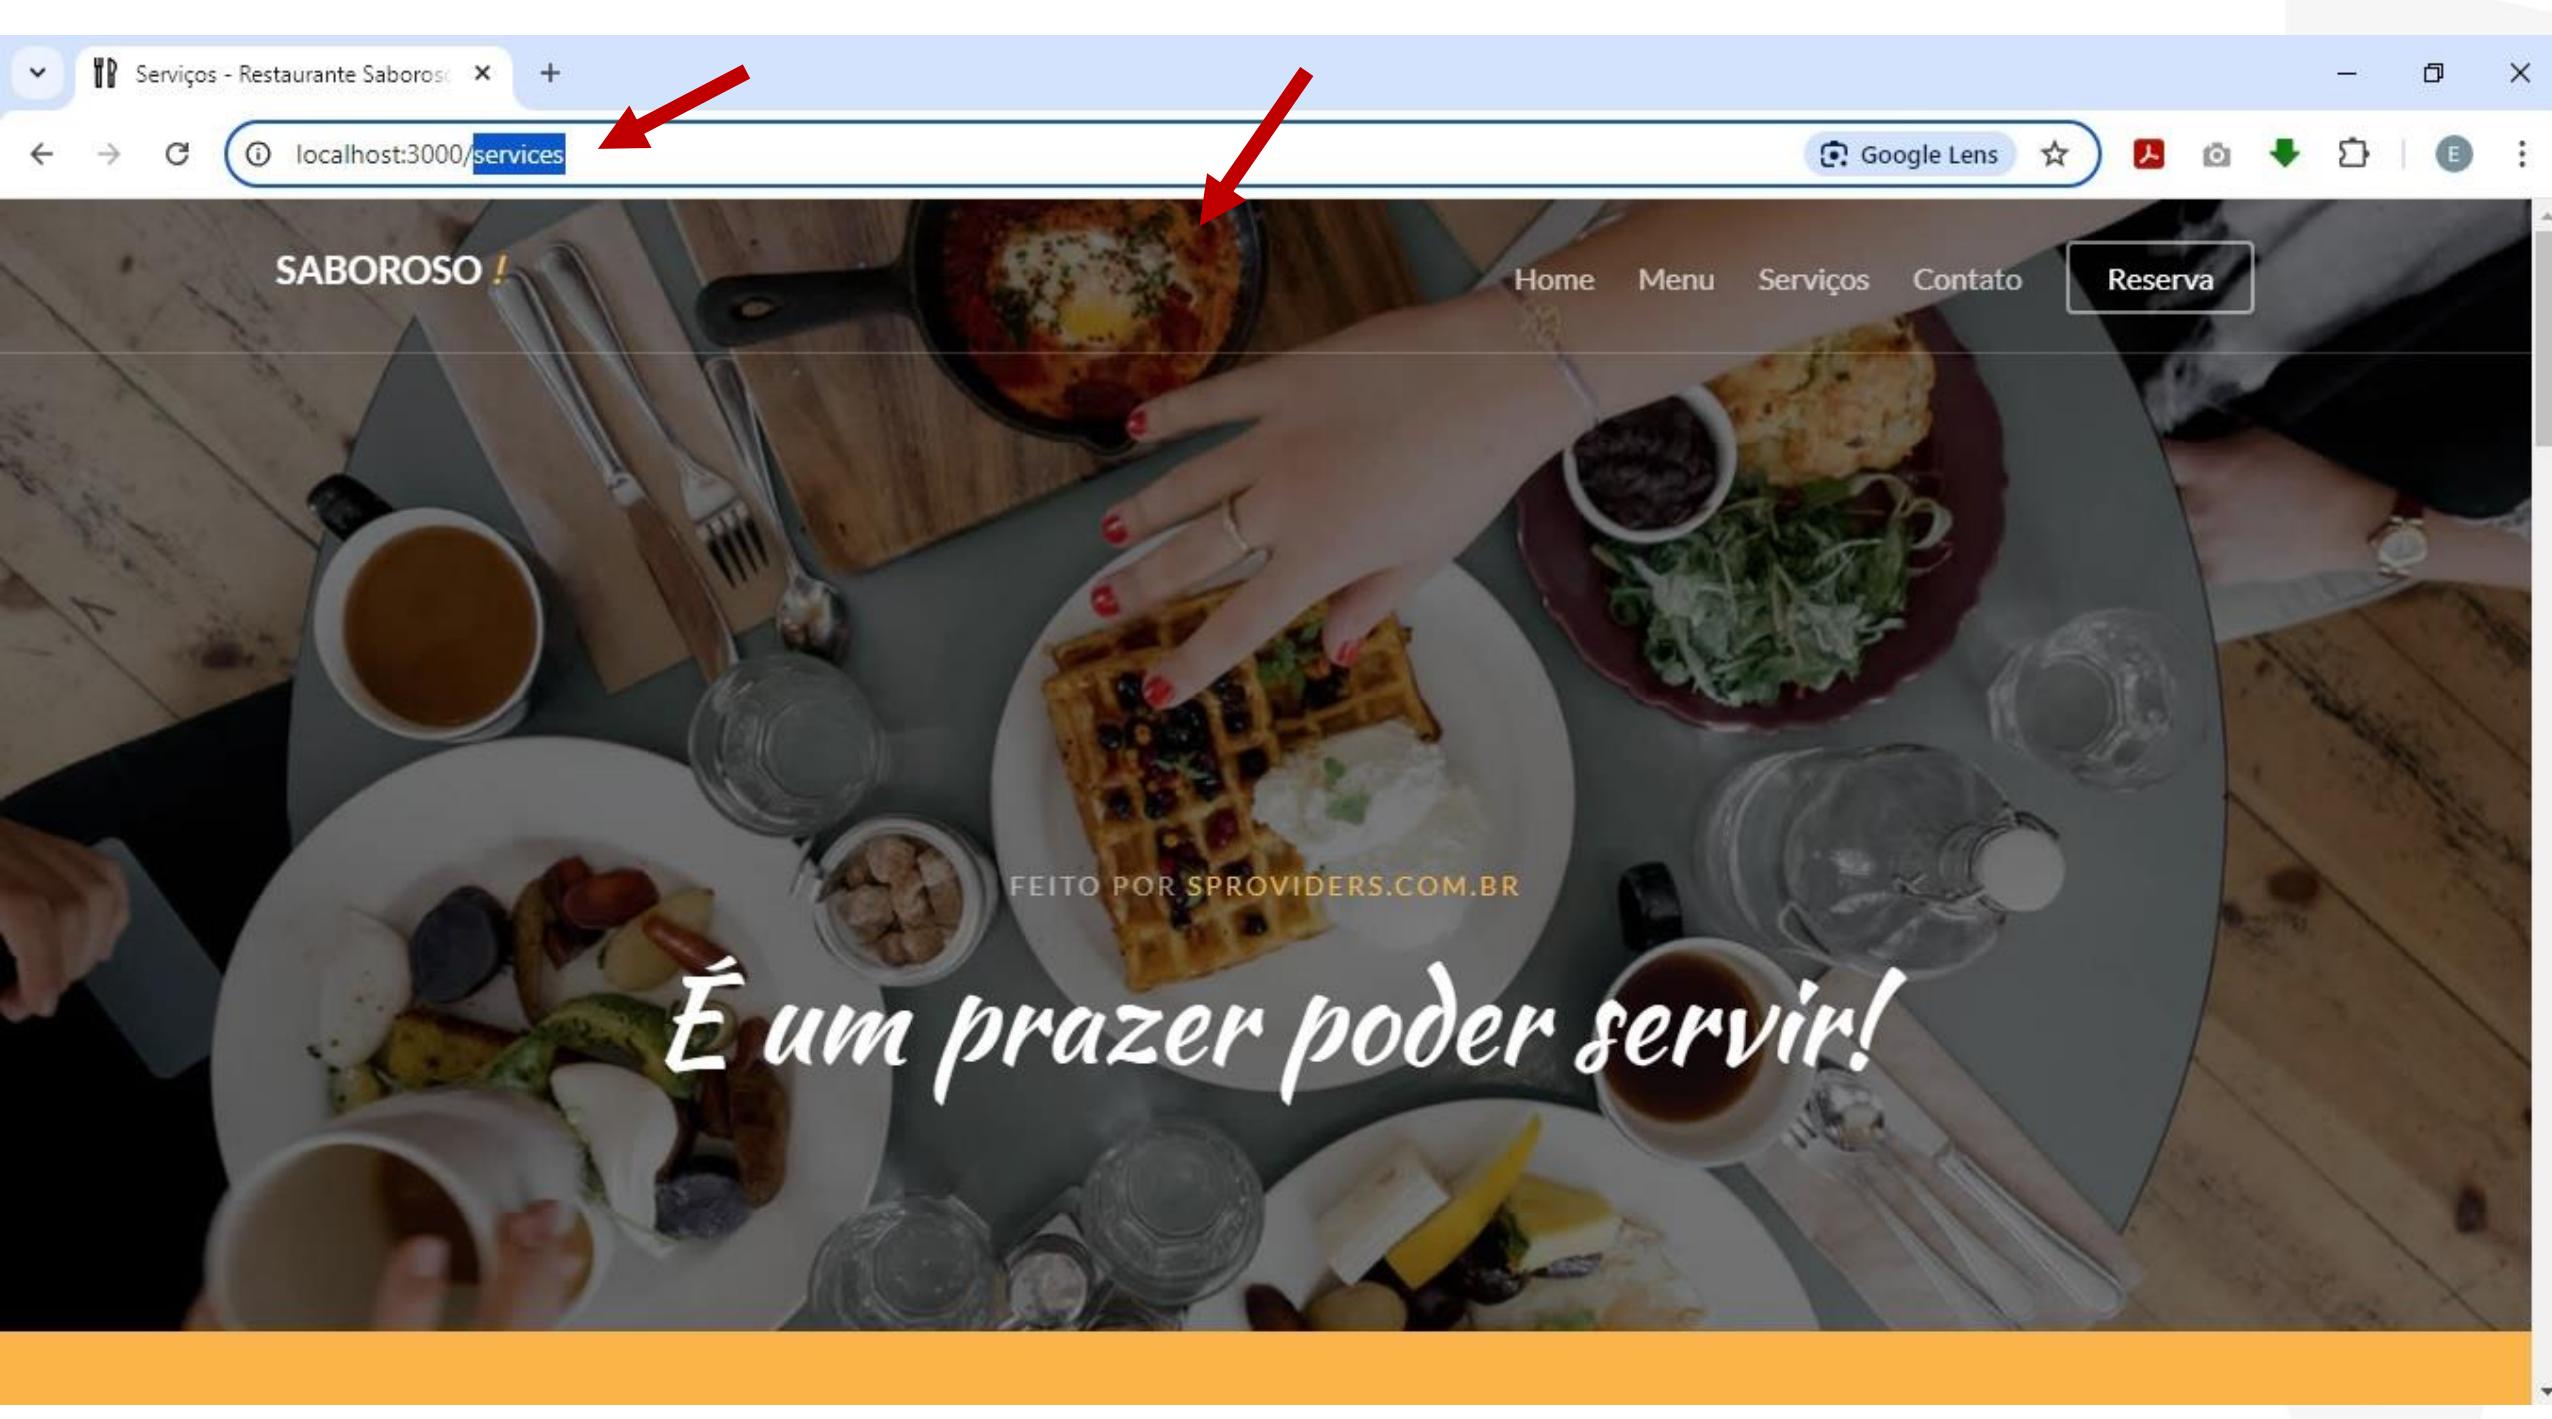

UC: Projetos

Assunto:

Projeto Restaurante – BackEnd

06 – Organizando o Header com Includes

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

- > bin
- ✓ inc
- JS db.js
- > node_modules
- > public
- ✓ routes
- JS index.js
- JS users.js
- ✓ views
- ✓ inc
- ↳ head.ejs
- ↳ contacts.ejs
- ↳ error.ejs
- ↳ index.ejs
- ↳ menus.ejs
- ↳ reservations.ejs
- ↳ services.ejs

JS app.js

{ } package-lock.json

{ } package.json

> OUTLINE

> TIMELINE

views > ↳ index.ejs > ↳ html > ↳ ?

```
1  <!DOCTYPE HTML>
2  <html>
3
4  <%- include("inc/head") -%>
5
6  <body>
7
8      <div class="gtco-loader"></div>
9
10     <div id="page">
11
12         <nav class="gtco-nav" role="navigation">
13             <div class="gtco-container">
14                 Click to collapse the range.
15
16                 <div class="row">
17                     <div class="col-sm-4 col-xs-12">
18                         <div id="gtco-logo">
19                             <a href="index.html">Saboroso
20                             <em>!</em>
21                         </a>
22                     </div>
23                 </div>
24                 <div class="col-xs-8 text-right menu-1">
25                     <ul>
26                         <li>
27                             <a href="index.html">Home</a>
```

🔍 Ln 4, Col 28 Tab Size: 4 UTF-8 LF { HTML ⚡ Go Live ⚡ Prettier ⚡

A screenshot of a code editor interface, likely Visual Studio Code, displaying an EJS file named `index.ejs`. The file content is as follows:

```
<!DOCTYPE HTML>
<html>
<%- include("inc/head") -%>
<body>
  <div class="gtco-loader"></div>
  <div id="page">
    <nav class="gtco-nav" role="navigation">...

A red arrow points from the bottom right towards the opening tag of the nav element on line 12. The code editor's status bar at the bottom indicates "Ln 12, Col 1 (750 selected)".


```

File Edit Selection View Go ... ⟲ ⟳ saboroso [Administrator] ⚡

EXPLORER ... ☰ index.ejs ✎ contacts.ejs menus.ejs reservations.ejs services.ejs head.ejs ⌂ ...

SABOROSO

- bin
- inc
- db.js
- node_modules
- public
- routes
- index.js
- users.js
- views
- inc
- head.ejs
- contacts.ejs
- error.ejs
- index.ejs
- menus.ejs
- reservations.ejs
- services.ejs

JS app.js

{ package-lock.json

{ package.json

> OUTLINE

> TIMELINE

views > index.ejs > html > ? > body > div#page

```
1 1<!DOCTYPE HTML>
2 2<html>
3 3
4 4<%- include("inc/head") -%>
5 5
6 6<body>
7 7
8 8<div class="gtco-loader"></div>
9 9
10 10<div id="page">
11 11
12 12<header id="gtco-header" class="gtco-cover gtco-cover-md" role="banner"
13 13 style="background-image: url(images/img_bg_1.jpg)"
14 14 data-stellar-background-ratio="0.5">
15 15<div class="overlay"></div>
16 16<div class="gtco-container">
17 17<div class="row">
18 18<div class="col-md-12 col-md-offset-0 text-left">
19 19
20 20
21 21
22 22
23 23
24 24<div class="row row-mt-15em">
<div class="col-md-7 mt-text animate-box"
data-animate-effect="fadeInUp">
<span class="intro-text-small">Feito por
```

Ln 12, Col 1 Tab Size: 4 UTF-8 LF { HTML ⚡ Go Live ⚡ Prettier



The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Home, Refresh, Stop, Minimize, Maximize, Close.
- Explorer Sidebar:** Shows the project structure under 'SABOROSO'. The 'header-menu.ejs' file is selected and highlighted with a blue background.
- Code Editor:** The 'header-menu.ejs' file is open. The code is an EJS template for a header menu. A red arrow points from the 'header-menu.ejs' tab in the top navigation bar to the 'header-menu.ejs' file in the Explorer sidebar.
- Code Content:**

```
<nav class="gtco-nav" role="navigation">
  <div class="gtco-container">
    <div class="row">
      <div class="col-sm-4 col-xs-12">
        <div id="gtco-logo">
          <a href="index.html">Saboroso
            <em>!</em>
          </a>
        </div>
      </div>
      <div class="col-xs-8 text-right menu-1">
        <ul>
          <li>
            <a href="index.html">Home</a>
          </li>
          <li>
            <a href="menu.html">Menu</a>
          </li>
          <li>
            <a href="services.html">Serviços</a>
          </li>
          <li>
            <a href="contact.html">Contato</a>
          </li>
        <ul class="btn-cta">
```
- Status Bar:** Ln 36, Col 7, Spaces: 4, CRLF, HTML, Go Live, Prettier.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the window title "saboroso [Administrator]". The menu bar includes File, Edit, Selection, View, Go, and other options. The Explorer sidebar on the left shows a project structure under a folder named "SABOROSO". The "header-menu.ejs" file is open in the main editor area. The code is an EJS template for a navigation bar. A red arrow points to the line of code where the href attribute of the anchor tag for the logo is highlighted. The code is as follows:

```
<nav class="gtco-nav" role="navigation">
  <div class="gtco-container">
    <div class="row">
      <div class="col-sm-4 col-xs-12">
        <div id="gtco-logo">
          <a href="index.html">Saboroso
            <em>!</em>
          </a>
        </div>
      </div>
      <div class="col-xs-8 text-right menu-1">
        <ul>
          <li>
            <a href="index.html">Home</a>
          </li>
          <li>
            <a href="menu.html">Menu</a>
          </li>
          <li>
            <a href="services.html">Serviços</a>
          </li>
          <li>
            <a href="contact.html">Contato</a>
          </li>
          <li class="btn-cta">

```

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... index.ejs header-menu.ejs contacts.ejs menus.ejs reservations.ejs services.ejs ...

SABOROSO

- > bin
- < inc
 - JS db.js
- > node_modules
- > public
- < routes
 - JS index.js
 - JS users.js
- < views
 - < inc
 - ↳ head.ejs
 - ↳ header-menu.ejs
 - ↳ contacts.ejs
 - ↳ error.ejs
 - ↳ index.ejs
 - ↳ menus.ejs
 - ↳ reservations.ejs
 - ↳ services.ejs
- JS app.js
- { package-lock.json
- ...

OUTLINE

TIMELINE

```
vs > inc > ↳ header-menu.ejs > nav.gtco-nav > div.gtco-container > div.row > div.col-sm-4.col-xs-12 > div#gtco-logo > a
1   <nav class="gtco-nav" role="navigation">
2     <div class="gtco-container">
3       <div class="row">
4         <div class="col-sm-4 col-xs-12">
5           <div id="gtco-logo">
6             <a href="/">Saboroso
7               <em>!</em>
8             </a>
9           </div>
10          </div>
11        <div class="col-xs-8 text-right menu-1">
12          <ul>
13            <li>
14              <a href="index.html">Home</a>
15            </li>
16            <li>
17              <a href="menu.html">Menu</a>
18            </li>
19            <li>
20              <a href="services.html">Serviços</a>
21            </li>
22            <li>
23              <a href="contact.html">Contato</a>
24            </li>
25            <li class="btn-cta">
26              <a href="#">Reservar</a>

```

Ln 7, Col 30 (1 selected) Spaces: 4 CRLF { HTML Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the window title "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the folder "SABOROSO". The current file being edited is "header-menu.ejs", which contains the following code:

```
<nav class="gtco-nav" role="navigation">
  <div class="gtco-container">
    <div class="row">
      <div class="col-sm-4 col-xs-12">
        <div id="gtco-logo">
          <a href="/">Saboroso
            <em>!</em>
          </a>
        </div>
      </div>
      <div class="col-xs-8 text-right menu-1">
        <ul>
          <li>
            <a href="index.html">Home</a>
          </li>
          <li>
            <a href="menu.html">Menu</a>
          </li>
          <li>
            <a href="services.html">Serviços</a>
          </li>
          <li>
            <a href="contact.html">Contato</a>
          </li>
          <li class="btn-cta">
            <a href="#">Reservar</a>
          </li>
        </ul>
      </div>
    </div>
  </div>
</nav>
```

A red arrow points to the line of code where the href attribute of the first menu item is set to "index.html".

The status bar at the bottom shows the following information: Line 15, Column 34 (10 selected), Spaces: 4, CRLF, HTML, Go Live, Prettier.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar (EXPLORER) displays the project structure under the "SABOROSO" folder, including files like "bin", "inc", "db.js", "node_modules", "public", "routes", "index.js", "users.js", "views", "inc", "head.ejs", and "header-menu.ejs". The "header-menu.ejs" file is currently open in the main editor area. The code is an EJS template for a navigation bar:

```
<nav class="gtco-nav" role="navigation">
  <div class="gtco-container">
    <div class="row">
      <div class="col-sm-4 col-xs-12">
        <div id="gtco-logo">
          <a href="/">Saboroso
            <em>!</em>
          </a>
        </div>
      </div>
      <div class="col-xs-8 text-right menu-1">
        <ul>
          <li>
            <a href="/">Home</a>
          </li>
          <li>
            <a href="menu.html">Menu</a>
          </li>
          <li>
            <a href="services.html">Serviços</a>
          </li>
          <li>
            <a href="contact.html">Contato</a>
          </li>
          <li class="btn-cta">
            <a href="#">Call To Action</a>
          </li>
        </ul>
      </div>
    </div>
  </div>
</nav>
```

A red arrow points to the first item in the menu's list, which is the "Home" link ([Home](/)). The status bar at the bottom indicates the current line and column: "Ln 15, Col 34 (1 selected)".

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Home, Stop, Refresh, Minimize, Maximize, Close.
- Explorer:** Shows the project structure under "SABOROSO".
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - head.ejs
 - header-menu.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
- Header:** index.ejs (selected), header-menu.ejs (highlighted), contacts.ejs, menus.ejs, reservations.ejs, services.ejs, ...
- Code Area:** Content of "header-menu.ejs".

```
> inc > header-menu.ejs > nav.gtco-nav > div.gtco-container > div.row > div.col-xs-8.text-right.menu-1 > ul > li > a
1   <nav class="gtco-nav" role="navigation">
2     <div class="gtco-container">
3       <div class="row">
4         <div class="col-sm-4 col-xs-12">
5           <div id="gtco-logo">
6             <a href="/">Saboroso
7               <em>!</em>
8             </a>
9           </div>
10        </div>
11        <div class="col-xs-8 text-right menu-1">
12          <ul>
13            <li>
14              <a href="/">Home</a>
15            </li>
16            <li>
17              <a href="menu.html">Menu</a>
18            </li>
19            <li>
20              <a href="services.html">Serviços</a>
21            </li>
22            <li>
23              <a href="contact.html">Contato</a>
24            </li>
25            <li class="btn-cta">
```
- Bottom Bar:** Line 18, Col 34 (9 selected), Spaces: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the window title "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the "SABOROSO" folder, including files like "index.ejs", "header-menu.ejs" (which is currently selected), "contacts.ejs", "menus.ejs", "reservations.ejs", and "services.ejs". The main editor area shows the content of "header-menu.ejs". The code is an EJS template with the following structure:

```
> inc > header-menu.ejs > nav.gtco-nav > div.gtco-container > div.row > div.col-xs-8.text-right.menu-1 > ul > li > a
1   <nav class="gtco-nav" role="navigation">
2     <div class="gtco-container">
3       <div class="row">
4         <div class="col-sm-4 col-xs-12">
5           <div id="gtco-logo">
6             <a href="/">Saboroso
7               <em>!</em>
8             </a>
9           </div>
10          </div>
11        <div class="col-xs-8 text-right menu-1">
12          <ul>
13            <li>
14              <a href="/">Home</a>
15            </li>
16            <li>
17              <a href="/menus">Menu</a>
18            </li>
19            <li>
20              <a href="services.html">Serviços</a>
21            </li>
22            <li>
23              <a href="contact.html">Contato</a>
24            </li>
25            <li class="btn-cta">
```

A red arrow points to the href attribute of the third menu item, which is set to "/menus".

The bottom status bar shows the current line and column: "Ln 18, Col 40 (6 selected)". Other status indicators include "Spaces: 4", "CRLF", "HTML", "Go Live", and "Prettier".

A screenshot of the Visual Studio Code (VS Code) interface, showing the code editor with the file `header-menu.ejs` open. The file contains EJS (Embedded JavaScript) code for a header menu. Red arrows point from the bottom of the image to specific menu items in the code.

```
<em>!</em>
</a>
</div>
</div>
<div class="col-xs-8 text-right menu-1">
  <ul>
    <li>
      <a href="/">Home</a>
    </li>
    <li>
      <a href="/menus">Menu</a>
    </li>
    <li>
      <a href="/services">Serviços</a>
    </li>
    <li>
      <a href="/contacts">Contato</a>
    </li>
    <li class="btn-cta">
      <a href="/reservations">
        <span>Reserva</span>
      </a>
    </li>
  </ul>
</div>
</div>
```

The code defines a navigation bar with a right-aligned menu. The menu items are:

- Home
- Menu
- Serviços
- Contato
- Reserva

Red arrows point to the menu items "Serviços", "Contato", and "Reserva". The "Reserva" item is highlighted with a blue selection bar at the bottom of the code editor.

A screenshot of a code editor interface, likely Visual Studio Code, showing a file named `index.ejs` open. The editor has a dark theme with syntax highlighting for HTML and CSS. A red arrow points from the `index.ejs` entry in the Explorer sidebar to the same entry in the top tab bar. Another red arrow points from the `index.ejs` entry in the Explorer sidebar to the code editor area, specifically pointing at the opening tag `<div id="page">`. The code editor shows the following content:

```
1  <!DOCTYPE HTML>
2  <html>
3
4  <%- include("inc/head") -%>
5
6  <body>
7
8      <div class="gtco-loader"></div>
9
10     <div id="page">
11
12         <header id="gtco-header" class="gtco-cover gtco-cover-md" role="banner"
13             style="background-image: url(images/img_bg_1.jpg)"
14             data-stellar-background-ratio="0.5">
15             <div class="overlay"></div>
16             <div class="gtco-container">
17                 <div class="row">
18                     <div class="col-md-12 col-md-offset-0 text-left">
19
20
21
22
23
24             <div class="row row-mt-15em">
25                 <div class="col-md-7 mt-text animate-box"
26                     data-animate-effect="fadeInUp">
27                     <span class="intro-text-small">Feito por
```

The Explorer sidebar on the left lists the project structure under the `SABOROSO` folder, including files like `bin`, `inc`, `db.js`, `node_modules`, `public`, `routes`, `index.js`, `users.js`, and `views`. The `views` folder contains `index.ejs`, `header-menu.ejs`, `contacts.ejs`, `error.ejs`, and `index.ejs` again. The top right corner shows window control buttons (minimize, maximize, close) and a search bar with the text "saboroso [Administrator]". The bottom status bar shows file information: Line 12, Column 1, Tab Size: 4, UTF-8, LF, HTML, Go Live, Prettier.

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Search icon, Minimize, Maximize, Close.
- Explorer View (Left):**
 - SABOROSO folder
 - bin
 - inc
 - JS db.js
 - node_modules
 - public
 - routes
 - JS index.js
 - JS users.js
 - views
 - inc
 - head.ejs
 - header-menu.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
- Code Editor View (Right):**
 - File tabs: index.ejs, header-menu.ejs, contacts.ejs, menus.ejs, reservations.ejs, services.ejs, ...
 - File structure: views > index.ejs > html > body > div#page > ?
 - Code content:

```
1  <!DOCTYPE HTML>
2  <html>
3
4  <%- include("inc/head") -%>
5
6  <body>
7
8      <div class="gtco-loader"></div>
9
10     <div id="page">
11         <%- include("inc/header-menu") -%>
12
13         <header id="gtco-header" class="gtco-cover gtco-cover-md" role="banner"
14             style="background-image: url(images/img_bg_1.jpg)"
15             data-stellar-background-ratio="0.5">
16             <div class="overlay"></div>
17             <div class="gtco-container">
18                 <div class="row">
19                     <div class="col-md-12 col-md-offset-0 text-left">
20
21
22
23
24             <div class="row row-mt-15em">
25                 <div class="col-md-7 mt-text animate-box"
26                     data-animate-effect="fadeInUp">
27                     <span class="intro-text-small">Feito por
```
 - Line numbers: 1 through 24.
 - Selection: Line 12, Column 9 (34 selected).
 - Status bar: Tab Size: 4, UTF-8, LF, HTML, Go Live, Prettier.


A screenshot of a code editor interface, likely Visual Studio Code, showing the file `index.ejs` open. The editor has a dark theme with syntax highlighting for HTML and EJS code.

The code in `index.ejs` is as follows:

```
1  <!DOCTYPE HTML>
2  <html>
3
4  <%- include("inc/head") -%>
5
6  <body>
7
8      <div class="gtco-loader"></div>
9
10     <div id="page">
11
12         <%- include("inc/header-menu") -%>
13
14     > <header id="gtco-header" class="gtco-cover gtco-cover-md" role="banner"
15         style="background-image: url(images/img_bg_1.jpg); ...
16             </header>
17
18
19         <div class="gtco-section">
20             <div class="gtco-container">
21                 <div class="row">
22                     <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
23                         <h2 class="cursive-font primary-color">Pratos Populares</h2>
24                         <p>Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num
25                             copo é motivis de denguis. Quem num gosta di mé, boa
```

A red arrow points to line 14, which contains the opening tag for the header element. The status bar at the bottom of the editor shows the following information:

- Ln 14, Col 1 (2928 selected)
- Tab Size: 4
- UTF-8
- LF
- HTML
- Go Live
- Prettier

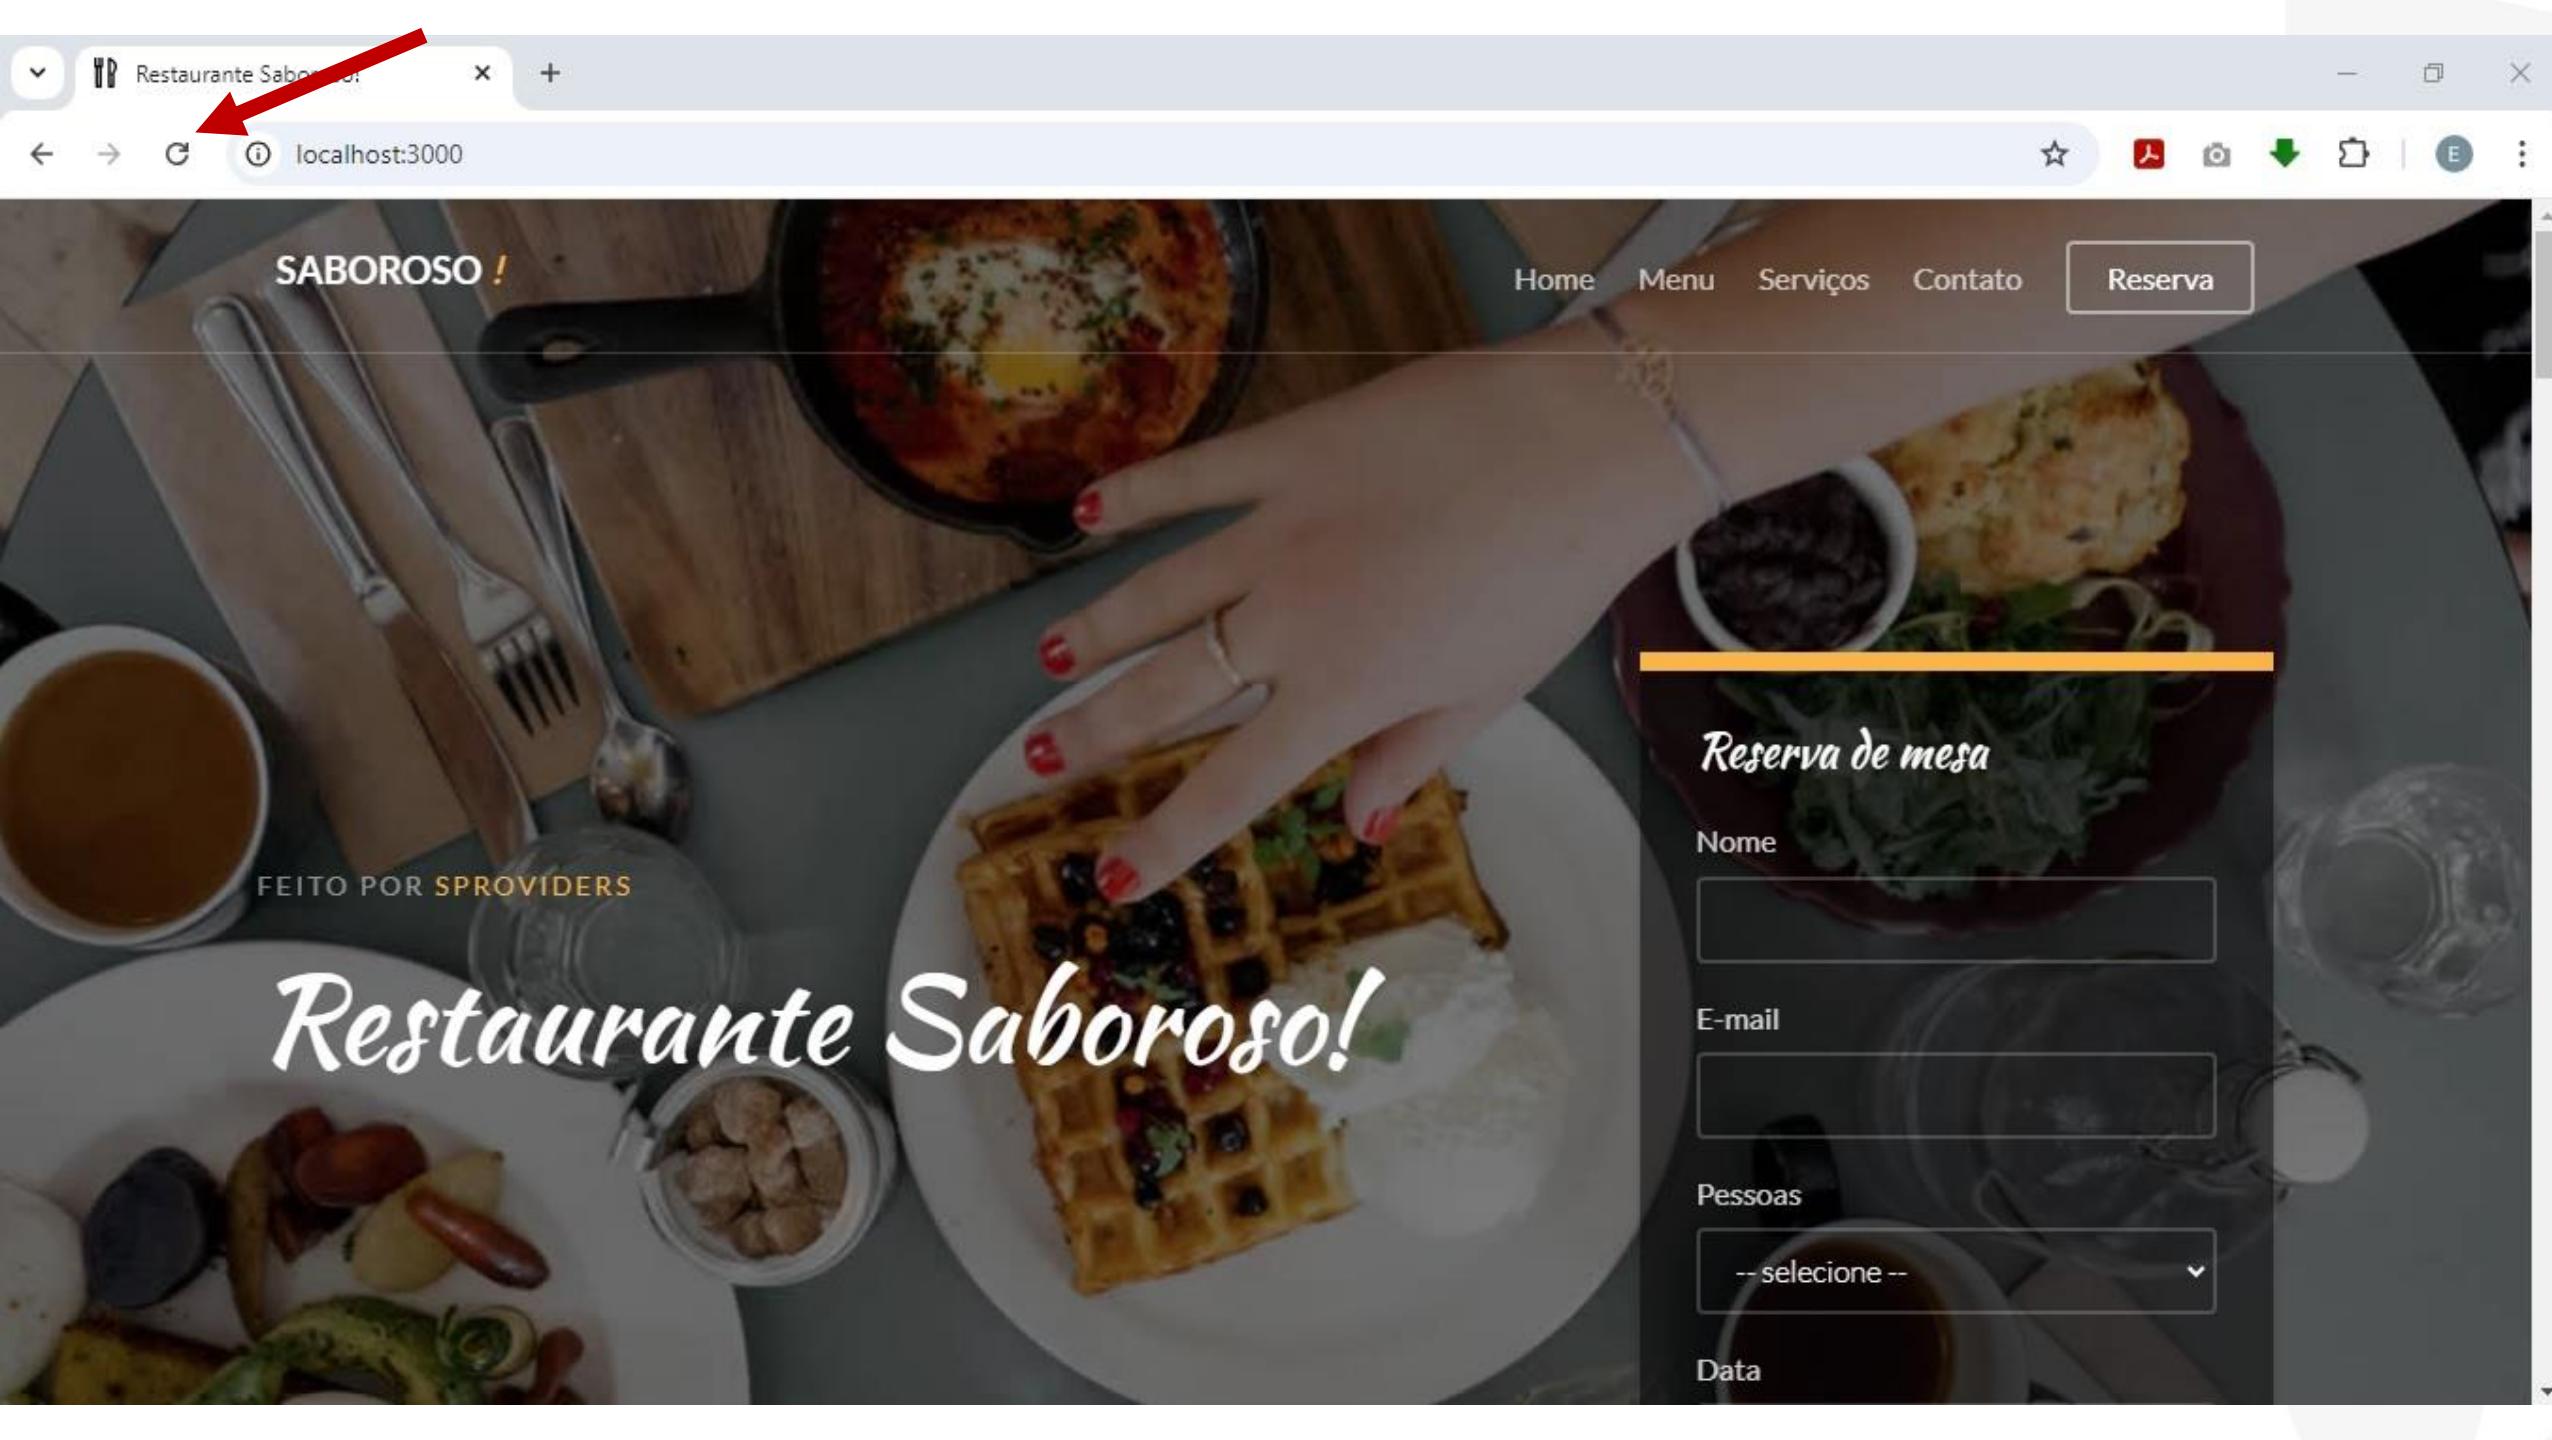

SABOROSO!

FEITO POR SPROVIDERS

Restaurante Saboroso!

Home Menu Serviços Contato

Reserva


Reserva de mesa

Nome

E-mail

Pessoas

Data

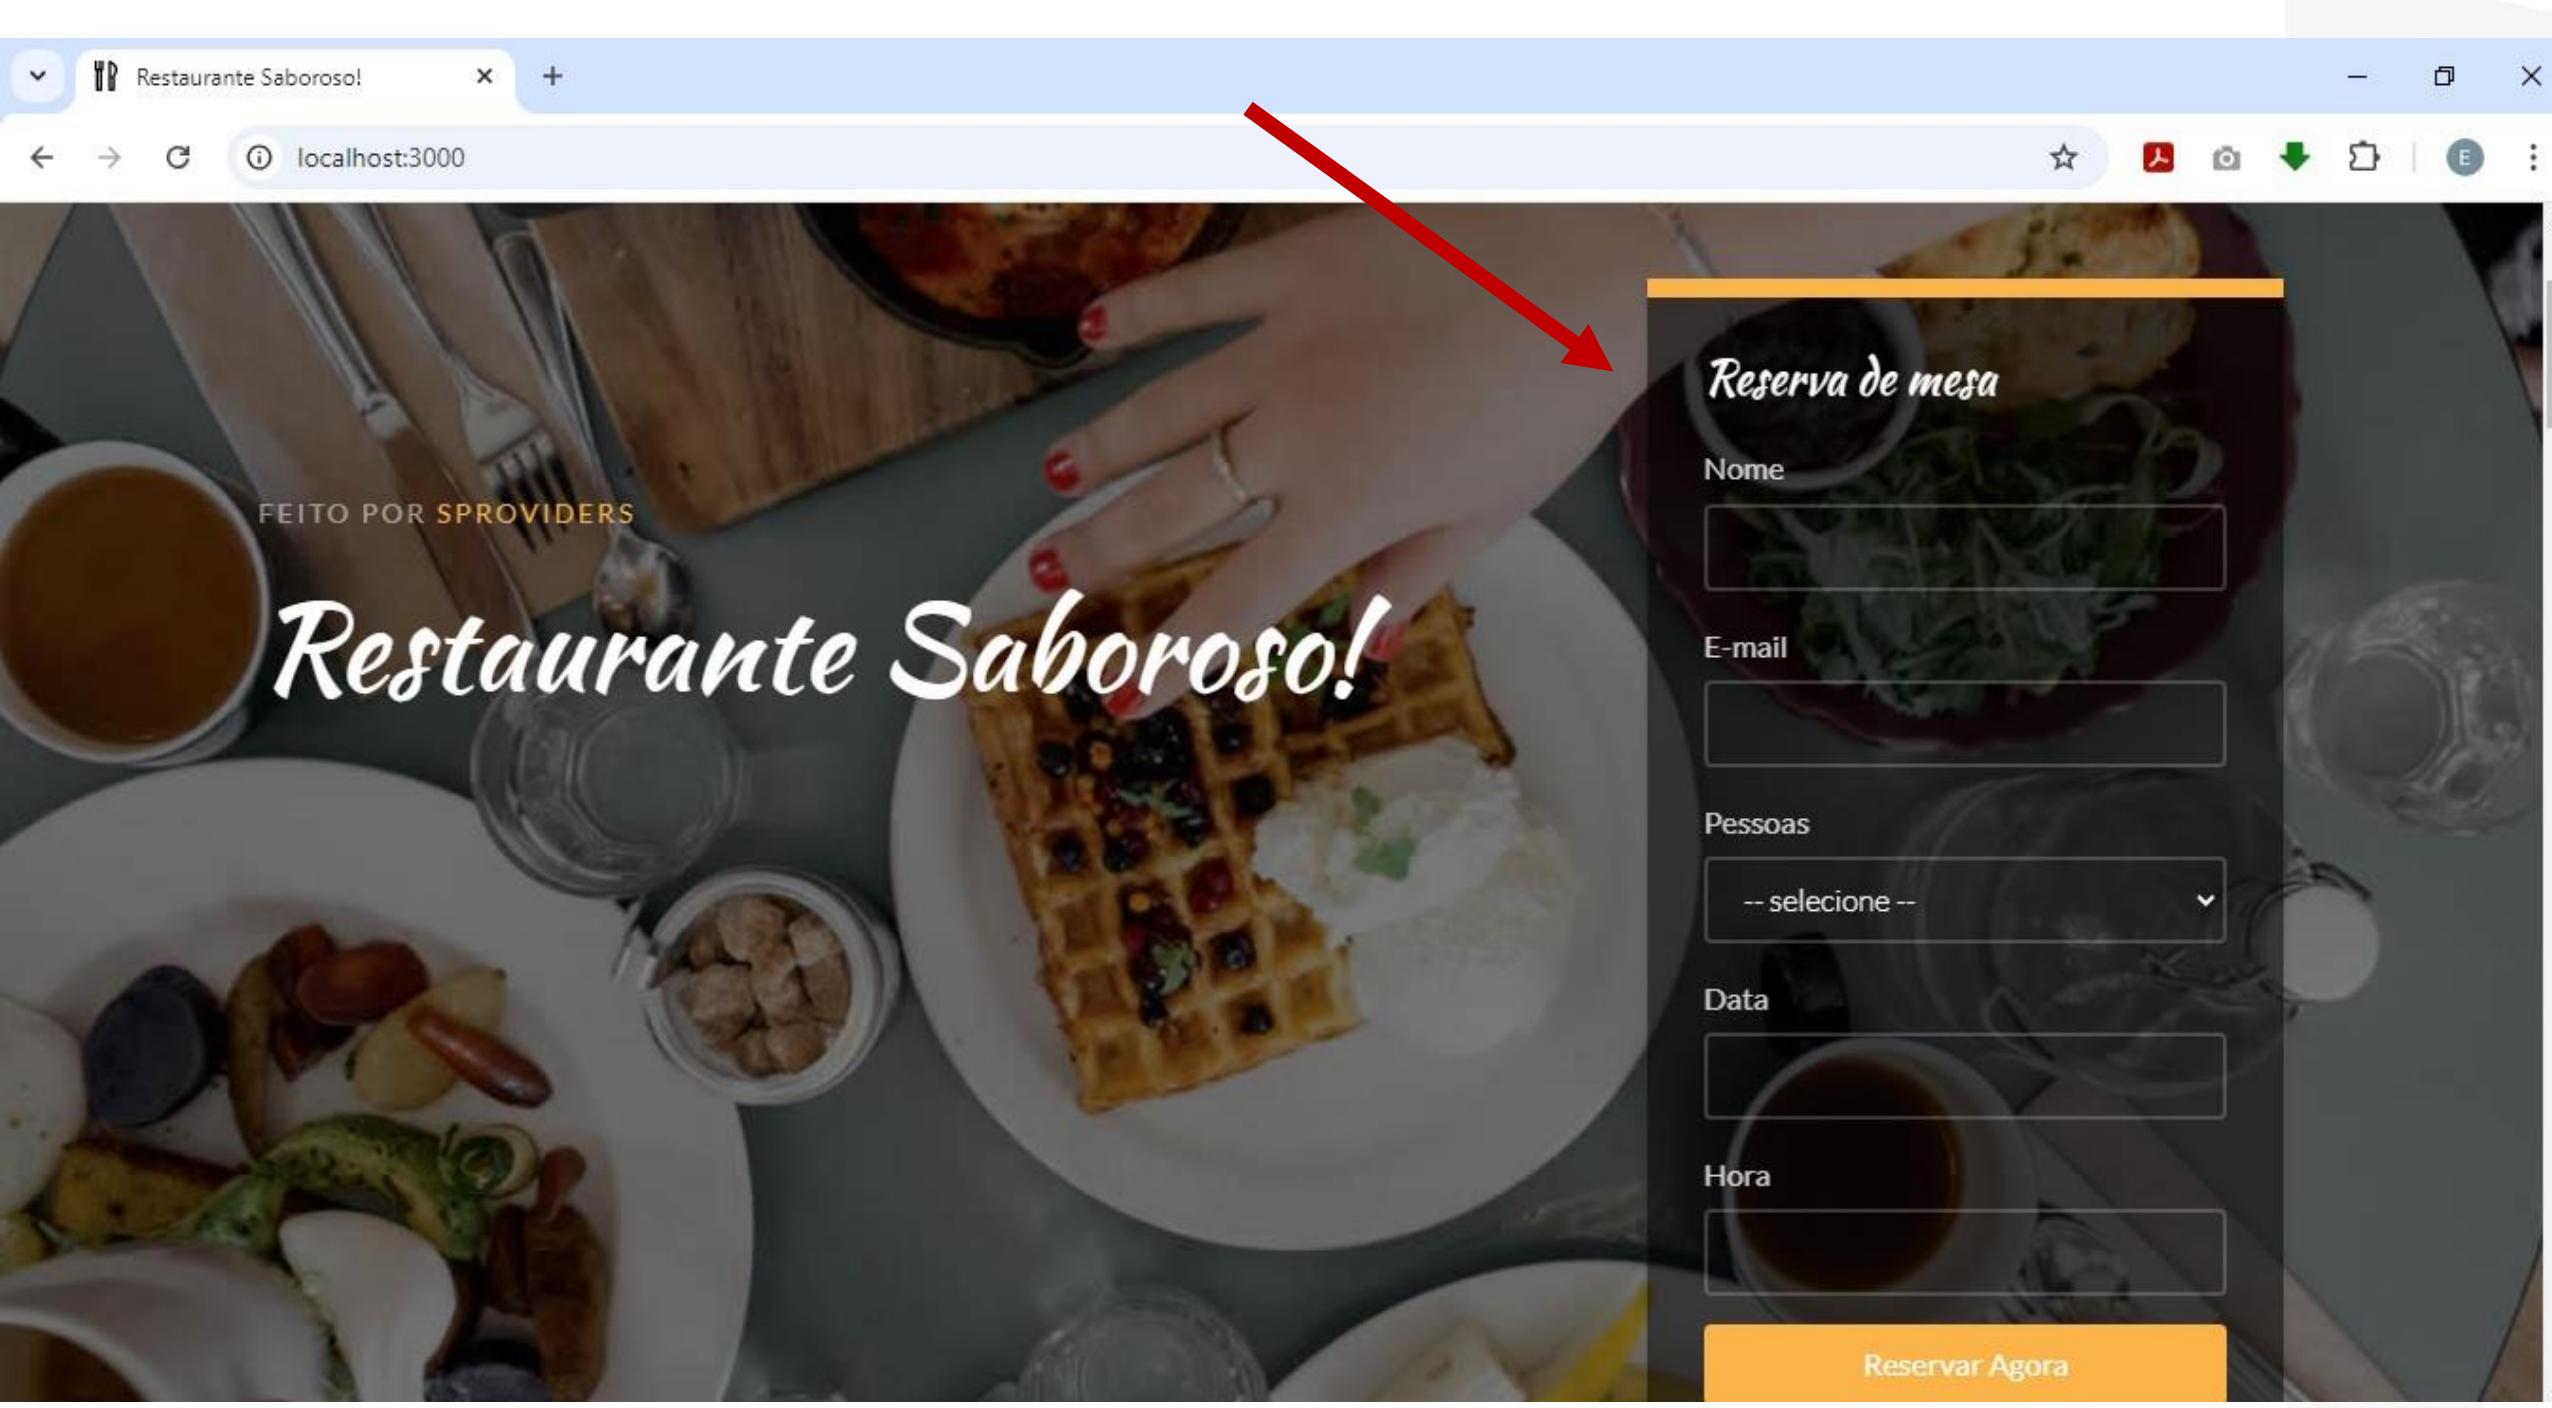

A screenshot of a code editor interface, likely Visual Studio Code, showing the file `index.ejs` open. The editor has a dark theme with syntax highlighting for HTML and EJS code.

The code in `index.ejs` is as follows:

```
<!DOCTYPE HTML>
<html>
<%- include("inc/head") -%>
<body>
<div class="gtco-loader"></div>
<div id="page">
<%- include("inc/header-menu") -%>
<header id="gtco-header" class="gtco-cover gtco-cover-md" role="banner"
style="background-image: url(images/img_bg_1.jpg)">
</header>
<div class="gtco-section">
<div class="gtco-container">
<div class="row">
<div class="col-md-8 col-md-offset-2 text-center gtco-heading">
<h2 class="cursive-font primary-color">Pratos Populares</h2>
<p>Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num
copo é motivis de denguis. Quem num gosta di mé, boa
```

The cursor is positioned at line 14, column 1, where the opening tag `<header ...>` begins. A large red arrow points from the left margin towards this line, highlighting it.

The Explorer sidebar on the left shows the project structure under the `SABOROSO` folder, including files like `bin`, `inc`, `db.js`, `node_modules`, `public`, `routes`, `index.js`, `users.js`, and various `ejs` files.

The status bar at the bottom shows the current line and column (Ln 14, Col 1), the selected tab size (Tab Size: 4), and the encoding (UTF-8). It also includes icons for Go Live and Prettier.

A screenshot of a code editor interface, likely Visual Studio Code, showing an EJS file named `index.ejs`. The file contains the following code:

```
1  <!DOCTYPE HTML>
2  <html>
3
4  <%- include("inc/head") -%>
5
6  <body>
7
8      <div class="gtco-loader"></div>
9
10     <div id="page">
11
12         <%- include("inc/header-menu") -%>
13
14
15
16
17
18     <div class="gtco-section">
19         <div class="gtco-container">
20             <div class="row">
21                 <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
22                     <h2 class="cursive-font primary-color">Pratos Populares</h2>
23                     <p>Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num
24                         copo é motivis de denguis. Quem num gosta di mé, boa
25                         gentis num é.</p>
26             </div>
```

A red arrow points from the left margin to the line of code containing the comment `<%- include("inc/header-menu") -%>`, indicating where the inclusion of the header menu component is defined.

File Edit Selection View Go ... ← → 🔍 saboroso [Administrator] ⚡

EXPLORER ... ↗ header-menu.ejs ↗ index.ejs ↗ header-index.ejs X ↗ contacts.ejs ↗ menus.ejs ↗ reservatic ...

SABOROSO

- > bin
- ✓ inc
- JS db.js
- > node_modules
- > public
- ✓ routes
- JS index.js
- JS users.js
- ✓ views
- ✓ inc
- ↳ head.ejs
- ↳ header-index.ejs
- ↳ header-menu.ejs
- ↳ contacts.ejs
- ↳ error.ejs
- ↳ index.ejs
- ↳ menus.ejs
- ↳ reservations.ejs
- ↳ services.ejs
- JS app.js
- ...

views > inc > ↗ header-index.ejs > ↗ header#gtco-header.gtco-cover.gtco-cover-md

```
1  <header id="gtco-header" class="gtco-cover gtco-cover-md" role="banner"
2    style="background-image: url(images/img_bg_1.jpg)"
3    data-stellar-background-ratio="0.5">
4      <div class="overlay"></div>
5      <div class="gtco-container">
6        <div class="row">
7          <div class="col-md-12 col-md-offset-0 text-left">
8
9            <div class="row row-mt-15em">
10           <div class="col-md-7 mt-text animate-box" data-animate-effect="fadeInUp">
11             <span class="intro-text-small">Feito por
12               <a href="#" target="_blank">SProviders</a>
13             </span>
14             <h1 class="cursive-font">Restaurante Saboroso!</h1>
15           </div>
16           <div class="col-md-4 col-md-push-1 animate-box"
17             data-animate-effect="fadeInRight">
18             <div class="form-wrap">
19               <div class="tab">
20
21                 <div class="tab-content">
22                   <div class="tab-content-inner active" data-content="signup">
23                     <h3 class="cursive-font">Reserva de mesa</h3>
24                     <form action="#">
25                       <div class="row form-group">
```

Ln 81, Col 10 Spaces: 4 UTF-8 CRLF { HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close
- Explorer Sidebar:** Shows the project structure under 'SABOROSO'. The 'views' folder contains 'index.ejs', which is highlighted with a red arrow.
- Code Editor:** The 'index.ejs' tab is active. The code content is as follows:

```
views > index.ejs > html > ? > body > div#page > ?
1   <!DOCTYPE HTML>
2   <html>
3
4   <%- include("inc/head") -%>
5
6   <body>
7
8     <div class="gtco-loader"></div>
9
10    <div id="page">
11
12      <%- include("inc/header-menu") -%>
13
14
15
16
17
18    <div class="gtco-section">
19      <div class="gtco-container">
20        <div class="row">
21          <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
22            <h2 class="cursive-font primary-color">Pratos Populares</h2>
23            <p>Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num
24              copo é motivis de denguis. Quem num gosta di mé, boa
25              gentis num é.</p>
</div>
```
- Status Bar:** Ln 14, Col 1, Tab Size: 4, UTF-8, LF, HTML, Go Live, Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the window title "saboroso [Administrator]". The menu bar includes File, Edit, Selection, View, Go, and other options. The Explorer sidebar on the left shows a project structure under "SABOROSO" with files like "bin", "inc" (containing "db.js"), "node_modules", "public", "routes" (with "index.js" and "users.js"), and "views" (containing "inc" with "head.ejs", "header-index.ejs", "header-menu.ejs", "contacts.ejs", "error.ejs", "index.ejs" (selected), "menus.ejs", "reservations.ejs", "services.ejs", and "app.js"). The "OUTLINE" and "TIMELINE" sections are also visible. The main editor area displays the "index.ejs" file content:

```
views > index.ejs > html > ? > body > div#page > ?  
1 1 <!DOCTYPE HTML>  
2 2 <html>  
3 3  
4 4 <%- include("inc/head") -%>  
5 5  
6 6 <body>  
7 7  
8 8 <div class="gtco-loader"></div>  
9 9  
10 10 <div id="page">  
11 11  
12 12 <%- include("inc/header-menu") -%>  
13 13 <%- include("inc/header-index") -%>  
14 14  
15 15 <div class="gtco-section">  
16 16 <div class="gtco-container">  
17 17 <div class="row">  
18 18 <div class="col-md-8 col-md-offset-2 text-center gtco-heading">  
19 19 <h2 class="cursive-font primary-color">Pratos Populares</h2>  
20 20 <p>Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num  
copo é motivis de denguis. Quem num gosta di mé, boa  
gentis num é.</p>  
21 21 </div>  
22 22 </div>  
23 23 </div class="row">  
24 24  
25 25
```

A red arrow points to the line "%> include('inc/header-index') -%" in the code.

The status bar at the bottom shows "Ln 13, Col 1 (37 selected)", "Tab Size: 4", "UTF-8", "LF", "HTML", "Go Live", "Prettier", and icons for search, file operations, and notifications.

A screenshot of a code editor interface, likely Visual Studio Code, showing an EJS file named `index.ejs`. The file contains the following code:

```
1  <!DOCTYPE HTML>
2  <html>
3
4  <%- include("inc/head") -%>
5
6  <body>
7
8      <div class="gtco-loader"></div>
9
10     <div id="page">
11
12         <%- include("inc/header-menu") -%>
13         <%- include("inc/header-index") -%>
14
15         <div class="gtco-section">
16             <div class="gtco-container">
17                 <div class="row">
18                     <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
19                         <h2 class="cursive-font primary-color">Pratos Populares</h2>
20                         <p>Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num
21                             copo é motivis de denguis. Quem num gosta di mé, boa
22                             gentis num é.</p>
23
24                 </div>
25             </div>
26         <div class="row">
```

A red arrow points to the line of code `<%- include("inc/header-menu") -%>`, which includes the header menu template. The code editor's sidebar shows the project structure under the `SABOROSO` folder, and the bottom status bar indicates the current line and column (Ln 12, Col 1) and selected text count (36 selected).

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Top Tabs:** header-menu.ejs, index.ejs, header-index.ejs, contacts.ejs (highlighted), menus.ejs, reservations.ejs
- Left Sidebar (EXPLORER):** Shows the project structure under SABOROSO:
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - contacts.ejs (highlighted)
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
- Bottom Status Bar:** Ln 11, Col 1 (753 selected) Tab Size: 4 CRLF { HTML Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

- > bin
- ✓ inc
 - JS db.js
- > node_modules
- > public
- ✓ routes
 - JS index.js
 - JS users.js
- ✓ views
 - ✓ inc
 - ↳ head.ejs
 - ↳ header-index.ejs
 - ↳ header-menu.ejs
 - ↳ contacts.ejs
 - ↳ error.ejs
 - ↳ index.ejs
 - ↳ menus.ejs
 - ↳ reservations.ejs
 - ↳ services.ejs
- JS app.js
- ...

views > ↳ contacts.ejs > ↳ html > ↳ ? > ↳ body > ↳ div#page > ↳ ?

```
1  <!DOCTYPE HTML>
2  <html>
3  |   <%- include("inc/head") -%>
4  |   <body>
5  |
6  |       <div class="gtco-loader"></div>
7  |
8  |       <div id="page">
9  |
10 |           <%- include("inc/header-menu") -%>
11 |
12 |           <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"
13 |               style="background-image: url(images/img_bg_3.jpg)">
14 |               <div class="overlay"></div>
15 |               <div class="gtco-container">
16 |                   <div class="row">
17 |                       <div class="col-md-12 col-md-offset-0 text-center">
18 |                           <div class="row row-mt-15em">
19 |                               <div class="col-md-12 mt-text animate-box"
20 |                                   data-animate-effect="fadeInUp">
21 |                                       <span class="intro-text-small">Feito por
22 |                                           <a href="#" target="_blank">SProviders.com.br</a>
23 |                                       </span>
24 |                                       <h1 class="cursive-font">Diga um oi!</h1>
|                               </div>
```

Ln 10, Col 5 (34 selected) Tab Size: 4 CRLF { HTML ⚡ Go Live ✓ Prettier

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer:** Shows a file tree under the project name "SABOROSO".
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
- Current File:** menus.ejs (selected, highlighted with a red arrow)
- Content Area:** Displays the code for the menus.ejs file.

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>

    <div class="gtco-loader"></div>

    <div id="page">

      <nav class="gtco-nav" role="navigation">...
```
- Status Bar:** Ln 11, Col 1 (753 selected) Tab Size: 4 CRLF { HTML Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO

- bin
- inc
- db.js
- node_modules
- public
- routes
- index.js
- users.js
- views
- inc
- head.ejs
- header-index.ejs
- header-menu.ejs
- contacts.ejs
- error.ejs
- index.ejs
- menus.ejs
- reservations.ejs
- services.ejs

header-menu.ejs index.ejs header-index.ejs contacts.ejs menus.ejs reservations.ejs services.ejs

views > menus.ejs > html > ? > body > div#page > ?

```
1  <!DOCTYPE HTML>
2  <html>
3  |   <%- include("inc/head") -%>
4  |   <body>
5
6   <div class="gtco-loader"></div>
7
8   <div id="page">
9
10  <%- include("inc/header-menu") -%>
11
12  <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"
13  style="background-image: url(images/img_bg_1.jpg)" data-stellar-background-ratio="0.5">
14      <div class="overlay"></div>
15      <div class="gtco-container">
16          <div class="row">
17              <div class="col-md-12 col-md-offset-0 text-center">
18
19                  <div class="row row-mt-15em">
20                      <div class="col-md-12 mt-text animate-box"
21                          data-animate-effect="fadeInUp">
22                          <span class="intro-text-small">Feito por
23                          <a href="#" target="_blank">SProviders.com.br</a>
24                          </span>
25                  <h1 class="curs" Select Indentation Prettier ie nosso menu!</h1>
```

Ln 10, Col 5 (34 selected) Tab Size: 4 UTF-8 CRLF { HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Top Tabs:** er-menu.ejs, index.ejs, header-index.ejs, contacts.ejs, menus.ejs, reservations.ejs (highlighted)
- Left Sidebar (EXPLORER):** Shows the project structure under 'SABOROSO'. The 'views' folder contains 'reservations.ejs' (highlighted).
- Code Editor:** The 'reservations.ejs' file content is displayed:

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>

    <div class="gtco-loader"></div>

    <div id="page">

      <nav class="gtco-nav" role="navigation">...
```
- Bottom Status Bar:** Ln 11, Col 1 (810 selected) Tab Size: 4 CRLF { HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Print, Copy, Paste, Find, Replace, Undo, Redo, Save, Open, Save As, New, Find in Files, Find in Projects, Find in Directories, Find in Editors, Find in Explorer, Find in Outline, Find in Timeline, Find in Services, Find in App.js, Find in Services.ejs, Find in Header-Index.ejs, Find in Contacts.ejs, Find in Menus.ejs, Find in Reservations.ejs.
- Explorer:** Shows the project structure under 'SABOROSO': bin, inc (db.js), node_modules, public, routes (index.js, users.js), and views (inc (head.ejs, header-index.ejs, header-menu.ejs), contacts.ejs, error.ejs, index.ejs, menus.ejs, reservations.ejs). The 'reservations.ejs' file is currently selected.
- Code Editor:** The 'reservations.ejs' file content is displayed:

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>

    <div class="gtco-loader"></div>

    <div id="page">

      <%- include("inc/header-menu") -%>

      <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"
style="background-image: url(images/img_bg_2.jpg)">
        <div class="overlay"></div>
        <div class="gtco-container">
          <div class="row">
            <div class="col-md-12 col-md-offset-0 text-center">

              <div class="row row-mt-15em">
                <div class="col-md-12 mt-text animate-box"
data-animate-effect="fadeInUp">
                  <span class="intro-text-small">Feito por
                    <a href="#" target="_blank">SProviders.com.br</a>
                  </span>
                  <h1 class="cursive-font">Reserve uma Mesa!</h1>
                </div>
              </div>
            </div>
          </div>
        </div>
      </header>
```
- Status Bar:** Ln 10, Col 1 (35 selected) Tab Size: 4 CRLF { HTML Go Live Prettier

The screenshot shows a code editor interface with a dark theme. The top menu bar includes File, Edit, Selection, View, Go, and a separator. The title bar displays "saboroso [Administrator]". The right side of the title bar features standard window control buttons (minimize, maximize, close) and a search bar.

The left sidebar, titled "EXPLORER", lists the project structure under "SABOROSO". It includes "bin", "inc" (with "db.js" highlighted in yellow), "node_modules", "public", "routes" (with "index.js" and "users.js" highlighted in yellow), and "views" (with "inc" expanded, showing "head.ejs", "header-index.ejs", "header-menu.ejs", "contacts.ejs", "error.ejs", "index.ejs", "menus.ejs", "reservations.ejs", and "services.ejs" all highlighted in yellow). Other files like "app.js" and ".gitignore" are also listed. Below "views" are sections for "OUTLINE" and "TIMELINE".

The main content area shows the file "services.ejs". The code uses EJS templating, starting with `<!DOCTYPE HTML>` and including the "inc/head" file. It defines a "gtco-loader" div and a "page" div containing a navigation bar ("gtco-nav") and a header ("gtco-header"). The header has a background image and a central text area with a "text-center" class. The footer section contains a "row" with a "col-md-12 col-md-offset-0" column and an "animate-box" with an "fadeInUp" effect, linking to "SProviders.com.br".

```
<!DOCTYPE HTML>
<%- include("inc/head") -%>
<body>

<div class="gtco-loader"></div>

<div id="page">

<nav class="gtco-nav" role="navigation">...
</nav>

<header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"
style="background-image: url(images/img_bg_1.jpg) data-stellar-background-ratio="0.5">
<div class="overlay"></div>
<div class="gtco-container">
<div class="row">
<div class="col-md-12 col-md-offset-0 text-center">

<div class="row row-mt-15em">
<div class="col-md-12 mt-text animate-box"
data-animate-effect="fadeInUp">
<span class="intro-text-small">Feito por
<a href="#" target="_blank">SProviders.com.br</a>
</span>

```

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close
- Explorer Sidebar:** Shows a project structure under "SABOROSO".
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
- Outline Sidebar:** OUTLINE, TIMELINE
- Code Editor:** The current file is "services.ejs". The code is a JSP-like template with the following structure:

```
1 <!DOCTYPE HTML>
2 <%- include("inc/head") -%>
3 <body>
4
5 <div class="gtco-loader"></div>
6
7 <div id="page">
8
9 <%- include("inc/header-menu") -%>
10
11 <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"
12 style="background-image: url(images/img_bg_1.jpg) data-stellar-background-ratio="0.5">
13 <div class="overlay"></div>
14 <div class="gtco-container">
15 <div class="row">
16 <div class="col-md-12 col-md-offset-0 text-center">
17
18 <div class="row row-mt-15em">
19 <div class="col-md-12 mt-text animate-box"
20 data-animate-effect="fadeInUp">
21 <span class="intro-text-small">Feito por
22 <a href="#" target="_blank">SProviders.com.br</a>
23 </span>
24 <h1 class="cursive-font">É um prazer poder servir!</h1>
</div>
```
- Status Bar:** Ln 9, Col 1 (35 selected), Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier

File Edit Selection View Go ... < > saboroso [Administrator] ⚡

EXPLORER ... index.ejs header-index.ejs contacts.ejs ✘ menus.ejs reservations.ejs services.ejs ⌂ ...

SABOROSO

- bin
- inc
- db.js
- node_modules
- public
- routes
- index.js
- users.js
- views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs

views > contacts.ejs > html > ? > body > div#page > ?

```
1  <!DOCTYPE HTML>
2  <html>
3  |   <%- include("inc/head") -%>
4  |   <body>
5
6  |       <div class="gtco-loader"></div>
7
8  |       <div id="page">
9
10 |           <%- include("inc/header-menu") -%>
11 |           <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"
12 |               style="background-image: url(images/img_bg_3.jpg)">
13 |                   </header>
14
15 |           <div class="gtco-section">
16 |               <div class="gtco-container">
17 |                   <div class="row">
18 |                       <div class="col-md-12">
19 |                           <div class="col-md-6 animate-box">
20 |                               <h3>Entre em Contato</h3>
21 |                               <form action="#">
22 |                                   <div class="row form-group">
23 |                                       <div class="col-md-12">
24 |                                           <label class="sr-only" for="name">Nome</label>
```

Ln 12, Col 1 (648 selected) Tab Size: 4 UTF-8 CRLF { HTML ⌂ Go Live ⌂ Prettier ⌂

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Search icon, Minimize, Maximize, Close.
- Explorer Sidebar:** Shows the project structure under "SABOROSO".
 - bin
 - inc (highlighted with a red arrow)
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - OUTLINE
 - TIMELINE
- Code Editor:** The tab "contacts.ejs" is active. The code content is:

```
1 <!DOCTYPE HTML>
2 <html>
3     <%- include("inc/head") -%>
4     <body>
5
6         <div class="gtco-loader"></div>
7
8         <div id="page">
9
10            <%- include("inc/header-menu") -%>
11
12
13
14
15            <div class="gtco-section">
16                <div class="gtco-container">
17                    <div class="row">
18                        <div class="col-md-12">
19                            <div class="col-md-6 animate-box">
20                                <h3>Entre em Contato</h3>
21                                <form action="#">
22                                    <div class="row form-group">
23                                        <div class="col-md-12">
24                                            <label class="sr-only" for="name">Nome</label>
25                                            <input type="text" id="name" class="form-control" placeholder="Seu nome">
```
- Bottom Status Bar:** Ln 12, Col 1, Tab Size: 4, CRLF, HTML, Go Live, Prettier.

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO

- > bin
- inc
- JS db.js
- > node_modules
- > public
- routes
- JS index.js
- JS users.js
- views
- inc
- ↳ head.ejs
- ↳ header-index.ejs
- ↳ header-menu.ejs
- ↳ header.ejs
- ↳ contacts.ejs
- ↳ error.ejs
- ↳ index.ejs
- ↳ menus.ejs
- ↳ reservations.ejs
- ↳ services.ejs

views > inc > ↳ header.ejs > ↳ header#gtco-header.gtco-cover.gtco-cover-sm

```
1 <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"  
2 style="background-image: url(images/img_bg_3.jpg);"  
3 <div class="overlay"></div>  
4 <div class="gtco-container">  
5 <div class="row">  
6 <div class="col-md-12 col-md-offset-0 text-center">  
7 <div class="row row-mt-15em">  
8 <div class="col-md-12 mt-text animate-box" data-animate-effect="fadeInUp">  
9 <span class="intro-text-small">Feito por  
10 <a href="#" target="_blank">SProviders.com.br</a>  
11 </span>  
12 <h1 class="cursive-font">Diga um oi!</h1>  
13 </div>  
14 </div>  
15 </div>  
16 </div>  
17 </div>  
18 </div>  
19 </div>  
20 </header>
```

Ln 20, Col 10 Spaces: 4 UTF-8 { HTML ⚡ Go Live ✅ Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... index.ejs header-index.ejs contacts.ejs header.ejs ✎ menus.ejs reservations.ejs ⏹ ...

SABOROSO

- bin
- inc
- db.js
- node_modules
- public
- routes
- index.js
- users.js
- views
- inc
- head.ejs
- header-index.ejs
- header-menu.ejs
- header.ejs
- contacts.ejs
- error.ejs
- index.ejs
- menus.ejs
- reservations.ejs
- services.ejs

views > inc > header.ejs > header#gtco-header.gtco-cover.gtco-cover-sm

```
1 <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"
2   style="background-image: url(images/img_bg_3.jpg)">
3     <div class="overlay"></div>
4     <div class="gtco-container">
5       <div class="row">
6         <div class="col-md-12 col-md-offset-0 text-center">
7           <div class="row row-mt-15em">
8             <div class="col-md-12 mt-text animate-box" data-animate-effect="fadeInUp">
9               <span class="intro-text-small">Feito por
10              <a href="#" target="_blank">SProviders.com.br</a>
11            </span>
12            <h1 class="cursive-font">Diga um oi!</h1>
13          </div>
14        </div>
15      </div>
16    </div>
17  </div>
18</div>
19</div>
20</header>
```

Ln 1, Col 121 (19 selected) Spaces: 4 CRLF { HTML ⏹ Go Live ✓ Prettier ⏹



File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... index.ejs header-index.ejs contacts.ejs header.ejs ✎ menus.ejs reservations.ejs ⌂ ...

SABOROSO

- bin
- inc
- db.js
- node_modules
- public
- routes
- index.js
- users.js
- views
- inc
- head.ejs
- header-index.ejs
- header-menu.ejs
- header.ejs
- contacts.ejs
- error.ejs
- index.ejs
- menus.ejs
- reservations.ejs
- services.ejs

views > inc > header.ejs > header#gtco-header.gtco-cover.gtco-cover-sm

```
1  <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"
2    style="background-image: url(<%-background-%>)">
3    <div class="overlay"></div>
4    <div class="gtco-container">
5      <div class="row">
6        <div class="col-md-12 col-md-offset-0 text-center">
7          <div class="row row-mt-15em">
8            <div class="col-md-12 mt-text animate-box" data-animate-effect="fadeInUp">
9              <span class="intro-text-small">Feito por
10             <a href="#" target="_blank">SProviders.com.br</a>
11           </span>
12           <h1 class="cursive-font">Diga um oi!</h1>
13         </div>
14       </div>
15     </div>
16   </div>
17 </div>
18 </div>
19 </div>
20 </header>
```

Ln 1, Col 118 (16 selected) Spaces: 4 UTF-8 CRLF { HTML ⚡ Go Live ✓ Prettier ⌂

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Minimize, Maximize, Close, Minimize, Maximize, Close.
- Explorer Sidebar:** Shows the project structure under the folder "SABOROSO".
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js (highlighted with a red arrow)
 - users.js
 - views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - .
- Editor Tab:** index.js (highlighted with a red arrow)

routes > JS index.js > router.get('/services') callback

```
14      }
15
16      res.render('index', {
17          title: 'Restaurante Saboroso!',
18          menus: results
19      });
20
21  });
22
23  });
24
25  router.get('/contacts', function(req, res, next) {
26
27      res.render('contacts',{
28          title: 'Contato - Restaurante Saboroso!'
29      });
30  });
31
32  router.get('/menus', function(req, res, next) {
33
34      res.render('menus', {
35          title: 'Menus - Restaurante Saboroso!'
36      });
37  });
38
39  router.get('/reservations', function(req, res, next) {
```
- Bottom Status Bar:** Ln 49, Col 24 (54 selected), Spaces: 2, UTF-8, LF, JavaScript, Go Live, Prettier.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the file path: routes > JS index.js > router.get('/contacts') callback > title. The code editor displays the following JavaScript code:

```
14     }
15
16     res.render('index', {
17         title: 'Restaurante Saboroso!',
18         menus: results
19     });
20
21 });
22
23 });
24
25 router.get('/contacts', function(req, res, next) {
26
27     res.render('contacts',{
28         title: 'Contato - Restaurante Saboroso!',
29         background: "images/img_bg_3.jpg"
30     });
31 });
32
33 router.get('/menus', function(req, res, next) {
34
35     res.render('menus', {
36         title: 'Menus - Restaurante Saboroso!'
37     });
38 });
39
```

A red arrow points to the line of code: `background: "images/img_bg_3.jpg"`. The code editor's status bar at the bottom indicates the current line is 28, column 45, with 39 selected characters. The status bar also shows the file type as JavaScript, encoding as UTF-8, line separator as LF, and the Prettier extension is active.

A screenshot of the Visual Studio Code (VS Code) interface. The Explorer sidebar on the left shows a file tree for a project named 'SABOROSO'. The 'views' folder contains several EJS files: header.ejs, menus.ejs, reservations.ejs, services.ejs, head.ejs, and index.js. A red arrow points from the status bar at the bottom to the 'header.ejs' file in the Explorer. The Editor tab bar at the top has tabs for 'header.ejs' (which is active), 'menus.ejs', 'reservations.ejs', 'services.ejs', 'head.ejs', and 'index.js'. The main editor area displays the content of the 'header.ejs' file, which is an EJS template for a header. The code includes a header element with a background image, an overlay, and a container. Inside the container, there's a row with a centered column containing text and a large h1 heading. The h1 heading 'Diga um oi!' is highlighted with a gray box and has a red arrow pointing towards it from the bottom right. The status bar at the bottom shows the current line (Ln 12), column (Col 61), and character count (11 selected). It also displays file encoding (UTF-8), line endings (CRLF), and icons for HTML, Go Live, and Prettier.

```
<header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner" style="background-image: url(<%-background-%>)";>
  <div class="overlay"></div>
  <div class="gtco-container">
    <div class="row">
      <div class="col-md-12 col-md-offset-0 text-center">
        <div class="row row-mt-15em">
          <div class="col-md-12 mt-text animate-box" data-animate-effect="fadeInUp">
            <span class="intro-text-small">Feito por<br/><a href="#" target="_blank">SProviders.com.br</a></span>
            <h1 class="cursive-font">Diga um oi!</h1>
          </div>
        </div>
      </div>
    </div>
  </div>
</header>
```

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the folder "SABOROSO". The current file being edited is "header.ejs", which contains the following code:

```
> div.col-md-12.col-md-offset-0.text-center > div.row.row-mt-15em > div.col-md-12.mt-text.animate-box > h1.cursive-font > ?  
1   <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"  
2     style="background-image: url(<%-background-%>)";  
3     <div class="overlay"></div>  
4     <div class="gtco-container">  
5       <div class="row">  
6         <div class="col-md-12 col-md-offset-0 text-center">  
7           <div class="row row-mt-15em">  
8             <div class="col-md-12 mt-text animate-box" data-animate-effect="fadeInUp">  
9               <span class="intro-text-small">Feito por  
10              <a href="#" target="_blank">SProviders.com.br</a>  
11            </span>  
12            <h1 class="cursive-font"><%-h1-%></h1>  
13          </div>  
14        </div>  
15      </div>  
16    </div>  
17  </div>  
18 </div>  
19 </div>  
20 </header>
```


A red arrow points from the bottom right towards the selected `<h1 class="cursive-font"><%-h1-%></h1>` line in the code editor.

The status bar at the bottom shows the current line and column: "Ln 12, Col 50 (8 selected)". Other status indicators include "Spaces: 4", "UTF-8", "CRLF", "HTML", "Go Live", "Prettier", and a bell icon.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar (Explorer) lists the project structure under the "SABOROSO" folder, including "bin", "inc", "db.js", "node_modules", "public", "routes", "index.js" (which is highlighted and has a red arrow pointing to it), and "users.js". The main editor area displays the "index.js" file content:

```
routes > JS index.js > router.get('/contacts') callback > background
14     }
15
16     res.render('index', {
17         title: 'Restaurante Saboroso!',
18         menus: results
19     });
20
21 });
22
23 });
24
25 router.get('/contacts', function(req, res, next) {
26
27     res.render('contacts',{
28         title: 'Contato - Restaurante Saboroso!',
29         background: "images/img_bg_3.jpg"
30     });
31 });
32
33 router.get('/menus', function(req, res, next) {
34
35     res.render('menus', {
36         title: 'Menus - Restaurante Saboroso!'
37     });
38 });
39
```

The status bar at the bottom shows the file path "index.js", line "Ln 29, Col 38", and encoding "UTF-8". It also includes icons for Go Live, Prettier, and other extensions.

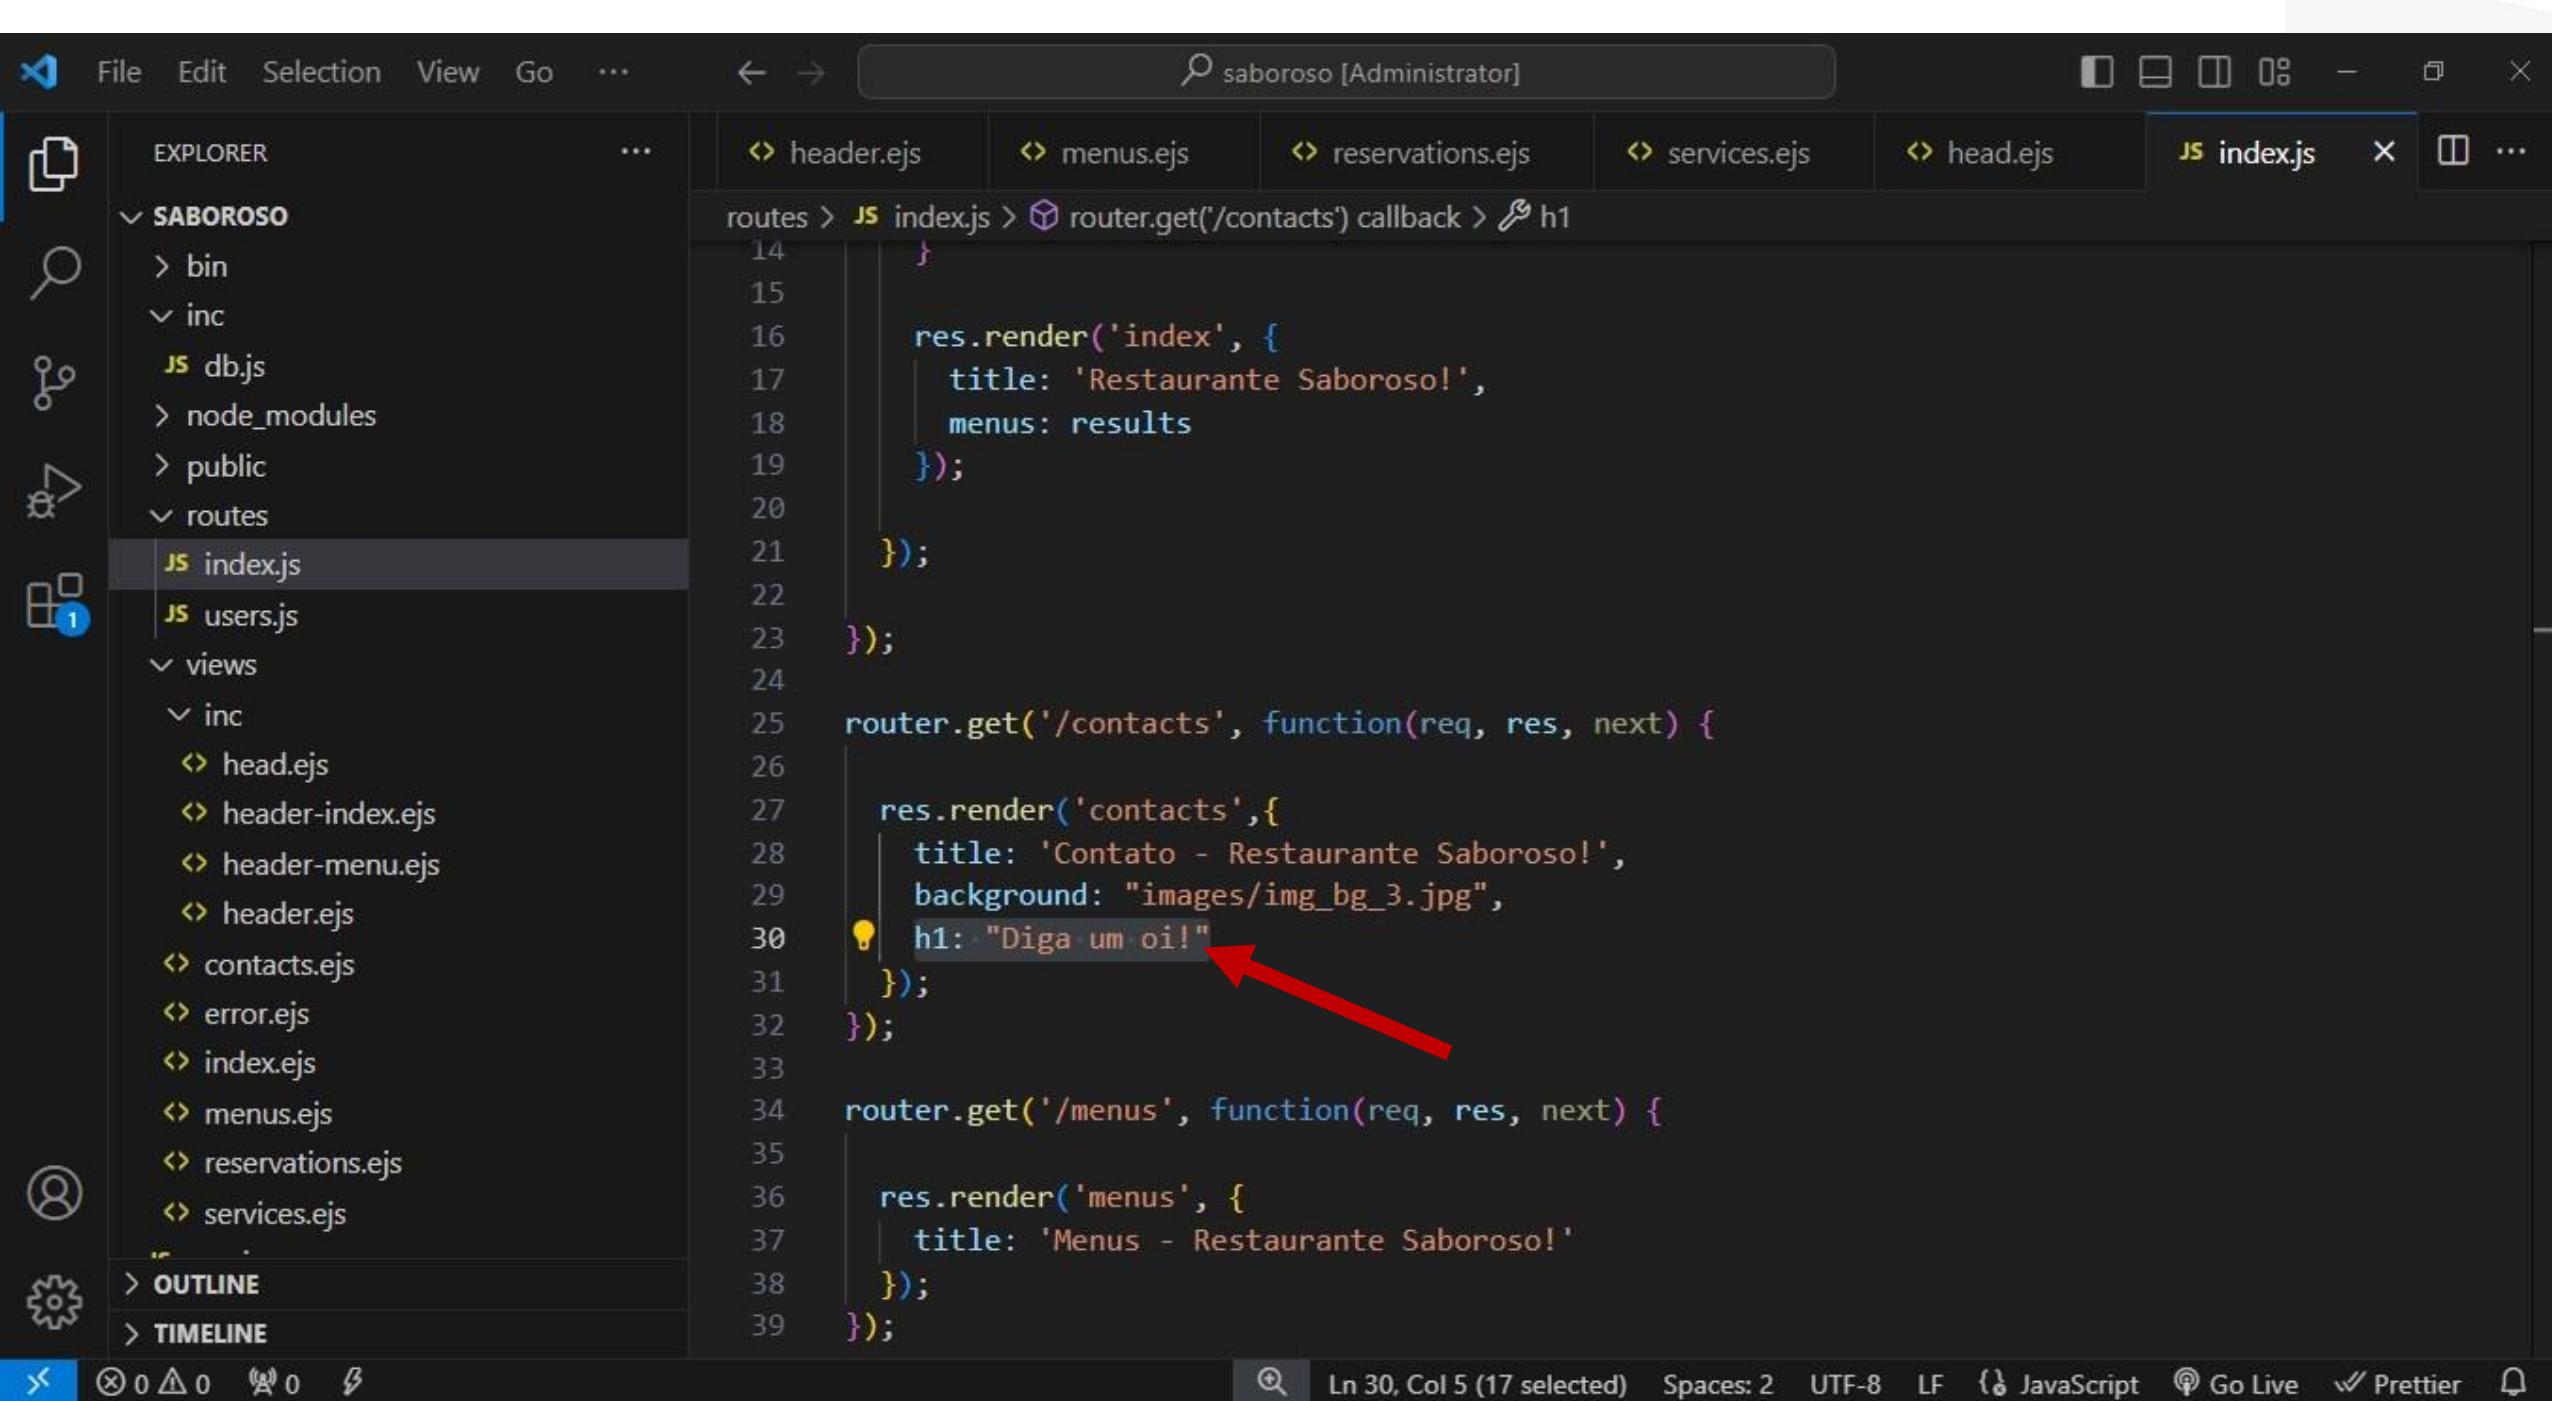

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Home, Stop, Refresh, Minimize, Maximize, Close.
- Explorer:** Shows a project structure under "SABOROSO".
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js (selected)
 - users.js
 - views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
- Code Editor:** Displays the content of index.js.

```
routes > JS index.js > router.get('/contacts') callback > title
14     }
15
16     res.render('index', {
17         title: 'Restaurante Saboroso!',
18         menus: results
19     });
20
21 });
22
23 });
24
25 router.get('/contacts', function(req, res, next) {
26
27     res.render('contacts',{
28         title: 'Contato - Restaurante Saboroso!',
29         background: "images/img_bg_3.jpg",
30         h1: "Diga um oi!"
31     });
32 });
33
34 router.get('/menus', function(req, res, next) {
35
36     res.render('menus', {
37         title: 'Menus - Restaurante Saboroso!'
38     });
39 });
```

A red arrow points to the line of code: `background: "images/img_bg_3.jpg",`.
- Bottom Status Bar:** Ln 28, Col 45 (62 selected), Spaces: 2, UTF-8, LF, JavaScript, Go Live, Prettier.

A screenshot of the Visual Studio Code (VS Code) interface. The top navigation bar includes File, Edit, Selection, View, Go, and other standard options. The search bar at the top right contains the text "saboroso [Administrator]". The left sidebar, titled "EXPLORER", shows a file tree for a project named "SABOROSO". The "routes" folder contains "index.js", which is currently selected and highlighted with a blue background. Other files in the routes folder include "header.ejs", "menus.ejs", "reservations.ejs", "services.ejs", and "head.ejs". Below the routes folder are "bin", "inc", "db.js", "node_modules", "public", and "views" folders, each containing various EJS and JS files. The main editor area displays the content of "index.js". The code is written in JavaScript and uses Express.js routing. It defines three routes: "/menus", "/reservations", and "/services". Each route's callback function sets the response's title, background image, and an "h1" header with the text "Diga um oi!". Three red arrows point from the bottom right towards the "h1" title in each of the three rendered views. The status bar at the bottom shows the line number (Ln 58), column number (Col 22), spaces (Spaces: 2), encoding (UTF-8), line feed (LF), file type (JavaScript), and Prettier status.

```
routes > index.js > router.get('/services') callback > h1
34   router.get('/menus', function(req, res, next) {
35
36     res.render('menus', {
37       title: 'Menus - Restaurante Saboroso!',
38       background: "images/img_bg_3.jpg",
39       h1: "Diga um oi!"
40     });
41   });
42
43 router.get('/reservations', function(req, res, next) {
44
45   res.render('reservations', {
46     title: 'Reservas - Restaurante Saboroso!',
47     background: "images/img_bg_3.jpg",
48     h1: "Diga um oi!"
49   });
50
51 });
52
53 router.get('/services', function(req, res, next) {
54
55   res.render('services', {
56     title: 'Serviços - Restaurante Saboroso!',
57     background: "images/img_bg_3.jpg",
58     h1: "Diga um oi!"
59   });

```

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Home, Refresh, Minimize, Maximize, Close.
- Left Sidebar (EXPLORER):**
 - SABOROSO folder
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs (highlighted with a red arrow)
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
- Right Panel:** A code editor window showing the contents of the selected file, contacts.ejs. The code is as follows:

```
1  <!DOCTYPE HTML>
2  <html>
3  |   <%- include("inc/head") -%>
4  |   <body>
5
6      <div class="gtco-loader"></div>
7
8      <div id="page">
9
10         <%- include("inc/header-menu") -%>
11
12
13
14
15      <div class="gtco-section">
16          <div class="gtco-container">
17              <div class="row">
18                  <div class="col-md-12">
19                      <div class="col-md-6 animate-box">
20                          <h3>Entre em Contato</h3>
21                          <form action="#">
22                              <div class="row form-group">
23                                  <div class="col-md-12">
24                                      <label class="sr-only" for="name">Nome</label>
25                                      <input type="text" id="name" class="form-control" placeholder="Seu nome">
```
- Bottom Status Bar:** Ln 12, Col 1, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

The screenshot shows a code editor interface with a dark theme. The top menu bar includes File, Edit, Selection, View, Go, and other options. The title bar says "saboroso [Administrator]". The left sidebar, titled "EXPLORER", shows a project structure under "SABOROSO": bin, inc (with db.js), node_modules, public, routes (index.js, users.js), and views (inc (head.ejs, header-index.ejs, header-menu.ejs, header.ejs), contacts.ejs, error.ejs, index.ejs, menus.ejs, reservations.ejs, services.ejs). The "views" folder is expanded. The "contacts.ejs" tab is active. The code editor displays the following EJS template:

```
1  <!DOCTYPE HTML>
2  <html>
3      <%- include("inc/head") -%>
4      <body>
5
6          <div class="gtco-loader"></div>
7
8          <div id="page">
9
10             <%- include("inc/header-menu") -%>
11             <%- include("inc/header") -%> ← Red arrow points here
12
13             <div class="gtco-section">
14                 <div class="gtco-container">
15                     <div class="row">
16                         <div class="col-md-12">
17                             <div class="col-md-6 animate-box">
18                                 <h3>Entre em Contato</h3>
19                                 <form action="#">
20                                     <div class="row form-group">
21                                         <div class="col-md-12">
22                                             <label class="sr-only" for="name">Nome</label>
23                                             <input type="text" id="name" class="form-control" placeholder="Seu nome">
24                                         </div>
```

The status bar at the bottom indicates "Ln 11, Col 1 (30 selected) Tab Size: 4 CRLF { HTML Go Live Prettier".

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Minimize, Maximize, Close, Minimize, Maximize, Close.
- Explorer Sidebar:** Shows a project structure under 'SABOROSO'. The 'views' folder contains 'index.ejs', 'users.js', and 'menus.ejs'. A red arrow points to the 'menus.ejs' file in the list.
- Code Editor:** The current file is 'menus.ejs'. The code is an EJS template for a page. It includes includes for 'inc/head' and 'inc/header-menu'. It features a header with a background image and a main content area with a title.
- Status Bar:** Ln 10, Col 1 (35 selected) Tab Size: 4 UTF-8 CRLF { HTML Go Live Prettier

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>

    <div class="gtco-loader"></div>

    <div id="page">

      <%- include("inc/header-menu") -%>

      <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"
style="background-image: url(images/img_bg_1.jpg)" data-stellar-background-ratio="0.5">
        <div class="overlay"></div>
        <div class="gtco-container">
          <div class="row">
            <div class="col-md-12 col-md-offset-0 text-center">

              <div class="row row-mt-15em">
                <div class="col-md-12 mt-text animate-box"
data-animate-effect="fadeInUp">
                  <span class="intro-text-small">Feito por
                    <a href="#" target="_blank">SProviders.com.br</a>
                  </span>
                  <h1 class="cursive-font">Saboreie nosso menu!</h1>
                </div>
              </div>
            </div>
          </div>
        </div>
      </header>
```

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Standard window control icons.
- Explorer:** Shows the project structure under "SABOROSO".
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
- Code Editor:** The current file is "menus.ejs". The code is as follows:

```
1  <!DOCTYPE HTML>
2  <html>
3  <%- include("inc/head") -%>
4  <body>
5
6  <div class="gtco-loader"></div>
7
8  <div id="page">
9
10 <%- include("inc/header-menu") -%>
11 <%- include("inc/header") -%> ← Red arrow points here
12
13 <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"
14 style="background-image: url(images/img_bg_1.jpg)" data-stellar-background-ratio="0.5">
15   <div class="overlay"></div>
16   <div class="gtco-container">
17     <div class="row">
18       <div class="col-md-12 col-md-offset-0 text-center">
19
20         <div class="row row-mt-15em">
21           <div class="col-md-12 mt-text animate-box"
22             data-animate-effect="fadeInUp">
23               <span class="intro-text-small">Feito por
24                 <a href="#" target="_blank">SProviders.com.br</a>
25               </span>
```
- Status Bar:** Ln 11, Col 1 (30 selected) Tab Size: 4 CRLF { HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Search icon, Minimize, Maximize, Close.
- Explorer:** Shows the project structure under "SABOROSO".
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
- Outline:** Shows the current file structure.
- Timeline:** Shows the history of changes.
- Code Editor:** The file "menus.ejs" is open. The code is an EJS template. A red arrow points to the following line of CSS code:

```
<header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner" style="background-image: url(images/img_bg_1.jpg) data-stellar-background-ratio="0.5">
```
- Bottom Status Bar:** Ln 13, Col 125 (19 selected), Tab Size: 4, CRLF, HTML, Go Live, Prettier.

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... header.ejs menus.ejs reservations.ejs services.ejs head.ejs JS index.js ⌂ ...

SABOROSO

- bin
- inc
- db.js
- node_modules
- public
- routes
- index.js
- users.js

views

- inc
- head.ejs
- header-index.ejs
- header-menu.ejs
- header.ejs
- contacts.ejs
- error.ejs
- index.ejs
- menus.ejs
- reservations.ejs
- services.ejs
- ...

routes > JS index.js > router.get('/menus') callback > background

```
23 });
24
25 router.get('/contacts', function(req, res, next) {
26
27   res.render('contacts',{
28     title: 'Contato - Restaurante Saboroso!',
29     background: "images/img_bg_3.jpg",
30     h1: "Diga um oi!"
31   });
32 }
33
34 router.get('/menus', function(req, res, next) {
35
36   res.render('menus', {
37     title: 'Menus - Restaurante Saboroso!',
38     background: "images/img_bg_3.jpg",
39     h1: "Diga um oi!"
40   });
41 }
42
43 router.get('/reservations', function(req, res, next) {
44
45   res.render('reservations', {
46     title: 'Reservas - Restaurante Saboroso!',
47     background: "images/img_bg_3.jpg",
48     h1: "Diga um oi!"
```

Ln 38, Col 18 (19 selected) Spaces: 2 UTF-8 LF { JavaScript Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... ↗ header.ejs ↗ menus.ejs ↗ reservations.ejs ↗ services.ejs ↗ head.ejs JS index.js ⌂ ...


SABOROSO

- bin
- inc
- db.js
- node_modules
- public
- routes
- index.js
- users.js
- views
- inc
- head.ejs
- header-index.ejs
- header-menu.ejs
- header.ejs
- contacts.ejs
- error.ejs
- index.ejs
- menus.ejs
- reservations.ejs
- services.ejs
- .

routes > JS index.js > router.get('/menus') callback > background

```
23  });
24
25  router.get('/contacts', function(req, res, next) {
26
27    res.render('contacts',{
28      title: 'Contato - Restaurante Saboroso!',
29      background: "images/img_bg_3.jpg",
30      h1: "Diga um oi!"
31    });
32  });
33
34  router.get('/menus', function(req, res, next) {
35
36    res.render('menus', {
37      title: 'Menus - Restaurante Saboroso!',
38      background: "images/img_bg_1.jpg", // Red arrow points here
39      h1: "Diga um oi!"
40    });
41  });
42
43  router.get('/reservations', function(req, res, next) {
44
45    res.render('reservations', {
46      title: 'Reservas - Restaurante Saboroso!',
47      background: "images/img_bg_3.jpg",
48      h1: "Diga um oi!"
```

Ln 38, Col 18 (19 selected) Spaces: 2 UTF-8 LF { JavaScript Go Live Prettier

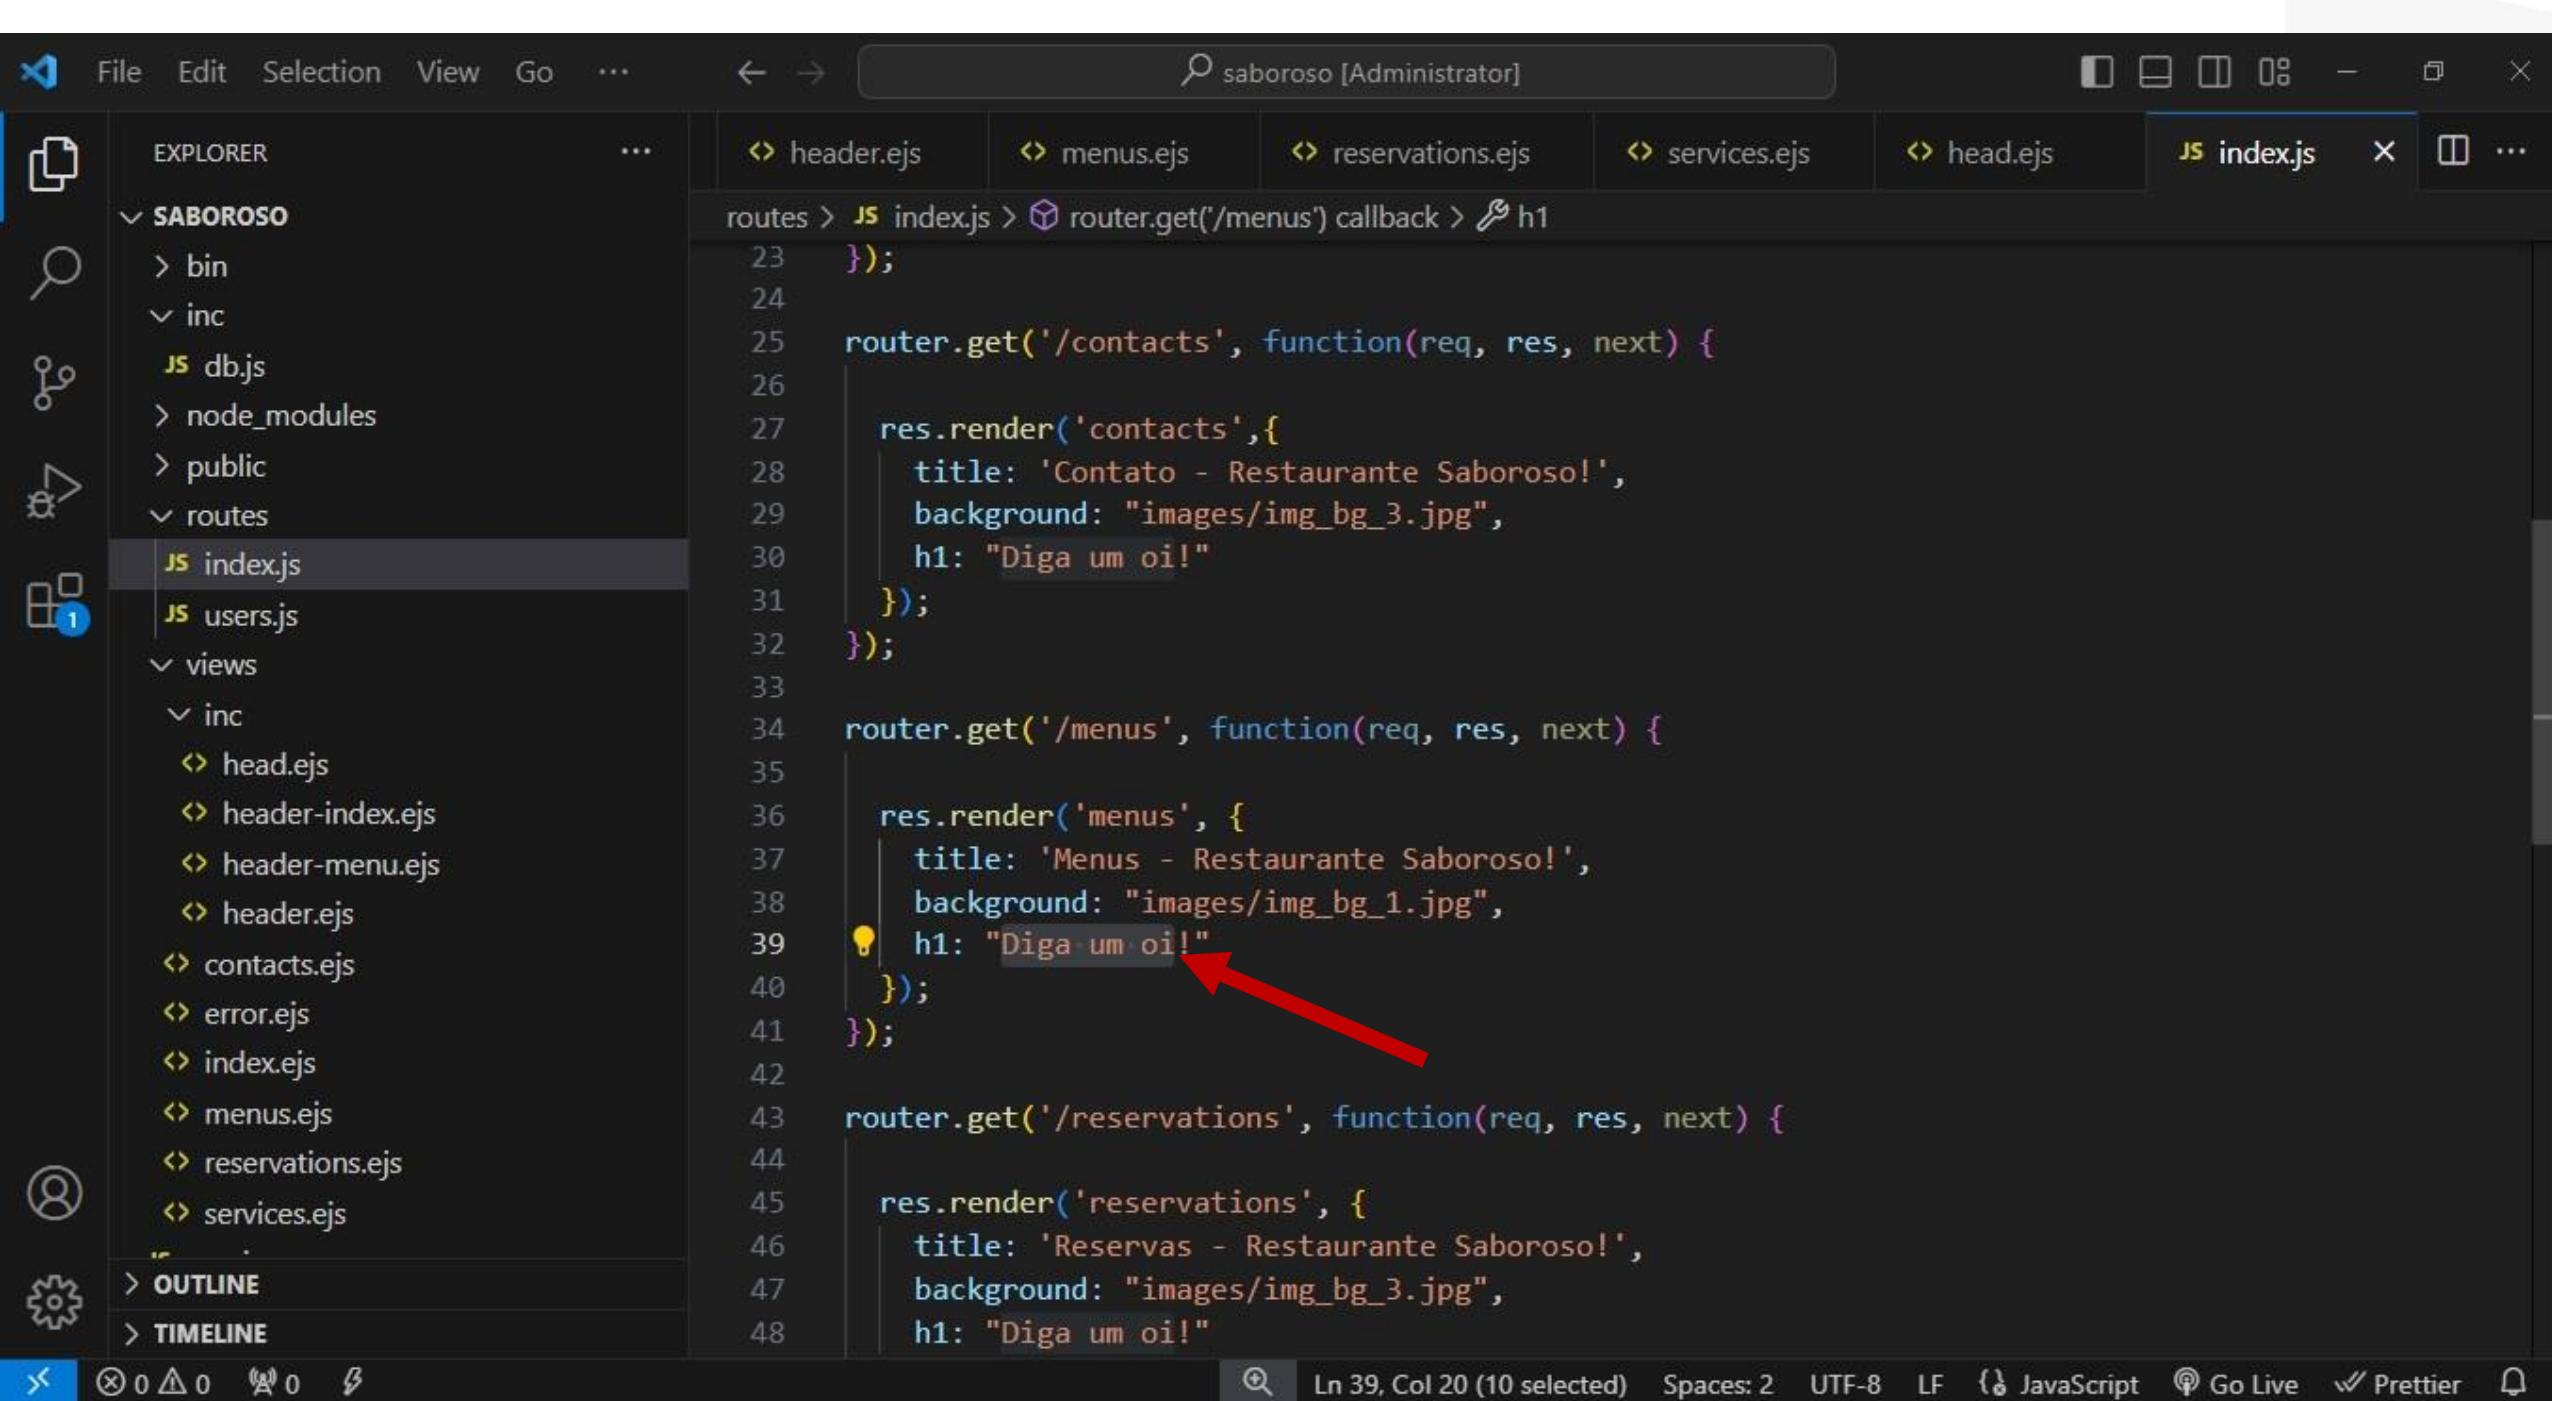

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... ↗ header.ejs ↗ menus.ejs ↗ reservations.ejs ↗ services.ejs ↗ head.ejs ↗ index.js ⌂ ...


SABOROSO

- > bin
- ✓ inc
- JS db.js
- > node_modules
- > public
- ✓ routes
- JS index.js
- JS users.js
- ✓ views
- ✓ inc
- ↳ head.ejs
- ↳ header-index.ejs
- ↳ header-menu.ejs
- ↳ header.ejs
- ↳ contacts.ejs
- ↳ error.ejs
- ↳ index.ejs
- ↳ menus.ejs
- ↳ reservations.ejs
- ↳ services.ejs
- ...

routes > JS index.js > ↗ router.get('/menus') callback > ↗ h1

```
23   });
24
25   router.get('/contacts', function(req, res, next) {
26
27     res.render('contacts',{
28       title: 'Contato - Restaurante Saboroso!',
29       background: "images/img_bg_3.jpg",
30       h1: "Diga um oi!"
31     });
32   });
33
34   router.get('/menus', function(req, res, next) {
35
36     res.render('menus', {
37       title: 'Menus - Restaurante Saboroso!',
38       background: "images/img_bg_1.jpg",
39       h1: "Saboreie nosso menu!"💡
40     });
41   });
42
43   router.get('/reservations', function(req, res, next) {
44
45     res.render('reservations', {
46       title: 'Reservas - Restaurante Saboroso!',
47       background: "images/img_bg_3.jpg",
48       h1: "Diga um oi!"
```

Ln 39, Col 10 (20 selected) Spaces: 2 UTF-8 LF { JavaScript Go Live Prettier

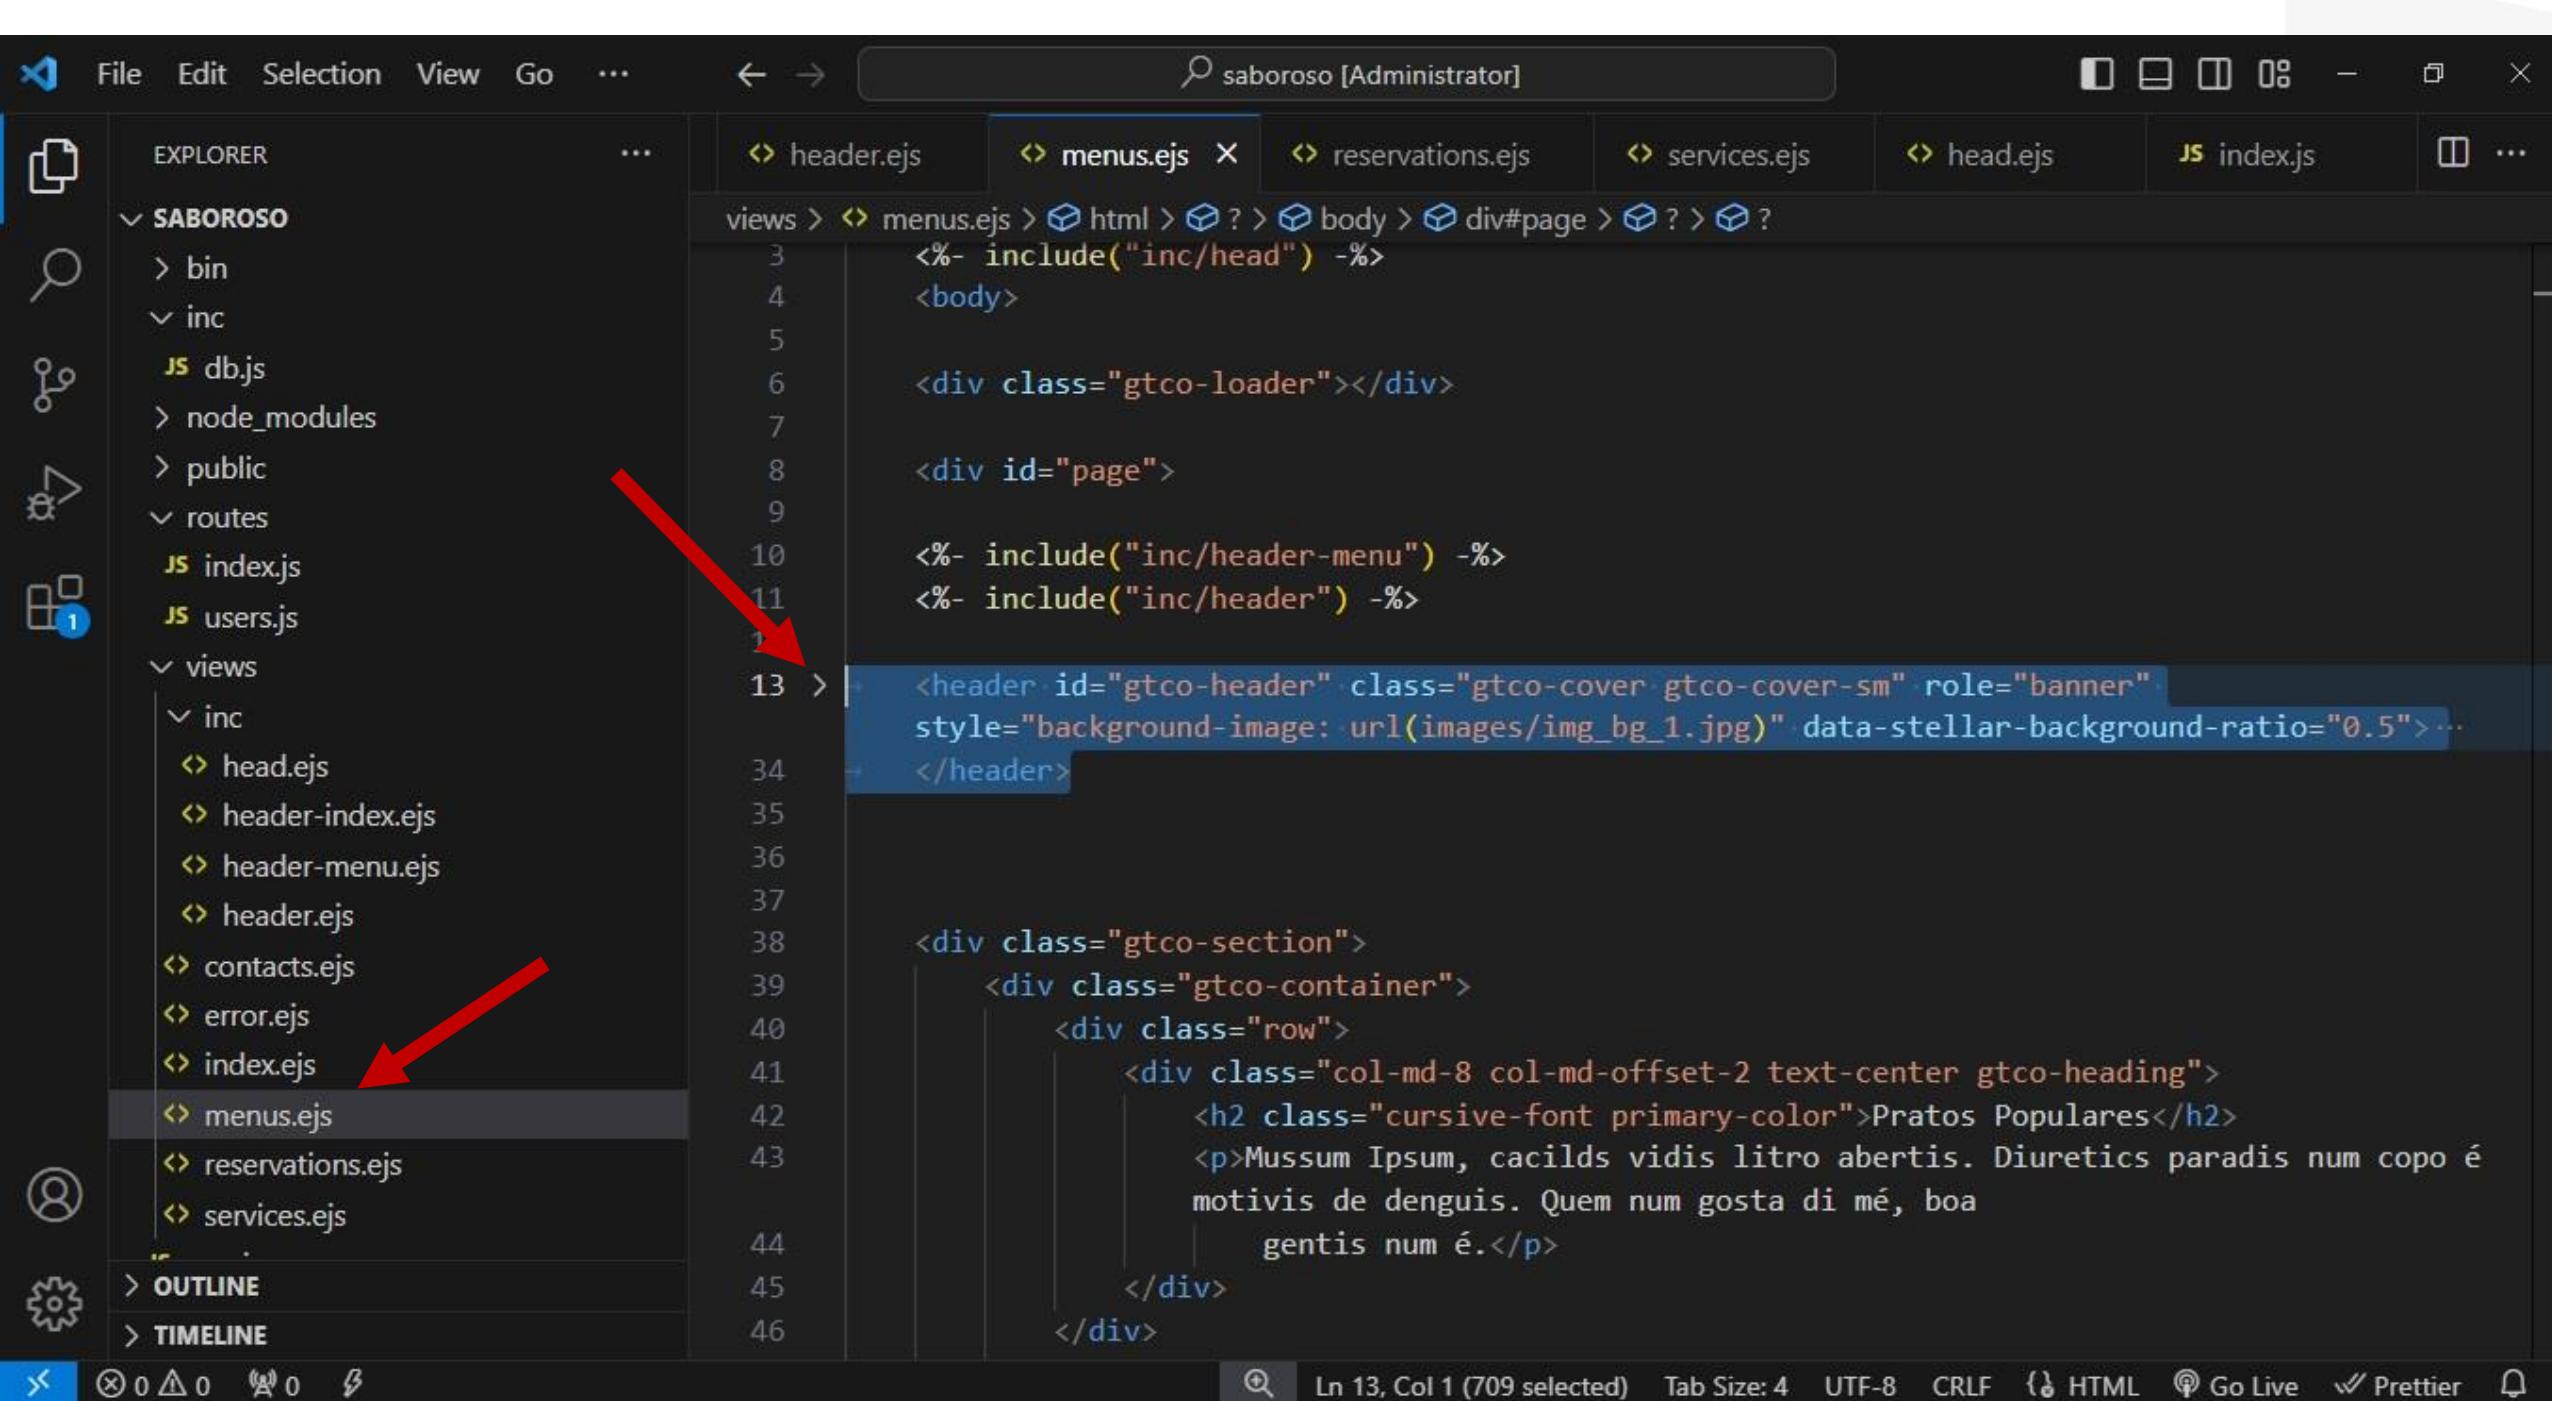

A screenshot of a code editor interface, likely Visual Studio Code, showing the file `menus.ejs` in the center tab bar. The file content is an EJS template with several include statements and a main section structure.

```
<%- include("inc/head") -%>
<body>

<div class="gtco-loader"></div>

<div id="page">

<%- include("inc/header-menu") -%>
<%- include("inc/header") -%>

<div class="gtco-section">
    <div class="gtco-container">
        <div class="row">
            <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
                <h2 class="cursive-font primary-color">Pratos Populares</h2>
                <p>Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de denguis. Quem num gosta di mé, boa gentis num é.</p>
            </div>
        </div>
        <div class="row">

            <div class="col-lg-4 col-md-4 col-sm-6">
                <a href="images/img_1.jpg" class="fh5co-card-item image-popup">
                    <figure>
                        <div class="overlay">
```

The line 12, which contains the opening tag of the main section (`<div class="gtco-section">`), has a red arrow pointing to it from the bottom right.

The left sidebar shows a tree view of the project structure under the `SABOROSO` folder, including `bin`, `inc` (with files `db.js`, `index.js`, and `users.js`), `node_modules`, `public`, `routes` (with `index.js` and `users.js`), and `views` (with `inc` containing `head.ejs`, `header-index.ejs`, `header-menu.ejs`, `header.ejs`, `contacts.ejs`, `error.ejs`, `index.ejs`, `menus.ejs` (the current file), `reservations.ejs`, `services.ejs`, and `...`).

File Edit Selection View Go ... ← → saboroso [Administrator] ⚡

EXPLORER ... header.ejs menus.ejs reservations.ejs ✎ services.ejs head.ejs index.js ⌂ ...

SABOROSO views > reservations.ejs > html > ? > body > div#page

bin inc db.js node_modules public routes index.js users.js

views inc head.ejs header-index.ejs header-menu.ejs header.ejs contacts.ejs error.ejs index.ejs menus.ejs reservations.ejs services.ejs

OUTLINE

TIMELINE

```
1  <!DOCTYPE HTML>
2  <html>
3  <%- include("inc/head") -%>
4  <body>
5
6  <div class="gtco-loader"></div>
7
8  <div id="page">
9
10 <%- include("inc/header-menu") -%>
11
12 <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"
13 style="background-image: url(images/img_bg_2.jpg)">
14 <div class="overlay"></div>
15 <div class="gtco-container">
16 <div class="row">
17 <div class="col-md-12 col-md-offset-0 text-center">
18
19 <div class="row row-mt-15em">
20 <div class="col-md-12 mt-text animate-box"
21 data-animate-effect="fadeInUp">
22 <span class="intro-text-small">Feito por
23 <a href="#" target="_blank">SProviders.com.br</a>
24 </span>
<h1 class="cursive-font">Reserve uma Mesa!</h1>
</div>
```

Ln 10, Col 1 (35 selected) Tab Size: 4 CRLF { HTML Go Live Prettier

File Edit Selection View Go ... ← → saboroso [Administrator] ⚡

EXPLORER ... header.ejs menus.ejs reservations.ejs ✕ services.ejs head.ejs index.js ⌂ ...

SABOROSO

- bin
- inc
- db.js
- node_modules
- public
- routes
- index.js
- users.js
- views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs

1 <!DOCTYPE HTML>

2 <html>

3 <%- include("inc/head") -%>

4 <body>

5

6 <div class="gtco-loader"></div>

7

8 <div id="page">

9

10 <%- include("inc/header-menu") -%>

11

12 <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner" style="background-image: url(images/img_bg_2.jpg)">

13 <div class="overlay"></div>

14 <div class="gtco-container">

15 <div class="row">

16 <div class="col-md-12 col-md-offset-0 text-center">

17

18 <div class="row row-mt-15em">

19 <div class="col-md-12 mt-text animate-box" data-animate-effect="fadeInUp">

20 Feito por

21 SProviders.com.br

22

23 <h1 class="cursive-font">Reserve uma Mesa!</h1>

24 </div>

Ln 12, Col 125 (19 selected) Tab Size: 4 CRLF { HTML ⌂ Go Live ⌂ Prettier



The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Home, Find, Replace, Save, Close, etc.
- Explorer:** Shows the project structure under the SABOROSO folder:
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes (selected)
 - index.js
 - users.jsA red arrow points to the "routes" folder.
- Code Editor:** The routes/index.js file is open. The code defines three routes: "/menus", "/reservations", and "/services". Each route's callback function uses `res.render` to set a title and a background image path.

```
routes > JS index.js > router.get('/reservations') callback > background
32  });
33
34  router.get('/menus', function(req, res, next) {
35
36    res.render('menus', {
37      title: 'Menus - Restaurante Saboroso!',
38      background: "images/img_bg_1.jpg",
39      h1: "Saboreie nosso menu!"
40    });
41 }
42
43 router.get('/reservations', function(req, res, next) {
44
45    res.render('reservations', {
46      title: 'Reservas - Restaurante Saboroso!',
47      background: "images/img_bg_3.jpg",
48      h1: "Diga um oi!"
49    });
50
51 });
52
53 router.get('/services', function(req, res, next) {
54
55    res.render('services', {
56      title: 'Serviços - Restaurante Saboroso!',
57      background: "images/img_bg_3.jpg",
```

A red arrow points to the "background" assignment in the "/reservations" route's render call.
- Status Bar:** Line 47, Col 18 (19 selected), Spaces: 2, UTF-8, LF, JavaScript, Go Live, Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the window title "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the folder "SABOROSO". The main editor area shows the file "routes/index.js". The code is a Node.js application using Express.js. It defines three routes: "/menus", "/reservations", and "/services". The "/reservations" route is highlighted with a red arrow pointing to the "background" path parameter in the render call.

```
routes > JS index.js > router.get('/reservations') callback > background
      32  });
      33
      34  router.get('/menus', function(req, res, next) {
      35
      36    res.render('menus', {
      37      title: 'Menus - Restaurante Saboroso!',
      38      background: "images/img_bg_1.jpg",
      39      h1: "Saboreie nosso menu!"
      40    });
      41  });
      42
      43  router.get('/reservations', function(req, res, next) {
      44
      45    res.render('reservations', {
      46      title: 'Reservas - Restaurante Saboroso!',
      47      background: "images/img_bg_2.jpg",
      48      h1: "Diga um oi!"
      49    });
      50
      51  });
      52
      53  router.get('/services', function(req, res, next) {
      54
      55    res.render('services', {
      56      title: 'Serviços - Restaurante Saboroso!',
      57      background: "images/img_bg_3.jpg",
```

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Top Tabs:** header.ejs, menus.ejs, **reservations.ejs**, services.ejs, head.ejs, index.js
- Left Sidebar (EXPLORER):**
 - SABOROSO
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs**
 - services.ejs
- Right Panel (Code Editor):** Content of the reservations.ejs file:

```
<div id="page">
  <%- include("inc/header-menu") -%>
  <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner" style="background-image: url(images/img_bg_2.jpg)">
    <div class="overlay"></div>
    <div class="gtco-container">
      <div class="row">
        <div class="col-md-12 col-md-offset-0 text-center">
          <div class="row row-mt-15em">
            <div class="col-md-12 mt-text animate-box" data-animate-effect="fadeInUp">
              <span class="intro-text-small">Feito por<br/><a href="#" target="_blank">SProviders.com.br</a></span>
              <h1 class="cursive-font">Reserve uma Mesa!</h1>
            </div>
          </div>
        </div>
      </div>
    </header>
```
- Bottom Status Bar:** Ln 23, Col 71 (17 selected), Tab Size: 4, CRLF, HTML, Go Live, Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The Explorer sidebar on the left shows a file tree for a project named 'SABOROSO'. The 'routes' folder contains 'index.js', which is currently selected and highlighted with a red arrow. Other files in 'routes' include 'header.ejs', 'menus.ejs', 'reservations.ejs', 'services.ejs', and 'head.ejs'. The main editor area displays the content of 'index.js'. The code defines several routes using Express.js's router object. The 'menus' route sets a background image and an h1 title. The 'reservations' route also sets a background image and an h1 title, with the text 'Diga um oi!' highlighted by a yellow lightbulb icon, indicating a suggestion or warning. The 'services' route sets another background image. The status bar at the bottom shows the current file is 'index.js', the line is 48, column is 10, 11 characters are selected, and the encoding is UTF-8.

```
routes > JS index.js > router.get('/reservations') callback > h1
32  });
33
34  router.get('/menus', function(req, res, next) {
35
36    res.render('menus', {
37      title: 'Menus - Restaurante Saboroso!',
38      background: "images/img_bg_1.jpg",
39      h1: "Saboreie nosso menu!"
40    });
41  });
42
43  router.get('/reservations', function(req, res, next) {
44
45    res.render('reservations', {
46      title: 'Reservas - Restaurante Saboroso!',
47      background: "images/img_bg_2.jpg",
48      h1: "Diga um oi!"
49    });
50
51  });
52
53  router.get('/services', function(req, res, next) {
54
55    res.render('services', {
56      title: 'Serviços - Restaurante Saboroso!',
57      background: "images/img_bg_3.jpg",

```

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Search icon, Home icon, Save icon, Close icon.
- Explorer:** Shows a tree view of the project structure under the "SABOROSO" folder:
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js (selected)
 - users.js
 - views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
- Code Editor:** The "index.js" file is open, showing the following code:

```
routes > JS index.js > router.get('/reservations') callback > h1
      32  });
      33
      34  router.get('/menus', function(req, res, next) {
      35
      36    res.render('menus', {
      37      title: 'Menus - Restaurante Saboroso!',
      38      background: "images/img_bg_1.jpg",
      39      h1: "Saboreie nosso menu!"
      40    });
      41  });
      42
      43  router.get('/reservations', function(req, res, next) {
      44
      45    res.render('reservations', {
      46      title: 'Reservas - Restaurante Saboroso!',
      47      background: "images/img_bg_2.jpg",
      48      h1: "Reserve uma Mesa!"^
      49    });
      50
      51  });
      52
      53  router.get('/services', function(req, res, next) {
      54
      55    res.render('services', {
      56      title: 'Serviços - Restaurante Saboroso!',
      57      background: "images/img_bg_3.jpg",
```
- Annotations:** A red arrow points to the line of code "h1: 'Reserve uma Mesa!'".
- Status Bar:** Ln 48, Col 10 (17 selected), Spaces: 2, UTF-8, LF, JavaScript, Go Live, Prettier.

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close
- Explorer Sidebar:** Shows a project structure under 'SABOROSO'.
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
- Outline Sidebar:** OUTLINE
- Timeline Sidebar:** TIMELINE
- Code Editor Area:** The current file is 'reservations.ejs'. The code is as follows:

```
<div id="page">
  <%- include("inc/header-menu") -%>
  <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"
    style="background-image: url(images/img_bg_2.jpg)"> ...
  </header>
  <div class="gtco-section" style="padding-bottom: 14em;">
    <div class="gtco-container">
      <div class="row">
        <div class="col-md-12">
          <div class="col-md-6 animate-box">
            <h3>Reserva de mesa</h3>
            <form action="#">
              <div class="row form-group">
                <div class="col-md-12">
                  <label for="inputName">Nome</label>
                  <input type="text" id="inputName" name="name"
                    class="form-control">
                </div>
              </div>
              <div class="row form-group">
                <div class="col-md-12">
                  <label for="inputEmail">Email</label>
                  <input type="email" id="inputEmail" name="email"
                    class="form-control">
                </div>
              </div>
            </form>
          </div>
        </div>
      </div>
    </div>
  </div>
```
- Status Bar:** Ln 12, Col 1 (660 selected) Tab Size: 4 UTF-8 CRLF { HTML Go Live Prettier

A screenshot of a code editor interface, likely Visual Studio Code, showing an EJS (Embedded JavaScript) file named `reservations.ejs`. The file contains HTML and EJS code for a reservation form.


```
<div id="page">
<%- include("inc/header-menu") -%>
<%- include("inc/header") -%>

<div class="gtco-section" style="padding-bottom: 14em;">
  <div class="gtco-container">
    <div class="row">
      <div class="col-md-12">
        <div class="col-md-6 animate-box">
          <h3>Reserva de mesa</h3>
          <form action="#">
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputName">Nome</label>
                <input type="text" id="inputName" name="name" class="form-control">
              </div>
            </div>
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputEmail">E-mail</label>
                <input type="email" id="inputEmail" name="email" class="form-control">
              </div>
            </div>
          </form>
        </div>
      </div>
    </div>
  </div>
</div>
```

The code editor has several features visible:

- File Explorer:** Shows the project structure under the `SABOROSO` folder, including `bin`, `inc`, `db.js`, `node_modules`, `public`, `routes`, `index.js`, and `users.js`.
- Search Bar:** At the top center, it says "saboroso [Administrator]".
- Code Editor Tabs:** Includes tabs for `header.ejs`, `menus.ejs`, `reservations.ejs` (which is the active tab), `services.ejs`, `head.ejs`, and `index.js`.
- Status Bar:** At the bottom, it shows "Ln 11, Col 1 (30 selected)", "Tab Size: 4", "UTF-8", "CRLF", "HTML", "Go Live", and "Prettier".

A red arrow points to the line of code `<%- include("inc/header") -%>`, highlighting it as the target of the screenshot.

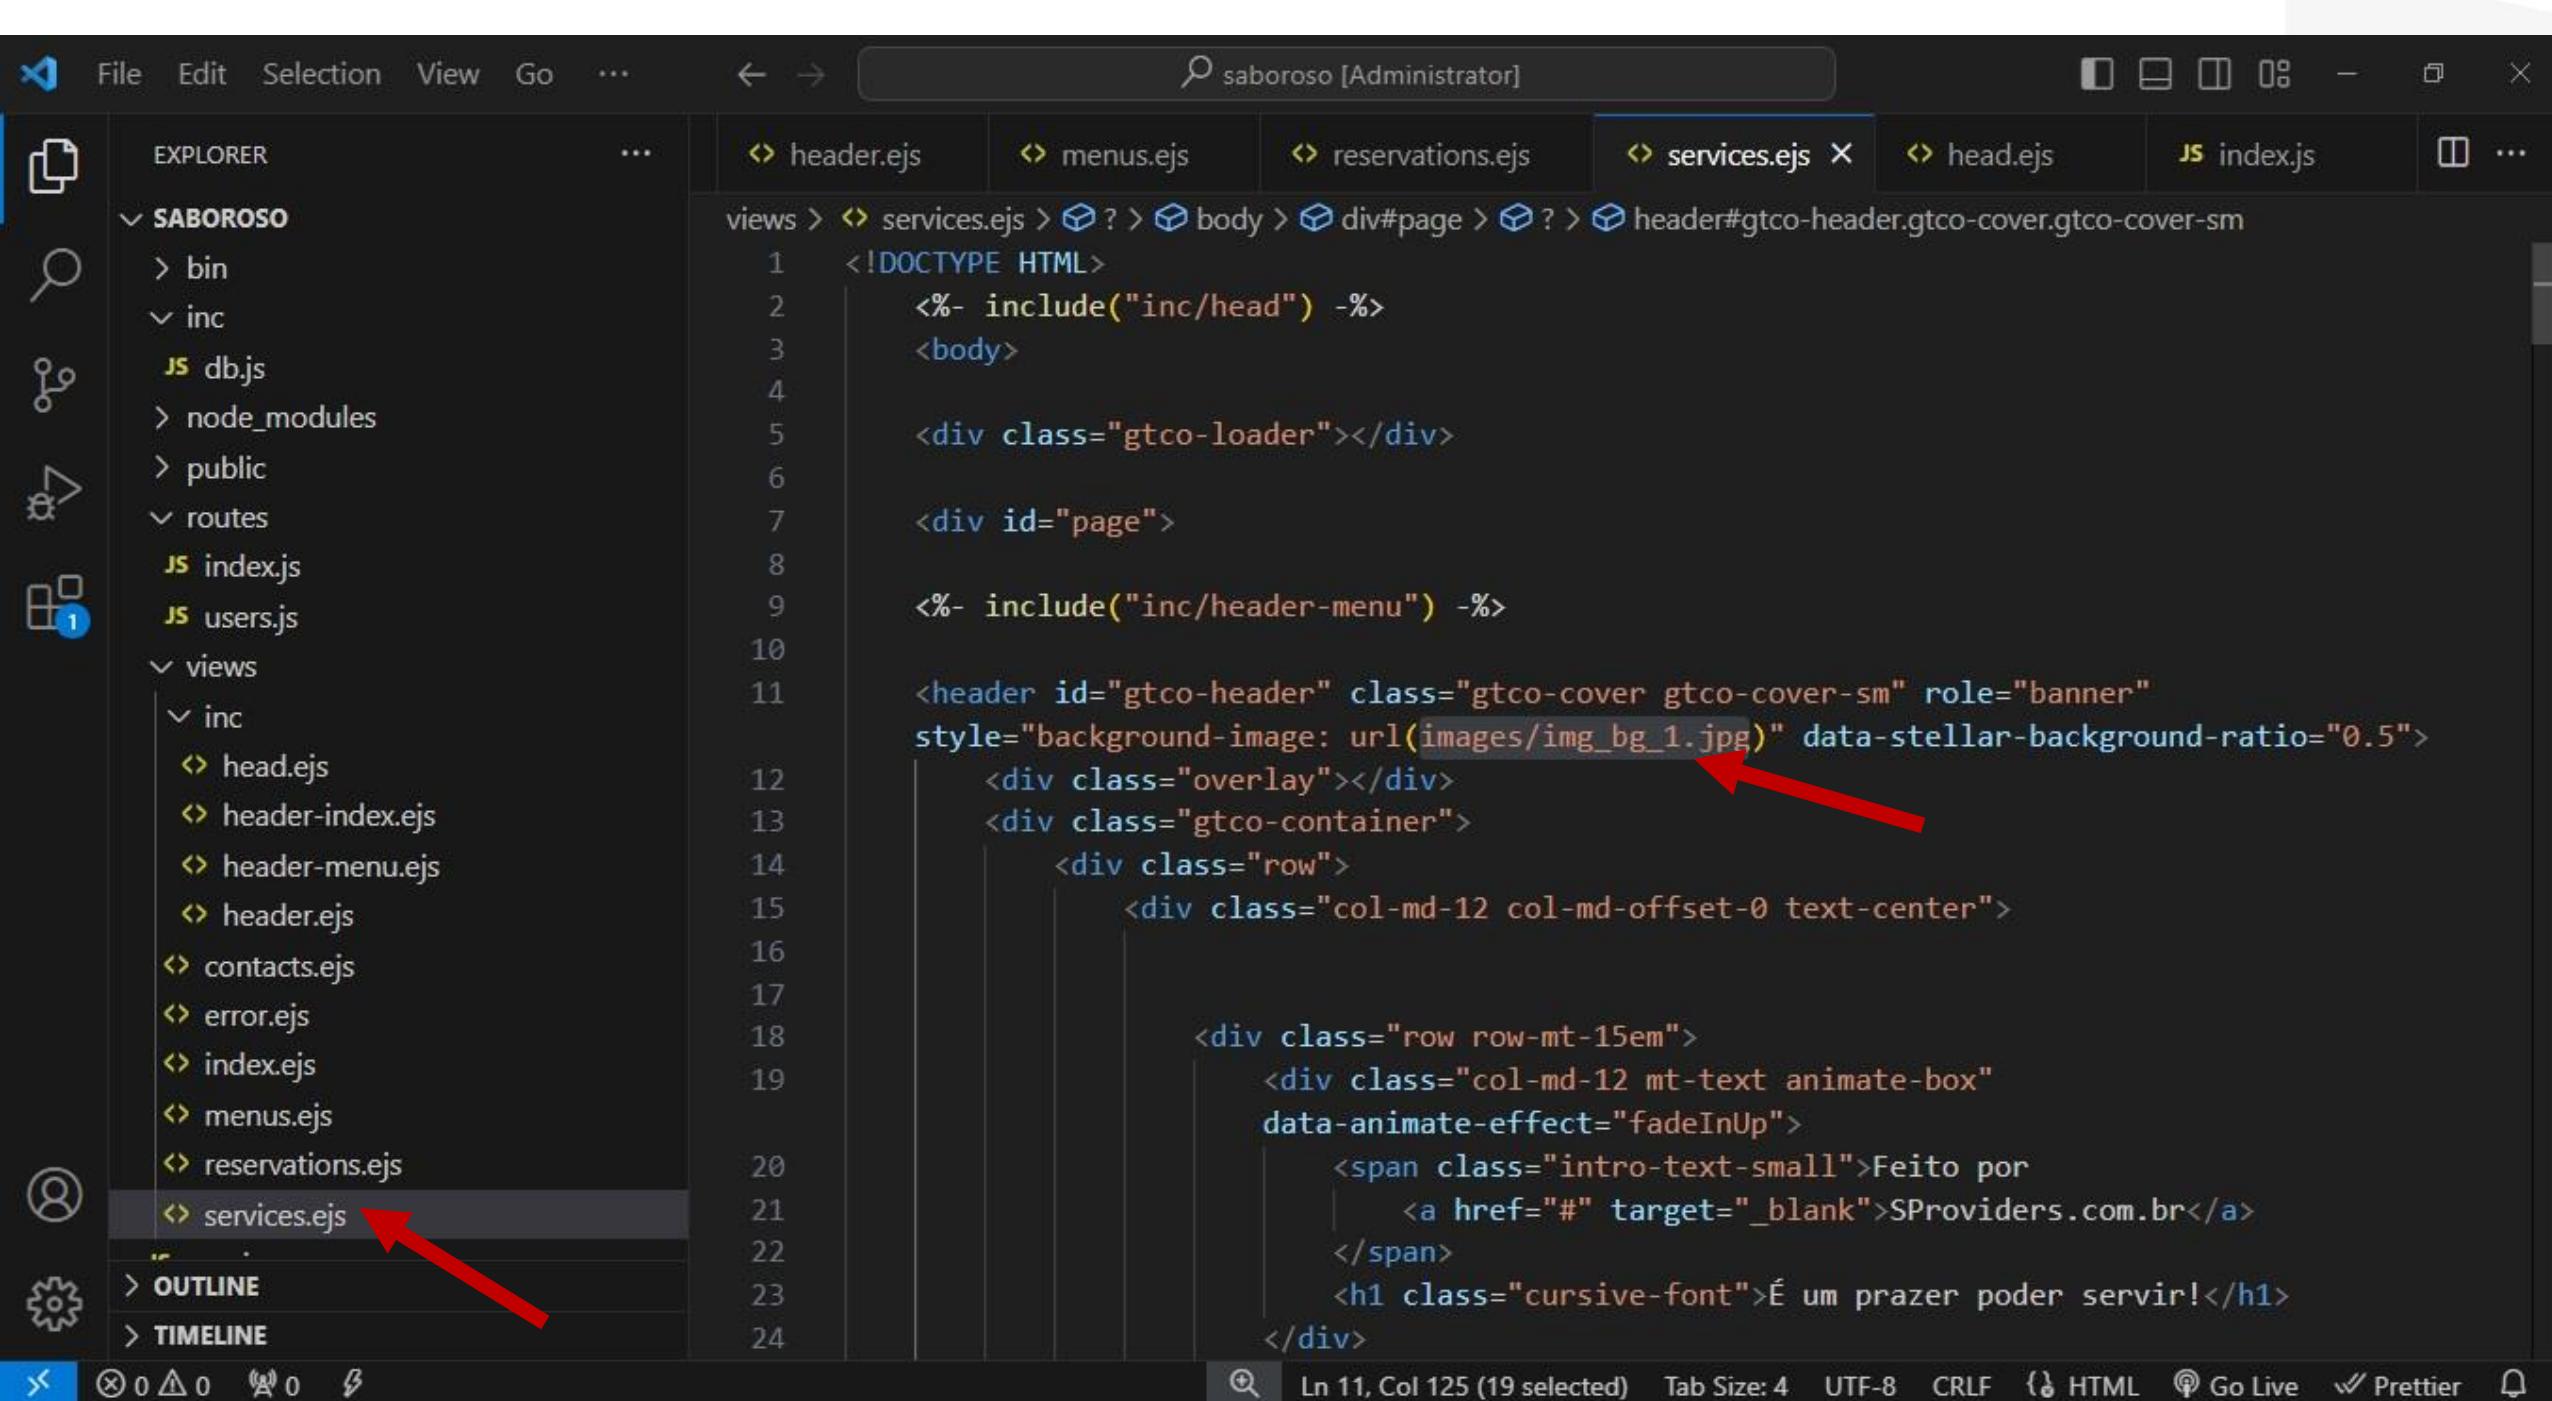

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... ↗ header.ejs ↗ menus.ejs ↗ reservations.ejs ↗ services.ejs ↗ head.ejs JS index.js ⌂ ...

SABOROSO

- > bin
- ✓ inc
 - JS db.js
- > node_modules
- > public
- ✓ routes
 - JS index.js
 - JS users.js
- ✓ views
 - ✓ inc
 - ↳ head.ejs
 - ↳ header-index.ejs
 - ↳ header-menu.ejs
 - ↳ header.ejs
 - ↳ contacts.ejs
 - ↳ error.ejs
 - ↳ index.ejs
 - ↳ menus.ejs
 - ↳ reservations.ejs
 - ↳ services.ejs

OUTLINE

TIMELINE

routes > JS index.js > router.get('/services') callback > background

```
41    });
42
43  router.get('/reservations', function(req, res, next) {
44
45    res.render('reservations', {
46      title: 'Reservas - Restaurante Saboroso!',
47      background: "images/img_bg_2.jpg",
48      h1: "Reserve uma Mesa!"
49    });
50
51  });
52
53  router.get('/services', function(req, res, next) {
54
55    res.render('services', {
56      title: 'Serviços - Restaurante Saboroso!',
57      background: "images/img_bg_3.jpg",
58      h1: "Diga um oi!"
59    });
60
61  });
62
63  module.exports = router;
64
```

Ln 57, Col 18 (19 selected) Spaces: 2 UTF-8 LF { JavaScript Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, etc.
- Explorer:** Shows the project structure under the **SABOROSO** root:
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes (selected)
 - index.js
 - users.js
- Views:** views, inc (with files: head.ejs, header-index.ejs, header-menu.ejs, header.ejs, contacts.ejs, error.ejs, index.ejs, menus.ejs, reservations.ejs, services.ejs).
- Outline:** > OUTLINE
- Timeline:** > TIMELINE
- Code Editor:** The current file is **index.js**. The code is as follows:

```
routes > JS index.js > router.get('/services') callback > background
41  });
42
43  router.get('/reservations', function(req, res, next) {
44
45    res.render('reservations', {
46      title: 'Reservas - Restaurante Saboroso!',
47      background: "images/img_bg_2.jpg",
48      h1: "Reserve uma Mesa!"
49    });
50
51  });
52
53  router.get('/services', function(req, res, next) {
54
55    res.render('services', {
56      title: 'Serviços - Restaurante Saboroso!',
57      background: "images/img_bg_1.jpg", // Red arrow points here
58      h1: "Diga um oi!"
59    });
60
61  });
62
63  module.exports = router;
```
- Status Bar:** Ln 57, Col 18 (19 selected) Spaces: 2 UTF-8 LF JavaScript Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... ↻ header.ejs ↻ menus.ejs ↻ reservations.ejs ↻ services.ejs ✎ head.ejs JS index.js ⌂ ...

SABOROSO

- > bin
- ✓ inc
- JS db.js
- > node_modules
- > public
- ✓ routes
- JS index.js
- JS users.js

views


- ✓ inc
 - ↳ head.ejs
 - ↳ header-index.ejs
 - ↳ header-menu.ejs
 - ↳ header.ejs
- ↳ contacts.ejs
- ↳ error.ejs
- ↳ index.ejs
- ↳ menus.ejs
- ↳ reservations.ejs
- ↳ services.ejs

OUTLINE

TIMELINE

```
views > ↻ services.ejs > ? > body > div#page > ? > header#gtco-header.gtco-cover.gtco-cover-sm > div.gtco-container
8
9     <%- include("inc/header-menu") -%>
10
11    <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"
12      style="background-image: url(images/img_bg_1.jpg)" data-stellar-background-ratio="0.5">
13      <div class="overlay"></div>
14      <div class="gtco-container">
15        <div class="row">
16          <div class="col-md-12 col-md-offset-0 text-center">
17
18            <div class="row row-mt-15em">
19              <div class="col-md-12 mt-text animate-box"
20                data-animate-effect="fadeInUp">
21                <span class="intro-text-small">Feito por
22                  <a href="#" target="_blank">SProviders.com.br</a>
23                </span>
24                <h1 class="cursive-font">É um prazer poder servir!</h1>
25
26              </div>
27
28            </div>
29
30          </div>
31        </div>
32      </div>
33    </div>
```

Ln 23, Col 79 (25 selected) Tab Size: 4 CRLF ⌂ HTML ⌂ Go Live ⌂ Prettier

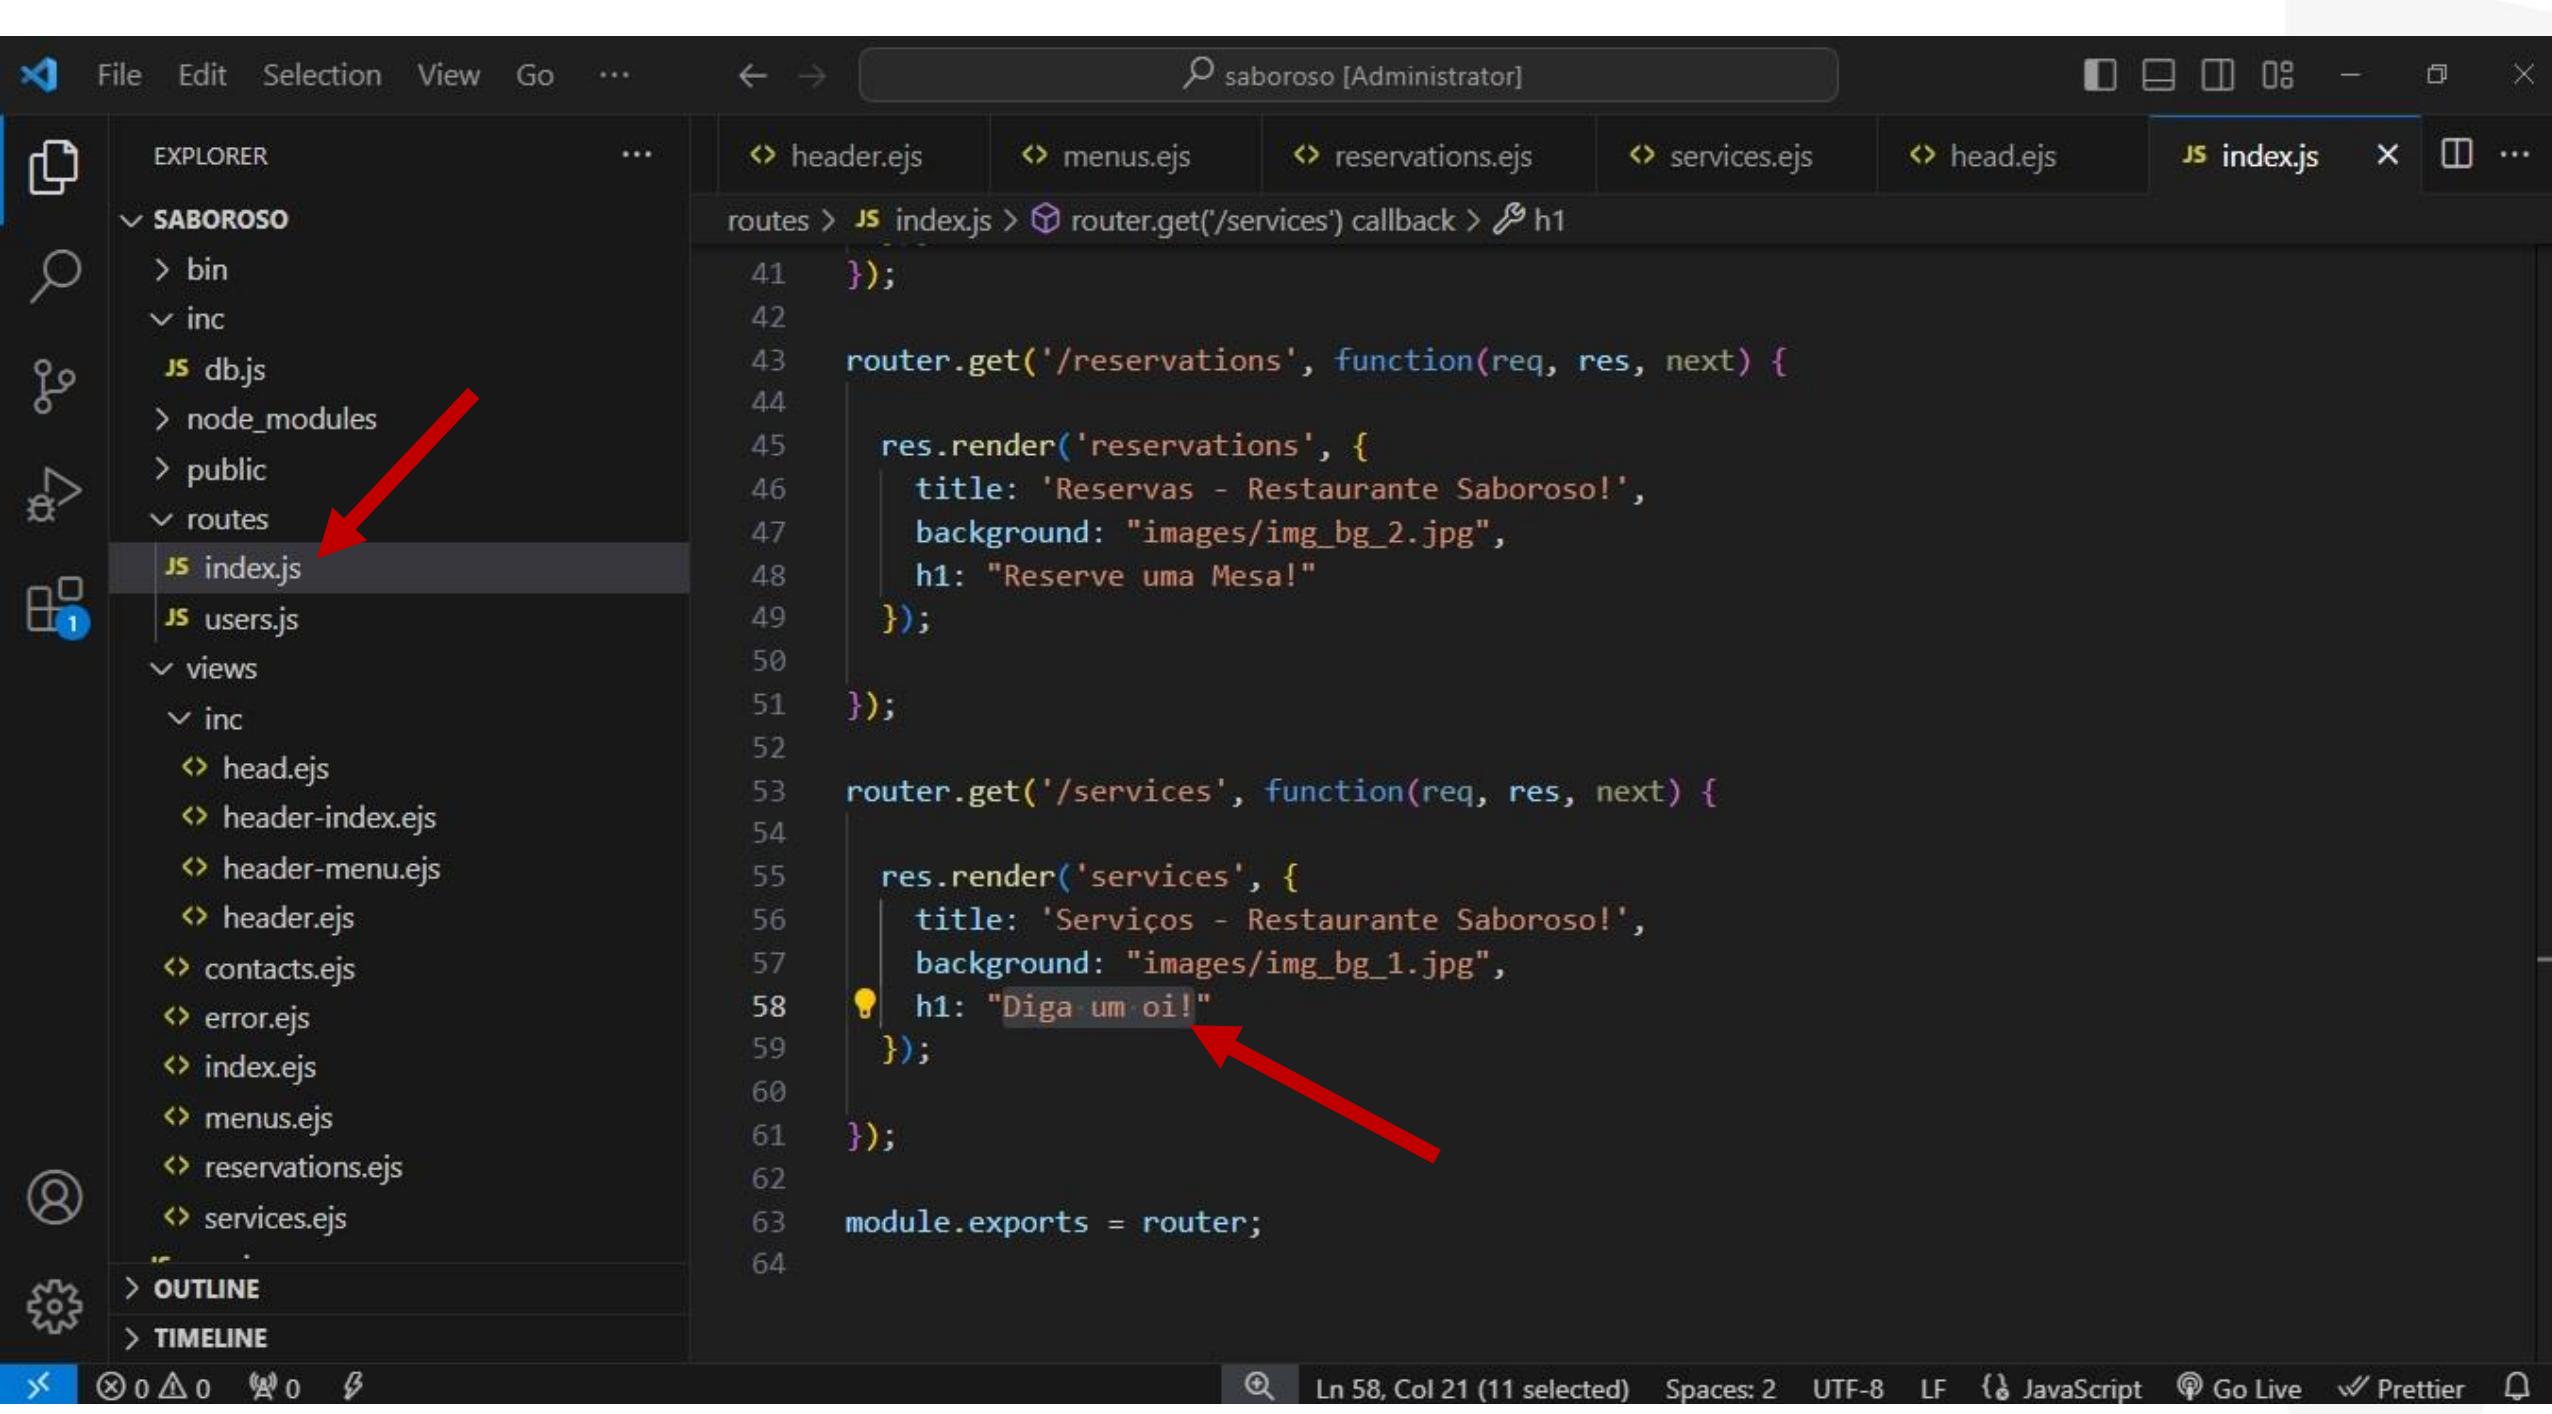

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the file path: routes > JS index.js > router.get('/services') callback > h1. The code editor displays the following JavaScript code:

```
41  });
42
43 router.get('/reservations', function(req, res, next) {
44
45   res.render('reservations', {
46     title: 'Reservas - Restaurante Saboroso!',
47     background: "images/img_bg_2.jpg",
48     h1: "Reserve uma Mesa!"
49   });
50
51 });
52
53 router.get('/services', function(req, res, next) {
54
55   res.render('services', {
56     title: 'Serviços - Restaurante Saboroso!',
57     background: "images/img_bg_1.jpg",
58     h1: "É um prazer poder servir!"!
59   });
60
61 });
62
63 module.exports = router;
```

A red arrow points from the bottom right towards the warning icon (a yellow lightbulb) located next to the line of code: "h1: "É um prazer poder servir!"

The screenshot shows a code editor interface with the following details:


- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Standard window control icons.
- Explorer Sidebar:** Shows a tree view of the project structure under "SABOROSO".
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
- Current File:** services.ejs (selected, highlighted in blue)
- Content Area:** Displays the code for "services.ejs".

```
<div id="page">
  <%- include("inc/header-menu") -%>
  <header id="gtco-header" class="gtco-cover gtco-cover-sm" role="banner"
    style="background-image: url(images/img_bg_1.jpg)" data-stellar-background-ratio="0.5">
    </header>
    <div id="gtco-features">
      <div class="gtco-container">
        <div class="row">
          <div class="col-md-8 col-md-offset-2 text-center gtco-heading animate-box">
            <h2 class="cursive-font">Nossos Serviços</h2>
            <p>Mussum Ipsum, cacilds vidis litro abertis. Si num tem leite então bota
              uma pinga aí cumpadi!</p>
          </div>
        </div>
        <div class="row">
          <div class="col-md-4 col-sm-6">
            <div class="feature-center animate-box" data-animate-effect="fadeIn">
              <span class="icon">
                <i class="ti-face-smile"></i>
              </span>
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
```
- Status Bar:** Ln 11, Col 1 (722 selected) Tab Size: 4 CRLF { HTML Go Live Prettier

A screenshot of a code editor interface, likely Visual Studio Code, displaying an EJS file named `services.ejs`. The file content is as follows:

```
<div id="page">
  <%- include("inc/header-menu") -%>
  <%- include("inc/header") -%>
  <div id="gtco-features">
    <div class="gtco-container">
      <div class="row">
        <div class="col-md-8 col-md-offset-2 text-center gtco-heading animate-box">
          <h2 class="cursive-font">Nossos Serviços</h2>
          <p>Mussum Ipsum, cacilds vidis litro abertis. Si num tem leite então bota uma pinga aí cumpadi!</p>
        </div>
      </div>
      <div class="row">
        <div class="col-md-4 col-sm-6">
          <div class="feature-center animate-box" data-animate-effect="fadeIn">
            <span class="icon">
              <i class="ti-face-smile"></i>
            </span>
            <h3>Pessoas Felizes</h3>
            <p>Mussum Ipsum, cacilds vidis litro abertis. Si num tem leite então bota uma pinga aí cumpadi!</p>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>
```

The line `<%- include("inc/header") -%>` is highlighted with a red arrow pointing to it from the bottom right. The code editor's status bar at the bottom shows "Ln 10, Col 1 (30 selected)".

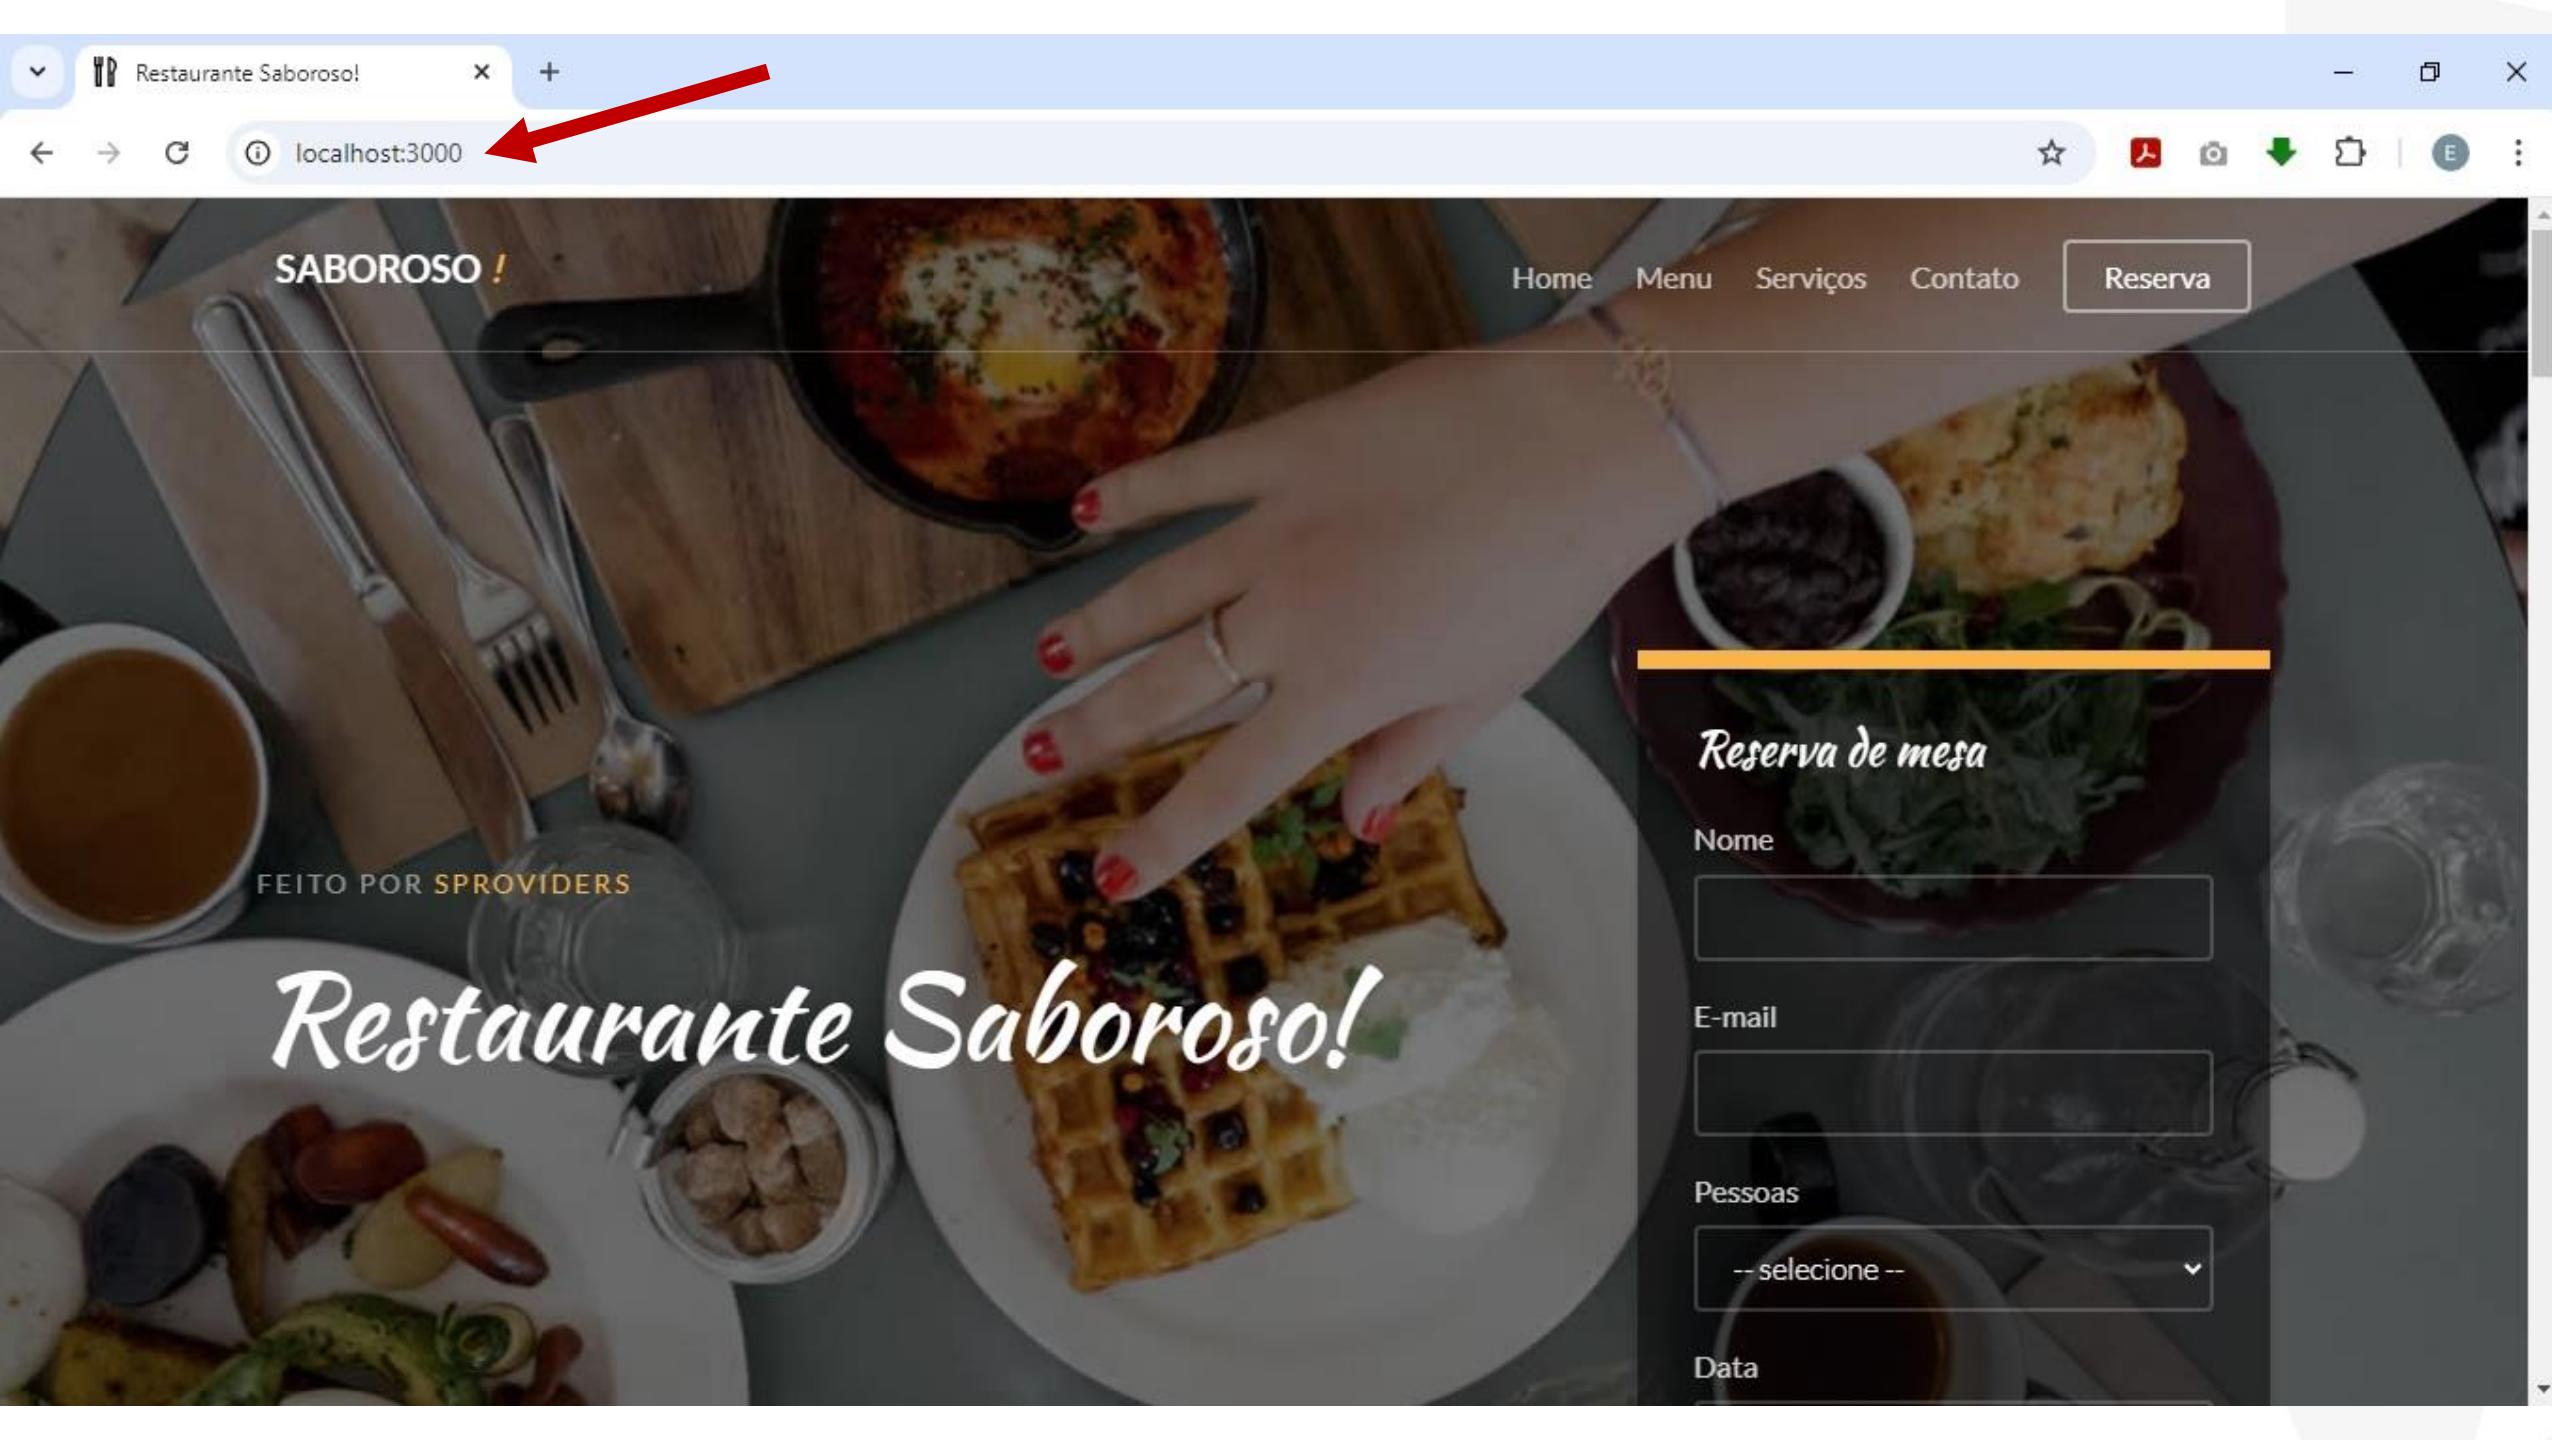

Home

Menu

Serviços

Contato

Reserva

SABOROSO !

FEITO POR SPROVIDERS

Restaurante Saboroso!

Home

Menu

Serviços

Contato

Reserva

Reserva de mesa

Nome

E-mail

Pessoas

Data

SABOROSO !

FEITO POR SPROVIDERS

Restaurante Saboroso!

Home Menu Serviços Contato Reserva


Reserva de mesa


Nome

E-mail


Pessoas


Data

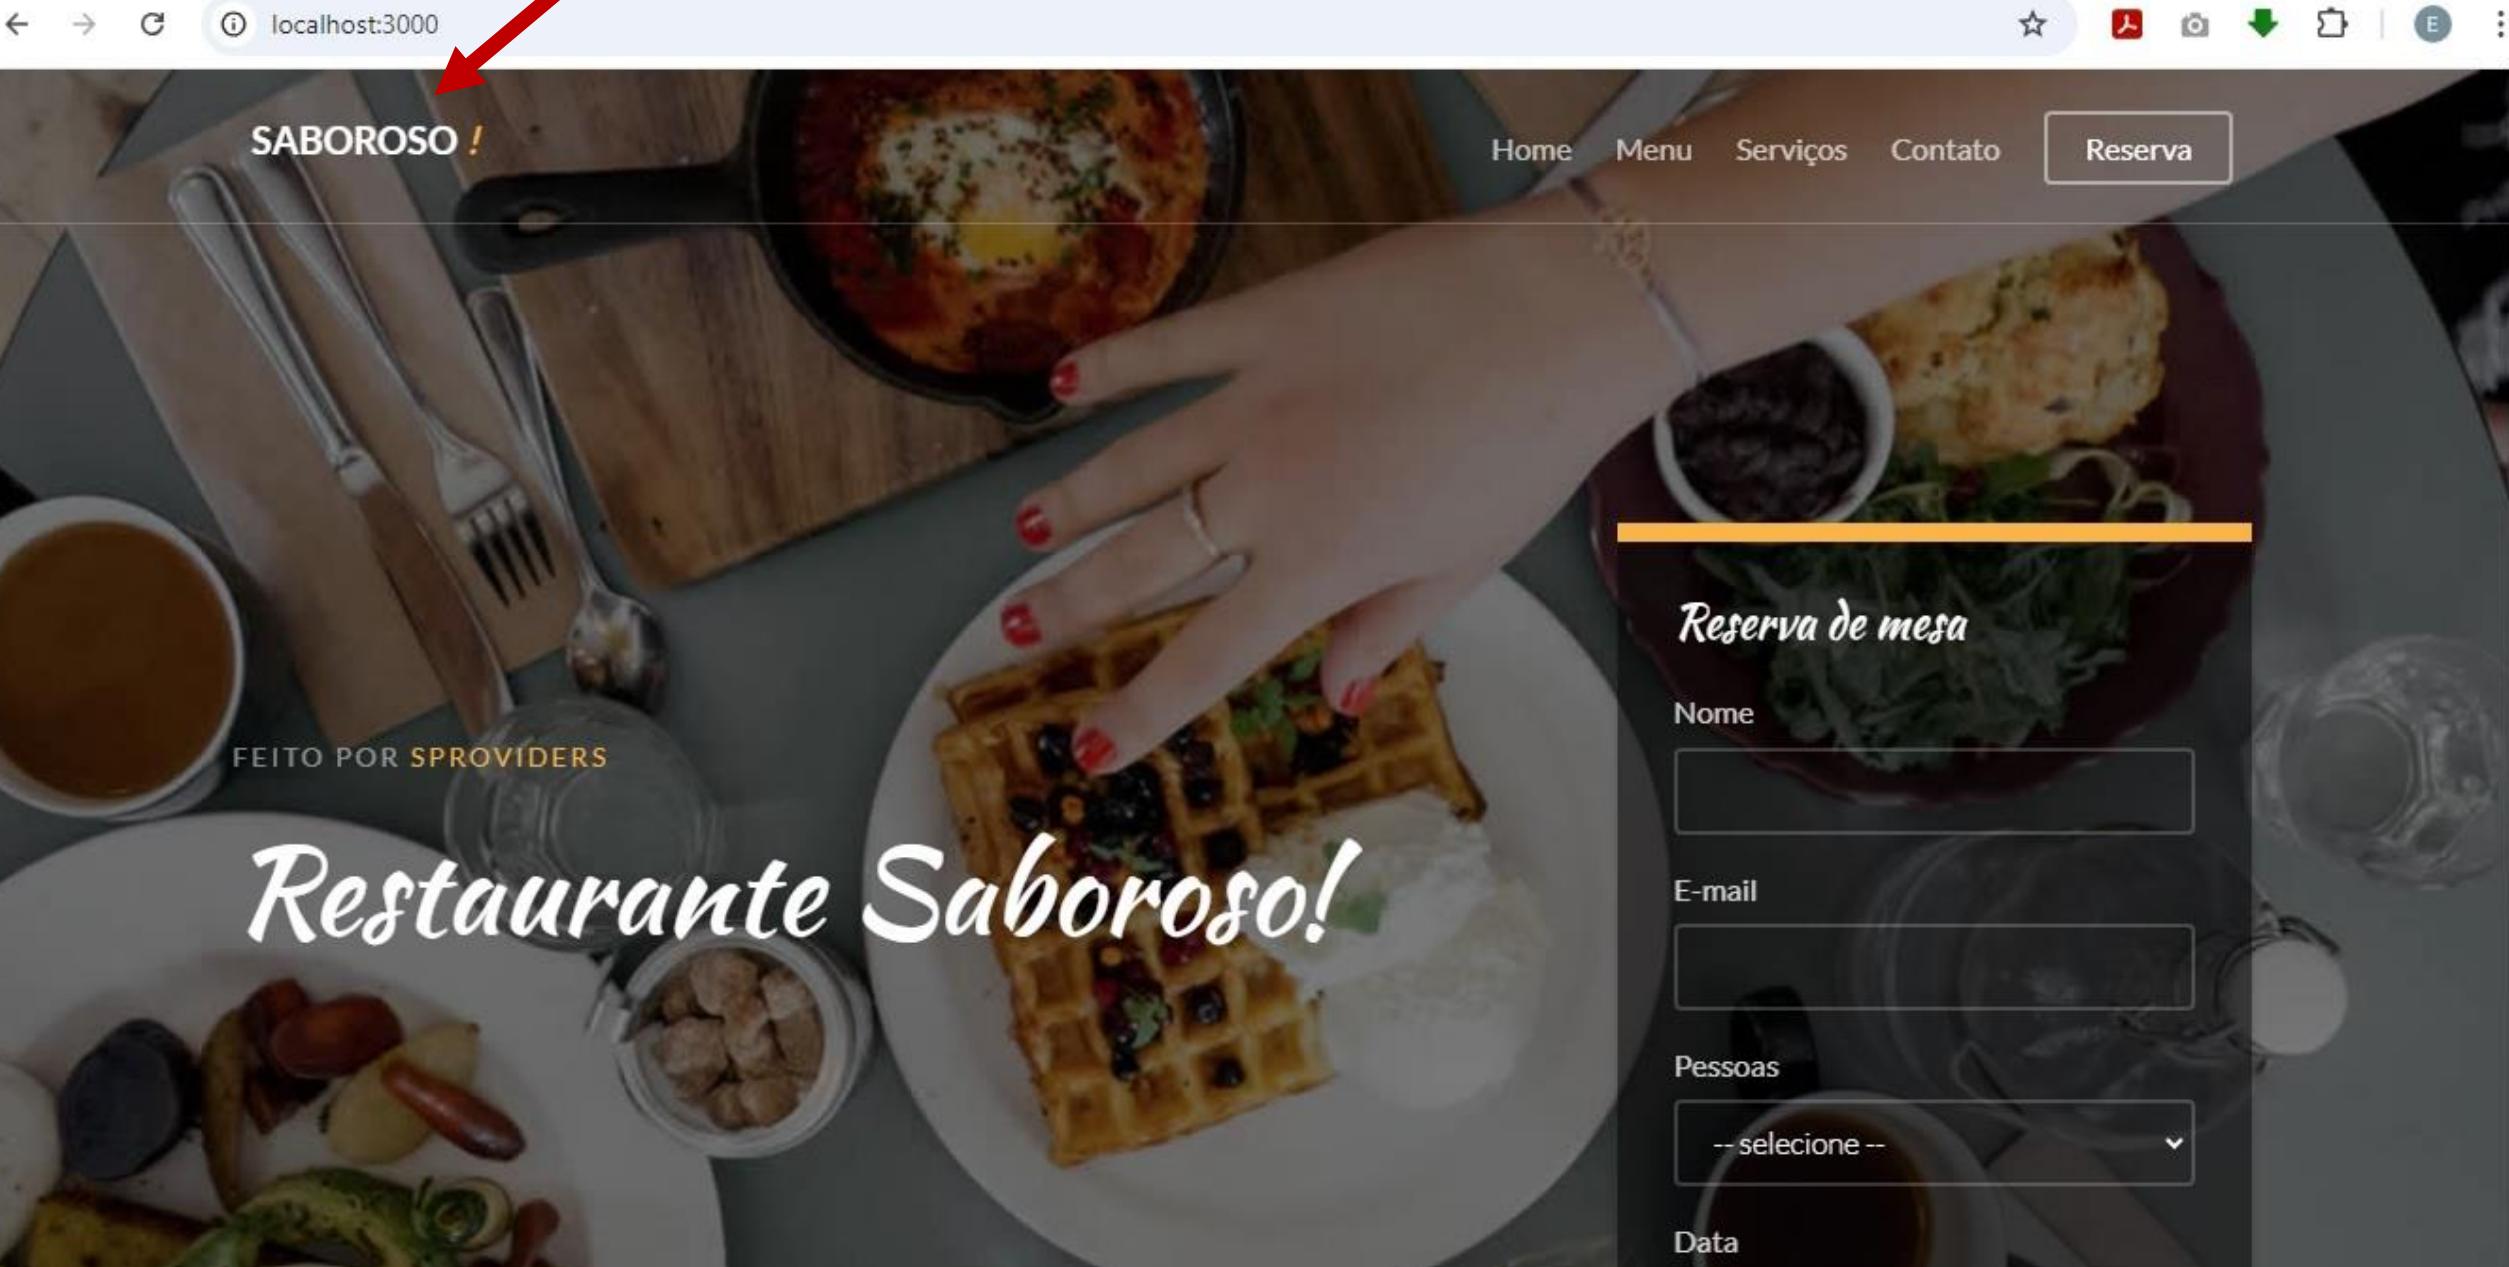

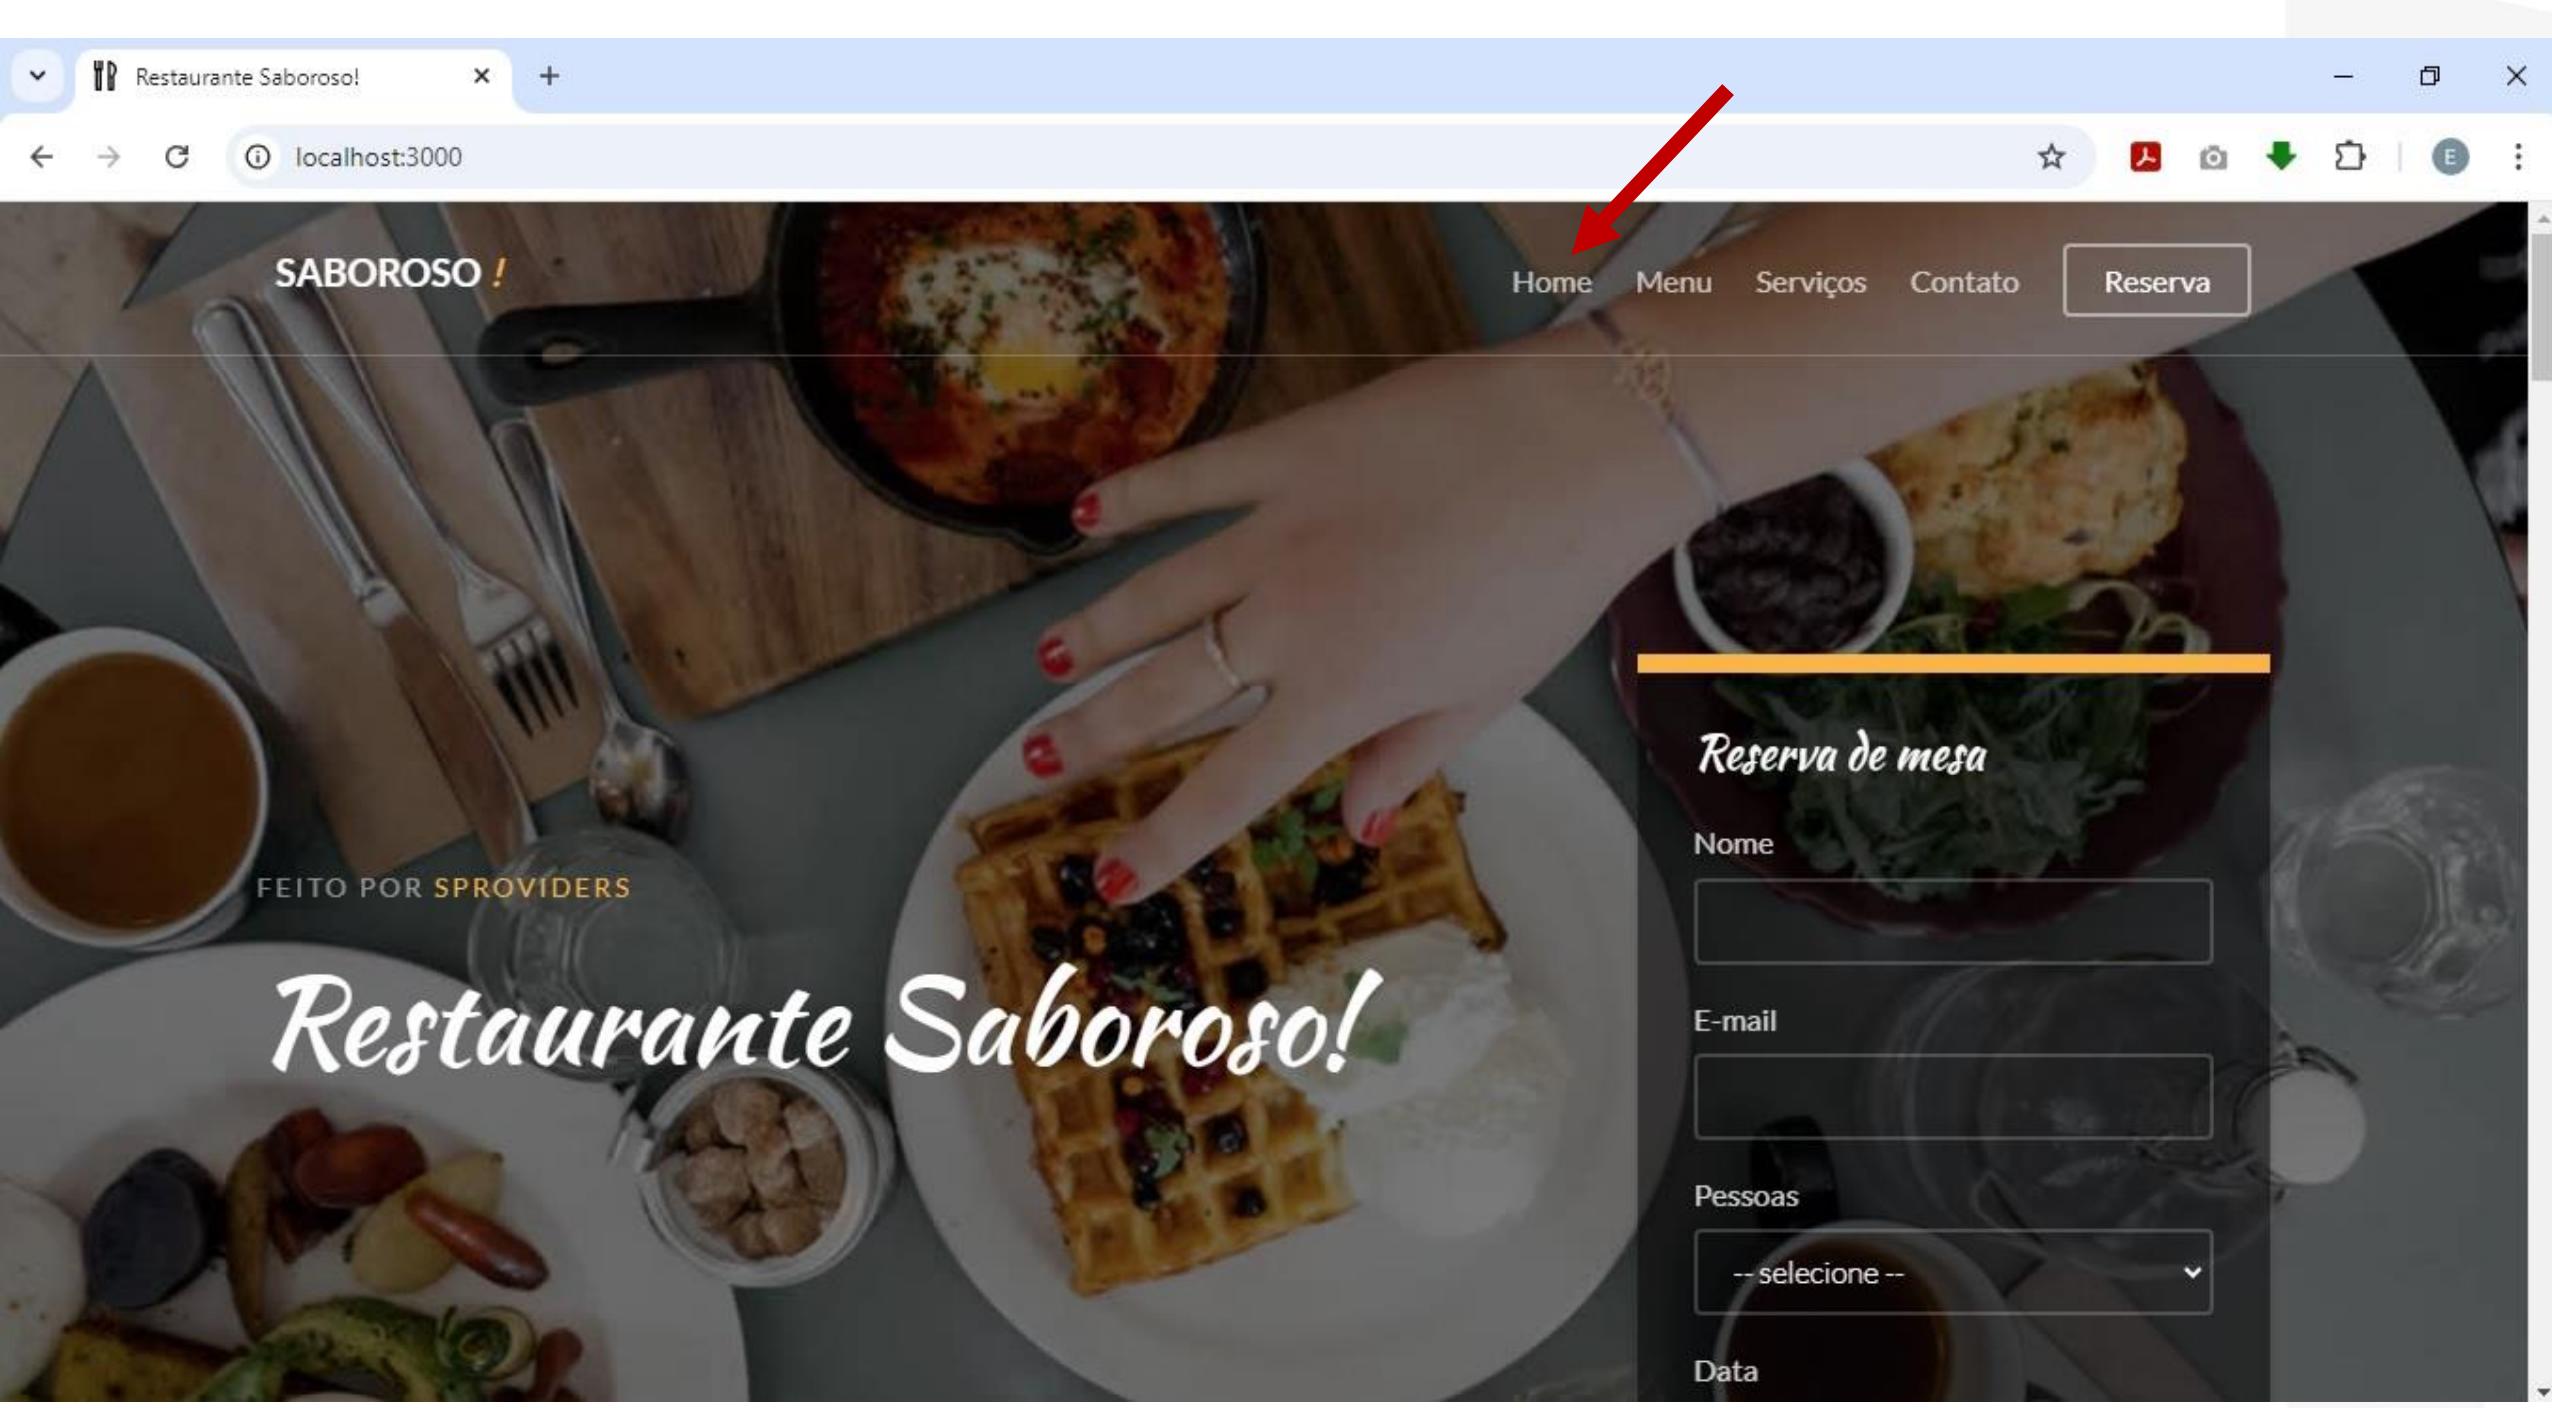

[Home](#)[Menu](#)[Serviços](#)[Contato](#)[Reserva](#)

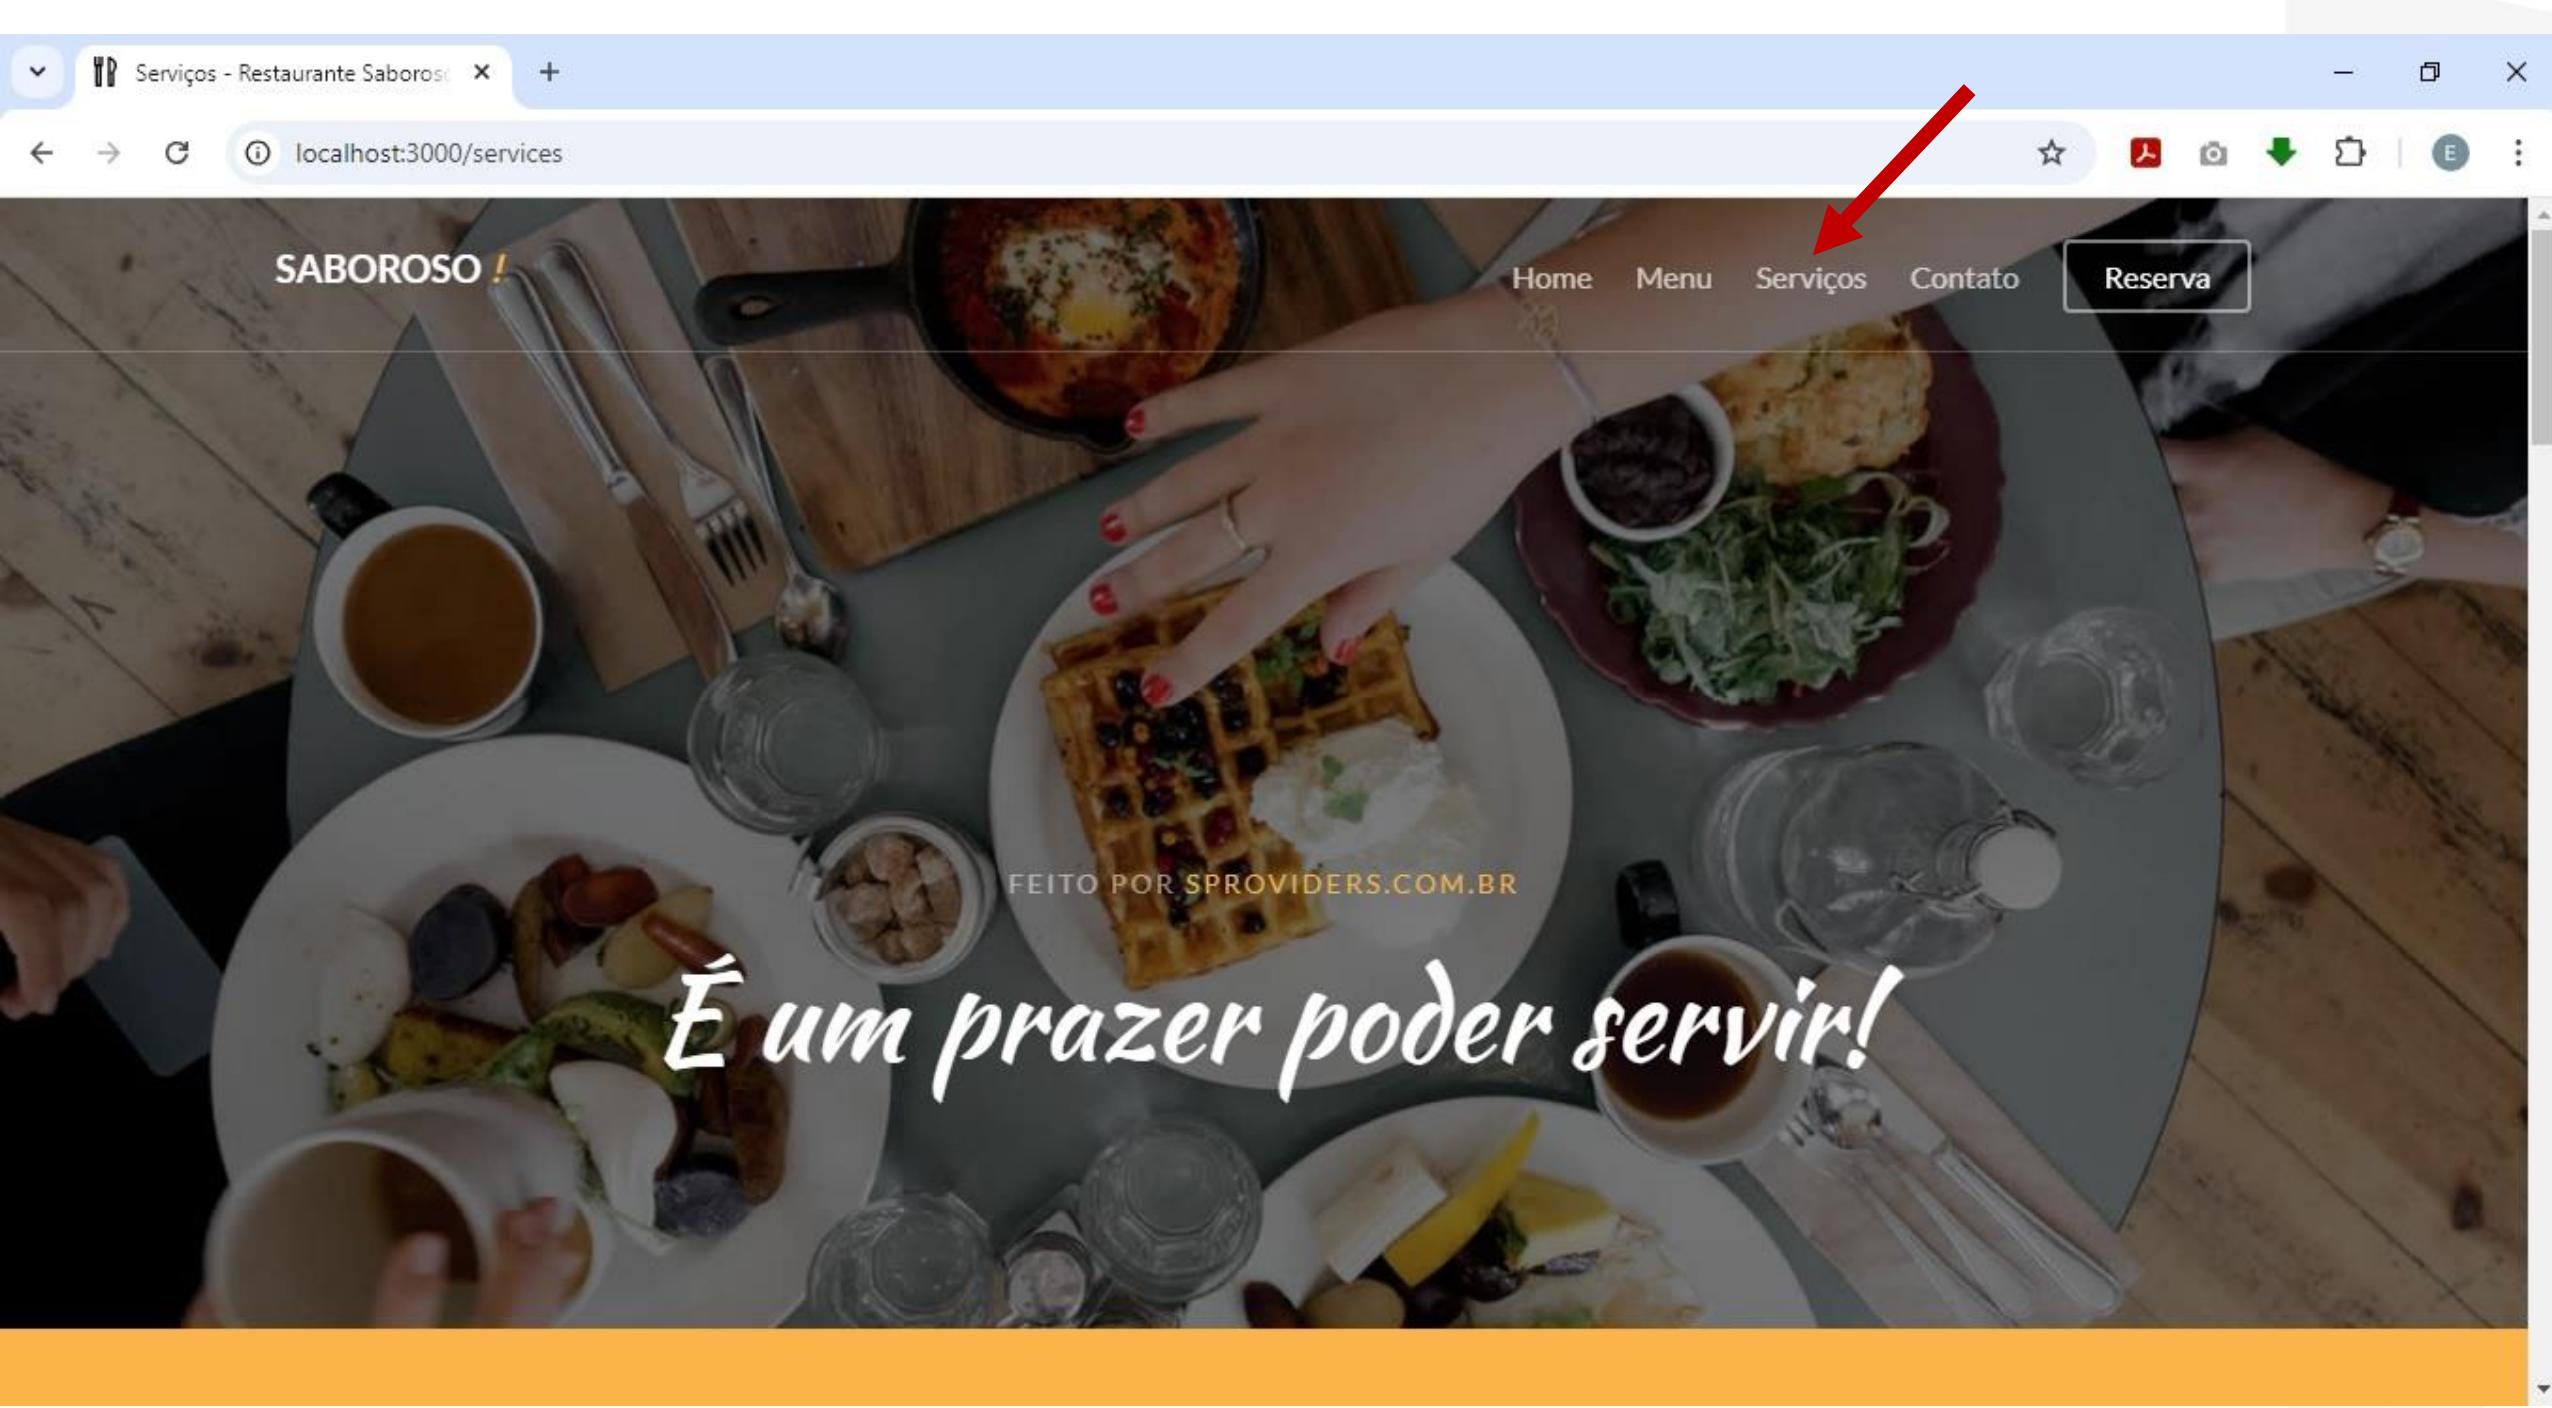

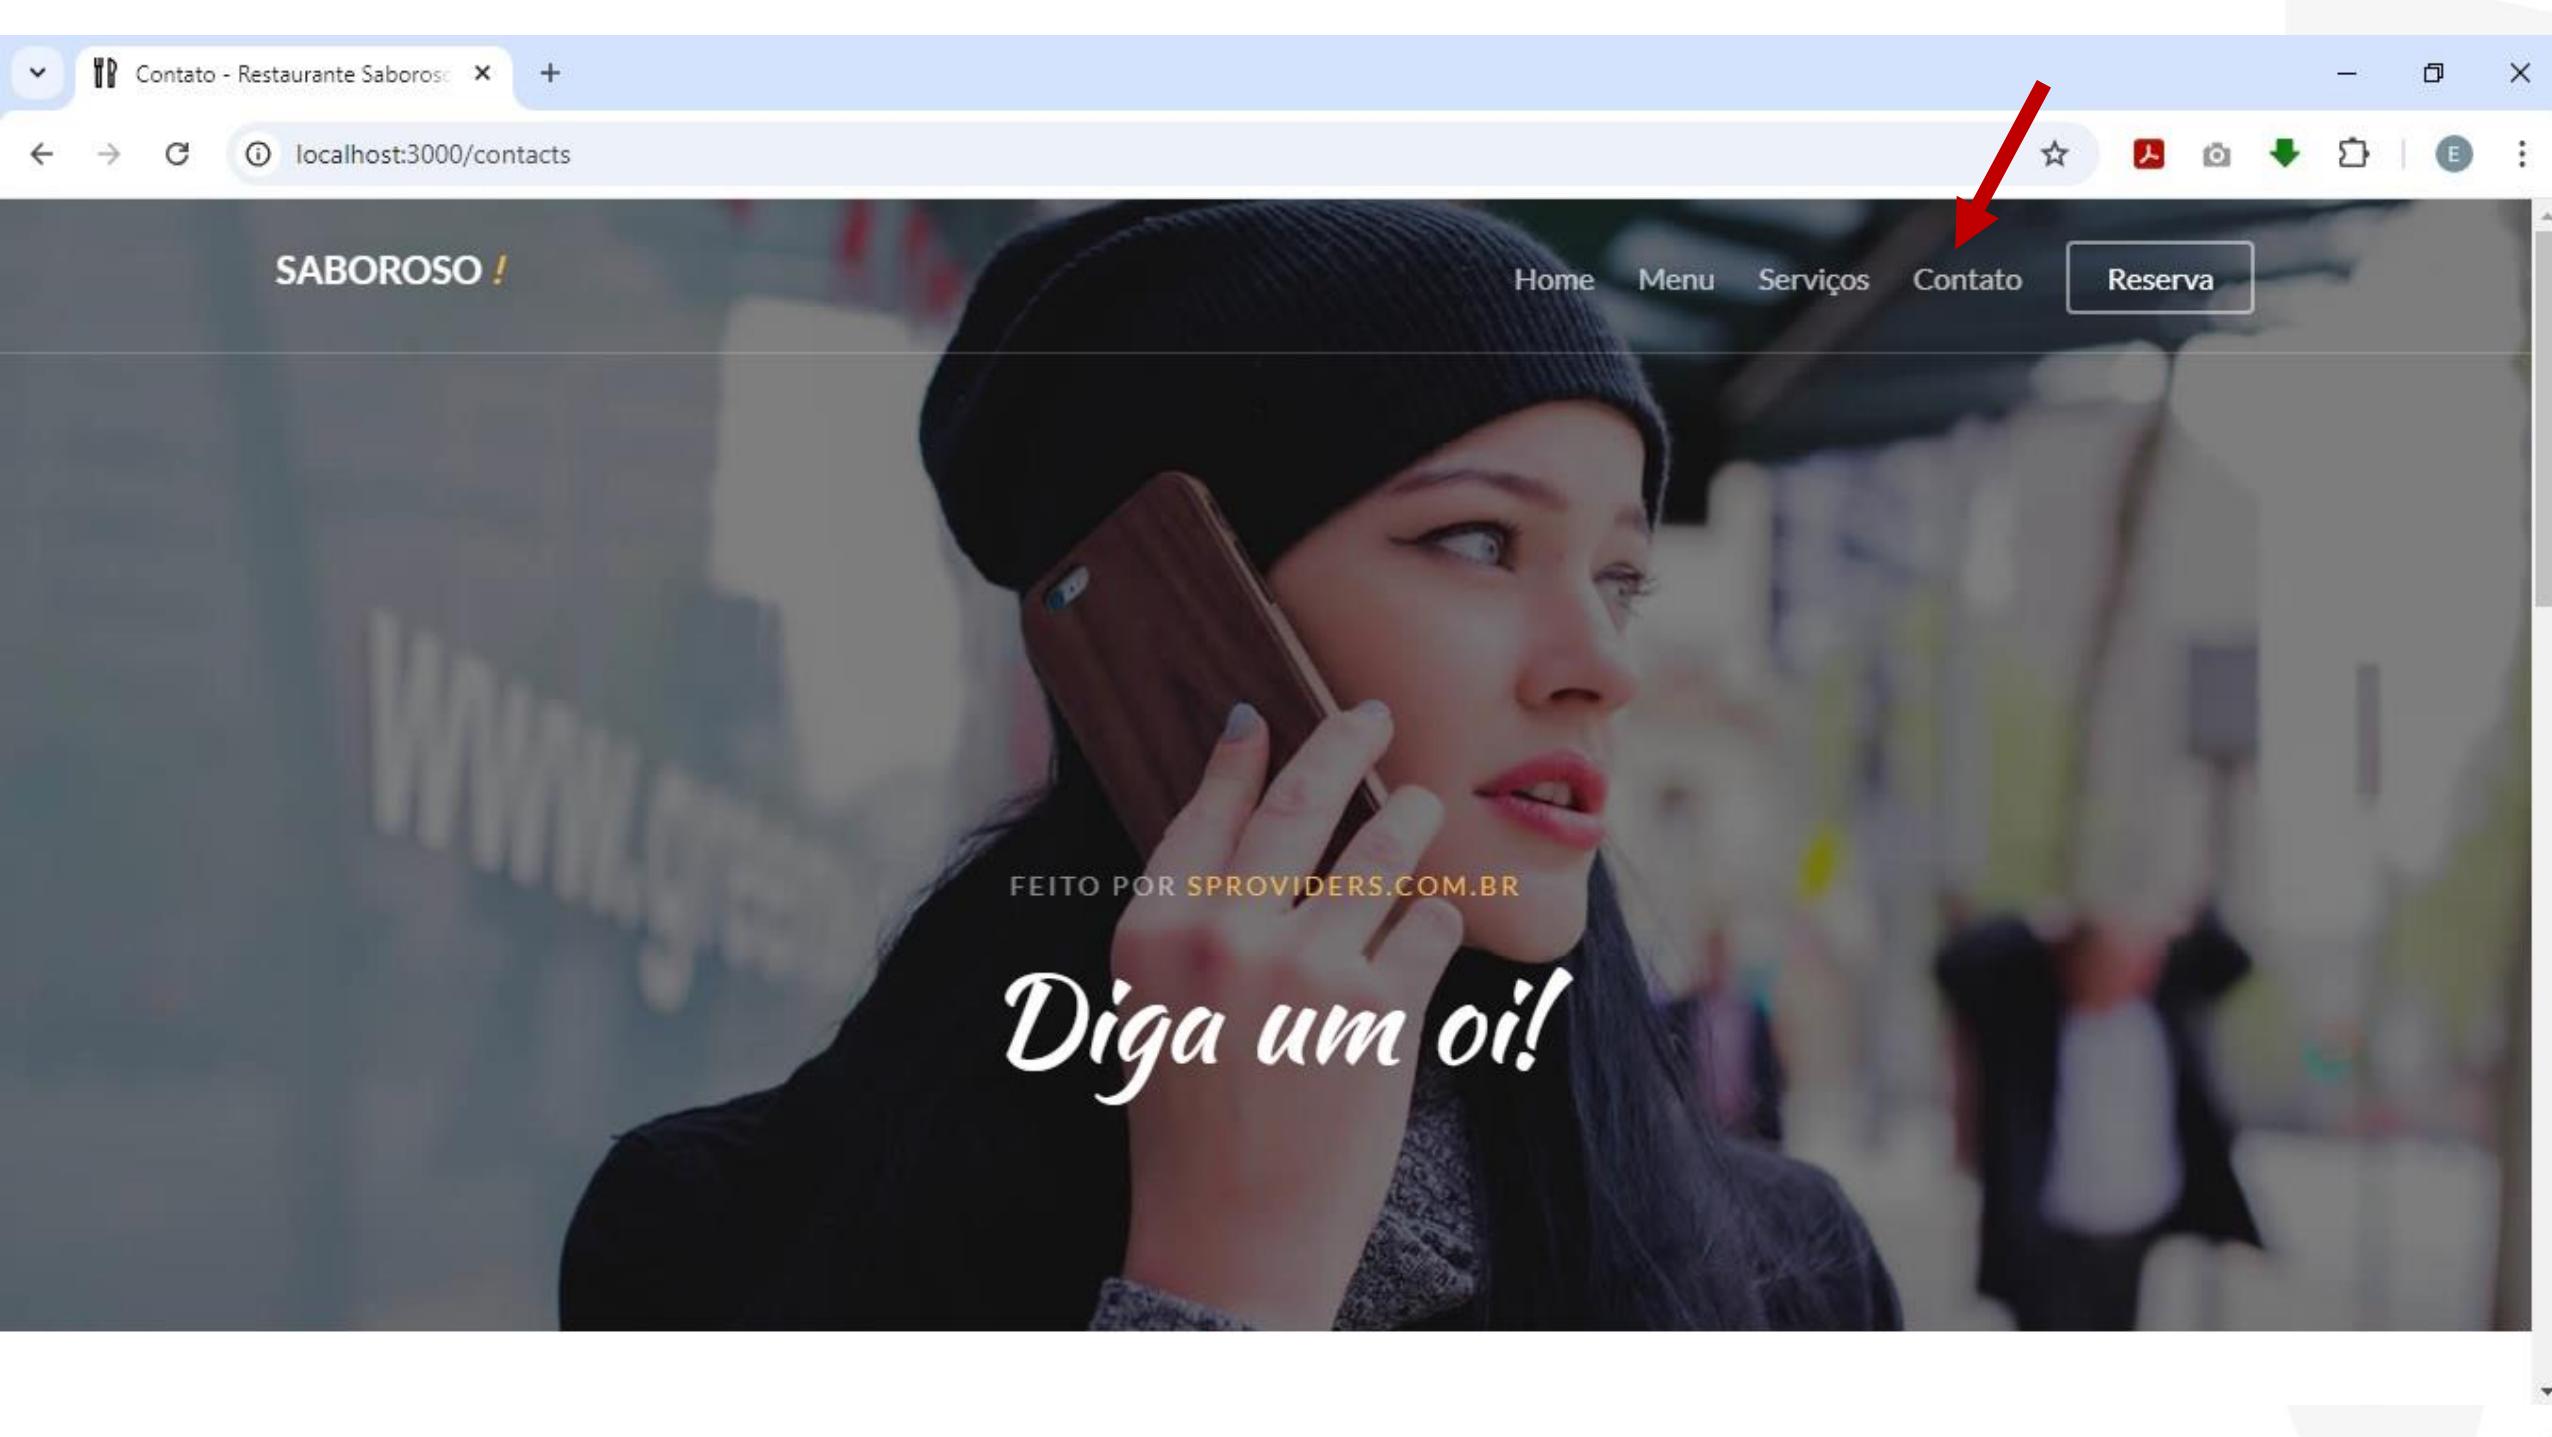

SABOROSO !

Home Menu Serviços Contato Reserva


FEITO POR SPROVIDERS.COM.BR

Diga um oi!

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close
- Explorer Sidebar:** Shows the project structure under "SABOROSO".
 - bin
 - inc
 - db.js (highlighted)
 - node_modules
 - public
 - routes
 - index.js (highlighted)
 - users.js
 - views
 - inc
 - head.ejs
 - header-index.ejs
 - header-menu.ejs (highlighted)
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - OUTLINE
 - TIMELINE
- Code Editor:** The current file is "header-menu.ejs". The code is as follows:

```
</div>
</div>
<div class="col-xs-8 text-right menu-1">
  <ul>
    <li>
      <a href="/">Home</a>
    </li>
    <li>
      <a href="/menu">Menu</a>
    </li>
    <li>
      <a href="/services">Serviços</a>
    </li>
    <li>
      <a href="/contacts">Contato</a>
    </li>
    <li class="btn-cta">
      <a href="/reservations">
        <span>Reserva</span>
      </a>
    </li>
  </ul>
</div>
</div>
```
- Status Bar:** Ln 27, Col 35 (12 selected) Spaces: 4 CRLF { HTML Go Live Prettier

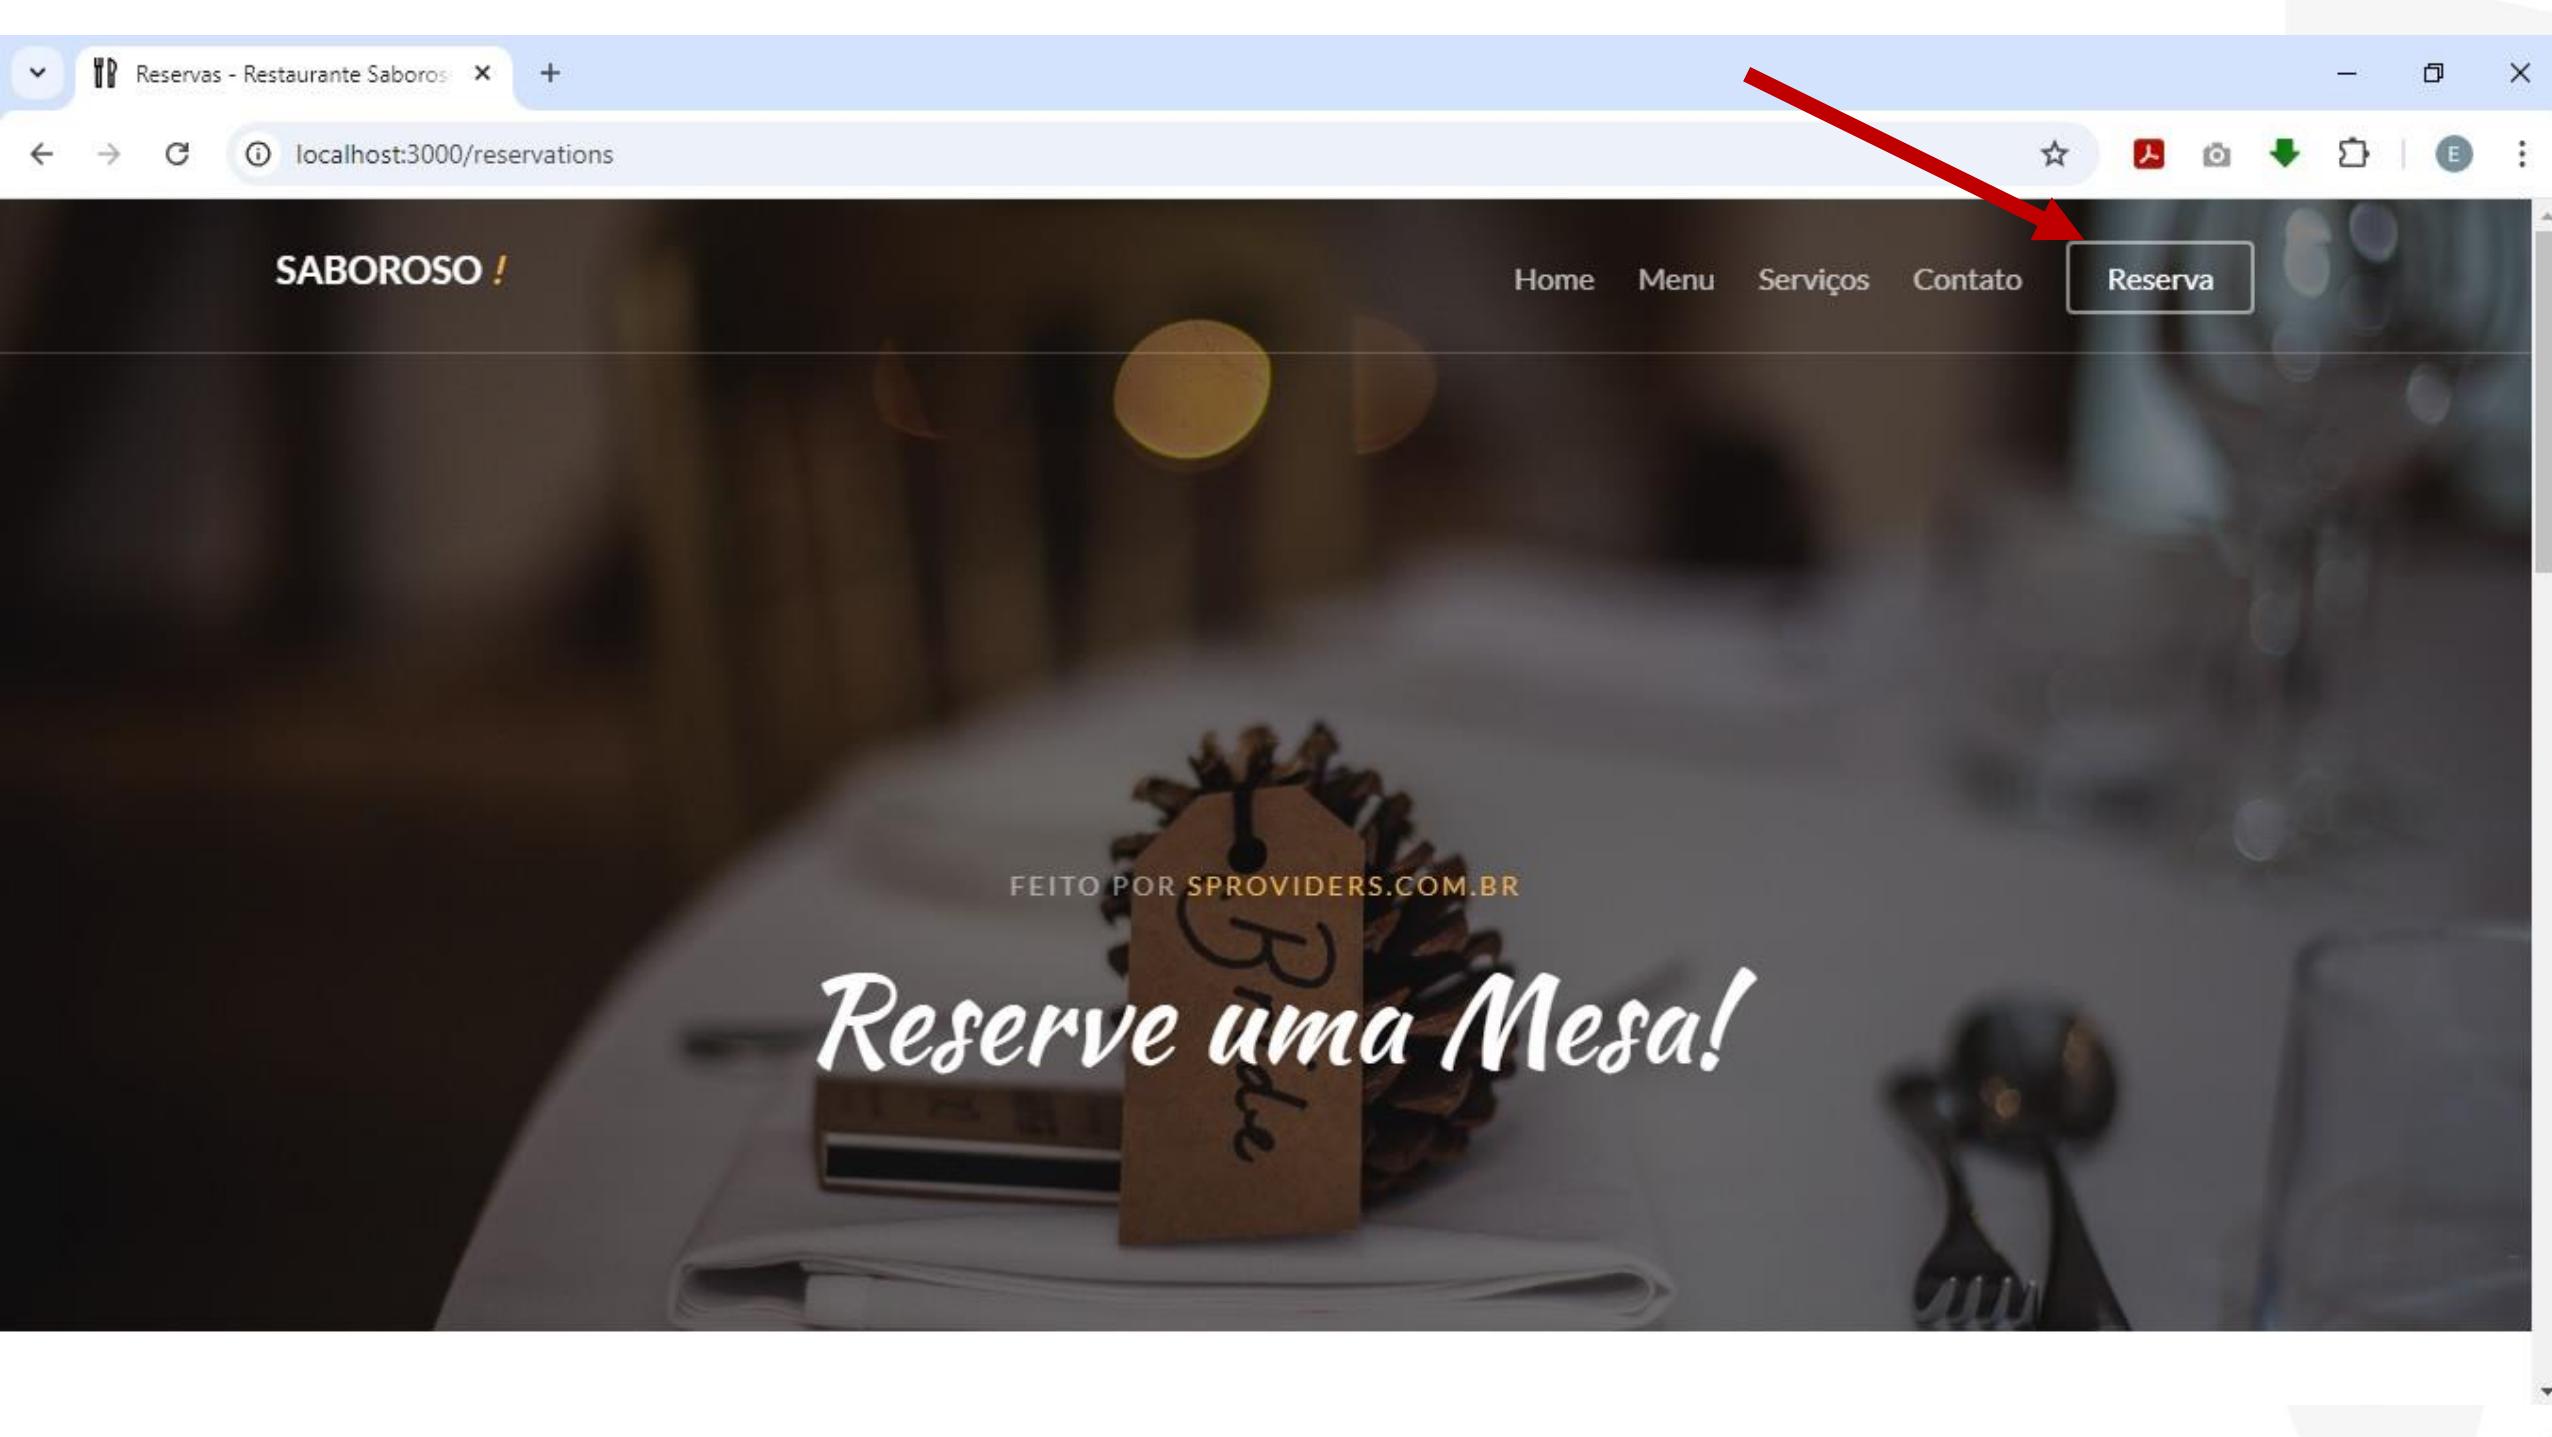

SABOROSO!

Home

Menu


Serviços

Contato

Reserva

FEITO POR SPROVIDERS.COM.BR

Reserve uma Mesa!

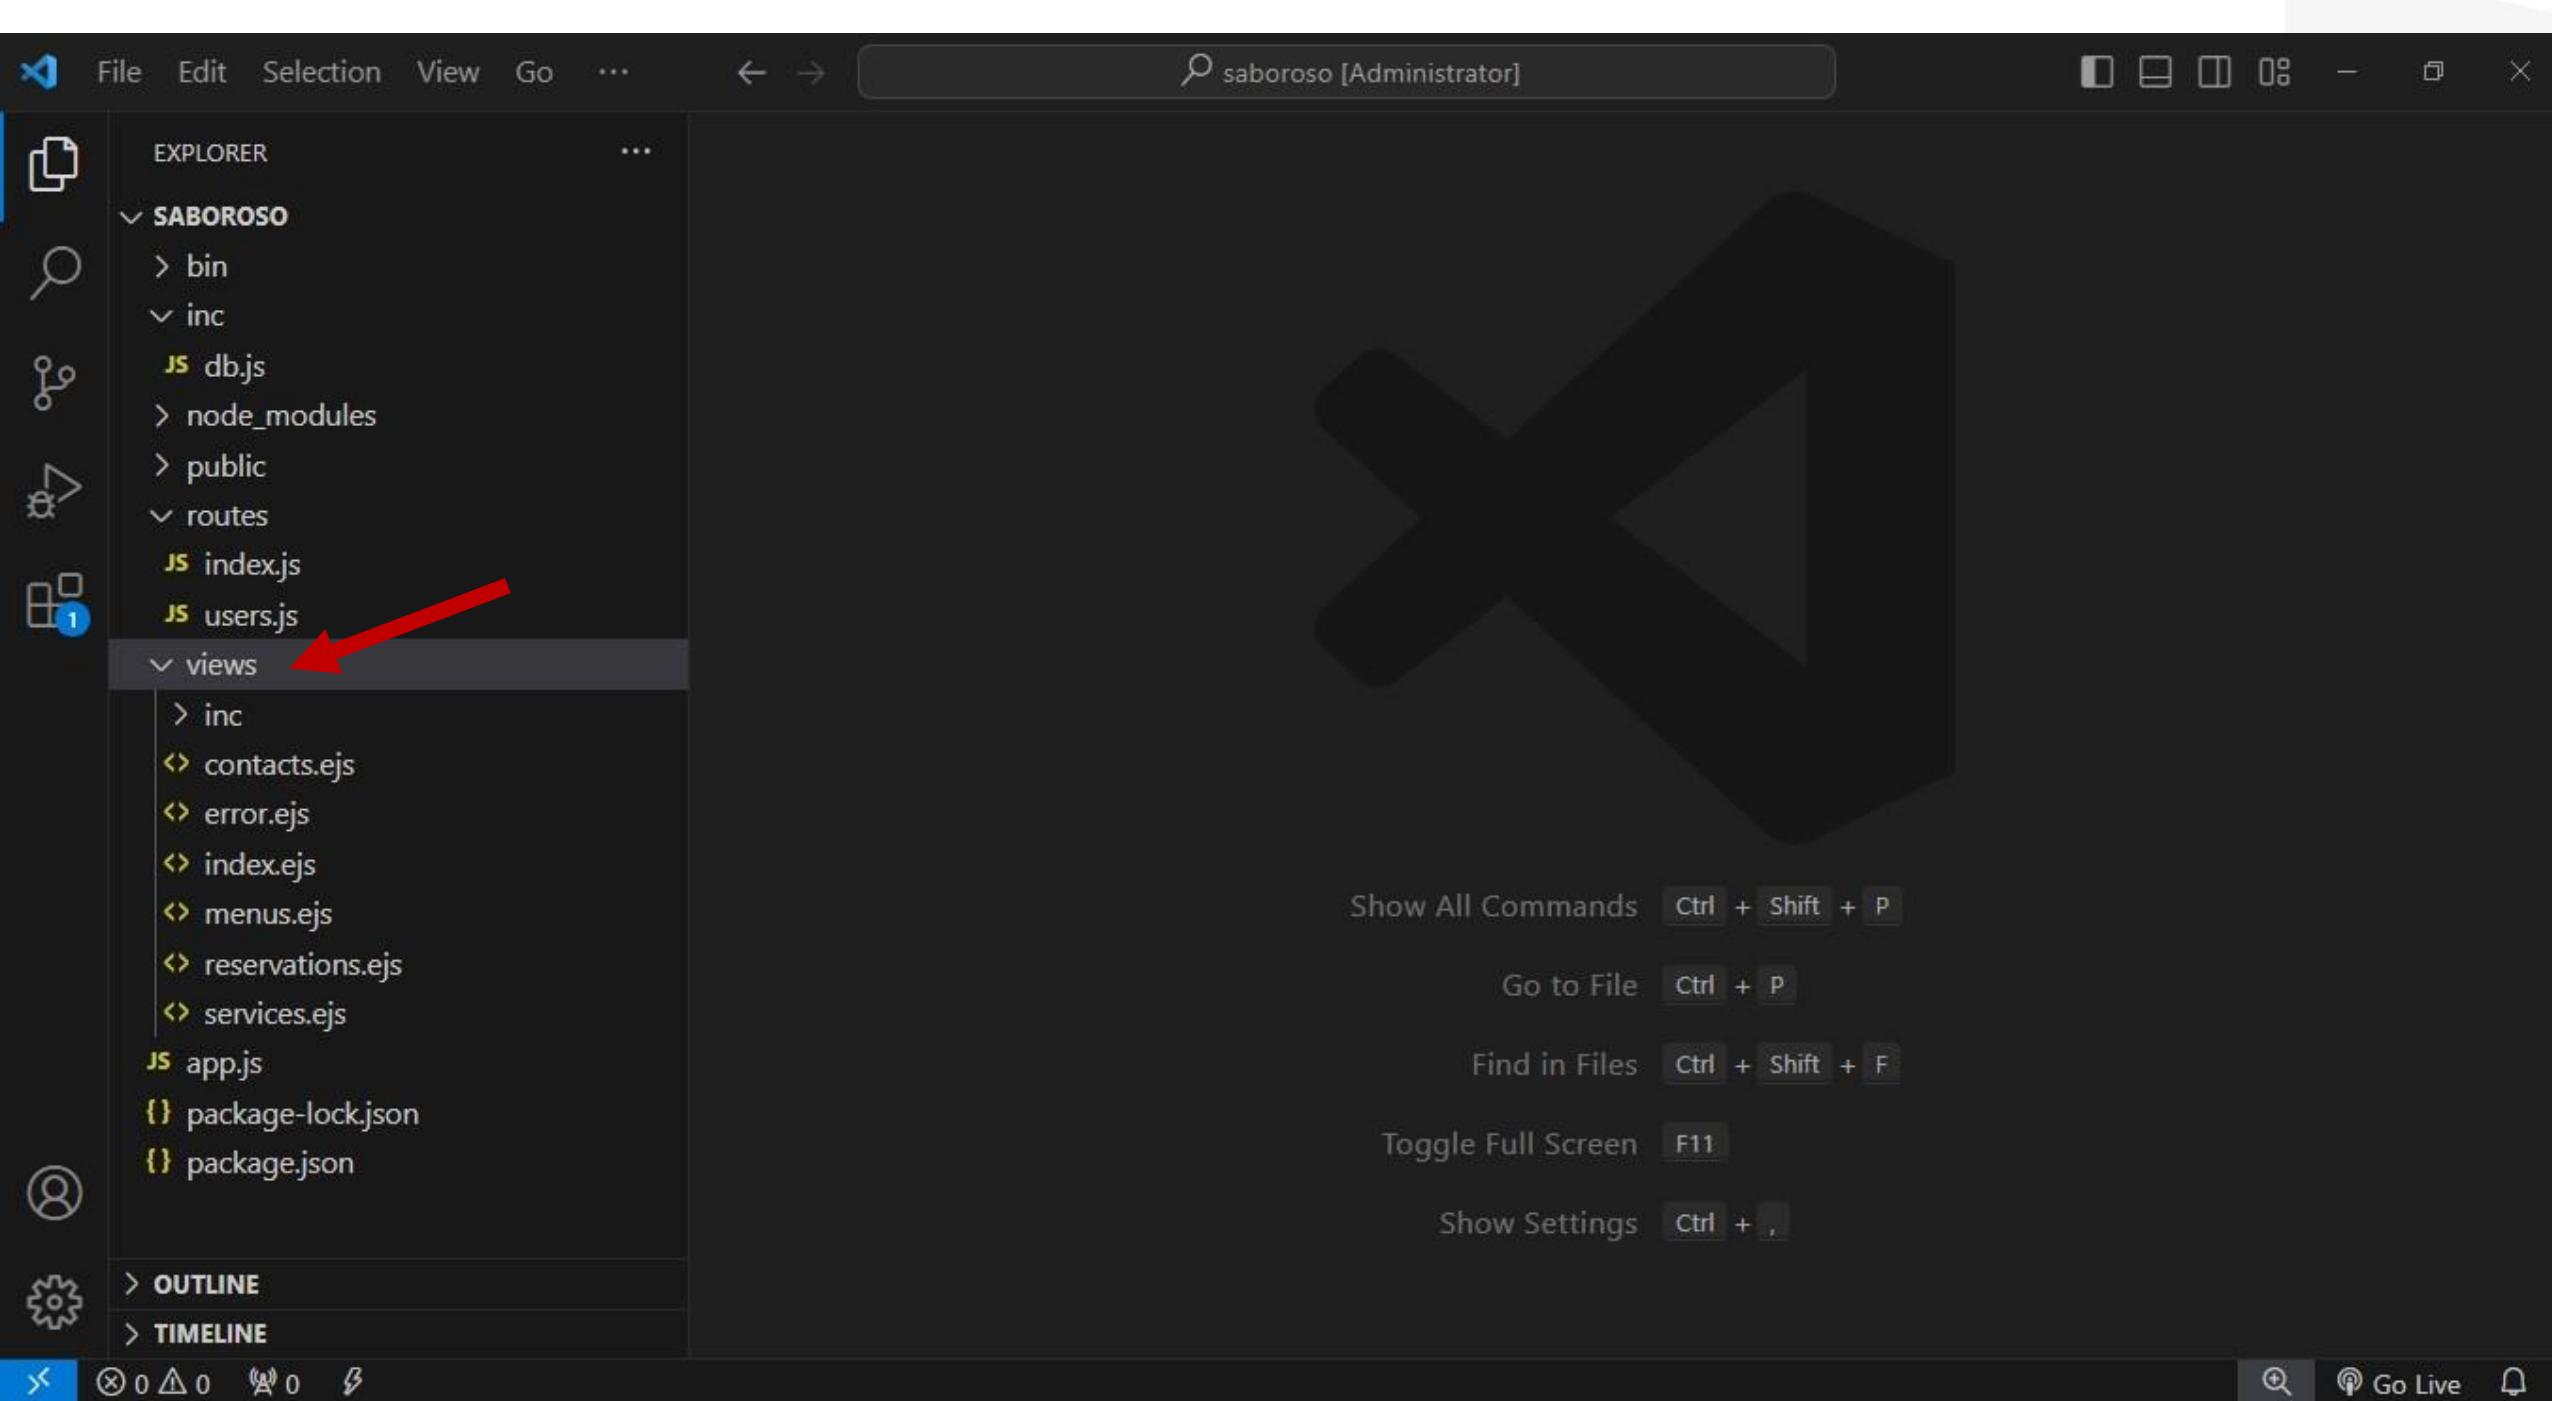

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO

- > bin
- < inc
 - JS db.js
- > node_modules
- > public
- < routes
 - JS index.js
 - JS users.js
- < views
 - > inc
 - < contacts.ejs
 - < error.ejs
 - < index.ejs
 - < menus.ejs
 - < reservations.ejs
 - < services.ejs
 - JS app.js
 - { package-lock.json
 - { package.json
- > OUTLINE
- > TIMELINE

index.ejs

views > index.ejs > html > body > div#page

```
1  <!DOCTYPE HTML>
2  <html>
3
4  <%- include("inc/head") -%>
5
6  <body>
7
8      <div class="gtco-loader"></div>
9
10     <div id="page">
11
12         <%- include("inc/header-menu") -%>
13         <%- include("inc/header-index") -%>
14
15         <div class="gtco-section">
16             <div class="gtco-container">
17                 <div class="row">
18                     <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
19                         <h2 class="cursive-font primary-color">Pratos Populares</h2>
20                         <p>Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num
21                                         copo é motivis de denguis. Quem num gosta di mé, boa
22                                         gentis num é.</p>
23
24                 </div>
25             </div>
26         <div class="row">
```

Ln 12, Col 43 Tab Size: 4 UTF-8 LF { HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer Tab:** Shows the project structure under SABOROSO:
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
- Editor Tab:** contacts.ejs
- Code Content:**

```
1  <!DOCTYPE HTML>
2  <html>
3  |   <%- include("inc/head") -%>
4  |   <body>
5  |
6  |       <div class="gtco-loader"></div>
7  |
8  |       <div id="page">
9  |
10 |           <%- include("inc/header-menu") -%>
11 |           <%- include("inc/header") -%>
12 |
13 |           <div class="gtco-section">
14 |               <div class="gtco-container">
15 |                   <div class="row">
16 |                       <div class="col-md-12">
17 |                           <div class="col-md-6 animate-box">
18 |                               <h3>Entre em Contato</h3>
19 |                               <form action="#">
20 |                                   <div class="row form-group">
21 |                                       <div class="col-md-12">
22 |                                           <label class="sr-only" for="name">Nome</label>
23 |                                           <input type="text" id="name" class="form-control" placeholder="Seu nome">
24 |                                       </div>
25 |                               </form>
```
- Status Bar:** Select Encoding, Ln 15, Col 30, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO

- bin
- inc
- db.js
- node_modules
- public
- routes
- index.js
- users.js
- views
- inc
- contacts.ejs
- error.ejs
- index.ejs
- menus.ejs
- reservations.ejs
- services.ejs

app.js

package-lock.json

package.json

OUTLINE

TIMELINE

menus.ejs

```
views > menus.ejs > html > ? > body > div#page > ? > ?
```

```
1  <!DOCTYPE HTML>
2  <html>
3  |   <%- include("inc/head") -%>
4  |   <body>
5  |
6  |       <div class="gtco-loader"></div>
7  |
8  |       <div id="page">
9  |
10 |           <%- include("inc/header-menu") -%>
11 |           <%- include("inc/header") -%>
12 |
13 |           <div class="gtco-section">
14 |               <div class="gtco-container">
15 |                   <div class="row">
16 |                       <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
17 |                           <h2 class="cursive-font primary-color">Pratos Populares</h2>
18 |                           <p>Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é
19 |                               motivis de denguis. Quem num gosta di mé, boa
20 |                                   gentis num é.</p>
21 |                   </div>
22 |               </div>
23 |
24 |               <div class="col-lg-4 col-md-4 col-sm-6">
25 |                   <a href="images/img_1.jpg" class="fh5co-card-item image-popup">
```

Ln 13, Col 1 Tab Size: 4 UTF-8 CRLF HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer Sidebar:** Shows the project structure under 'SABOROSO'. The 'views' folder contains 'reservations.ejs', which is currently selected (highlighted with a dark grey background). Other files in 'views' include 'contacts.ejs', 'error.ejs', 'index.ejs', 'menus.ejs', 'services.ejs', 'app.js', 'package-lock.json', and 'package.json'. Below 'views' are 'bin', 'inc', 'node_modules', 'public', 'routes', 'index.js', and 'users.js'. A red arrow points from the 'reservations.ejs' entry in the sidebar to the file tab in the top bar.
- Code Editor:** The 'reservations.ejs' file content is displayed. The code is an EJS template with the following structure:

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>
    <div class="gtco-loader"></div>
    <div id="page">
      <%- include("inc/header-menu") -%>
      <%- include("inc/header") -%>

      <div class="gtco-section" style="padding-bottom: 14em;">
        <div class="gtco-container">
          <div class="row">
            <div class="col-md-12">
              <div class="col-md-6 animate-box">
                <h3>Reserva de mesa</h3>
                <form action="#">
                  <div class="row form-group">
                    <div class="col-md-12">
                      <label for="inputName">Nome</label>
                      <input type="text" id="inputName" name="name" class="form-control">
                    </div>
                  </div>
                </form>
              </div>
            </div>
          </div>
        </div>
      </div>
    </div>
  </body>
</html>
```
- Status Bar:** Ln 24, Col 35, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO

- > bin
- < inc
- JS db.js
- > node_modules
- > public
- < routes
- JS index.js
- JS users.js
- < views
- > inc
- ▷ contacts.ejs
- ▷ error.ejs
- ▷ index.ejs
- ▷ menus.ejs
- ▷ reservations.ejs
- ▷ services.ejs

services.ejs

views > services.ejs > body > div#page > ?

```
1  <!DOCTYPE HTML>
2  <%- include("inc/head") -%>
3  <body>
4
5  <div class="gtco-loader"></div>
6
7  <div id="page">
8
9  <%- include("inc/header-menu") -%>
10 <%- include("inc/header") -%>
11
12 <div id="gtco-features">
13   <div class="gtco-container">
14     <div class="row">
15       <div class="col-md-8 col-md-offset-2 text-center gtco-heading animate-box">
16         <h2 class="cursive-font">Nossos Serviços</h2>
17         <p>Mussum Ipsum, cacilds vidis litro abertis. Si num tem leite então bota  
uma pinga aí cumpadi!</p>
18       </div>
19     </div>
20     <div class="row">
21       <div class="col-md-4 col-sm-6">
22         <div class="feature-center animate-box" data-animate-effect="fadeIn">
23           <span class="icon">
24             <i class="ti-face-smile"></i>
25           </span>
```

Ln 9, Col 39 Tab Size: 4 UTF-8 CRLF { HTML ⚡ Go Live ✓ Prettier

A screenshot of a code editor interface, likely Visual Studio Code, showing a file named `index.js` in the `routes` directory of a project named `SABOROSO`. The code in the editor handles requests for services, contacts, menus, and reservations, rendering correspondingejs files with specific titles, backgrounds, and h1 headings.


```
routes > JS index.js > router.get('/services') callback
23  });
24
25  router.get('/contacts', function(req, res, next) {
26
27    res.render('contacts',{
28      title: 'Contato - Restaurante Saboroso!',
29      background: "images/img_bg_3.jpg",
30      h1: "Diga um oi!"
31    });
32  });
33
34  router.get('/menus', function(req, res, next) {
35
36    res.render('menus', {
37      title: 'Menus - Restaurante Saboroso!',
38      background: "images/img_bg_1.jpg",
39      h1: "Saboreie nosso menu!"
40    });
41  });
42
43  router.get('/reservations', function(req, res, next) {
44
45    res.render('reservations', {
46      title: 'Reservas - Restaurante Saboroso!',
47      background: "images/img_bg_2.jpg",
48      h1: "Reserve uma Mesa!"
```

UC: Projetos

Assunto:

Projeto Restaurante – BackEnd

07 – Organizando o Footer com Includes

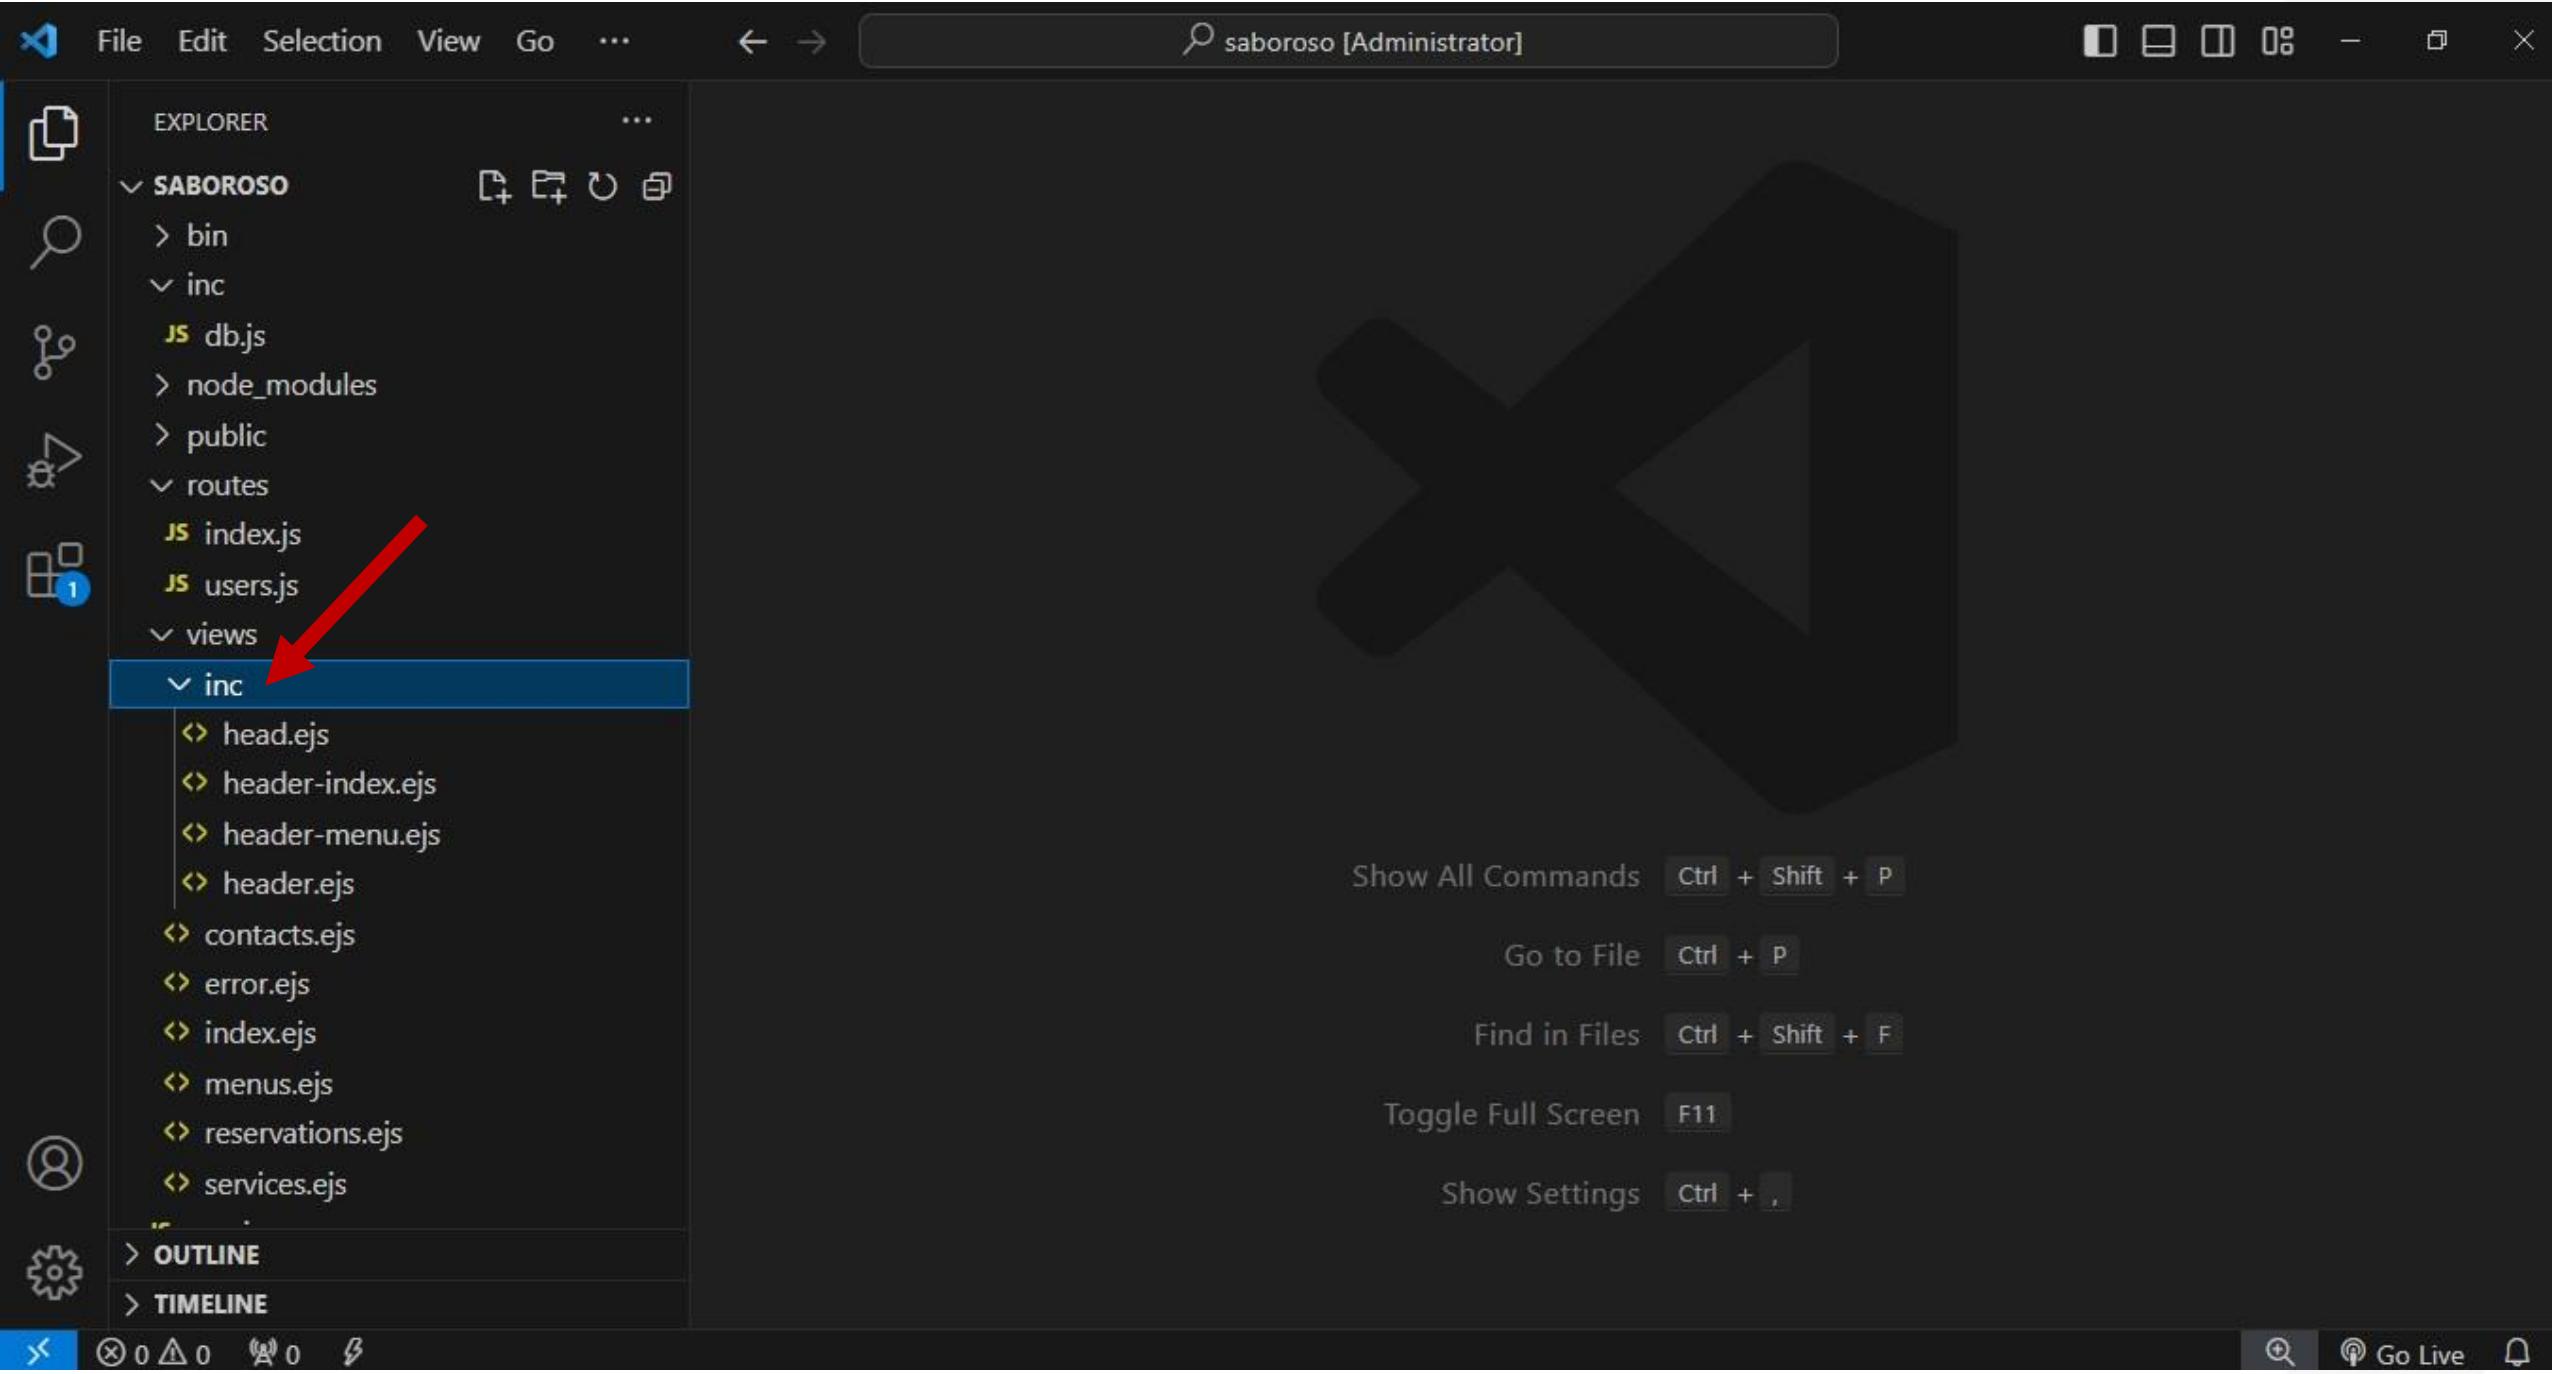

The screenshot shows a dark-themed code editor interface. The top bar includes standard menu items: File, Edit, Selection, View, Go, and a three-dot ellipsis. To the right of the menu is a search bar containing the text "saboroso [Administrator]". On the far right of the header are window control buttons (minimize, maximize, close) and a set of small icons.

The left sidebar contains several icons: a file icon, a magnifying glass, a circular progress bar, a gear, and a user profile icon. Below these are sections for "EXPLORER", "SABOROSO", and "OUTLINE/TIMELINE".

The main area is titled "views > inc > footer-scripts.ejs". The code editor displays the content of the file "footer-scripts.ejs", which contains a single character "1".

The Explorer panel on the left lists the project structure:

- SABOROSO
 - bin
 - inc
 - db.js
 - index.js
 - users.js
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - footer-scripts.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs

A red arrow points to the file "footer-scripts.ejs" in the "inc" folder of the Explorer panel.

The bottom status bar shows file navigation information: "Ln 1, Col 1", "Spaces: 4", "UTF-8", "CRLF", "HTML", "Go Live", "Prettier", and a refresh icon.

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Toolbars:** Standard Windows-style icons for copy, paste, search, etc.
- Left Sidebar (EXPLORER):**
 - SABOROSO folder:
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes folder:
 - index.js
 - users.js
 - views folder:
 - inc folder:
 - footer-scripts.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs** (highlighted with a red arrow)
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
- Right Panel (Code View):**
 - Current file: footer-scripts.ejs (tab bar)
 - Open file: index.ejs (tab bar)
 - Content pane:

```
views > index.ejs > html > ? > body
    <i class="icon-arrow-up"></i>
</a>
</div>


<script src="js/jquery.min.js"></script>

<script src="js/jquery.easing.1.3.js"></script>

<script src="js/bootstrap.min.js"></script>

<script src="js/jquery.waypoints.min.js"></script>

<script src="js/owl.carousel.min.js"></script>

<script src="js/jquery.countTo.js"></script>


<script src="js/jquery.stellar.min.js"></script>


<script src="js/jquery.magnific-popup.min.js"></script>
<script src="js/magnific-popup-options.js"></script>

<script src="js/moment.min.js"></script>
<script src="js/bootstrap-datetimepicker.min.js"></script>


<script src="js/main.js"></script>

</body>
```

A screenshot of a code editor interface, likely Visual Studio Code, showing an EJS template file named `index.ejs`. The file contains HTML and JavaScript code. A large red arrow points from the bottom right towards line 251 of the code.

```
</div>
</div>
</div>
<div class="gototop js-top">
  <a href="#" class="js-gotop">
    <i class="icon-arrow-up"></i>
  </a>
</div>
</body>
</html>
```

The code editor's sidebar shows a project structure with files like `bin`, `inc`, `db.js`, `node_modules`, `public`, `routes`, `index.js`, `users.js`, and various `ejs` files under `views`. The file `index.ejs` is currently selected in the sidebar.

File Edit Selection View Go Run ... 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO


- bin
- inc
- db.js
- node_modules
- public
- routes
- index.js
- users.js
- views
- inc
- footer-scripts.ejs
- head.ejs
- header-index.ejs
- header-menu.ejs
- header.ejs
- contacts.ejs
- error.ejs
- index.ejs
- menus.ejs
- reservations.ejs
- services.ejs
- app.js

views > inc > footer-scripts.ejs

views > inc > footer-scripts.ejs < index.ejs

```
views > inc > footer-scripts.ejs > script
1   <!-- jQuery -->
2   <script src="js/jquery.min.js"></script>
3   <!-- jQuery Easing -->
4   <script src="js/jquery.easing.1.3.js"></script>
5   <!-- Bootstrap -->
6   <script src="js/bootstrap.min.js"></script>
7   <!-- Waypoints -->
8   <script src="js/jquery.waypoints.min.js"></script>
9   <!-- Carousel -->
10  <script src="js/owl.carousel.min.js"></script>
11  <!-- countTo -->
12  <script src="js/jquery.countTo.js"></script>
13
14  <!-- Stellar Parallax -->
15  <script src="js/jquery.stellar.min.js"></script>
16
17  <!-- Magnific Popup -->
18  <script src="js/jquery.magnific-popup.min.js"></script>
19  <script src="js/magnific-popup-options.js"></script>
20
21  <script src="js/moment.min.js"></script>
22  <script src="js/bootstrap-datetimepicker.min.js"></script>
23
24
25  <!-- Main -->
26  <script src="js/main.js"></script>
```

Ln 26, Col 39 Spaces: 4 UTF-8 CRLF ↴ HTML ⚡ Go Live ✅ Prettier

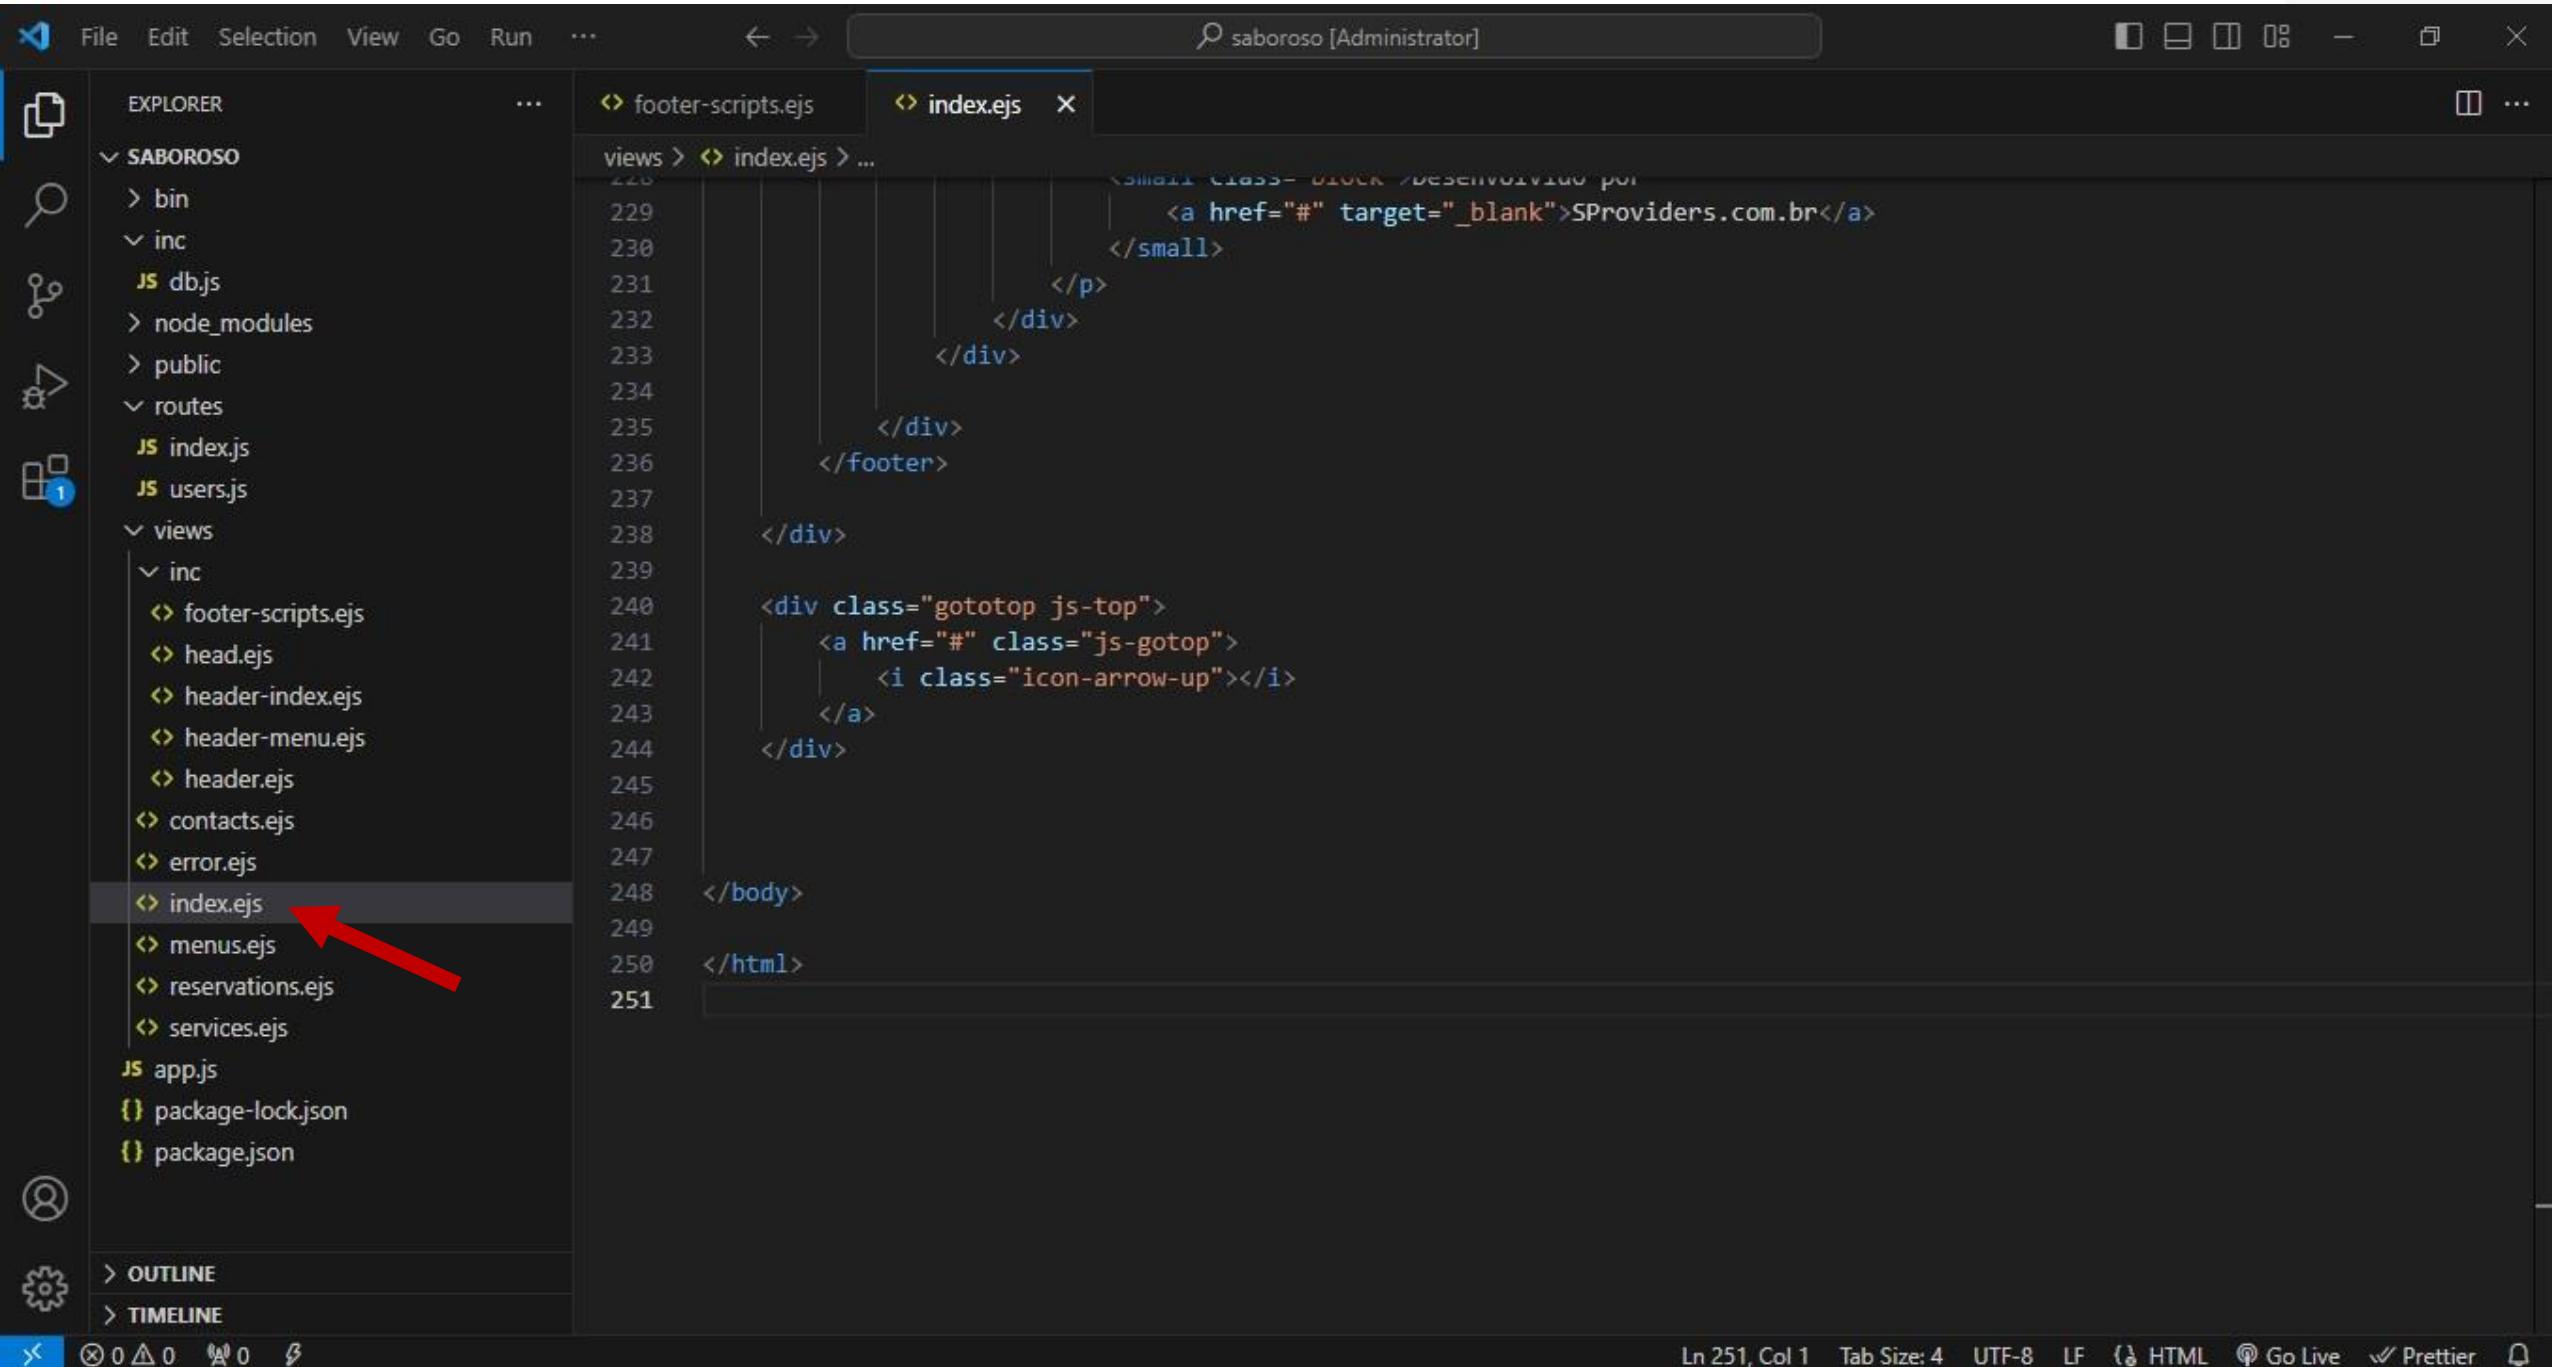

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Toolbars:** Standard Windows-style icons for minimize, maximize, close, etc.
- SIDE BAR:** Includes icons for Explorer, Search, Find, and Outline/Timeline.
- EXPLORER:** Shows the project structure:
 - SABOROSO (expanded): bin, inc (containing db.js), node_modules, public, routes (containing index.js and users.js), views (expanded): inc (containing footer-scripts.ejs, head.ejs, header-index.ejs, header-menu.ejs, header.ejs, contacts.ejs, error.ejs), index.ejs (selected and highlighted in grey), menus.ejs, reservations.ejs, services.ejs.
 - views (expanded): inc (containing footer-scripts.ejs, head.ejs, header-index.ejs, header-menu.ejs, header.ejs, contacts.ejs, error.ejs), index.ejs (selected and highlighted in grey), menus.ejs, reservations.ejs, services.ejs.
- EDITOR TABS:** footer-scripts.ejs (inactive), index.ejs (active).
- EDITOR CONTENT:** The 'index.ejs' file contains the following code:

```
239
240     <div class="gototop js-top">
241         <a href="#" class="js-gotop">
242             <i class="icon-arrow-up"></i>
243         </a>
244     </div>
245
246     <%- include("inc/footer-scripts") -%>
247
248 </body>
249
250 </html>
251
```

A red arrow points to the line containing the file inclusion directive `<%- include("inc/footer-scripts") -%>`.
- STATUS BAR:** Ln 246, Col 5 (37 selected) Tab Size: 4 UTF-8 LF (HTML) Go Live Prettier

The screenshot shows a code editor window with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Sidebar (EXPLORER):** Shows the project structure:
 - SABOROSO (expanded): bin, inc (db.js), node_modules, public, routes (index.js, users.js), views (inc (footer-scripts.ejs, head.ejs, header-index.ejs, header-menu.ejs, header.ejs, contacts.ejs, error.ejs), index.ejs, menus.ejs, reservations.ejs, services.ejs)
 - JS app.js, package-lock.json, package.json
- Code Editor:** The current file is index.ejs. The code is as follows:

```
views > index.ejs > html > ? > body > ?
231           </p>
232           </div>
233           </div>
234           </div>
235           </div>
236           </div>
237           </div>
238           </div>
239
240           <div class="gototop js-top">
241             <a href="#" class="js-gotop">
242               <i class="icon-arrow-up"></i>
243             </a>
244           </div>
245
246           <%- include("inc/footer-gototop") -%>
247
248           <%- include("inc/footer-scripts") -%>
249
250           </body>
251
252           </html>
253
```
- Status Bar:** Ln 246, Col 5 (37 selected) Tab Size: 4 UTF-8 LF HTML Go Live Prettier

A screenshot of a code editor interface, likely Visual Studio Code, showing the file structure and a specific file selected.

The top bar includes standard menu items: File, Edit, Selection, View, Go, Run, ..., and a search bar labeled "saboroso [Administrator]".

The left sidebar contains icons for Explorer, Search, Open, Find, and others, with the "EXPLORER" icon currently active.

The Explorer sidebar shows the project structure:

- SABOROSO
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - footer-gototop.ejs
 - footer-scripts.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
- OUTLINE
- TIMELINE

A red arrow points to the "footer-gototop.ejs" file in the "inc" folder under "views".

The main editor area shows the file content:

```
<> footer-gototop.ejs
```

The status bar at the bottom indicates: Ln 1, Col 1 Spaces: 4 UTF-8 CRLF & HTML Go Live Prettier

The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer (Left):** Shows the project structure under 'SABOROSO'. Files listed include: bin, inc (db.js), node_modules, public, routes (index.js, users.js), views (inc (footer-gototop.ejs, footer-scripts.ejs, head.ejs, header-index.ejs, header-menu.ejs, header.ejs), contacts.ejs, error.ejs, index.ejs, menus.ejs, reservations.ejs, services.ejs), app.js, package-lock.json, and package.json.
- Code Editor (Center):** The 'index.ejs' file is open. The code is an EJS template for a page. It includes sections for 'body', 'header', and 'footer'. The footer section contains a 'gototop' button with an upward arrow icon. The code is numbered from 231 to 253.
- Status Bar (Bottom):** Shows the current line (Ln 240, Col 1) and character count (109 selected), tab size (4), encoding (UTF-8), line separator (LF), file type (HTML), and status (Go Live, Prettier).

```
<div class="gototop js-top">
  <a href="#" class="js-gotop">
    <i class="icon-arrow-up"></i>
  </a>
</div>

<% include("inc/footer-gototop") -%>

<% include("inc/footer-scripts") -%>
```

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under "SABOROSO", including "bin", "inc" (containing "db.js"), "node_modules", "public", "routes" (containing "index.js" and "users.js"), and "views" (containing "inc" (containing "footer-gototop.ejs", "footer-scripts.ejs", "head.ejs", "header-index.ejs", "header-menu.ejs", "header.ejs"), "contacts.ejs", "error.ejs", "index.ejs" (selected), "menus.ejs", "reservations.ejs", "services.ejs", "app.js", "package-lock.json", and "package.json"). The main editor area shows the file "index.ejs" with the following content:

```
<div>
  <div>
    <div>
      <p></p>
    </div>
  </div>
</div>

<%- include("inc/footer-gototop") -%>
<%- include("inc/footer-scripts") -%>
</body>
</html>
```

A large red arrow points from the bottom right towards the closing tag of the innermost div at line 240.

The status bar at the bottom shows "Ln 240, Col 1 Tab Size: 4 UTF-8 LF HTML Go Live Prettier".

File Edit Selection View Go Run ... ← → 🔍 saboroso [Administrator] ⬡ ⬢ ⬣ ⬤ ⬥ ⬦

EXPLORER

SABOROSO

- > bin
- > inc
- JS db.js
- > node_modules
- > public
- > routes
- JS index.js
- JS users.js

views

inc

- ↳ footer-gototop.ejs
- ↳ footer-scripts.ejs
- ↳ head.ejs
- ↳ header-index.ejs
- ↳ header-menu.ejs
- ↳ header.ejs
- ↳ contacts.ejs
- ↳ error.ejs
- ↳ index.ejs
- ↳ menus.ejs
- ↳ reservations.ejs
- ↳ services.ejs

JS app.js

{ package-lock.json

{ package.json

> OUTLINE

> TIMELINE

← 0 △ 0 ⌂ 0 ⌃ 0 🔍

views > inc > ↳ footer-gototop.ejs > div.gototop.js-top

```
1 <div class="gototop js-top">
2   <a href="#" class="js-gotop">
3     <i class="icon-arrow-up"></i>
4   </a>
5 </div>
```

Ln 5, Col 7 Spaces: 4 UTF-8 CRLF ⚙ HTML ⚙ Go Live ⚙ Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Explorer View (Left):**
 - SABOROSO folder:
 - bin
 - inc
 - JS db.js
 - node_modules
 - public
 - routes
 - JS index.js
 - JS users.js
 - views
 - inc
 - JS footer-gototop.ejs
 - JS footer-scripts.ejs
 - JS head.ejs
 - JS header-index.ejs
 - JS header-menu.ejs
 - JS header.ejs
 - JS contacts.ejs
 - JS error.ejs
 - JS index.ejs (highlighted)
 - JS menus.ejs
 - JS reservations.ejs
 - JS services.ejs
 - JS app.js
 - package-lock.json
 - package.json
 - Outline View (Bottom Left):** OUTLINE, TIMELINE
 - Code Editor (Right):**
 - File tabs: footer-scripts.ejs, index.ejs (highlighted), footer-gototop.ejs
 - Path: views > index.ejs > html > body > div#page > ? > ?
 - Code Lines 164-248:

```
164           </div>
165       </div>
166       <div class="col-md-6 col-sm-6">
167         <button type="submit" class="btn btn-default btn-block">Inscrirer</button>
168       </div>
169     </div>
170   </div>
171 </div>
172 </div>
173 </div>
174
175 <footer id="gtco-footer" role="contentinfo" style="background-image: url(images/img_bg_1.jpg)" data-stellar-background-ratio="0.5"> ...
176   </footer>
177 </div>
178
179 <%- include("inc/footer-gototop") -%>
180
181 <%- include("inc/footer-scripts") -%>
182
183 </body>
184
185 </html>
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
```
 - A red arrow points to the line containing the footer element.
 - A red arrow points to the "index.ejs" file in the Explorer view.
 - Status bar at the bottom: Ln 175, Col 1 (1682 selected) Tab Size: 4 UTF-8 LF HTML Go Live Prettier

A screenshot of a code editor interface, likely Visual Studio Code, showing an open file named 'footer.ejs'. The file contains EJS (Embedded JavaScript) code for a footer section of a web page. The code includes HTML structures like divs and spans, and CSS-like styles using inline style attributes. The editor's sidebar on the left shows a tree view of the project structure under 'SABOROSO', with 'views' expanded to show 'inc' and several EJS files. The 'footer.ejs' file is highlighted with a blue selection bar and a red arrow points to it from the bottom-left. The top navigation bar includes File, Edit, Selection, View, Go, Run, and other standard options. The status bar at the bottom shows file details like 'Ln 62, Col 10' and encoding 'UTF-8'.

```
<footer id="gtco-footer" role="contentinfo" style="background-image: url(images/img_bg_1.jpg); background-size: cover; background-position: center; position: relative; height: 300px; padding-top: 10px; padding-bottom: 10px; border-bottom: 1px solid #e0e0e0; margin-bottom: 10px; data-stellar-background-ratio="0.5">
  <div class="overlay"></div>
  <div class="gtco-container">
    <div class="row row-pb-md">
      <div class="col-md-12 text-center">
        <div class="gtco-widget">
          <h3>Entrar em Contato</h3>
          <ul class="gtco-quick-contact">
            <li>
              <a href="#">
                <i class="icon-phone"></i> +1 234 567 890</a>
              </li>
            <li>
              <a href="#">
                <i class="icon-mail2"></i> contato@sproviders.com.br</a>
              </li>
            <li>
              <a href="#">
                <i class="icon-chat"></i> Chat</a>
              </li>
            </ul>
          </div>
          <div class="gtco-widget">
            <h3>Redes Sociais</h3>
            <ul class="gtco-social-icons">
              <li>
                <a href="https://twitter.com/">
                  <i class="icon-twitter"></i>
                </a>
              </li>
            </ul>
          </div>
        </div>
      </div>
    </div>
  </div>
</footer>
```

A screenshot of a code editor interface, likely Visual Studio Code, showing a file named `index.ejs` open. The editor has a dark theme. On the left is the Explorer sidebar showing the project structure under the `SABOROSO` folder. The `index.ejs` file is selected in the Explorer. The main pane displays the contents of the `index.ejs` file, which is an EJS template. A red arrow points from the bottom-left towards the line `<%- include("inc/footer") -%>`. Another red arrow points from the top-left towards the same line, indicating it is the target of a search or selection.

```
<!-- footer-scripts.ejs --> <!-- index.ejs X --> <!-- head.ejs --> <!-- footer.ejs --> <!-- footer-gototop.ejs -->  
views > <!-- index.ejs > html > ? > body > div#page > ? > ?  
164 </div>  
165 </div>  
166 <div class="col-md-6 col-sm-6">  
167 <button type="submit" class="btn btn-default btn-block">Inscrever</button>  
168 </div>  
169 </form>  
170 </div>  
171 </div>  
172 </div>  
173 </div>  
174 <%- include("inc/footer") -%> -----^  
175 </div>  
176 <%- include("inc/footer-gototop") -%>  
177 <%- include("inc/footer-scripts") -%>  
178 </body>  
179 </html>  
180 <%- include("inc/footer-gototop") -%>  
181 <%- include("inc/footer-scripts") -%>  
182 </body>  
183 </html>  
184 <%- include("inc/footer-gototop") -%>  
185 <%- include("inc/footer-scripts") -%>  
186 </body>  
187 </html>
```

File Edit Selection View Go Run ... 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO

- > bin
- < inc
- JS db.js
- > node_modules
- > public
- < routes
- JS index.js
- JS users.js

views

- < inc
 - JS footer-gototop.ejs
 - JS footer-scripts.ejs
 - JS footer.ejs
 - JS head.ejs
 - JS header-index.ejs
 - JS header-menu.ejs
 - JS header.ejs
 - JS contacts.ejs
 - JS error.ejs
- JS index.ejs
- JS menus.ejs
- JS reservations.ejs
- JS services.ejs

JS app.js

{ package-lock.json

{ package.json

> OUTLINE

> TIMELINE

index.ejs

```
views > index.ejs > html > ? > body > ? > ?
```

```
164           </div>
165           </div>
166           <div class="col-md-6 col-sm-6">
167             <button type="submit" class="btn btn-default btn-block">Inscrever</button>
168           </div>
169           </div>
170           </div>
171           </div>
172           </div>
173           </div>
174           <%- include("inc/footer") -%>
175           </div>
176           <%- include("inc/footer-gototop") -%>
177           <%- include("inc/footer-scripts") -%>
178       </div>
179     </div>
180   </div>
181 </body>
182 </html>
```

Select Indentation

Ln 182, Col 42 (121 selected) Tab Size: 4 UTF-8 LF ⓘ HTML ⓘ Go Live ⓘ Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Toolbar:** Back, Forward, Search bar (saboroso [Administrator]), Minimize, Maximize, Close.
- Explorer Sidebar:** Shows the project structure under "SABOROSO".
 - bin
 - inc
 - JS db.js
 - node_modules
 - public
 - routes
 - JS index.js
 - JS users.js
 - views
 - inc
 - JS footer-gototop.ejs
 - JS footer-scripts.ejs
 - JS footer.ejs
 - JS head.ejs
 - JS header-index.ejs
 - JS header-menu.ejs
 - JS header.ejs
 - JS contacts.ejs
 - JS error.ejs
 - JS index.ejs
 - JS menus.ejs
 - JS reservations.ejs
 - JS services.ejs
 - JS app.js
 - {} package-lock.json
 - {} package.json
- Tabs Bar:** index.ejs (active), contacts.ejs (selected).
- Code Editor:** The "views/contacts.ejs" file is open.

```
58.      </div>
59.      </div>
60.      </div>
61.      </div>
62.      </div>
63.      </div>
64.
65.      <footer id="gtco-footer" role="contentinfo" style="background-image: url(images/img_bg_1.jpg)" data-stellar-background-ratio="0.5">
66.        <div class="overlay"></div>
67.        <div class="gtco-container">
68.          <div class="row row-pb-md">
69.            <div class="col-md-12 text-center">
70.              <div class="gtco-widget">
71.                <h3>Entrar em Contato</h3>
72.                <ul class="gtco-quick-contact">
73.                  <li>
74.                    <a href="#">
75.                      <i class="icon-phone"></i> (11) 98765-4321</a>
76.                    </li>
77.                    <li>
78.                      <a href="#">
79.                        <i class="icon-mail2"></i> contato@sproviders.com.br</a>
80.                      </li>
81.                      <li>
82.                        <a href="#">
83.                          <i class="icon-chat"></i> Chat</a>
84.                        </li>
85.                  </ul>
86.                </div>
87.              <div class="gtco-widget">
```
- Bottom Status Bar:** Ln 159, Col 39 (2606 selected) Tab Size: 4 UTF-8 CRLF HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Toolbar:** Back, Forward, Search (saboroso [Administrator]), Minimize, Maximize, Close.
- Left Sidebar (EXPLORER):**
 - SABOROSO folder:
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views folder:
 - inc
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs (highlighted)
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
- Top Status Bar:** Ln 159, Col 39 (2606 selected) Tab Size: 4 UTF-8 CRLF HTML Go Live Prettier
- Code Editor:** The contacts.ejs file is open, showing EJS template code. Lines 134 through 164 are visible, containing script tags for various jQuery and Bootstrap libraries. A red arrow points from the contacts.ejs tab in the sidebar to the code editor area.

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Explorer:** Shows the project structure under "SABOROSO".
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
- Code Editor:** The "contacts.ejs" file is open.

```
<? index.ejs <? contacts.ejs <? html ?> ?> body ?> div#page ?> ?> ?>
49
50
51 <h3>Informações de Contato</h3>
52 <ul>
53   <li class="address">Avenida, R. 1234, 56 - 1º andar - Centro, Odimais - RG, 00000-000</li>
54   <li class="phone"><a href="tel://11987654321">(11) 98765-4321</a></li>
55   <li class="email"><a href="mailto:contato@sproviders.com.br">contato@sproviders.com.br</a></li>
56   <li class="url"><a href="#">sproviders.com.br</a></li>
57 </ul>
58 </div>
59 </div>
60 </div>
61 </div>
62 </div>
63 </div>
64 <%- include("inc/footer") -%>
65 </div>
66 <%- include("inc/footer-gototop") -%>
67 <%- include("inc/footer-scripts") -%>
68 </body>
69 </html>
```
- Status Bar:** Ln 65, Col 1 (124 selected) Tab Size: 4 UTF-8 CRLF HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Search icon, Minimize, Maximize, Close.
- Left Sidebar (EXPLORER):**
 - SABOROSO
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
 - OUTLINE
 - TIMELINE
- Current File Tab:** menus.ejs
- Code Editor Content:** (Content of the menus.ejs file)
- Bottom Status Bar:** Ln 120, Col 1 (124 selected) Tab Size: 4 UTF-8 CRLF (HTML) Go Live Prettier

The screenshot shows a code editor interface with the following details:


- File Bar:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Explorer:** Shows the project structure:
 - SABOROSO
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
 - Editor:** The 'reservations.ejs' tab is active. The code shows a template structure with includes:

```
<div>
  <ul>
    <li class="url"><a href="#">sproviders.com.br</a></li>
  </ul>
</div>
<div>
</div>
<div>
</div>
<%- include("inc/footer") -%>
</div>
<%- include("inc/footer-gototop") -%>
<%- include("inc/footer-scripts") -%>
</body>
</html>
```
 - Status Bar:** Ln 84, Col 1 (124 selected) Tab Size: 4 UTF-8 CRLF HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Toolbar:** Back, Forward, Search bar (saboroso [Administrator]), Minimize, Maximize, Close.
- Explorer Sidebar:** Shows the project structure under "SABOROSO".
 - bin
 - inc
 - JS db.js
 - node_modules
 - public
 - routes
 - JS index.js
 - JS users.js
 - views
 - inc
 - JS footer-gototop.ejs
 - JS footer-scripts.ejs
 - JS footer.ejs
 - JS head.ejs
 - JS header-index.ejs
 - JS header-menu.ejs
 - JS header.ejs
 - JS contacts.ejs
 - JS error.ejs
 - JS index.ejs
 - JS menus.ejs
 - JS reservations.ejs
 - JS services.ejs
- Code Editor:** Tab bar: index.ejs, contacts.ejs, menus.ejs, reservations.ejs, services.ejs (selected).

```
<div class="col-md-8 col-md-offset-2">
    <form class="form-inline">
        <div class="col-md-6 col-sm-6">
            <div class="form-group">
                <label for="email" class="sr-only">E-mail</label>
                <input type="email" class="form-control" id="email" placeholder="Seu E-mail">
            </div>
        <div class="col-md-6 col-sm-6">
            <button type="submit" class="btn btn-default btn-block">Inscrever</button>
        </div>
    </form>
</div>
</div>
<%- include("inc/footer") -%>
</div>
<%- include("inc/footer-gototop") -%>
<%- include("inc/footer-scripts") -%>
</body>
</html>
```
- Bottom Status Bar:** Ln 120, Col 1 (124 selected) Tab Size: 4 UTF-8 CRLF HTML Go Live Prettier

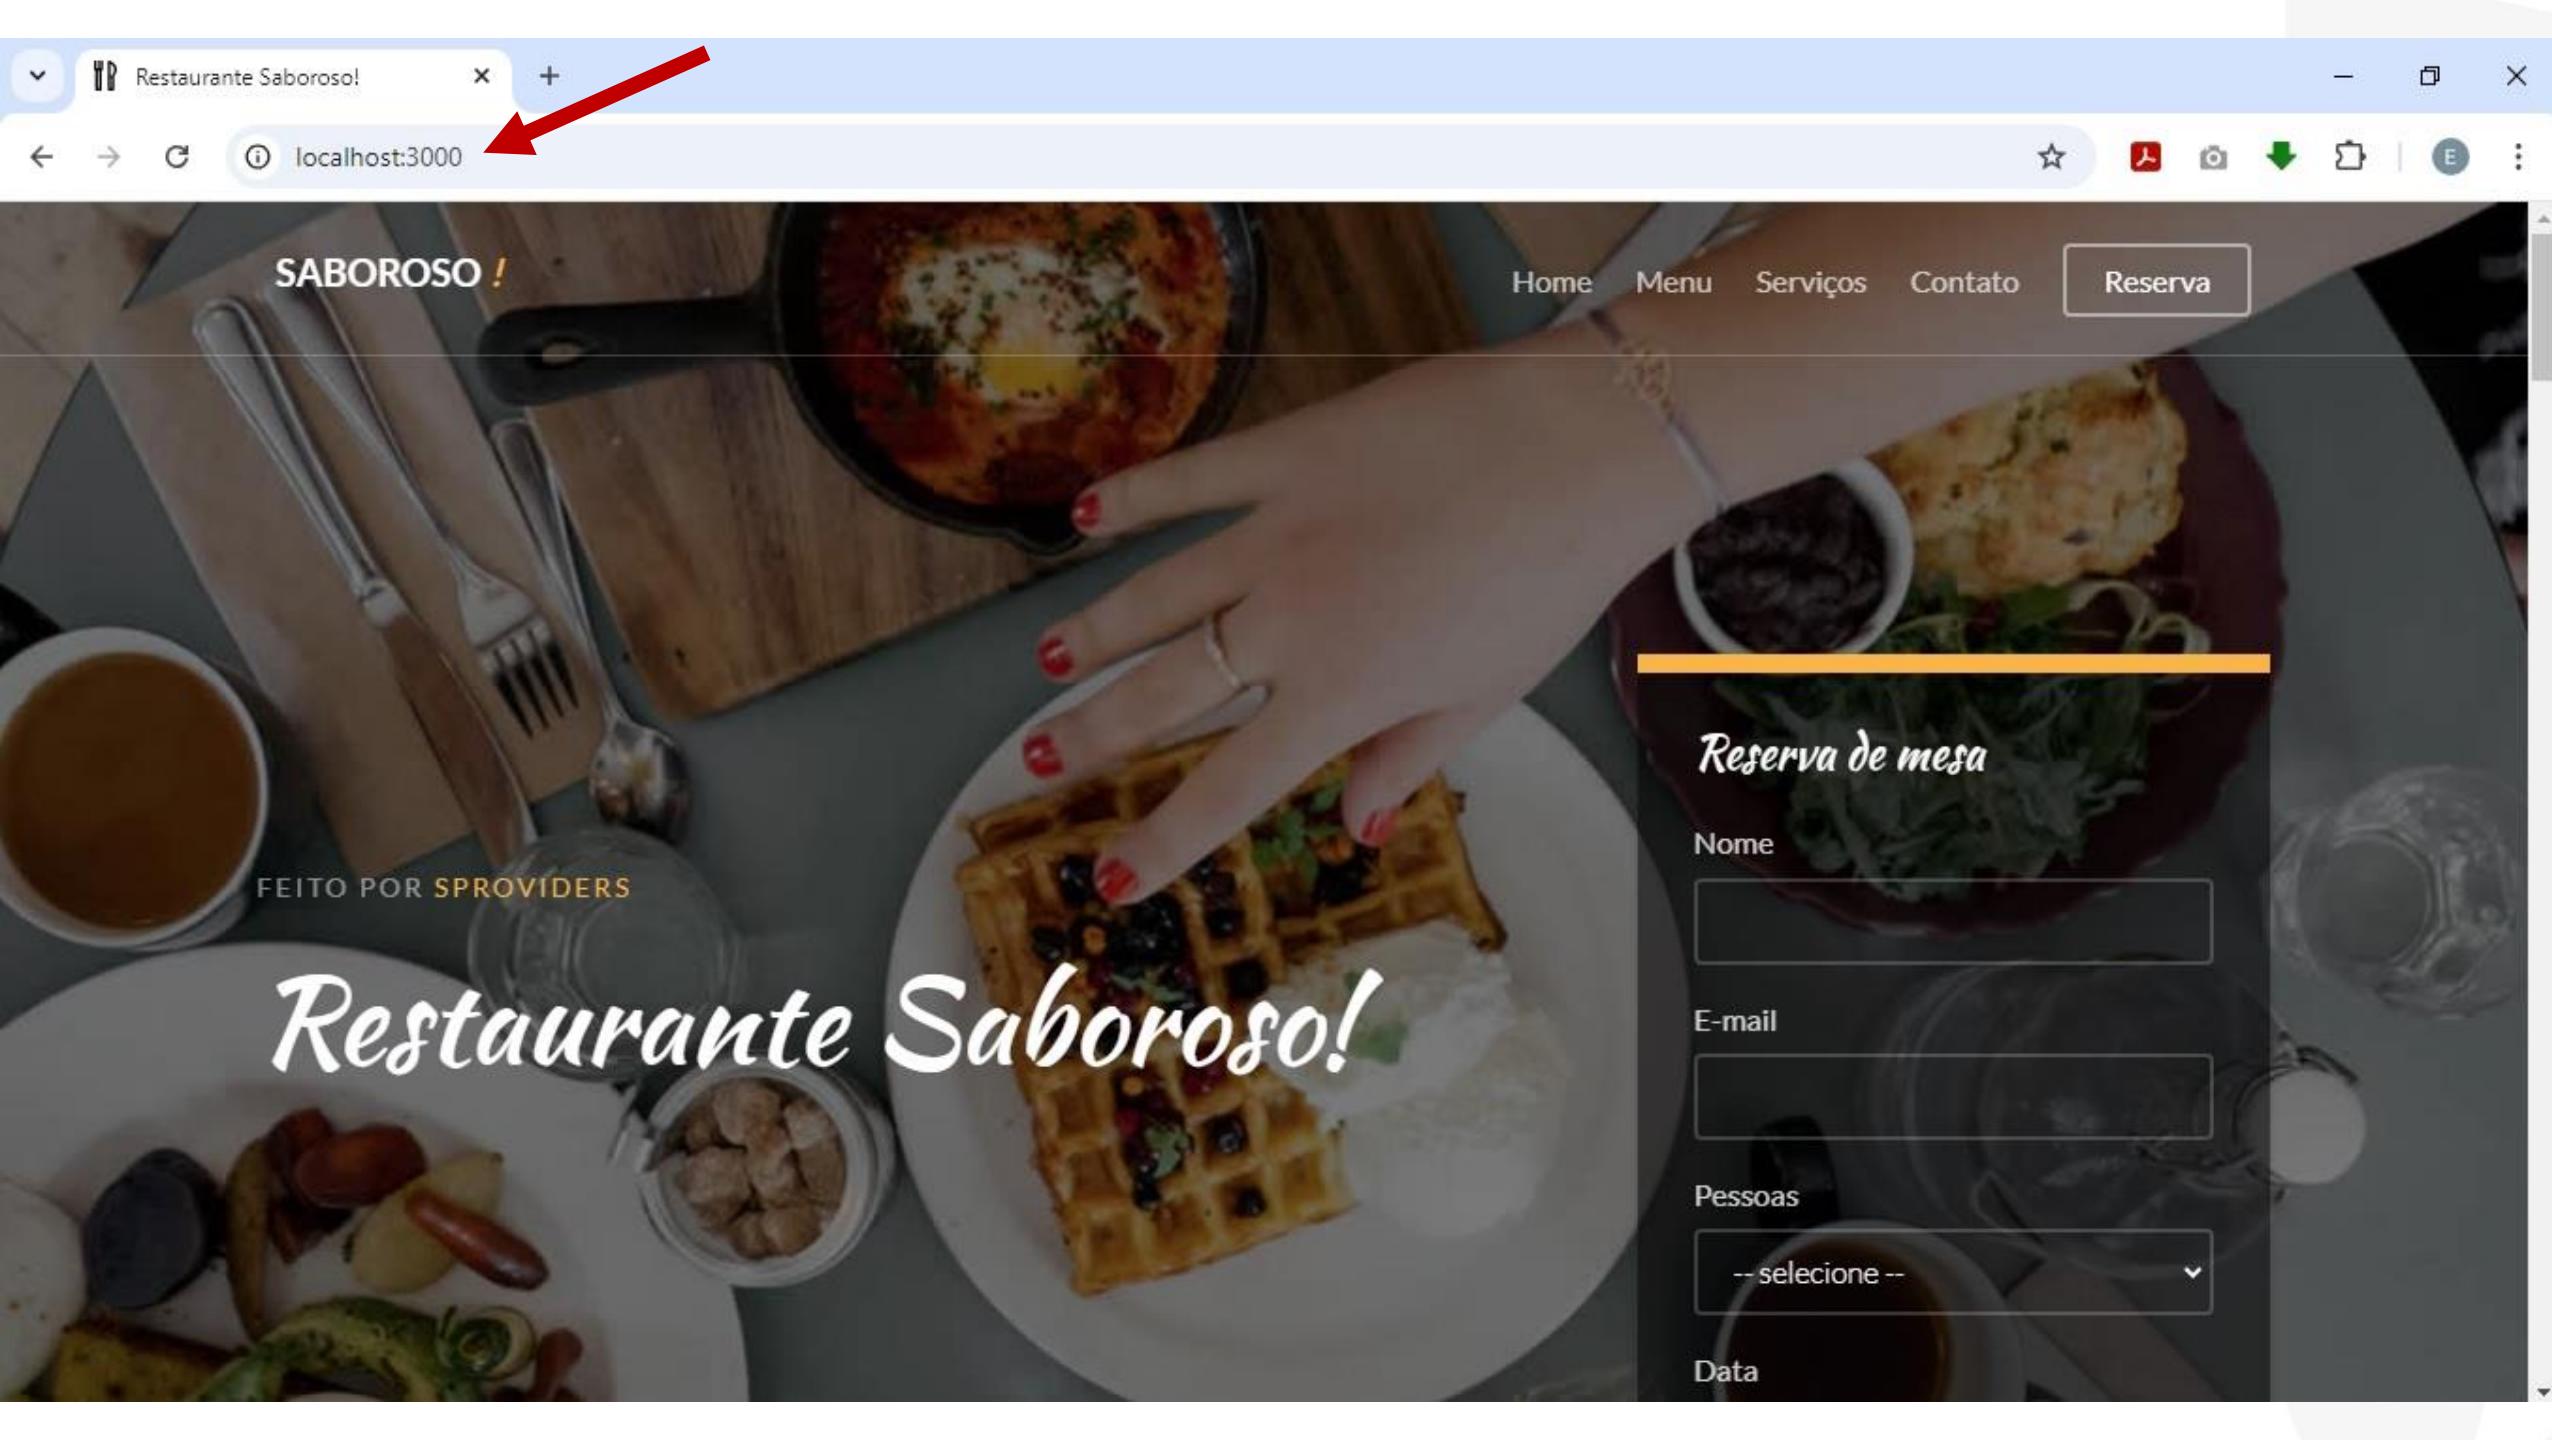

localhost:3000

SABOROSO!

FEITO POR SPROVIDERS

Restaurante Saboroso!

Home

Menu

Serviços

Contato

Reserva



Reserva de mesa


Nome


E-mail

Pessoas

Data

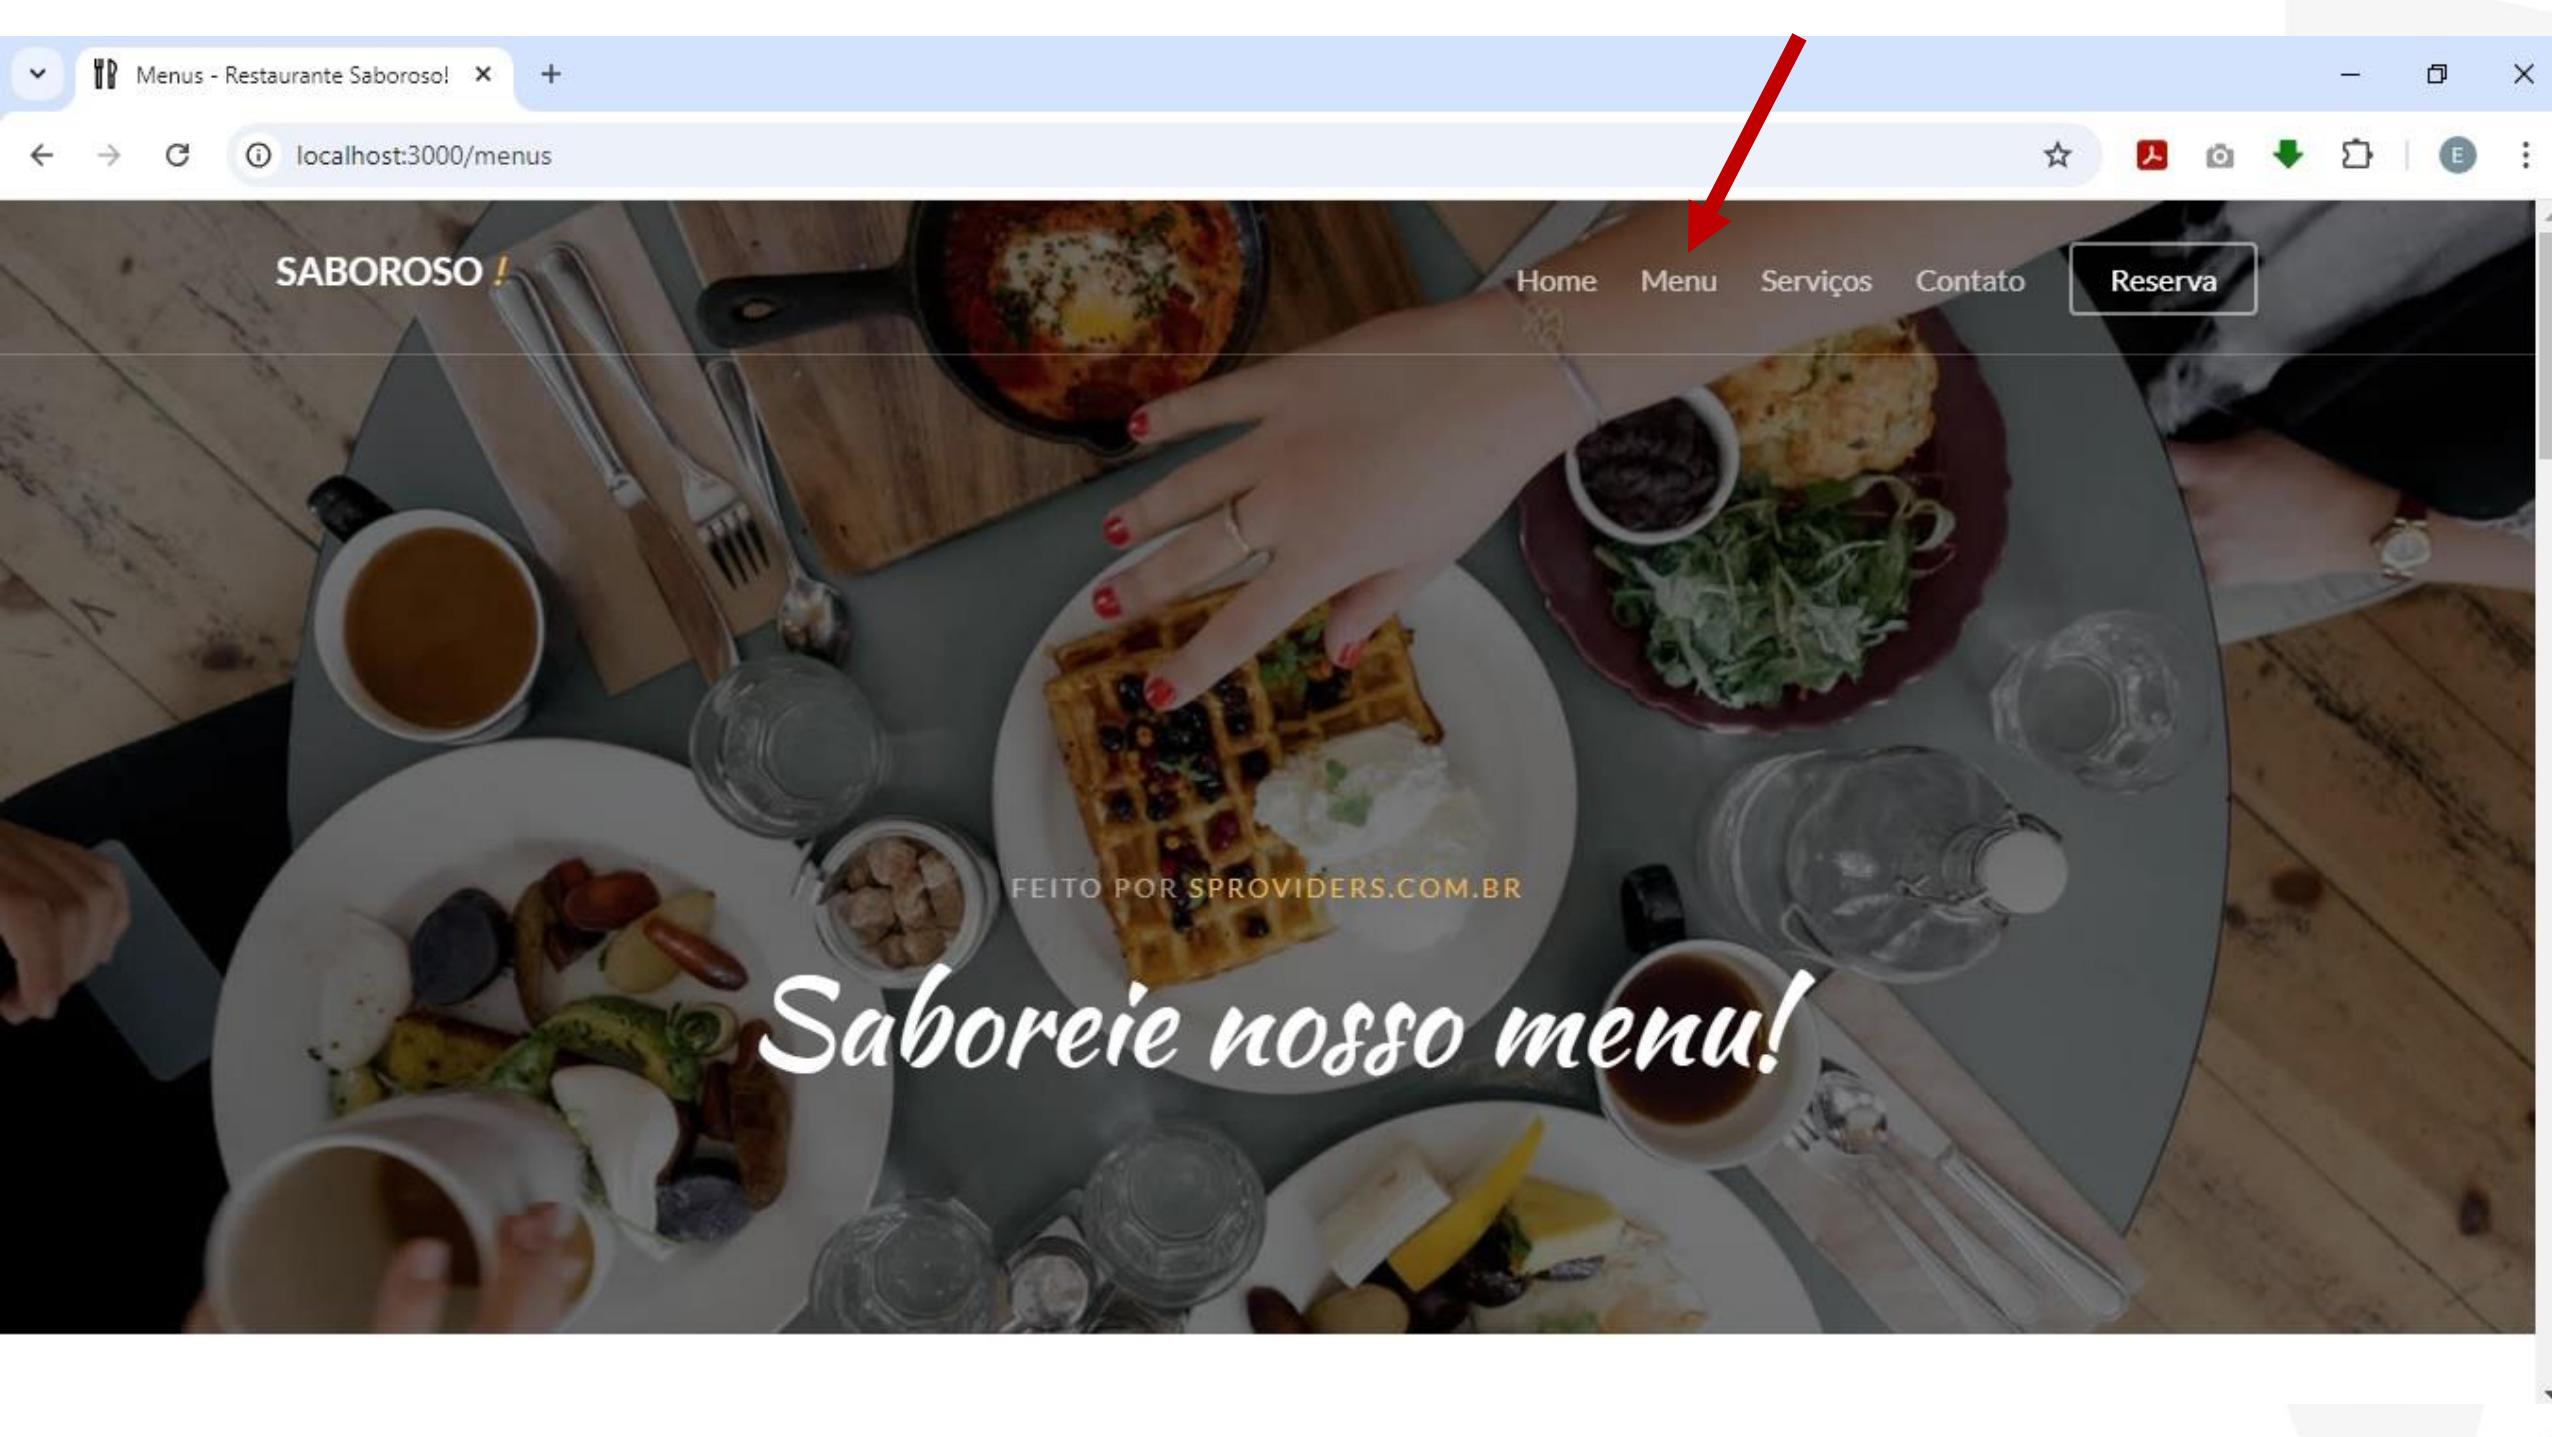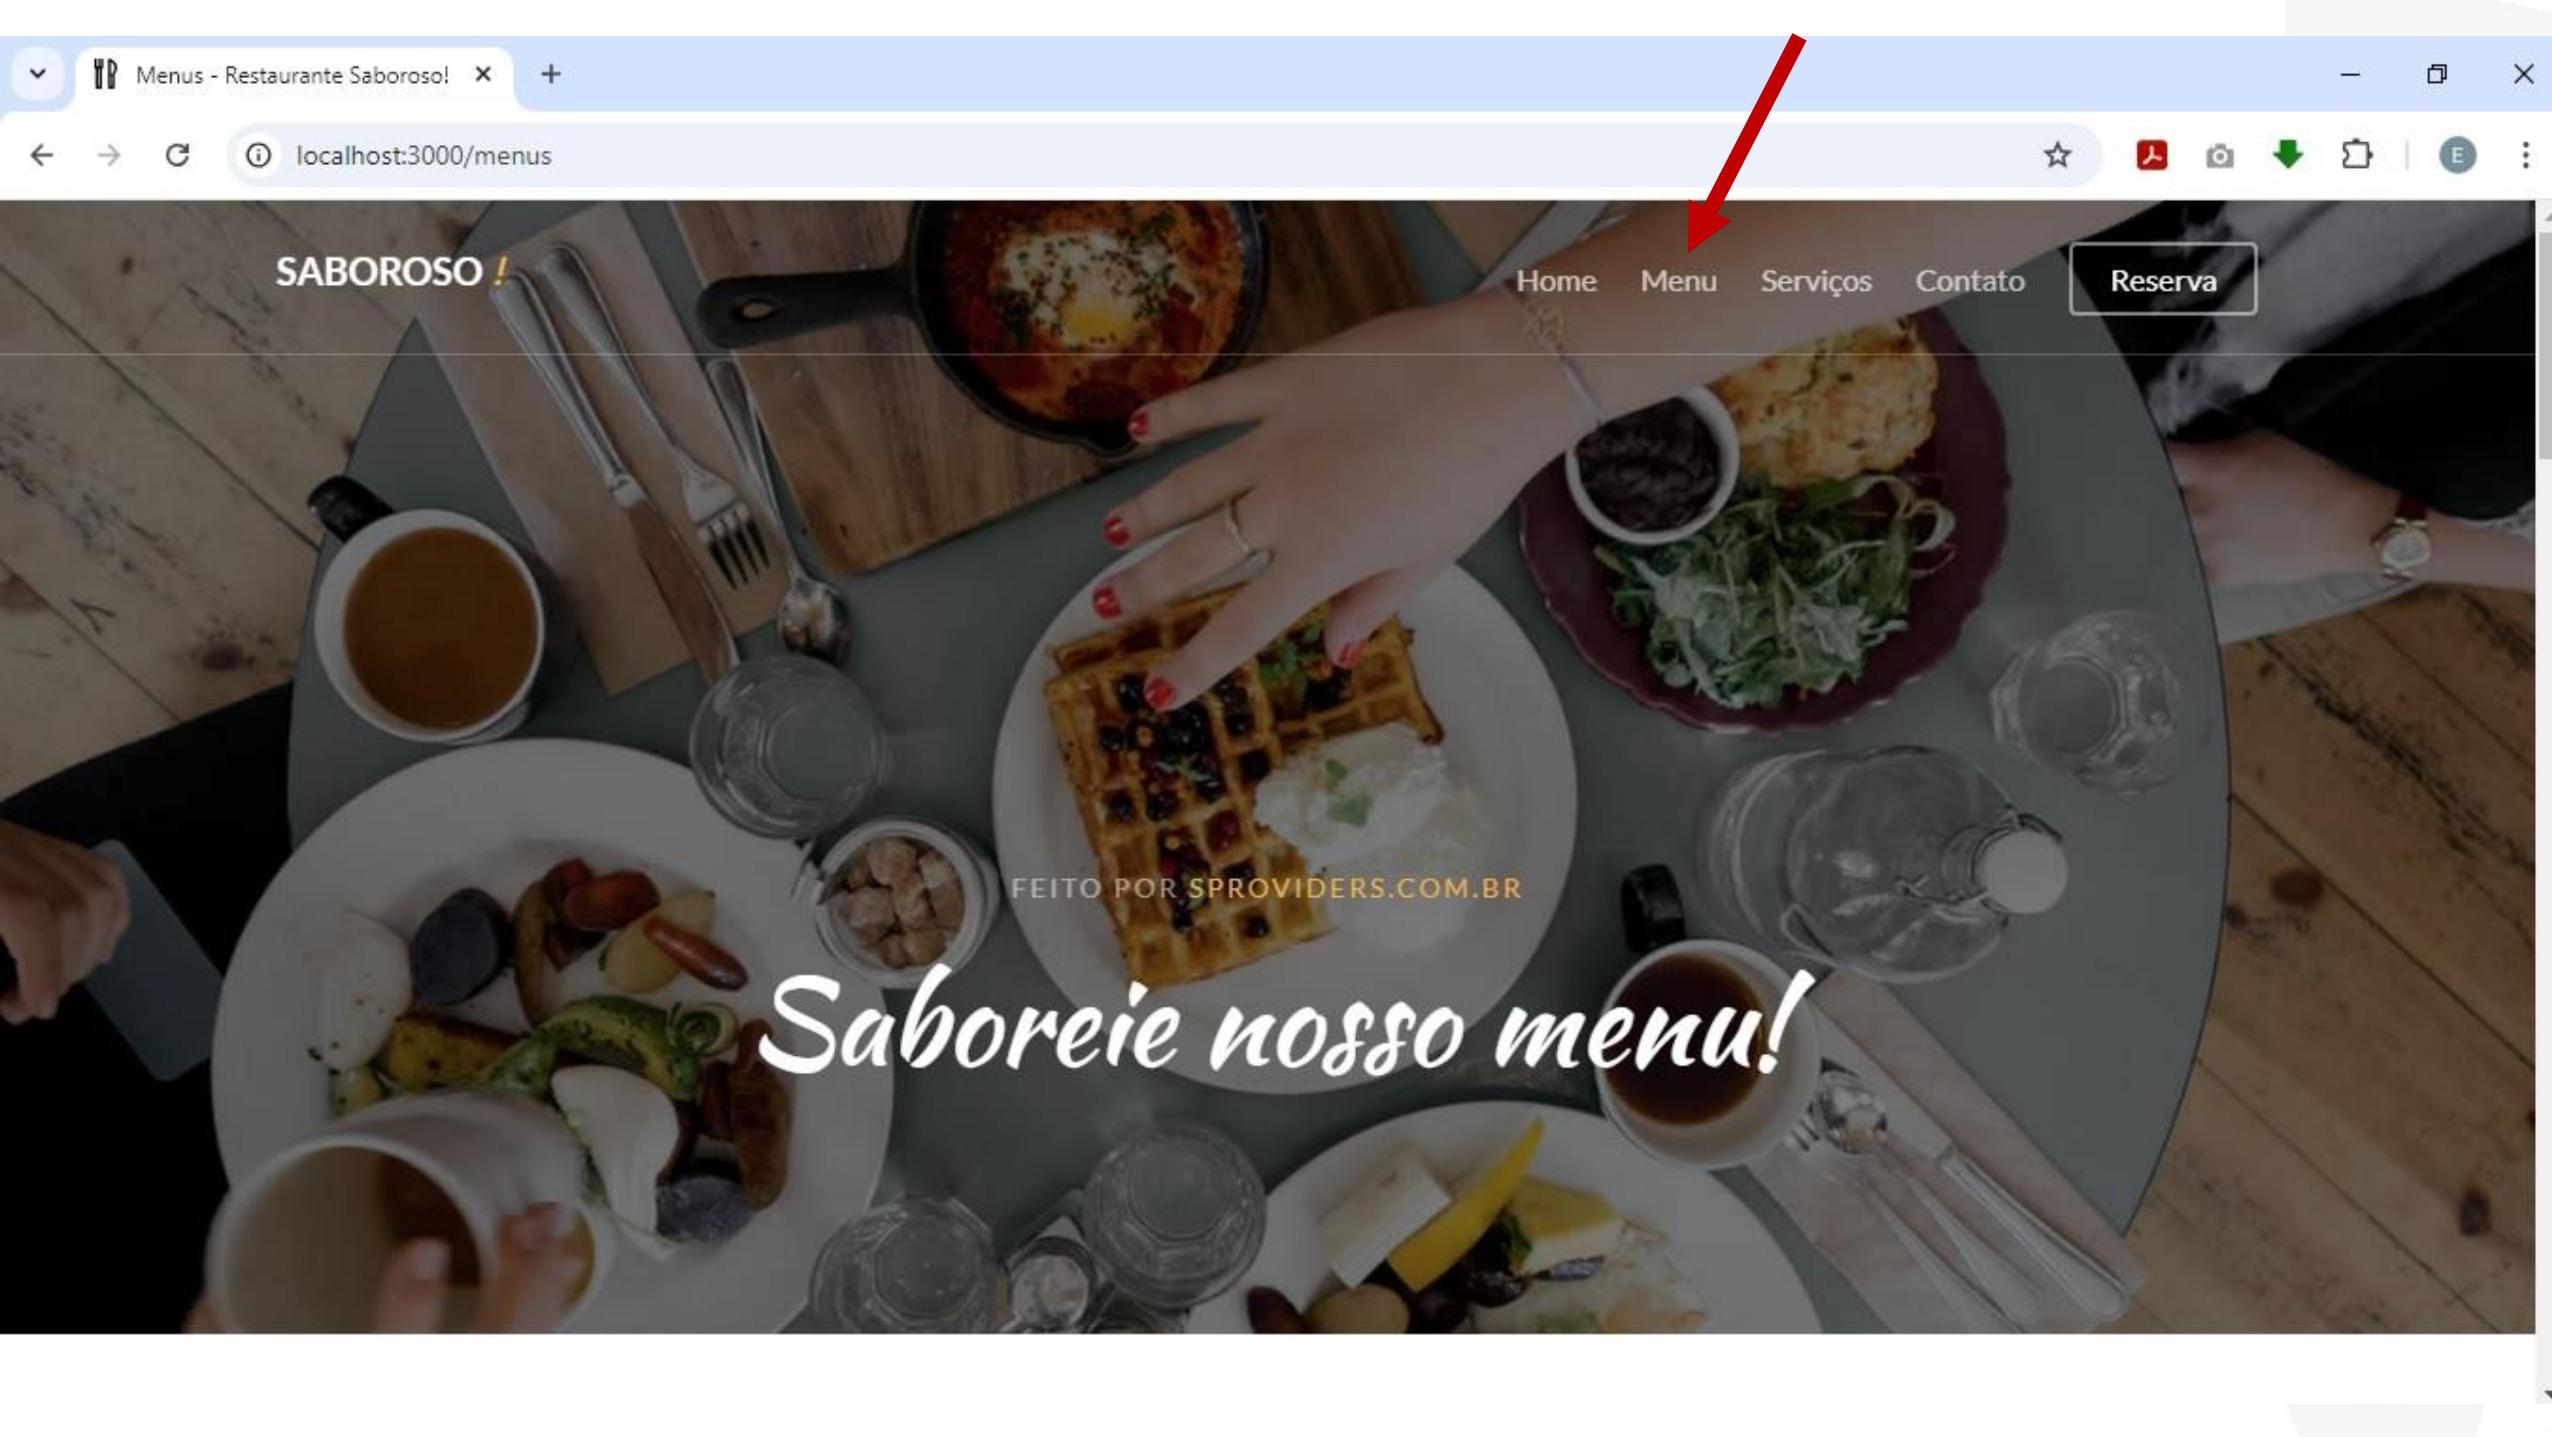

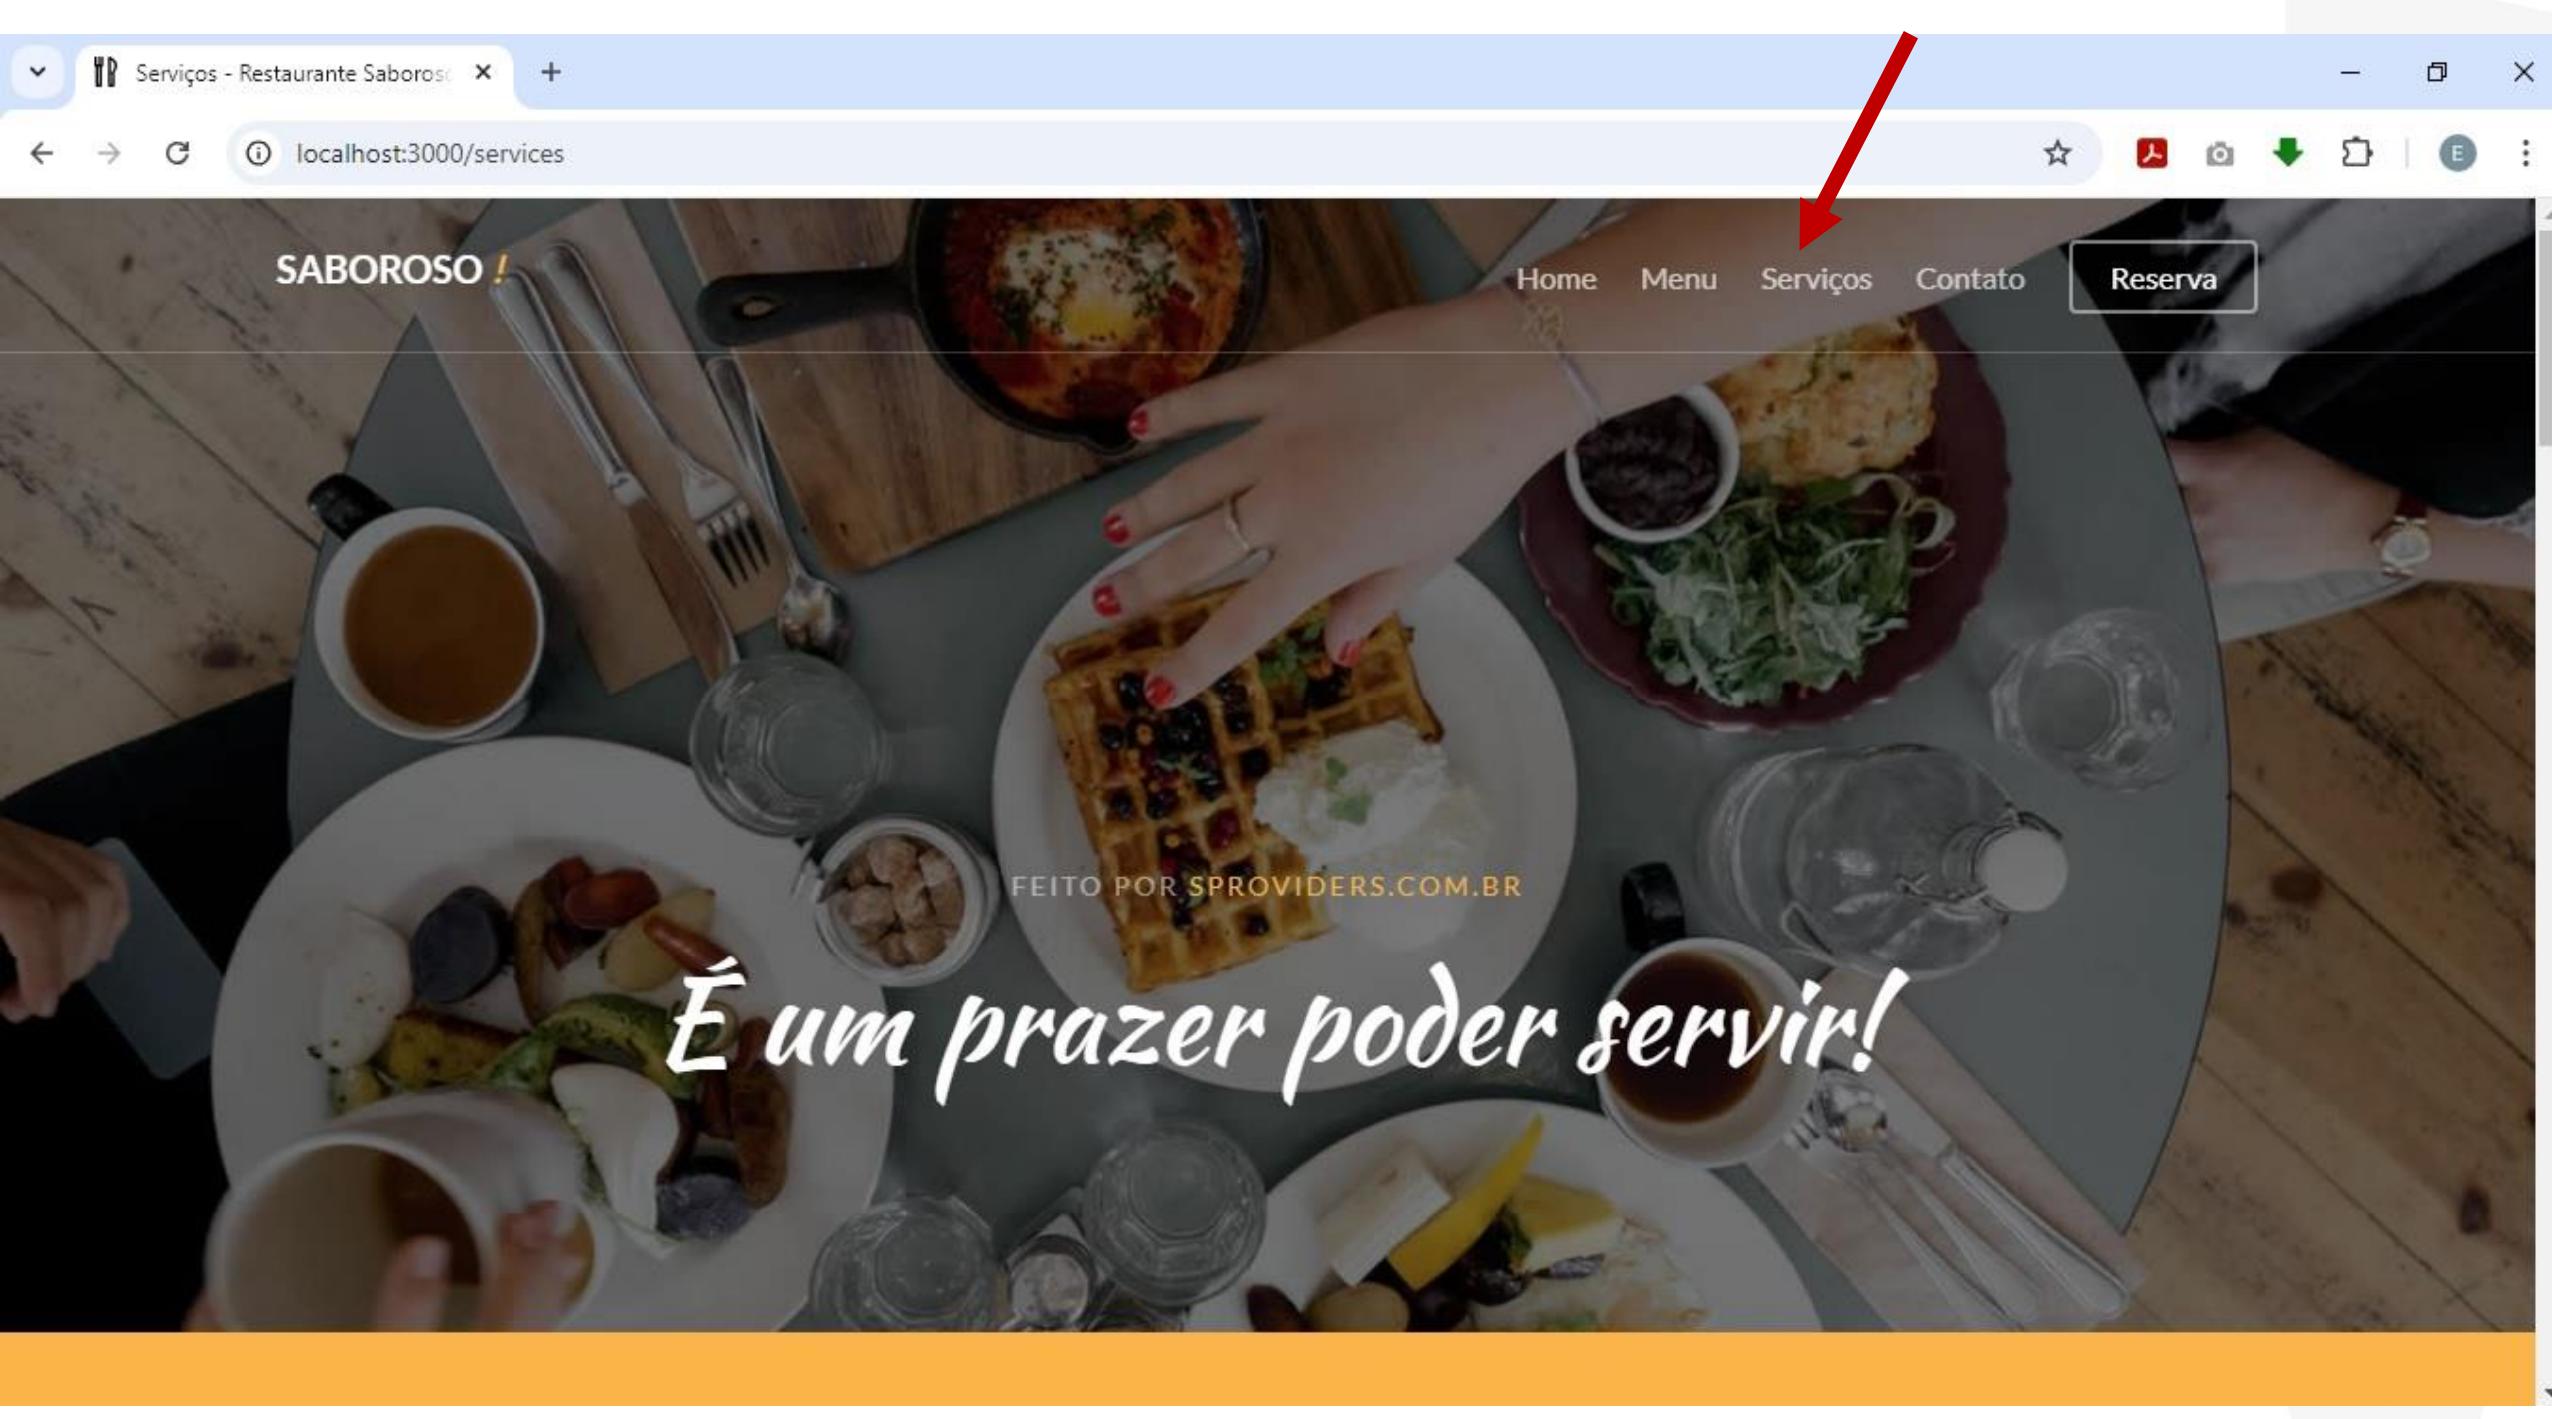

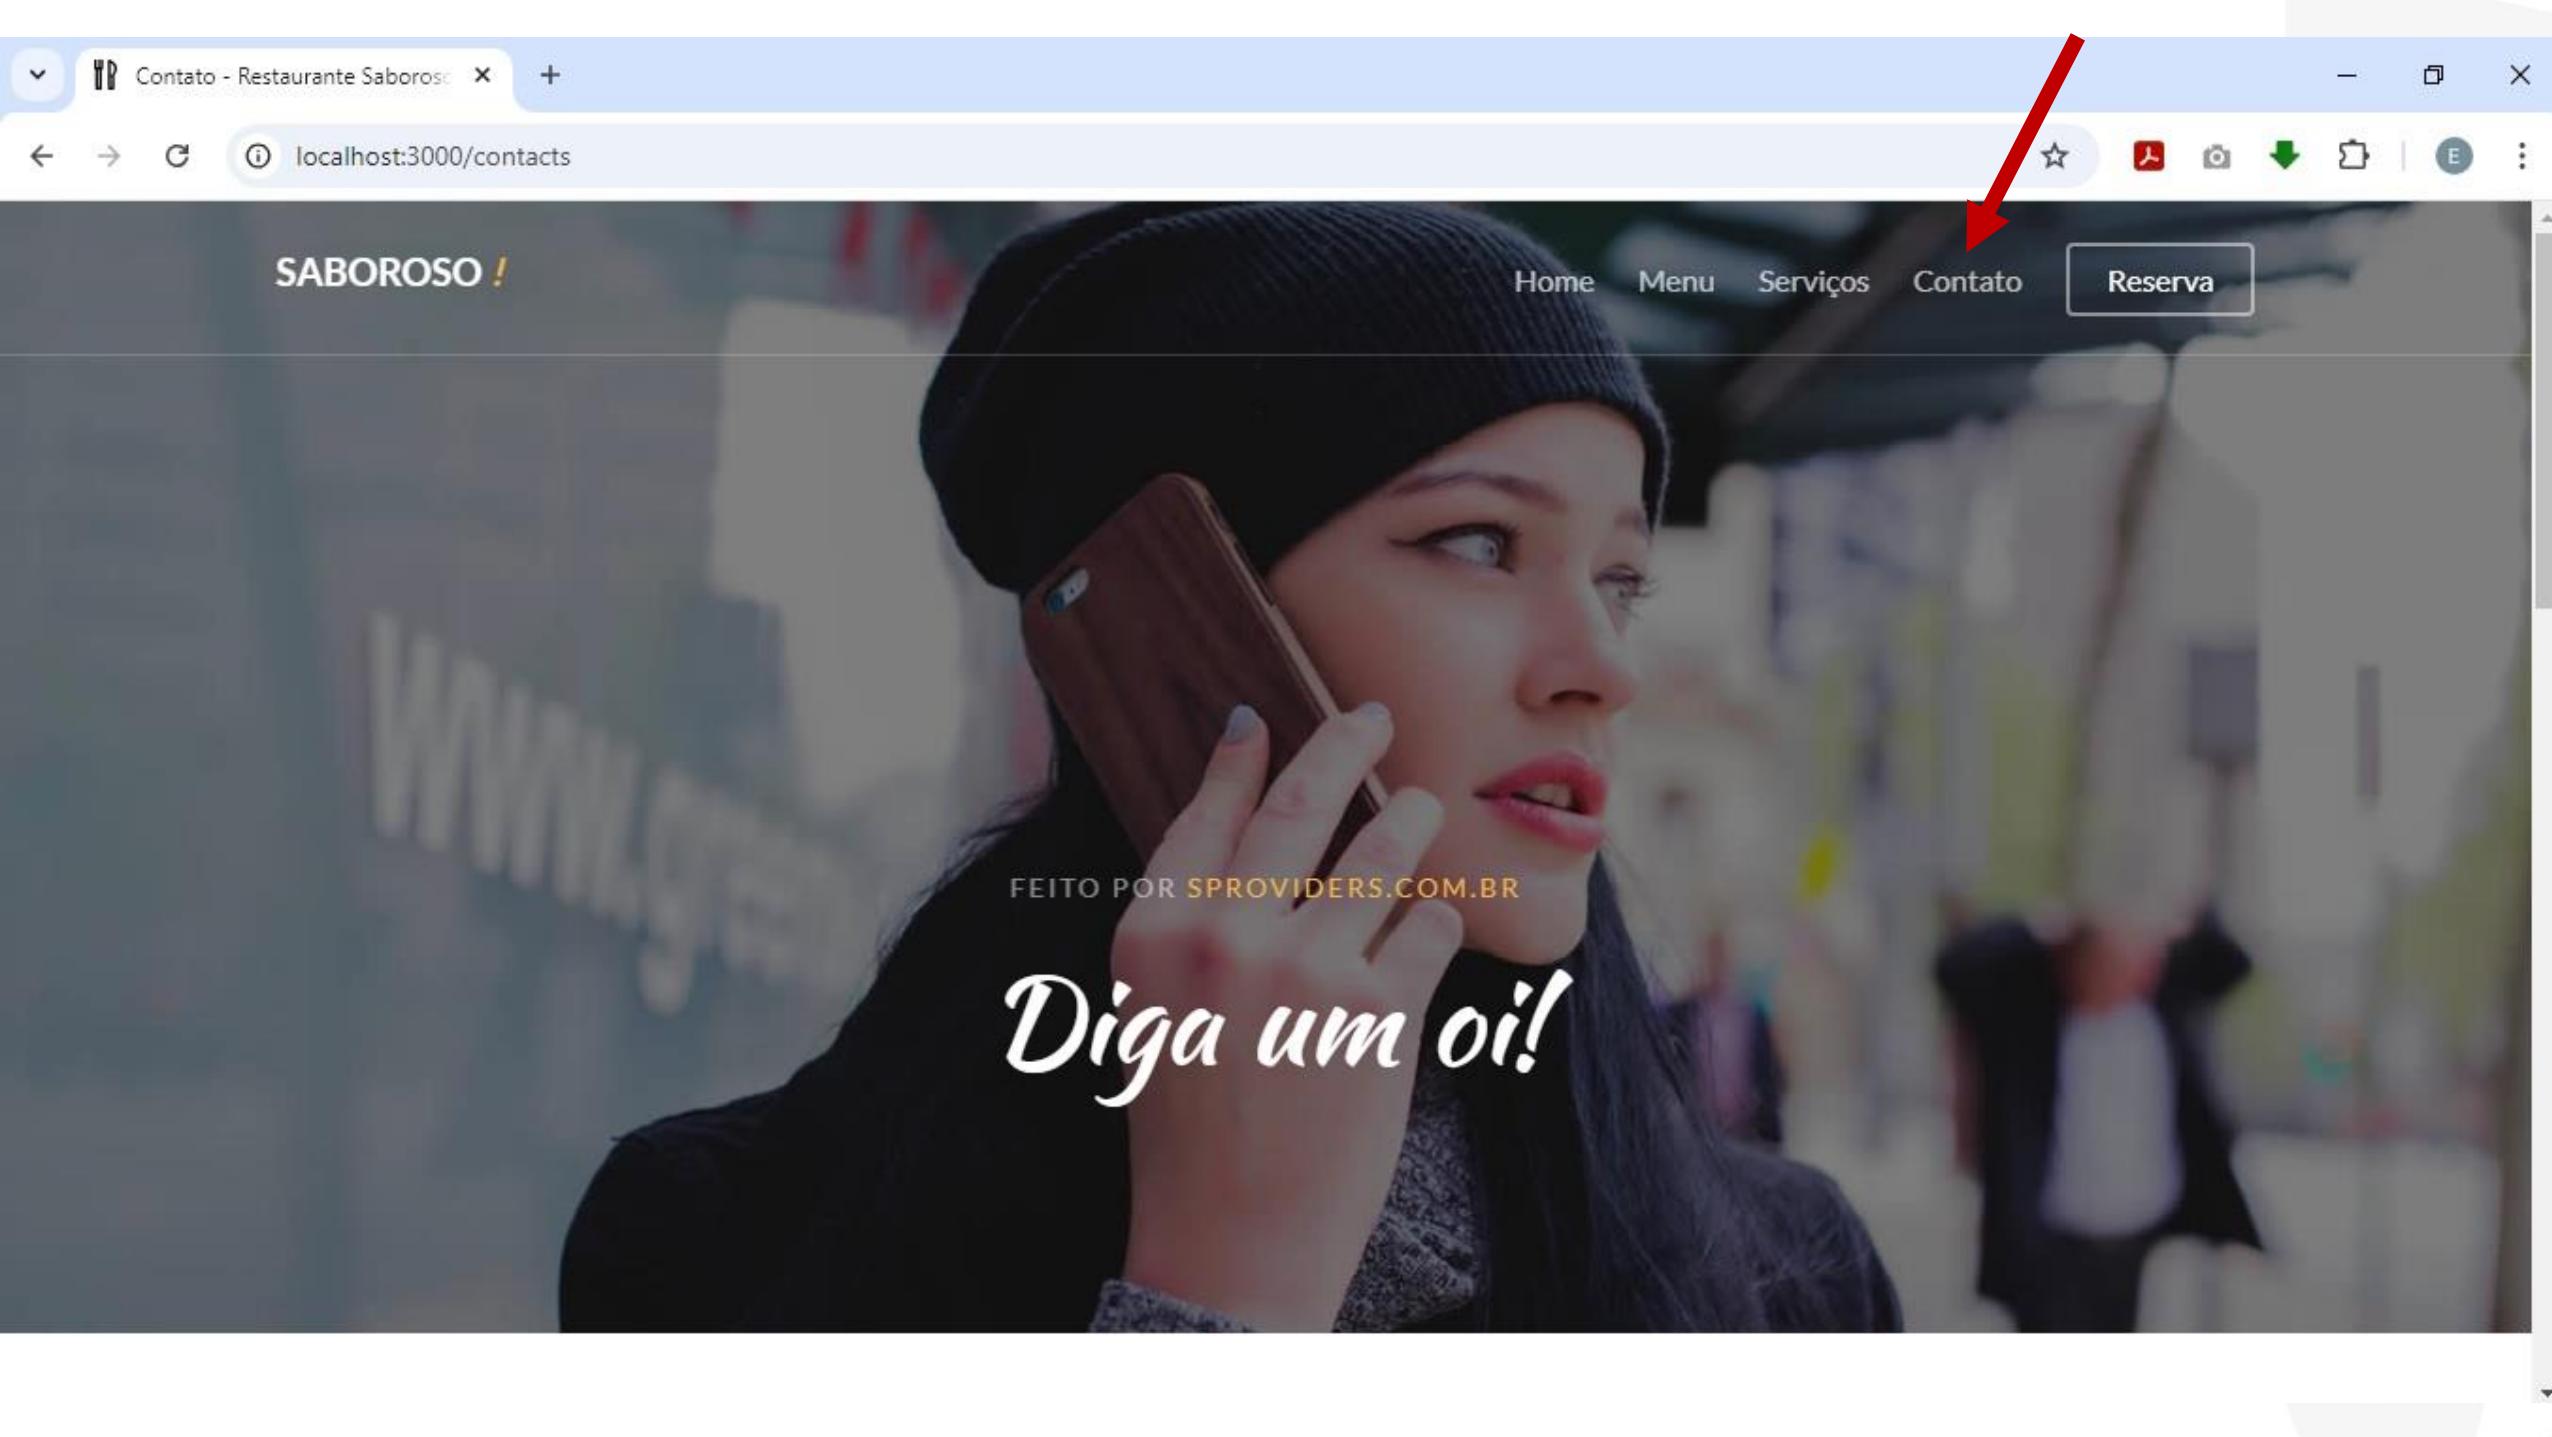

SABOROSO!

Home Menu Serviços Contato Reserva

FEITO POR SPROVIDERS.COM.BR

Diga um oi!

SABOROSO !

Home Menu Serviços Contato Reserva

Reserva

Reserva

FEITO POR SPROVIDERS.COM.BR

Reserve uma Mesa!



ENTRAR EM CONTATO

📞 +1234 567 890

✉️ contato@sproviders.com.br

💬 Chat


REDES SOCIAIS




© 2024 SProviders. Todos os Direitos Reservados.

Desenvolvido por [SProviders.com.br](#)



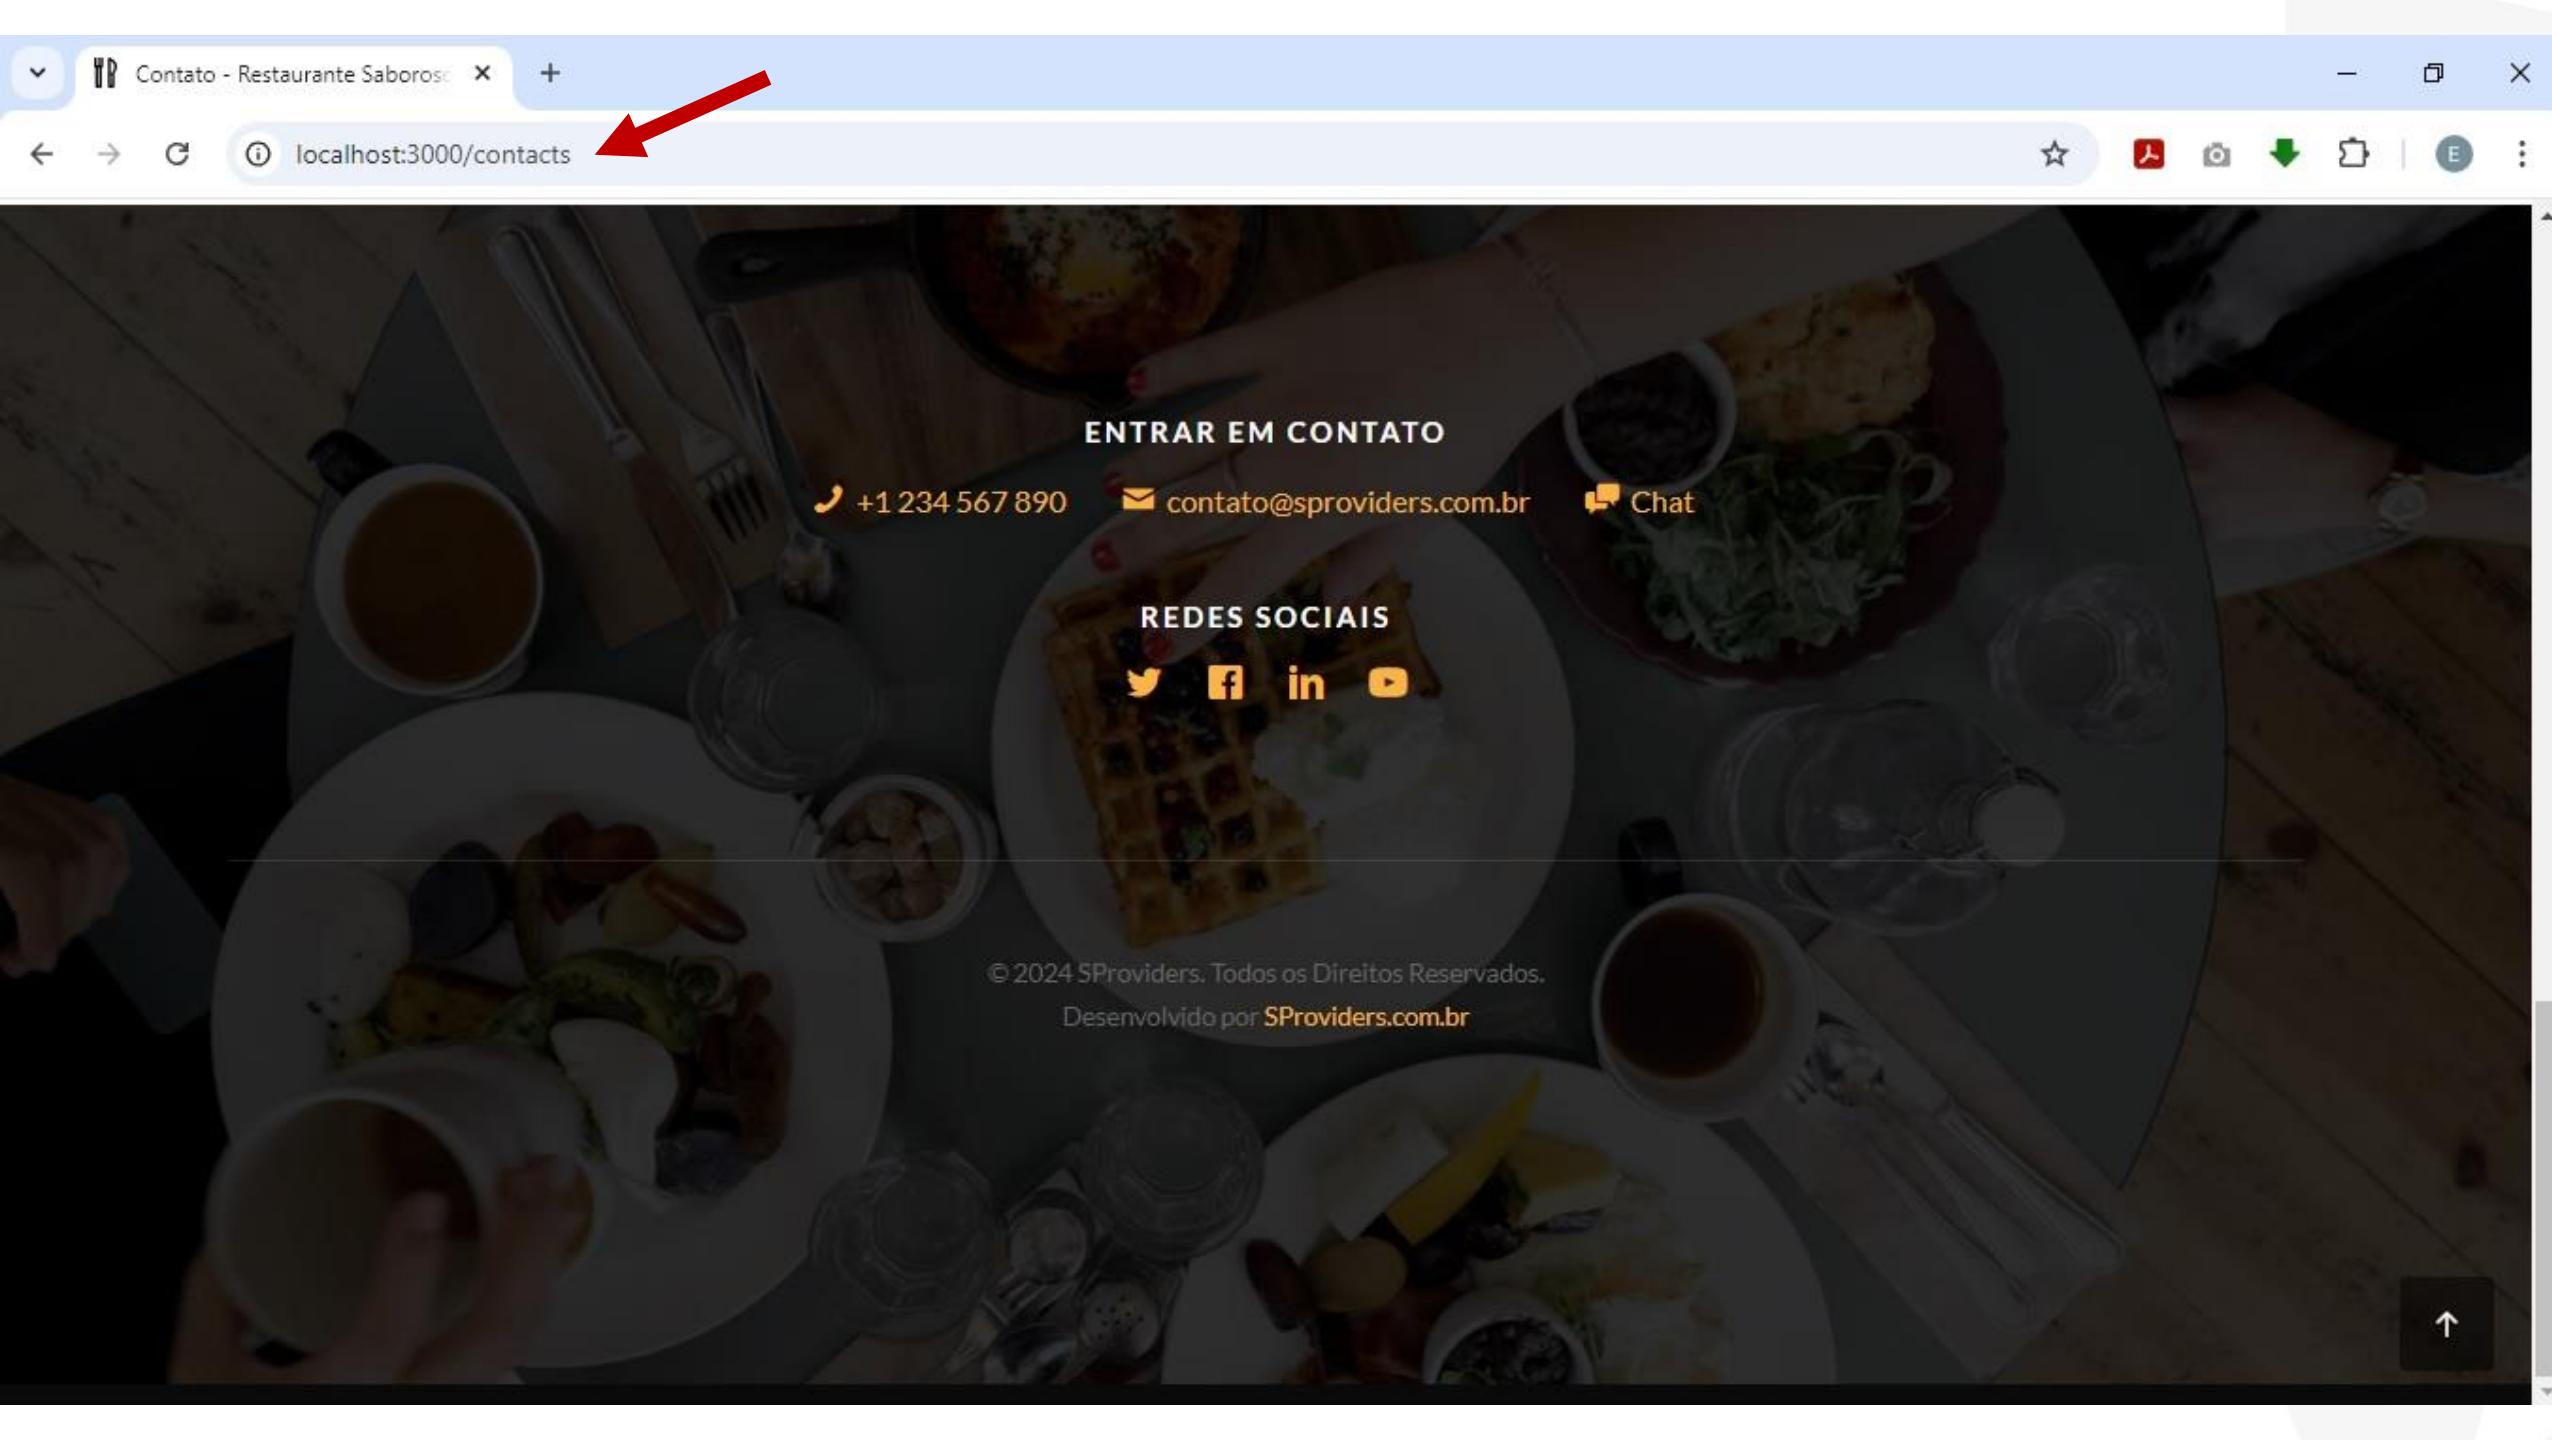

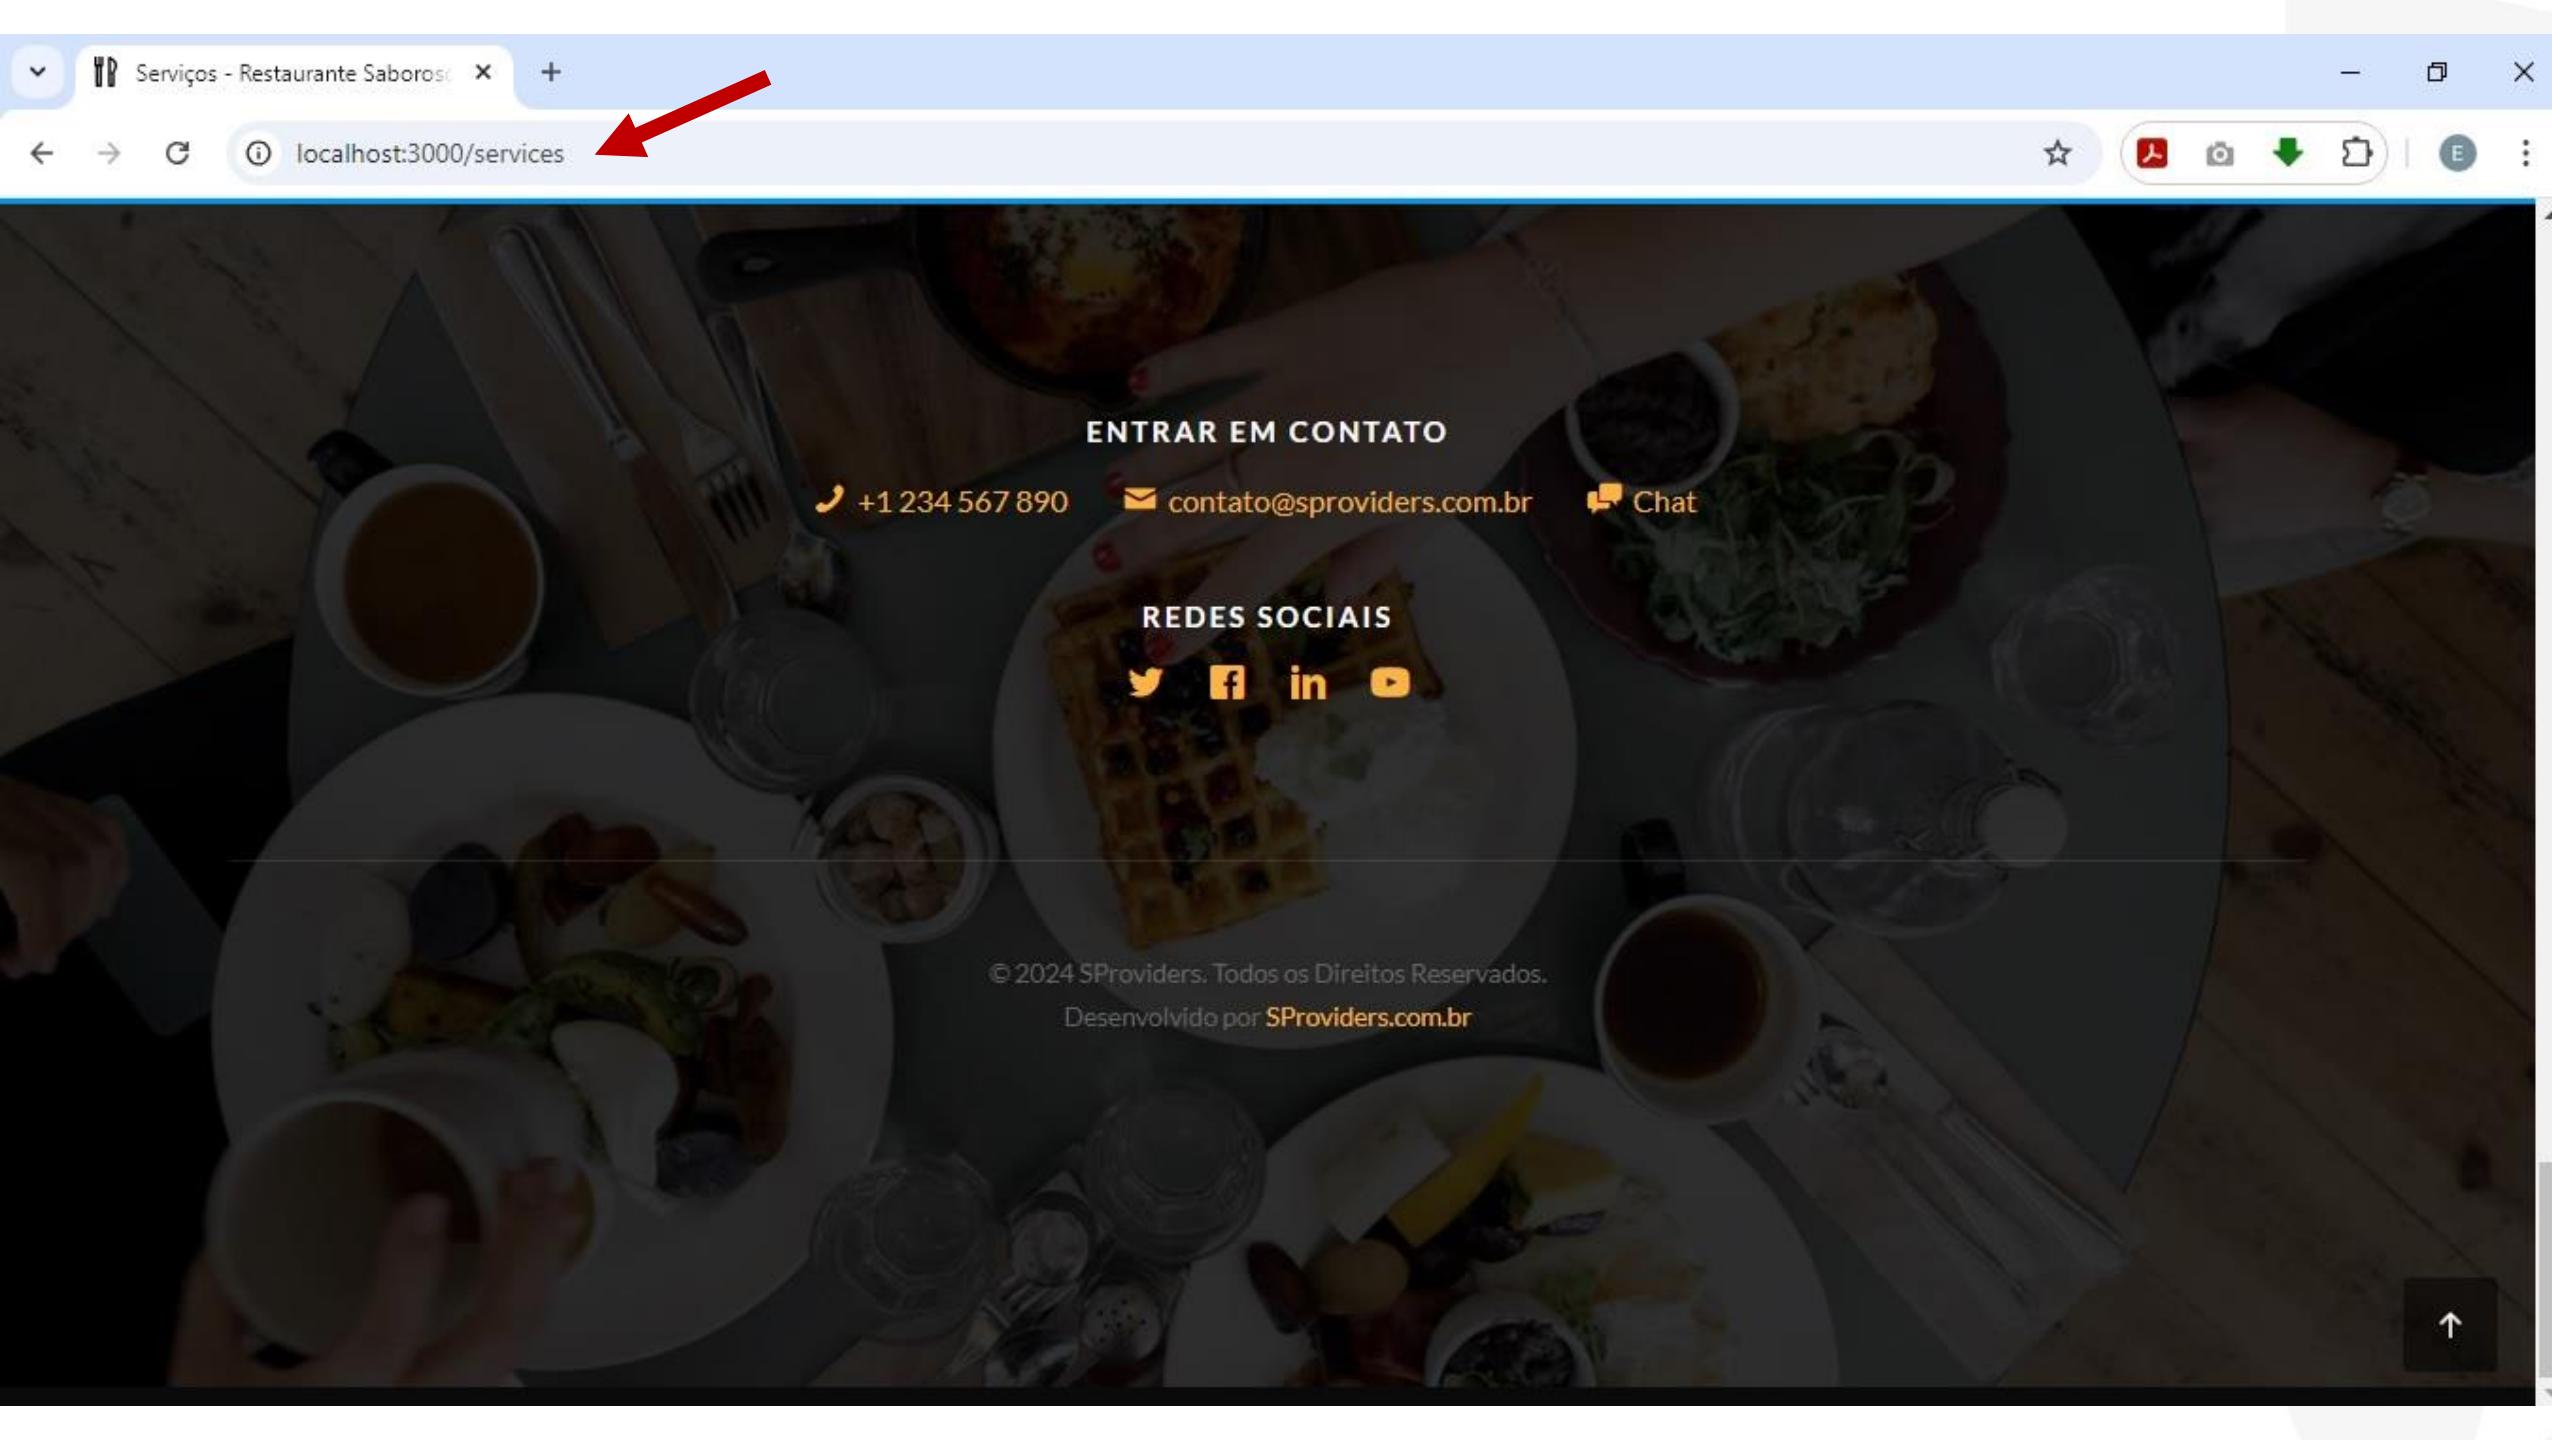

Serviços - Restaurante Saboroso



localhost:3000/services




ENTRAR EM CONTATO

📞 +1234 567 890

✉️ contato@sproviders.com.br

💬 Chat


REDES SOCIAIS



© 2024 SProviders. Todos os Direitos Reservados.

Desenvolvido por [SProviders.com.br](#)



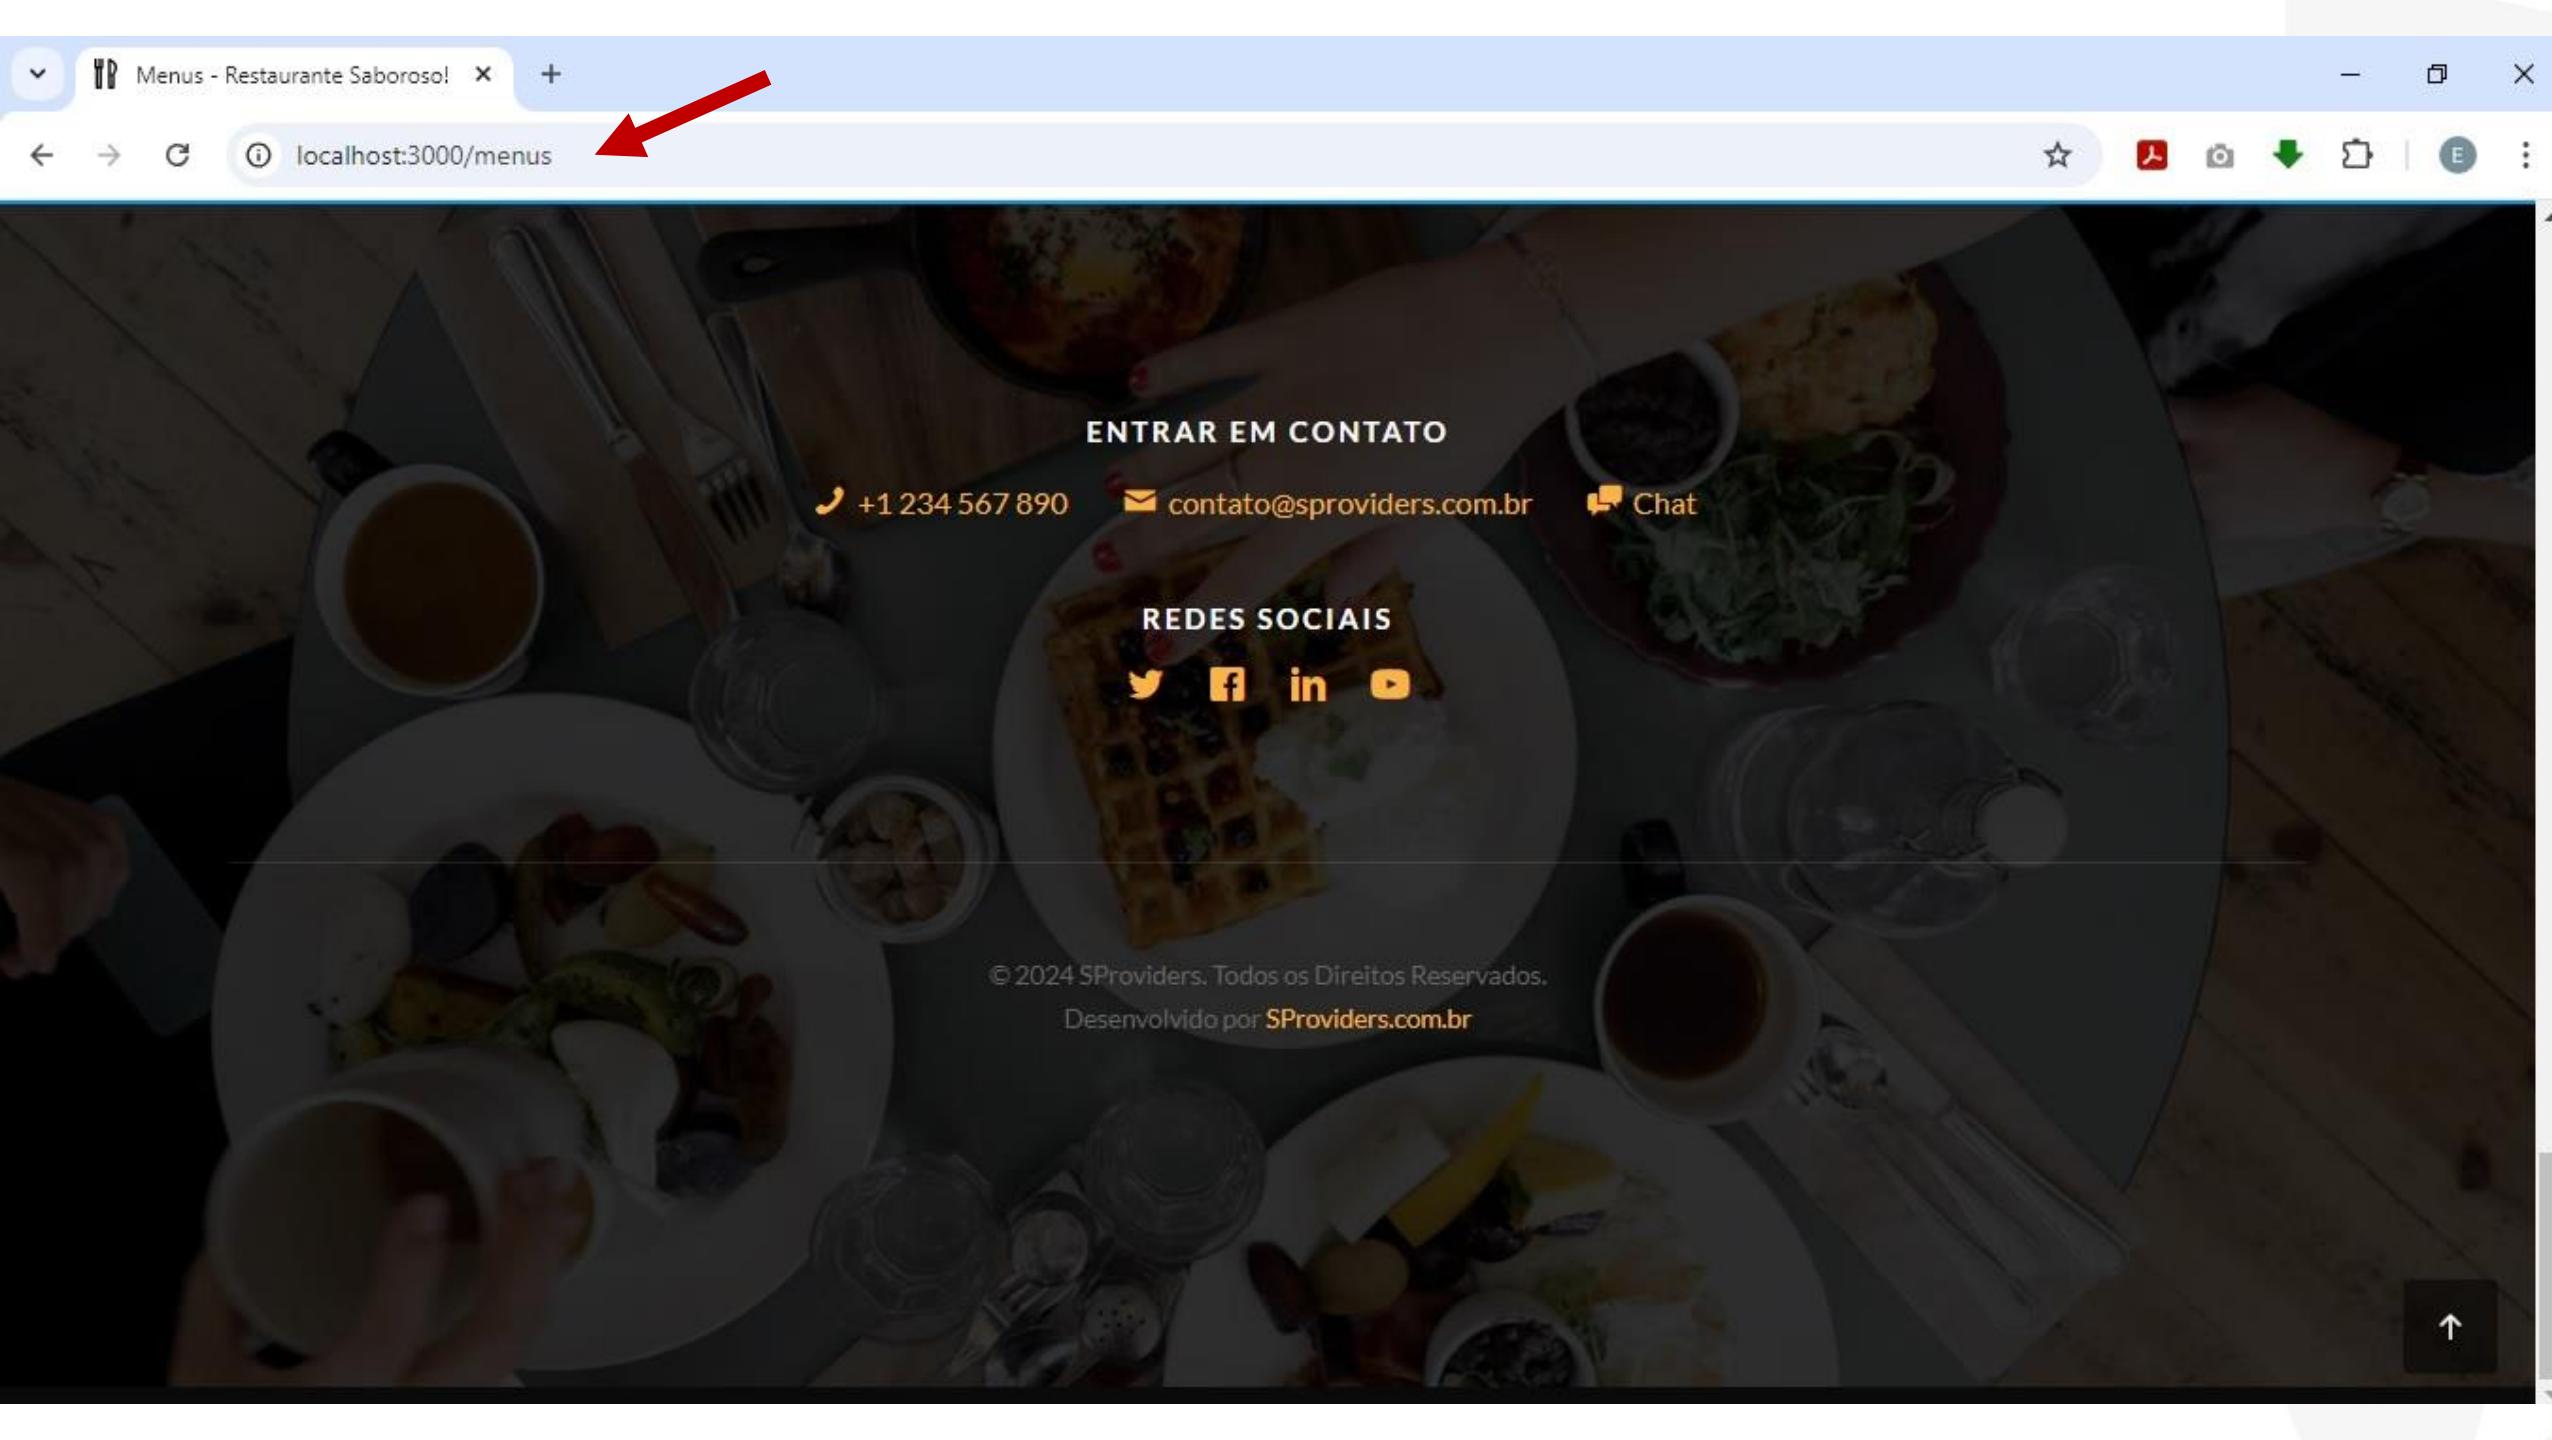

Menus - Restaurante Saboroso! X



localhost:3000/menus



ENTRAR EM CONTATO

📞 +1 234 567 890

✉️ contato@sproviders.com.br


💬 Chat

REDES SOCIAIS



© 2024 SProviders. Todos os Direitos Reservados.

Desenvolvido por SProviders.com.br

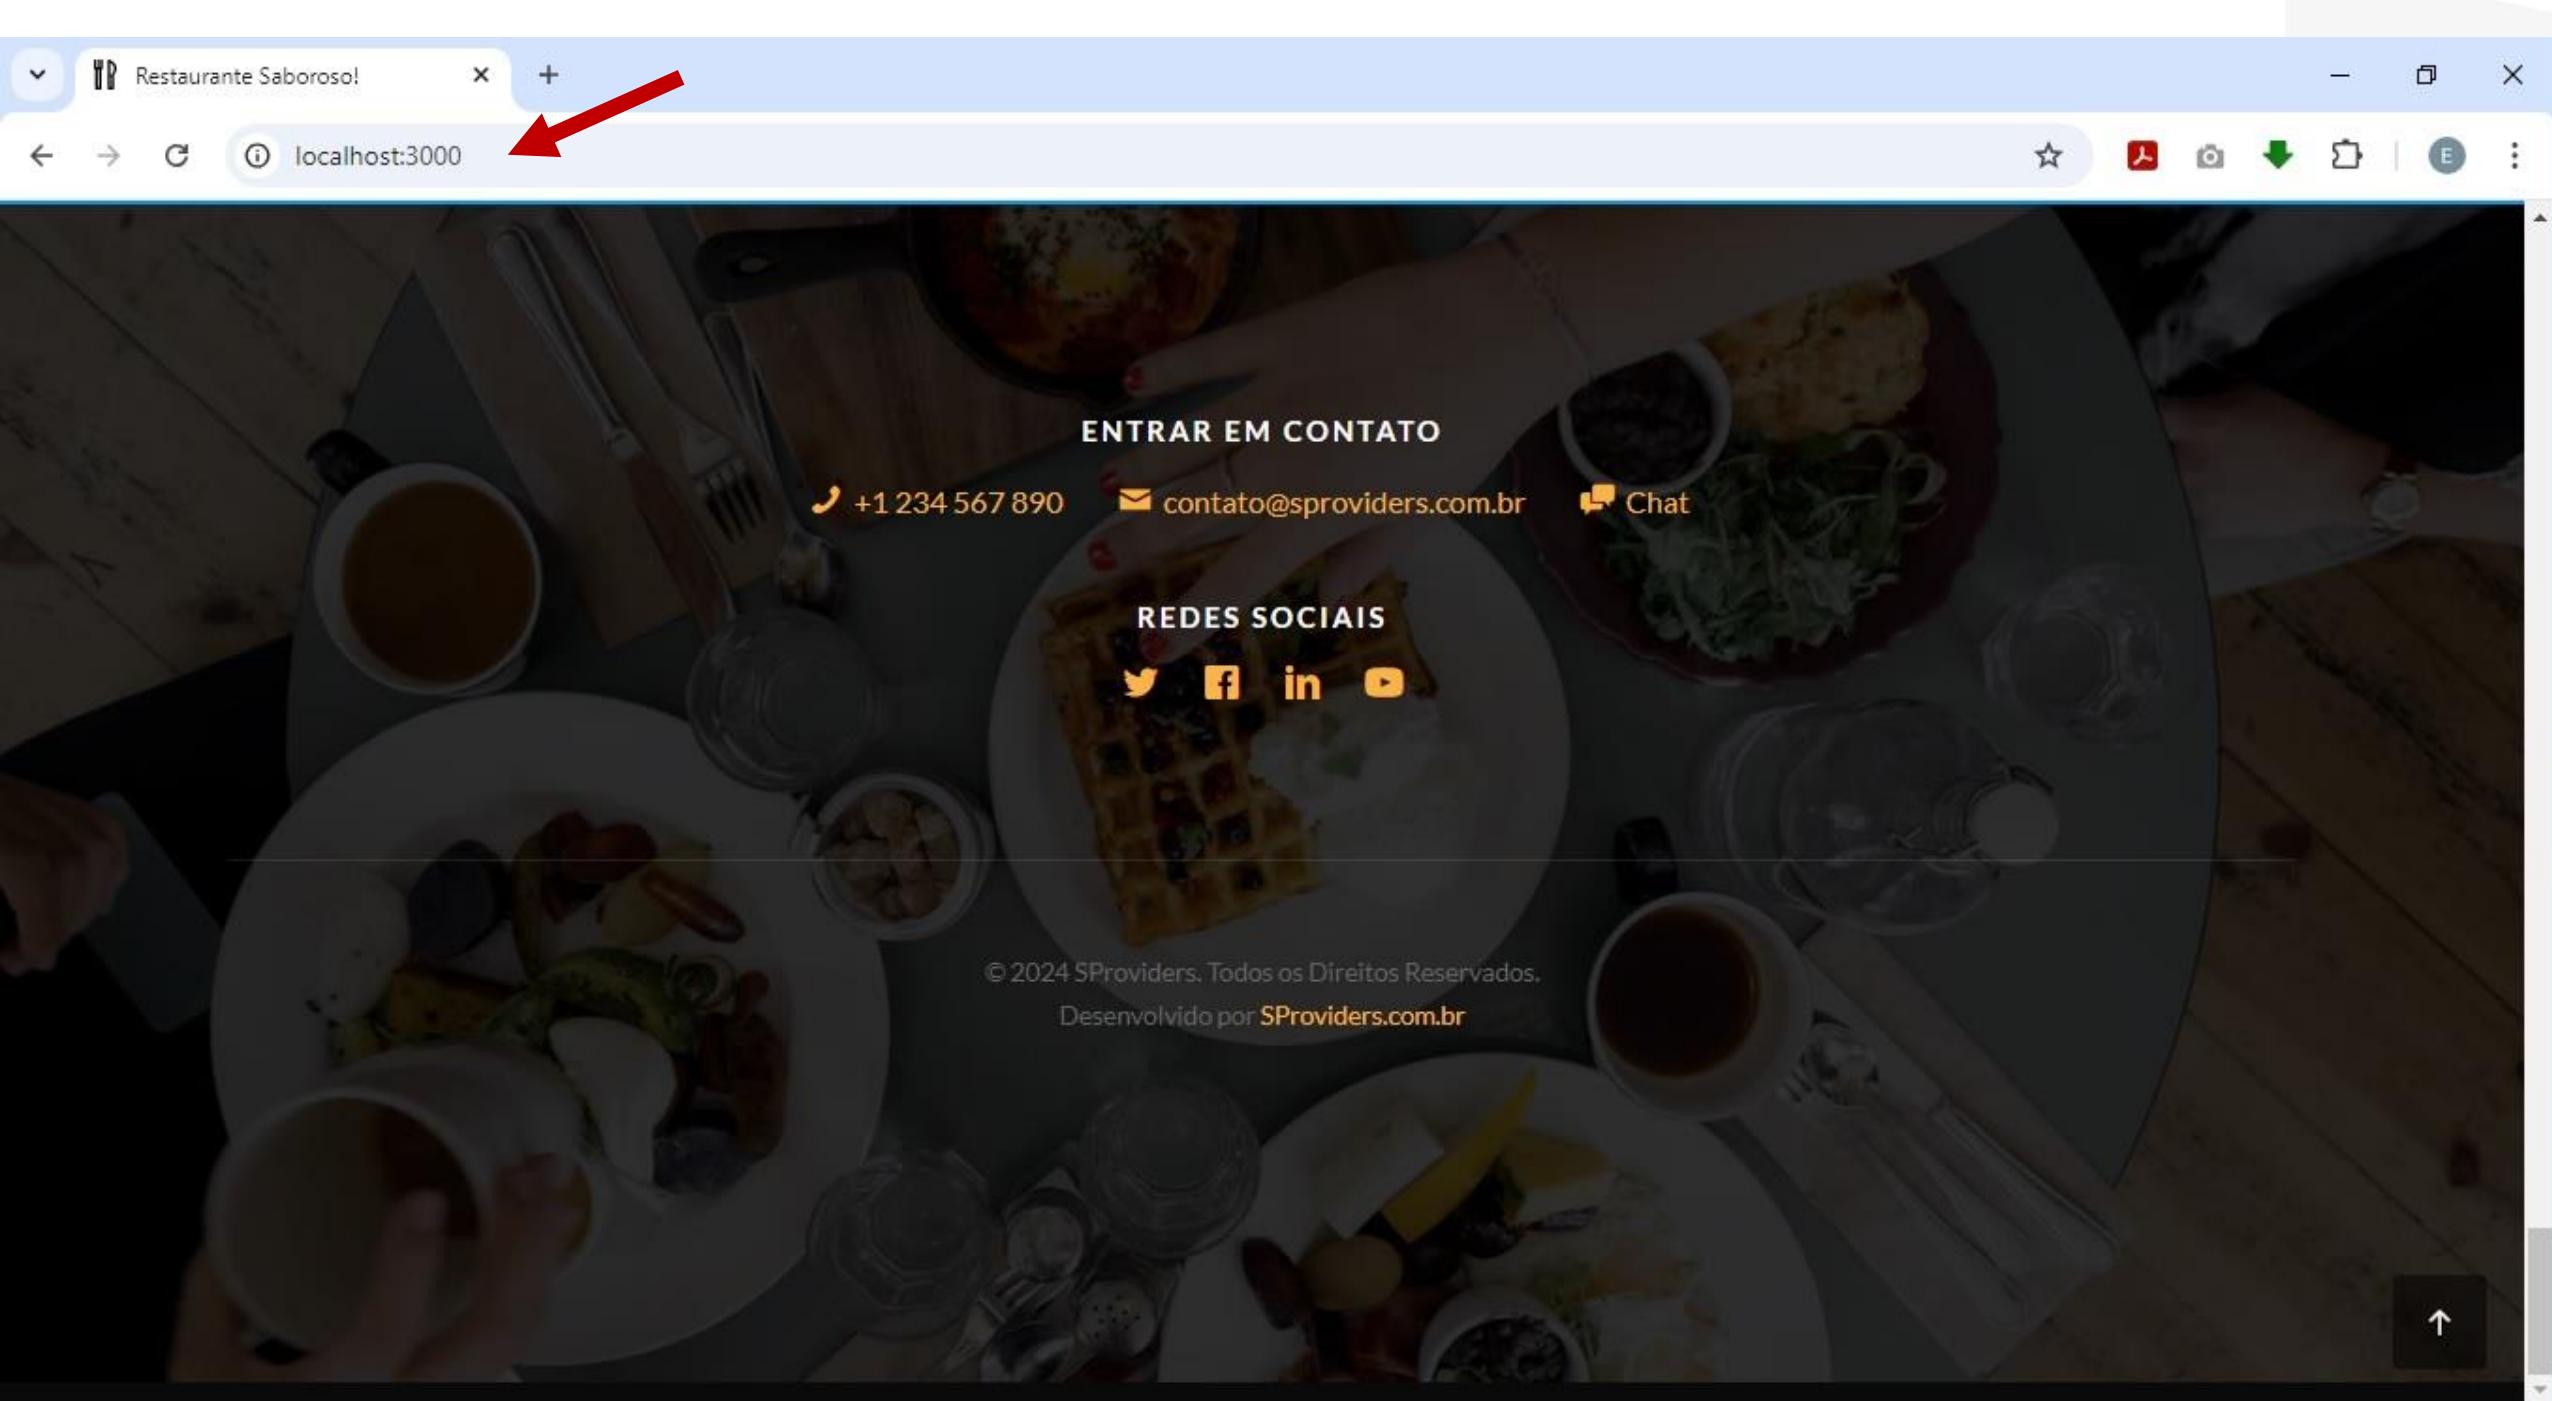

UC: Projetos

Assunto:

Projeto Restaurante – BackEnd

08 – Organizando o Conteúdo com Includes



Pratos Populares

Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de denguis. Quem num gosta dí mé, boa gentis num é.



Bife de Costela com molho

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

45.35



Chilli com Carne

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.40



Hambúrguer com Fritas

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.80

Pratos Populares

Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de denguis. Quem num gosta di mé, boa gentis num é.



Bife de Costela com molho

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

R\$35,69



Hambúrguer com Fritas

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.


R\$22,80



Chilli com Carne

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

R\$29,40

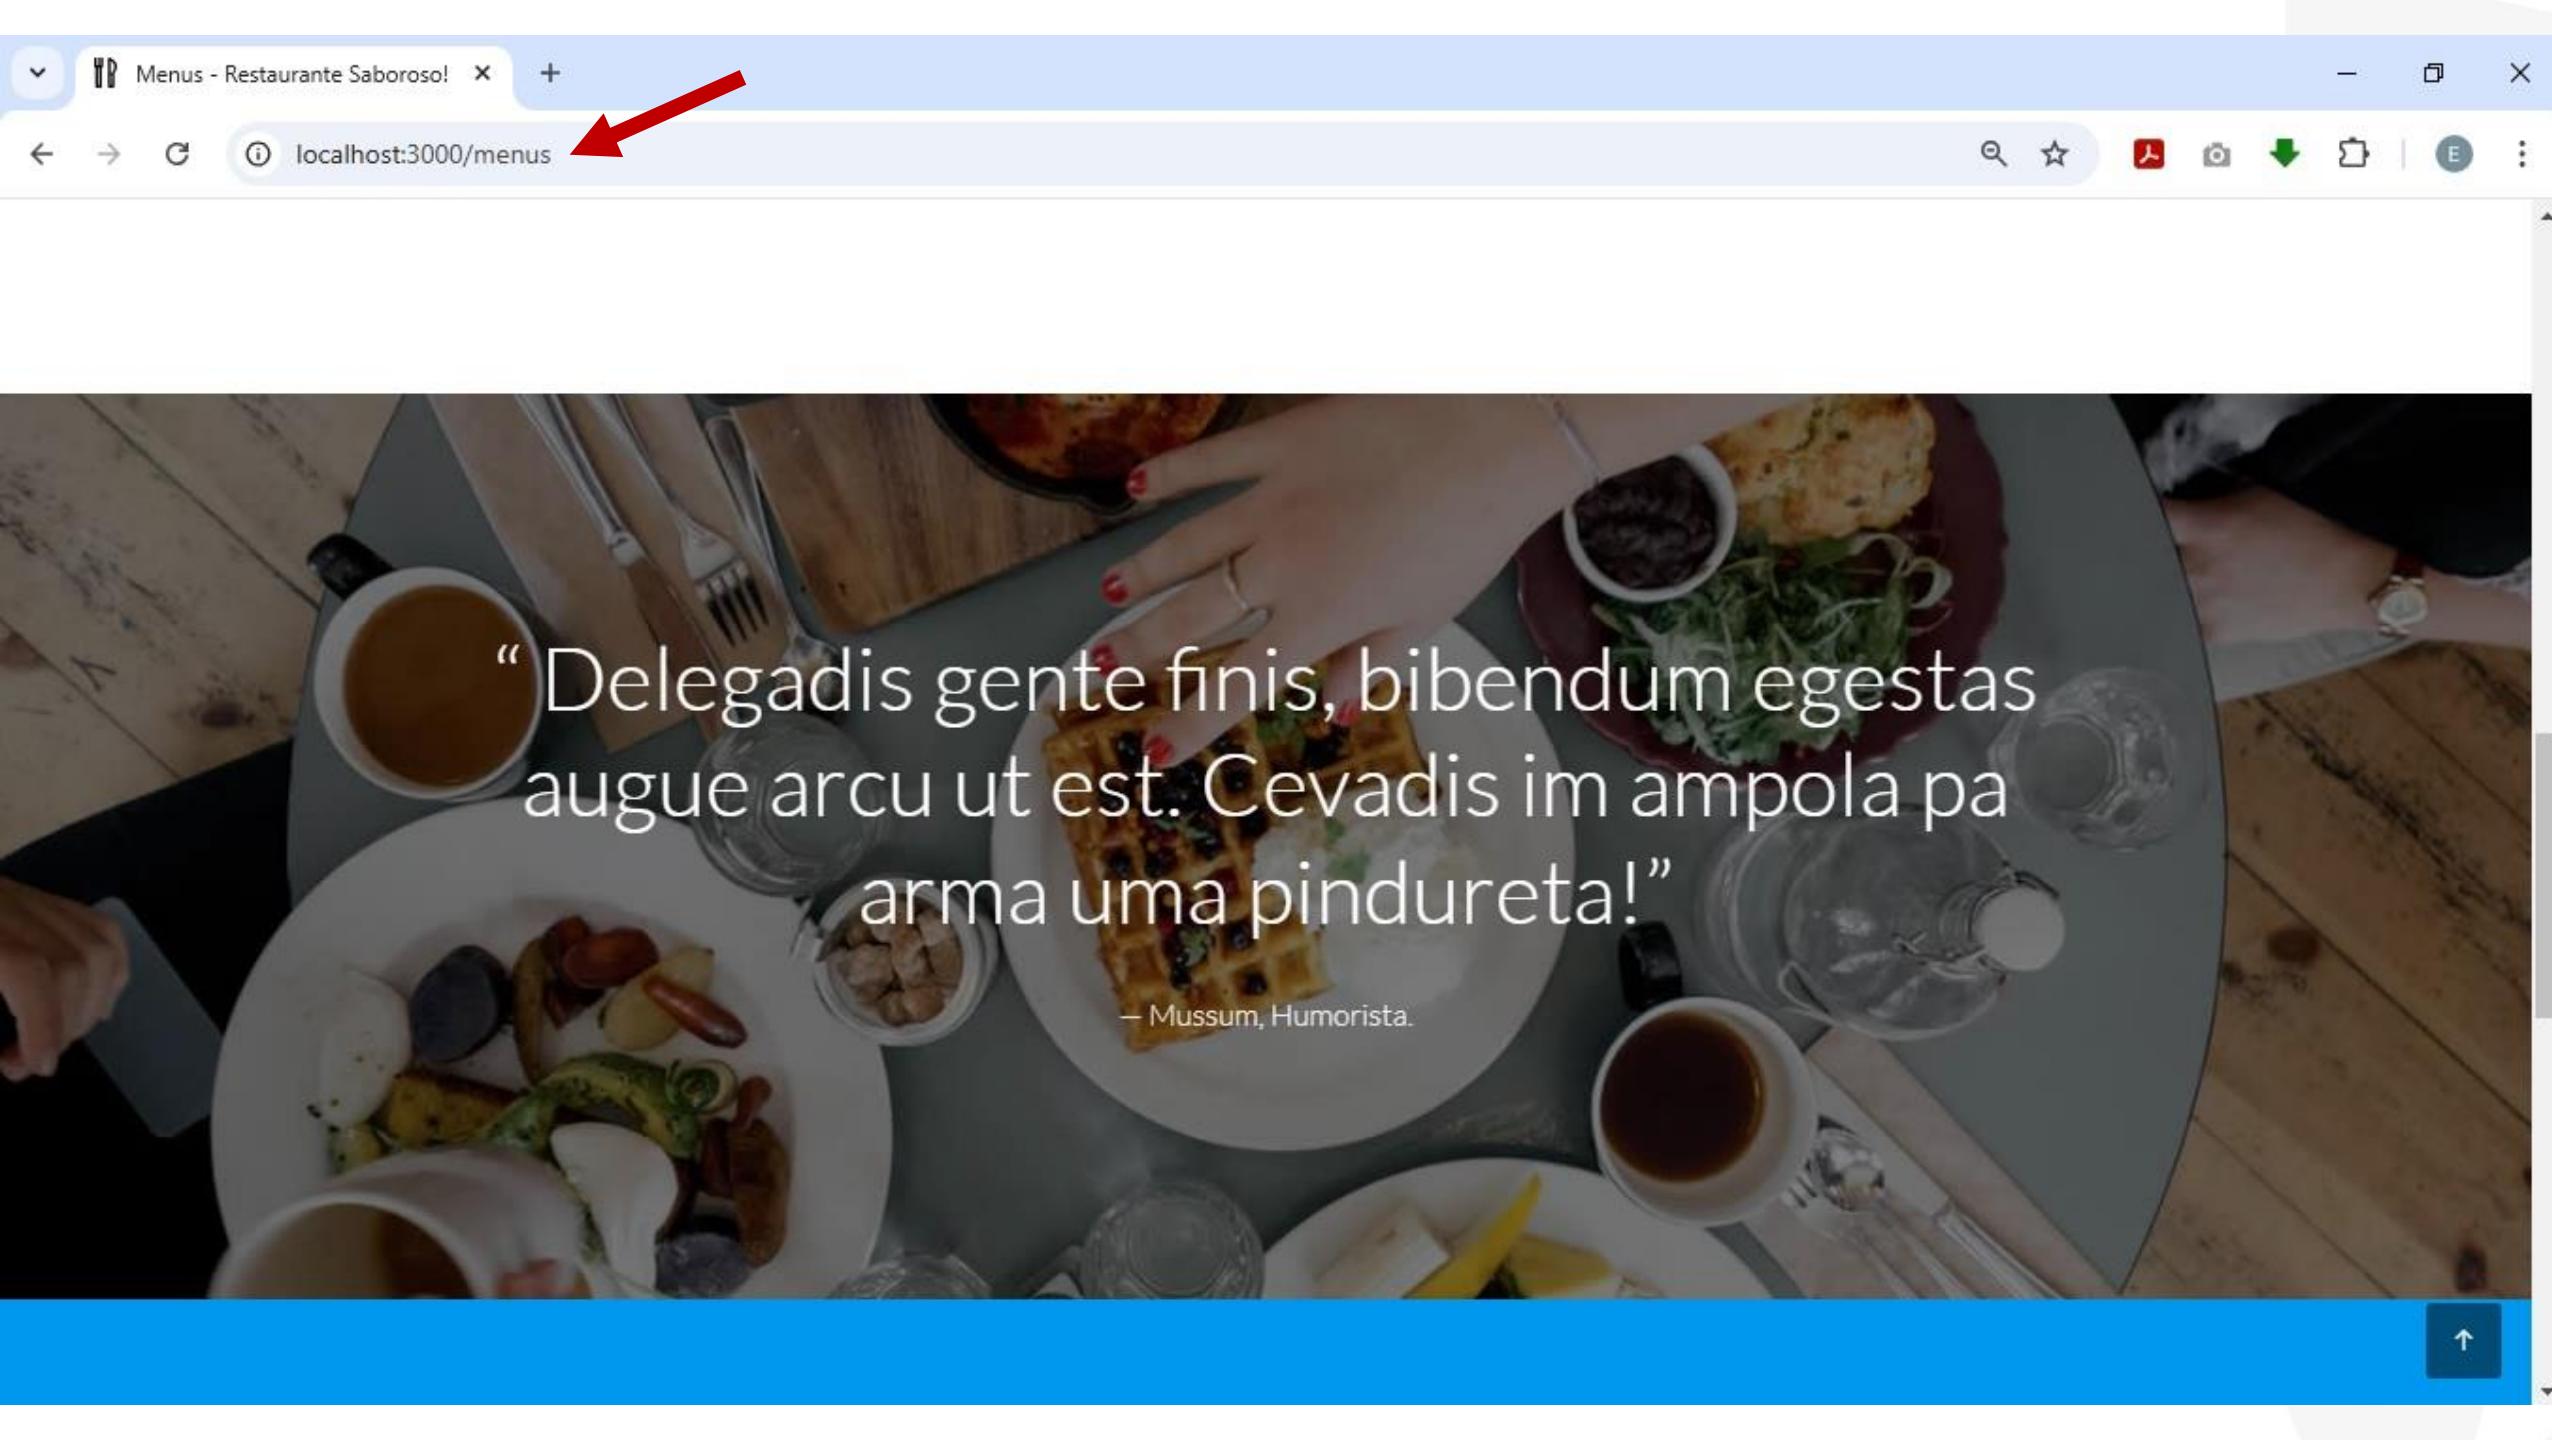

“Delegadis gente finis, bibendum egestas
augue arcu ut est. Cevadis im ampola pa
arma uma pindureta!”

— Mussum, Humorista.



localhost:3000/menus



Se inscrever

Receba as novidades do nosso restaurante

Seu E-mail

INSCREVER

ENTRAR EM CONTATO

+1234 567 890

contato@sproviders.com.br

Chat

REDES SOCIAIS



Nossos Serviços

Mussum Ipsum, cacilds vidis litro abertis. Si num tem leite então bota uma pinga
ai cumpadi!



Pessoas Felizes

Mussum Ipsum, cacilds vidis litro abertis. Si
num tem leite então bota uma pinga ai
cumpadi!




Culinária Criativa

Mussum Ipsum, cacilds vidis litro abertis. Si
num tem leite então bota uma pinga ai
cumpadi!



Delivery

Mussum Ipsum, cacilds vidis litro abertis. Si
num tem leite então bota uma pinga ai
cumpadi!

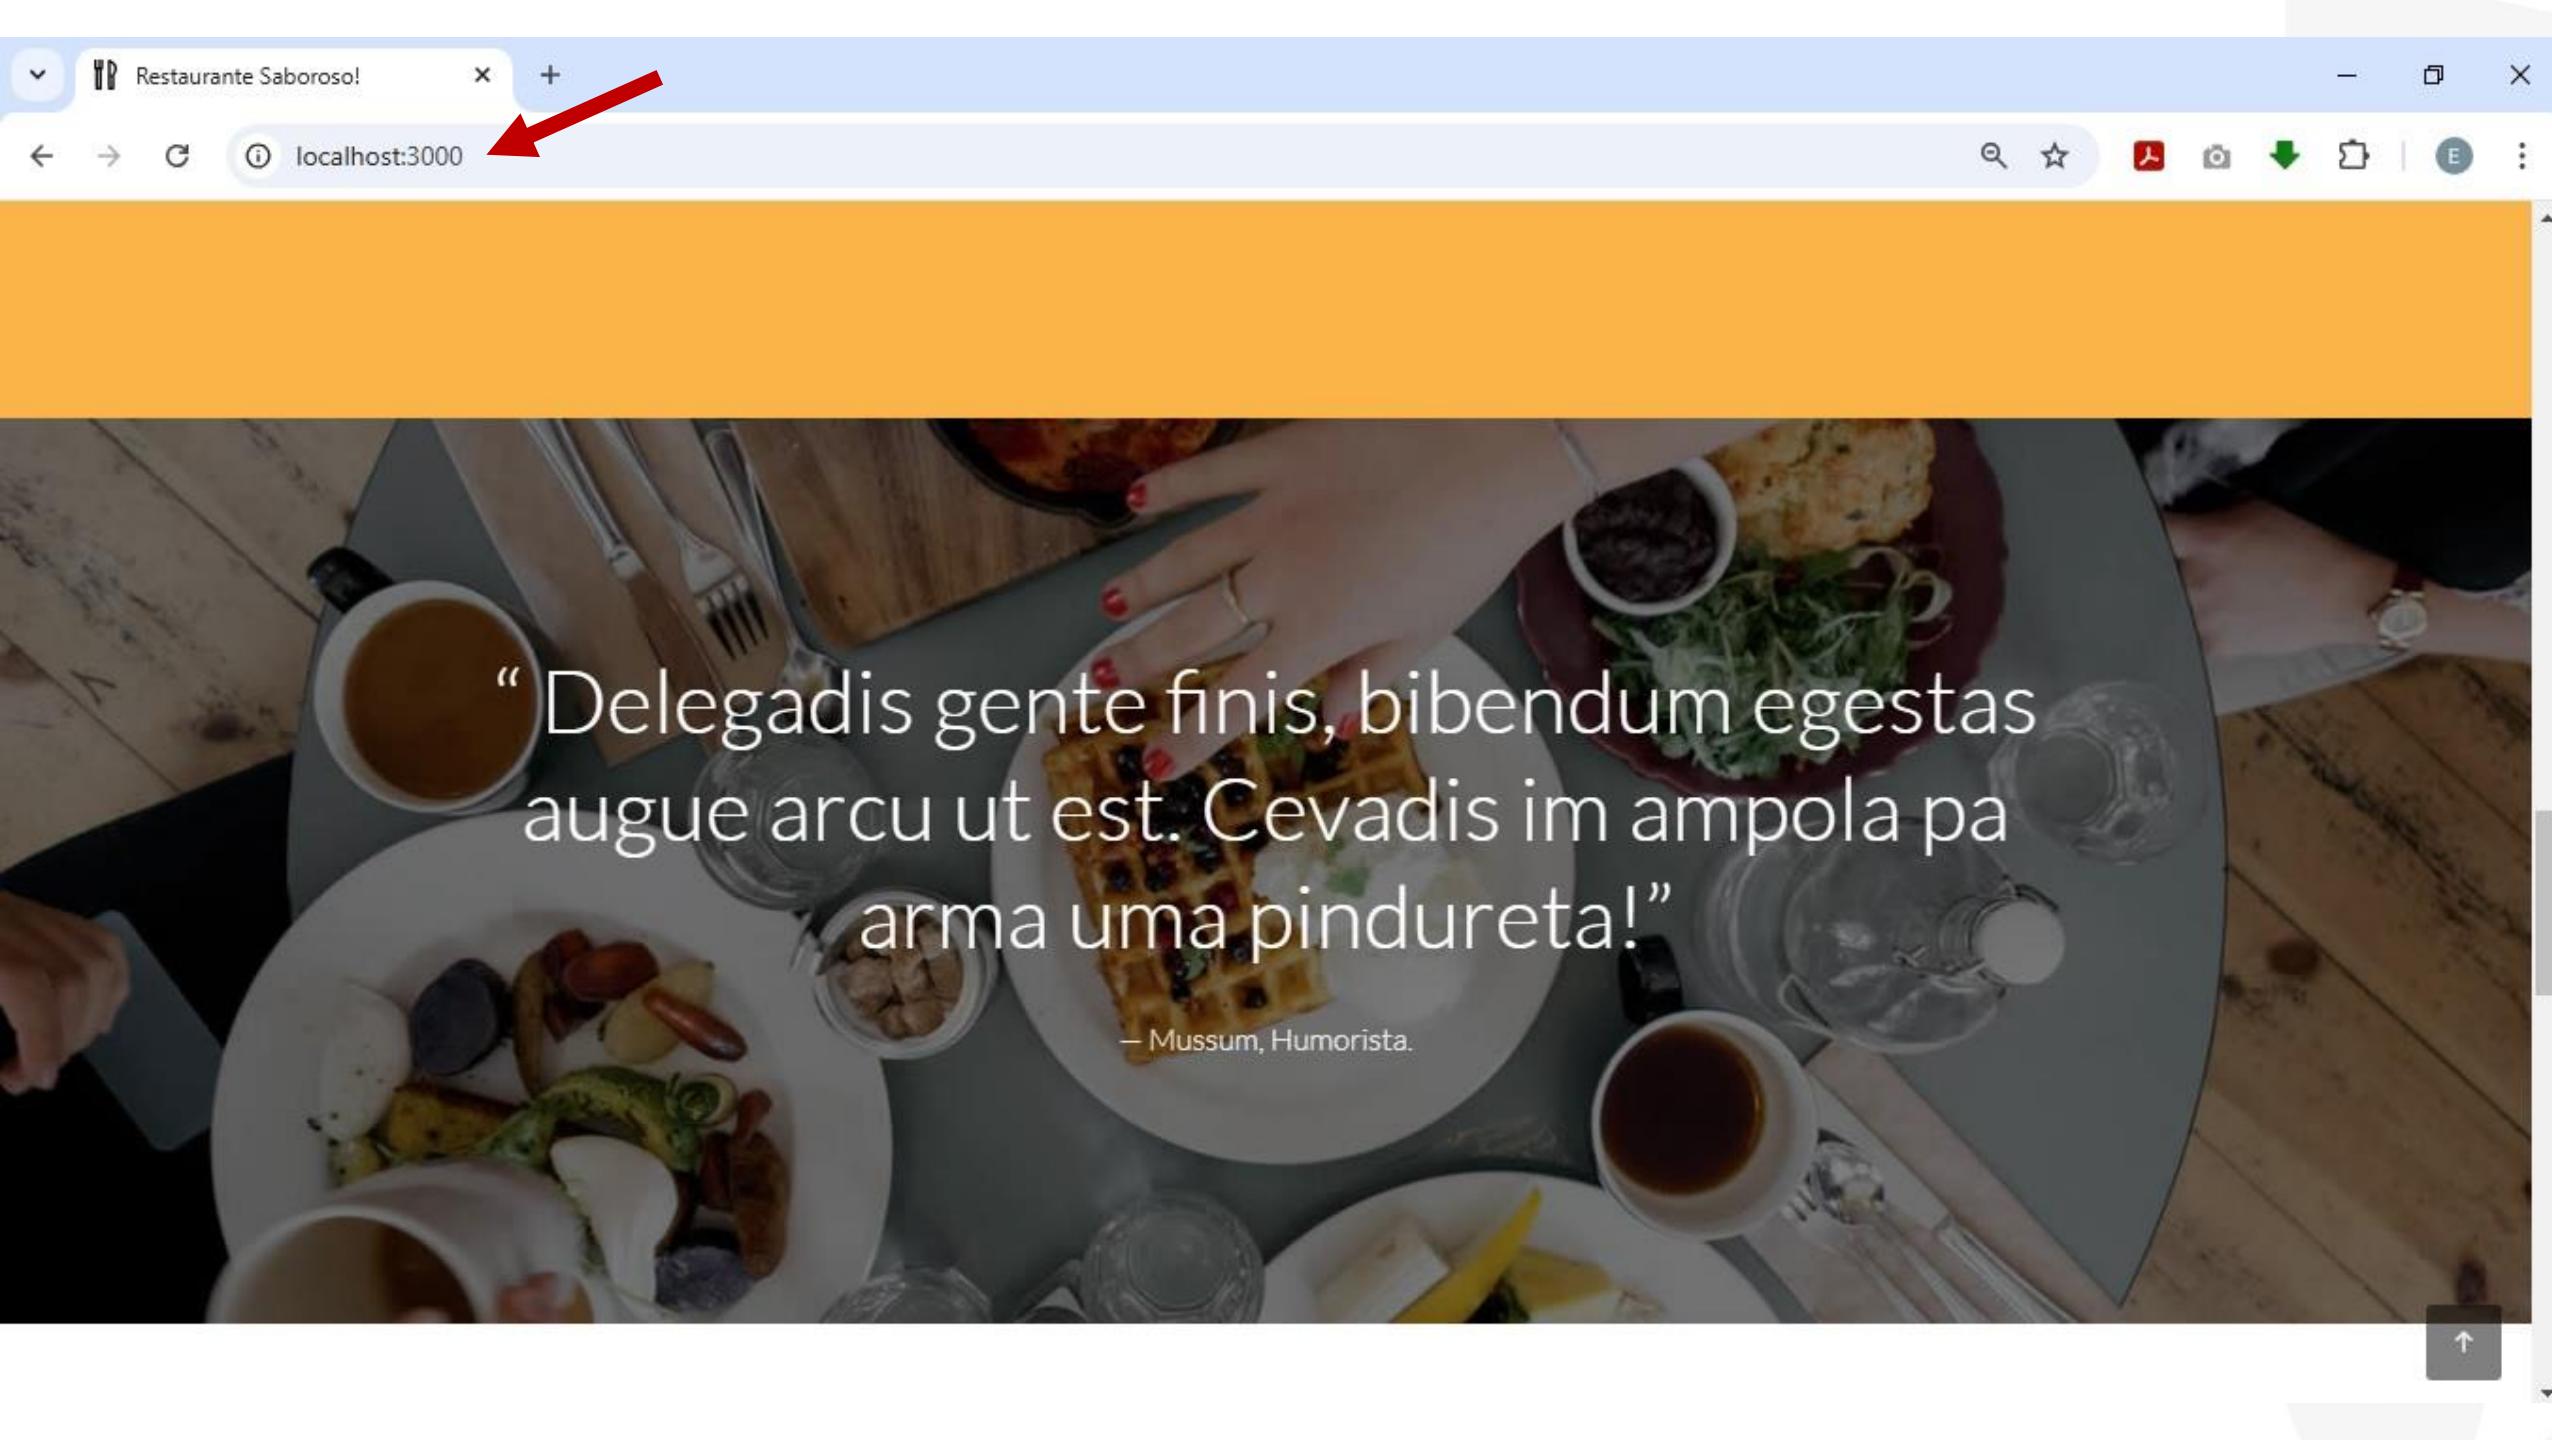



Fatos

Delegadis gente finis, bibendum egestas augue arcu ut est. Cevadis im ampola pa
arma uma pindureta!

5

AVALIAÇÃO MÉDIA

43


OPÇÕES DE PRATOS

32

CHEFES DE COZINHA

1985

DESDE

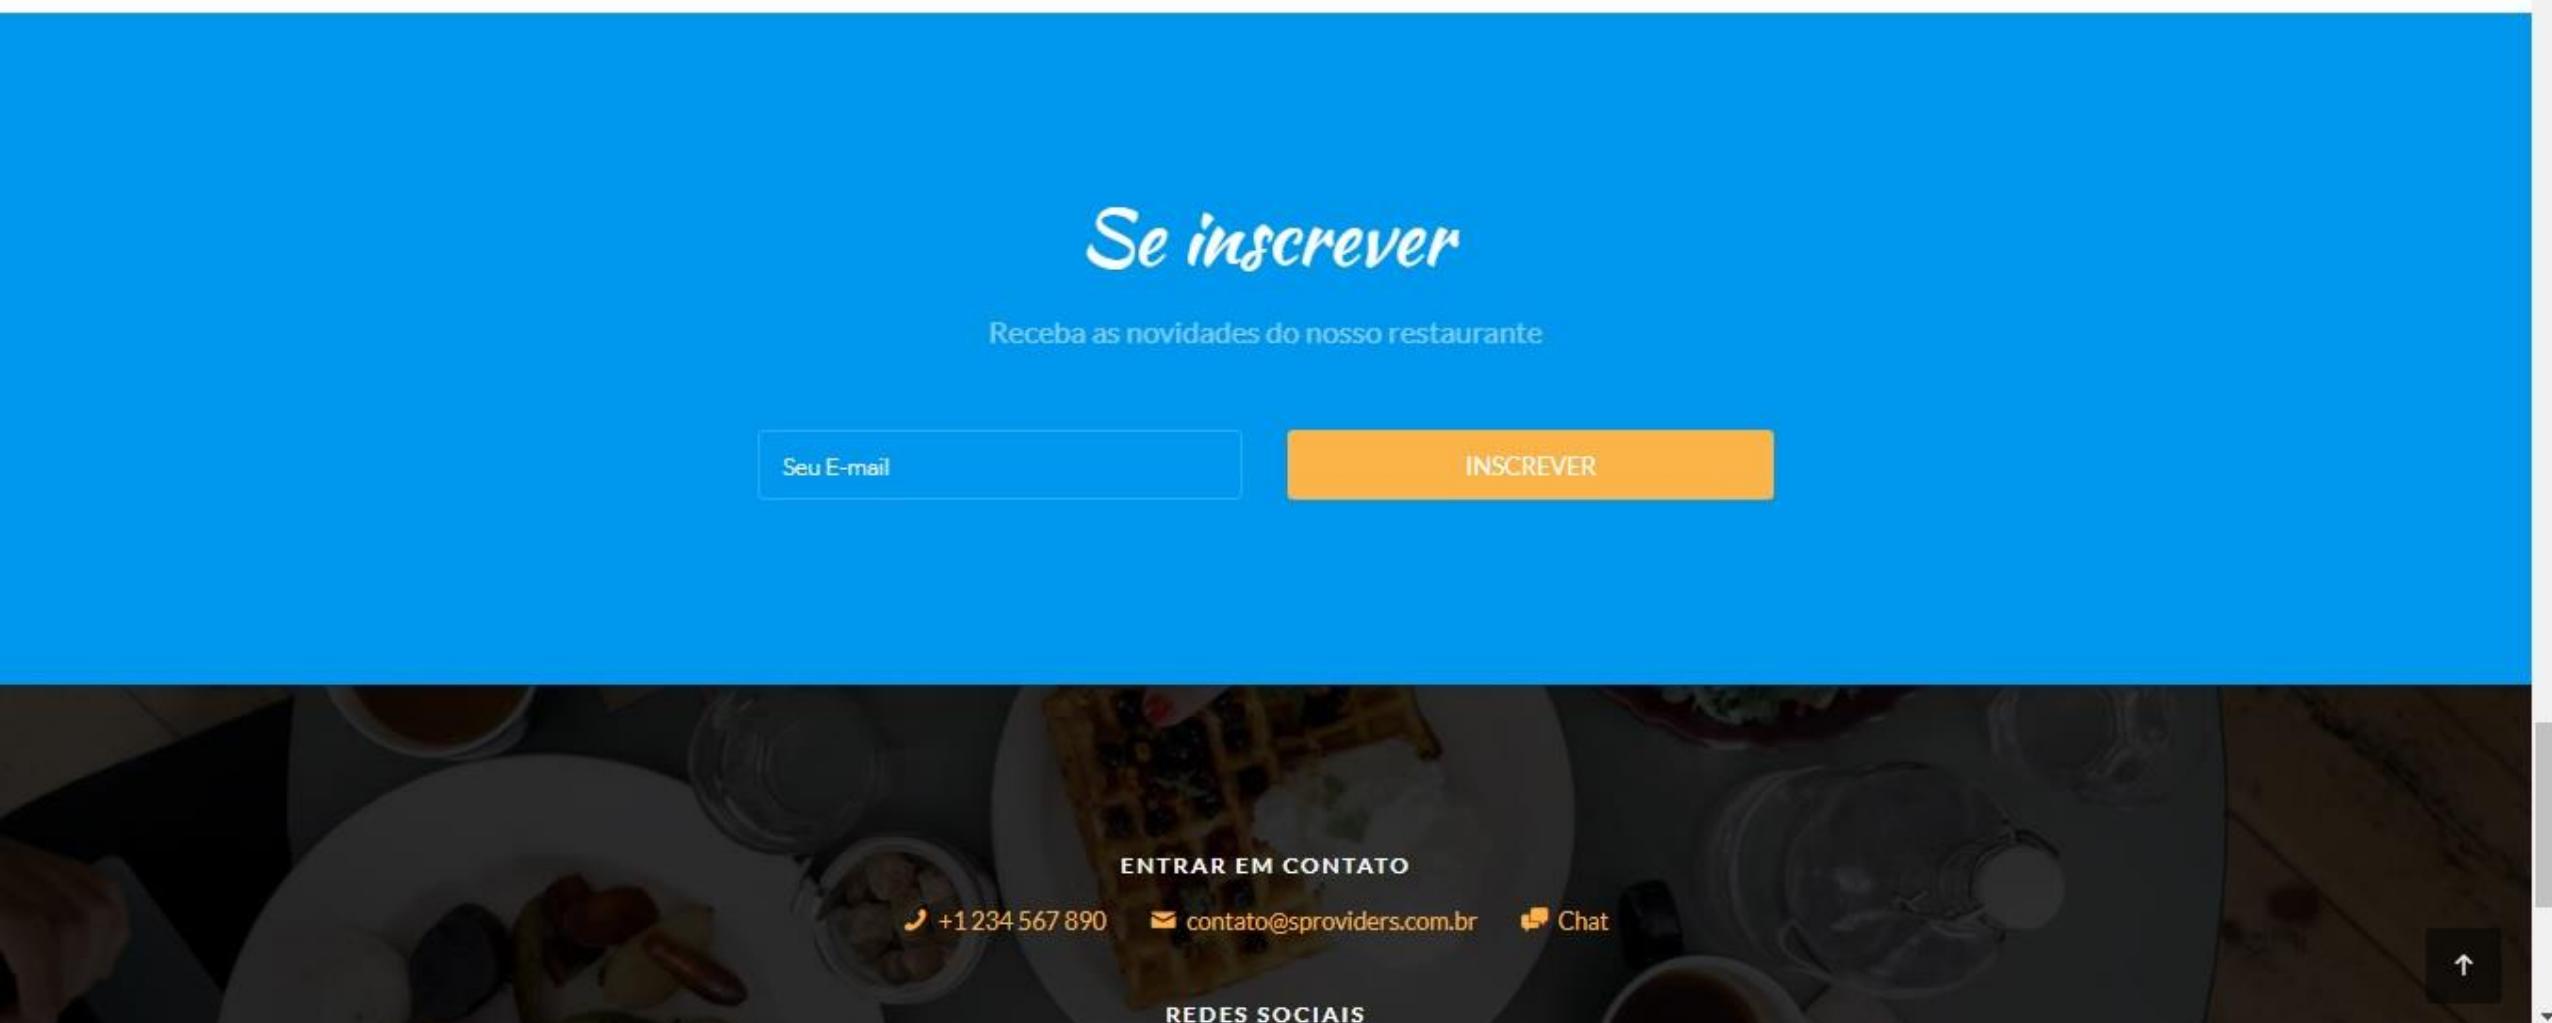

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer Sidebar:** Shows a tree view of the project structure under the 'SABOROSO' root:
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs (highlighted with a red arrow)
- Code Editor:** The active tab is 'index.ejs'. The code content is as follows:

```
3
4   <%- include("inc/head") -%
5
6   <body>
7
8     <div class="gtco-loader"></div>
9
10    <div id="page">
11
12      <%- include("inc/header-menu") -%
13      <%- include("inc/header-index") -%
14
15      <div class="gtco-section">
16        <div class="gtco-container">
17          <div class="row">
18            <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
19              <h2 class="cursive-font primary-color">Pratos Populares</h2>
20              <p>Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num
21              copo é motivis de denguis. Quem num gosta di mé, boa
22              gentis num é.</p>
23            </div>
24          </div>
25
26          <% menus.forEach(function(row){ %>
27            <div class="col-lg-4 col-md-4 col-sm-6">
```
- Status Bar:** Ln 185, Col 1, Tab Size: 4, UTF-8, LF, HTML, Go Live, Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Fullscreen, Print, Help, ...
- Explorer Sidebar:** Shows the project structure under "SABOROSO".
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
- Outline:** Shows the current file structure.
- Timeline:** Shows the history of changes.
- Code Editor:** The file "index.ejs" is open.

```
<%- include("inc/head") -%>
<body>
  <div class="gtco-loader"></div>
  <div id="page">
    <%- include("inc/header-menu") -%>
    <%- include("inc/header-index") -%>
    <div class="gtco-section">...
    </div>

    <div id="gtco-features">
      <div class="gtco-container">
        <div class="row">
          <div class="col-md-8 col-md-offset-2 text-center gtco-heading animate-box">
            <h2 class="cursive-font">Nossos Serviços</h2>
            <p>Mussum Ipsum, cacilds vidis litro abertis. Si num tem leite então bota uma pinga aí cumpadi!</p>
          </div>
        </div>
        <div class="row">
          <div class="col-md-4 col-sm-6">
```
- Status Bar:** Ln 185, Col 1, Tab Size: 4, UTF-8, LF, HTML, Go Live, Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, ...
- Explorer:** Shows a project structure under SABOROSO:
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
- Code Editor:** The current file is index.ejs. The code is as follows:

```
views > index.ejs > html > body > div#page > div#gtco-features
3
4    <%- include("inc/head") -%>
5
6    <body>
7
8        <div class="gtco-loader"></div>
9
10       <div id="page">
11
12           <%- include("inc/header-menu") -%>
13           <%- include("inc/header-index") -%>
14
15       >     <div class="gtco-section">...
16           </div>
17
18       >     <div id="gtco-features">...
19           </div>
20
21
22           <div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)
23             " data-stellar-background-ratio="0.5">
24               <div class="overlay"></div>
25               <div class="gtco-container text-center">
26                 <div class="display-t">
27                   <div class="display-tc">
28                     <h1>&ldquo; Delegadis gente finis, bibendum egestas augue arcu ut est.
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
```
- Status Bar:** Ln 89, Col 15, Tab Size: 4, UTF-8, LF, HTML, Go Live, Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO

- bin
- inc
- db.js
- node_modules
- public
- routes
- index.js
- users.js

views

- inc
- footer-gototop.ejs
- footer-scripts.ejs
- footer.ejs
- head.ejs
- header-index.ejs
- header-menu.ejs
- header.ejs
- contacts.ejs
- error.ejs
- index.ejs

OUTLINE

TIMELINE

index.ejs

views > index.ejs > html > body > div#page > div#gtco-features

```
8 <div class="gtco-loader"></div>
9
10 <div id="page">
11
12 <%- include("inc/header-menu") -%>
13 <%- include("inc/header-index") -%>
14
15 > <div class="gtco-section">...
16 </div>
17
18 > <div id="gtco-features">...
19 </div>
20
21 > <div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)
22 " data-stellar-background-ratio="0.5">...
23 </div>
24
25 <div id="gtco-counter" class="gtco-section">
26 <div class="gtco-container">
27
28 <div class="row">
29 <div class="col-md-8 col-md-offset-2 text-center gtco-heading animate-box">
30 <h2 class="cursive-font primary-color">Fatos</h2>
31 <p>Delegadis gente finis, bibendum egestas augue arcu ut est. Cevadis
32 im ampola na arma uma vindureta!</p>
```

Ln 89, Col 15 Tab Size: 4 UTF-8 LF { HTML ⚡ Go Live ✓ Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... 🔍 index.ejs X

SABOROSO

- > bin
- < inc
- JS db.js
- > node_modules
- > public
- < routes
- JS index.js
- JS users.js

< views

- < inc
- ↳ footer-gototop.ejs
- ↳ footer-scripts.ejs
- ↳ footer.ejs
- ↳ head.ejs
- ↳ header-index.ejs
- ↳ header-menu.ejs
- ↳ header.ejs
- ↳ contacts.ejs
- ↳ error.ejs
- ↳ index.ejs

OUTLINE

TIMELINE

views > 🔍 index.ejs > html > body > div#page > ? > div#gtco-features

```
12     <%- include("inc/header-menu") -%>
13     <%- include("inc/header-index") -%>
14
15 >     <div class="gtco-section">...
16
17
18
19 >     <div id="gtco-features">...
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42 >     <div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)
43     " data-stellar-background-ratio="0.5">...
44     </div>
45 >     <div id="gtco-counter" class="gtco-section">...
46     </div> ←
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89 >     <div id="gtco-subscribe">
90         <div class="gtco-container">
91             <div class="row animate-box">
92                 <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
93                     <h2 class="cursive-font">Se inscrever</h2>
94                     <p>Receba as novidades do nosso restaurante</p>
95                 </div>
```

Ln 89, Col 15 Tab Size: 4 UTF-8 LF { HTML ⚡ Go Live ✓ Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO

- > bin
- ✓ inc
 - JS db.js
- > node_modules
- > public
- ✓ routes
 - JS index.js
 - JS users.js
- ✓ views
 - ✓ inc
 - ↳ footer-gototop.ejs
 - ↳ footer-scripts.ejs
 - ↳ footer.ejs
 - ↳ head.ejs
 - ↳ header-index.ejs
 - ↳ header-menu.ejs
 - ↳ header.ejs
 - ↳ contacts.ejs
 - ↳ error.ejs
 - ↳ index.ejs

OUTLINE

TIMELINE

index.ejs

views > index.ejs > html > body > div#page > ? > ? > div#gtco-features

```
12     <%- include("inc/header-menu") -%>
13     <%- include("inc/header-index") -%>
14
15     >     <div class="gtco-section">...
16
17     >     <div id="gtco-features">...
18
19
20     >     <div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)
21         " data-stellar-background-ratio="0.5">...
22     </div>
23
24     >     <div id="gtco-counter" class="gtco-section">...
25     </div>
26
27     >     <div id="gtco-subscribe">...
28     </div>
29
30     <%- include("inc/footer") -%>
31
32     </div>
```

Ln 89, Col 15 Tab Size: 4 UTF-8 LF { HTML Go Live Prettier

A screenshot of a code editor interface, likely Visual Studio Code, showing an EJS file named `index.ejs`. The file is located in the `views` directory of a project named `SABOROSO`.

The code editor displays the following EJS template:

```
<div class="gtco-loader"></div>
<div id="page">
  <%- include("inc/header-menu") -%>
  <%- include("inc/header-index") -%>
  <%- include("inc/content/menus") -%>
  <div class="gtco-section">...
  </div>
  <div id="gtco-features">...
  </div>
<div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)
  " data-stellar-background-ratio="0.5">...
</div>
<div id="gtco-counter" class="gtco-section">...
</div>
<div id="atco-subscribe">...
```

A red arrow points to the line of code `<%- include("inc/content/menus") -%>`, which is highlighted in blue.

The status bar at the bottom shows the following information:

- Ln 15, Col 1 (38 selected)
- Tab Size: 4
- UTF-8 LF
- { HTML
- Go Live
- Prettier

File Edit Selection View Go ... ← → 🔍 saboroso [Administrator] ⚡

EXPLORER ...

✓ SABOROSO

- > bin
- ✓ inc
 - JS db.js
- > node_modules
- > public
- ✓ routes
 - JS index.js
 - JS users.js
- ✓ views
 - ✓ inc
 - ✓ content
 - ✓ menus.ejs
 - ✓ footer-gototop.ejs
 - ✓ footer-scripts.ejs
 - ✓ footer.ejs
 - ✓ head.ejs
 - ✓ header-index.ejs
 - ✓ header-menu.ejs
 - ✓ header.ejs
 - ✓ contacts.ejs

RED ARROWS POINTING TO: menus.ejs

views > inc > content > menus.ejs

1

OUTLINE

TIMELINE

Ln 1, Col 1 Spaces: 4 CRLF { HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Top Right:** Minimize, Maximize, Close, Help, ...
- Left Sidebar (EXPLORER):**
 - SABOROSO
 - views
 - inc
 - content
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs** (highlighted)
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
- Top Center:** index.ejs (active tab), menus.ejs
- Code Editor:** views > index.ejs (HTML structure)

```
8     <div class="gtco-loader"></div>
9
10    <div id="page">
11
12      <%- include("inc/header-menu") -%>
13      <%- include("inc/header-index") -%>
14
15      <%- include("inc/content/menus") -%>
16
17    > <div class="gtco-section"> ...
18    >   </div>
19
20    <div id="gtco-features">...
21    >   </div>
22
23
24    > <div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)
25      " data-stellar-background-ratio="0.5">...
26    </div>
27
28    <div id="gtco-counter" class="gtco-section">...
29    </div>
30
31
32    > <div id="gtco-subscribe">...
33  </div>
```
- Bottom Status Bar:** Line 17, Col 1 (1032 selected), Tab Size: 4, UTF-8, LF, HTML, Go Live, Prettier

The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer (Left):** Shows the project structure under "SABOROSO".
- Search Bar (Top):** Contains the text "saboroso [Administrator]".
- Code Editor (Center):** Displays the file "index.ejs".
- breadcrumbs:** Shows the navigation path: views > index.ejs > html > body > div#page > ? > ? > ?
- Code Content:** The file contains EJS template code. A red arrow points to the line: `<%- include("inc/content/menus") -%>`.
- Status Bar (Bottom):** Shows "Ln 17, Col 1", "Tab Size: 4", "UTF-8", "LF", "HTML", "Go Live", "Prettier", and a bell icon.

```
<div class="gtco-loader"></div>
<div id="page">
  <%- include("inc/header-menu") -%>
  <%- include("inc/header-index") -%>
  <%- include("inc/content/menus") -%>
  <div id="gtco-features">...
    </div>
  <div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)
    " data-stellar-background-ratio="0.5">...
    </div>
  <div id="gtco-counter" class="gtco-section">...
    </div>
  <div id="gtco-subscribe">...
    </div>
```

A screenshot of the Visual Studio Code interface. The Explorer sidebar on the left shows a file tree with a red arrow pointing to the file 'menus.ejs' under the 'content' folder. The Editor tab bar at the top has 'index.ejs' and 'menus.ejs' tabs, with 'menus.ejs' being the active tab. The main editor area displays the content of 'menus.ejs', which is an EJS template for a menu page. The Status Bar at the bottom shows file statistics: 0 0 ▲ 0 ⚡ 0 ⚡, Ln 33, Col 7, Spaces: 4, UTF-8, CRLF, { HTML, Go Live, Prettier.

```
<div class="gtco-section">
  <div class="gtco-container">
    <div class="row">
      <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
        <h2 class="cursive-font primary-color">Pratos Populares</h2>
        <p>Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de denguis. Quem num gosta di mé, boa gentis num é.</p>
      </div>
    </div>
    <div class="row">
      <% menus.forEach(function(row){ %>
        <div class="col-lg-4 col-md-4 col-sm-6">
          <a href="<%= row.photo %>" class="fh5co-card-item image-popup">
            <figure>
              <div class="overlay">
                <i class="ti-plus"></i>
              </div>
              
            </figure>
            <div class="fh5co-text">
              <h2><%= row.title %></h2>
              <p><%= row.description %></p>
              <p> <span class="price cursive-font"><%= row.price %></span>
            </div>
          </a>
        </div>
      <% }) %>
    </div>
  </div>
</div>
```

A screenshot of the Visual Studio Code (VS Code) interface. The top bar includes standard menu items: File, Edit, Selection, View, Go, and others. A search bar is centered above the main workspace. The left sidebar, titled 'EXPLORER', shows a file tree for a project named 'SABOROSO'. The 'views' folder contains subfolders 'inc' and 'content', with several EJS files listed under each. A red arrow points from the bottom of the 'content' folder towards the 'menus.ejs' file in the editor. The central workspace displays the contents of the 'menus.ejs' file, which is part of a larger file structure under 'views > inc > content'. The code uses EJS templating syntax, including script tags and CSS classes like 'fh5co-section', 'row', 'col-lg-4', 'col-md-4', 'col-sm-6', 'fh5co-card-item', 'image-popup', 'overlay', 'ti-plus', and 'img-responsive'. The status bar at the bottom provides information about the current file: Line 33, Column 7, Spaces: 4, CRLF, HTML, Go Live, Prettier, and a refresh icon.

```
views > inc > content > menus.ejs > div.gtco-section
9   </div>
10  <div class="row">
11
12    <% menus.forEach(function(row){ %>
13      <div class="col-lg-4 col-md-4 col-sm-6">
14        <a href="<%= row.photo %>" class="fh5co-card-item image-popup">
15          <figure>
16            <div class="overlay">
17              <i class="ti-plus"></i>
18            </div>
19            
20          </figure>
21          <div class="fh5co-text">
22            <h2><%= row.title %></h2>
23            <p><%= row.description %></p>
24            <p>
25              <span class="price cursive-font"><%= row.price %></span>
26            </p>
27          </div>
28        </a>
29      </div>
30    <% }); %>
31  </div>
32</div>
33</div>
```

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER


SABOROSO

- > node_modules
- > public
- routes
 - JS index.js
 - JS users.js
- views
 - inc
 - content
 - menus.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - OUTLINE
 - TIMELINE

views > index.ejs > html > body > div#page > ? > ? > ?

```
8 <div class="gtco-loader"></div>
9
10 <div id="page">
11
12 <%- include("inc/header-menu") -%>
13 <%- include("inc/header-index") -%>
14
15 <%- include("inc/content/menus") -%>
16 <%- include("inc/content/services") -%>
17
18 > <div id="gtco-features">...
19 </div>
20
21 > <div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)
22 " data-stellar-background-ratio="0.5">...
23 </div>
24
25 > <div id="gtco-counter" class="gtco-section">...
26 </div>
27
28 > <div id="gtco-subscribe">...
29 </div>
```

Ln 16, Col 1 (41 selected) Tab Size: 4 UTF-8 LF { HTML Go Live Prettier

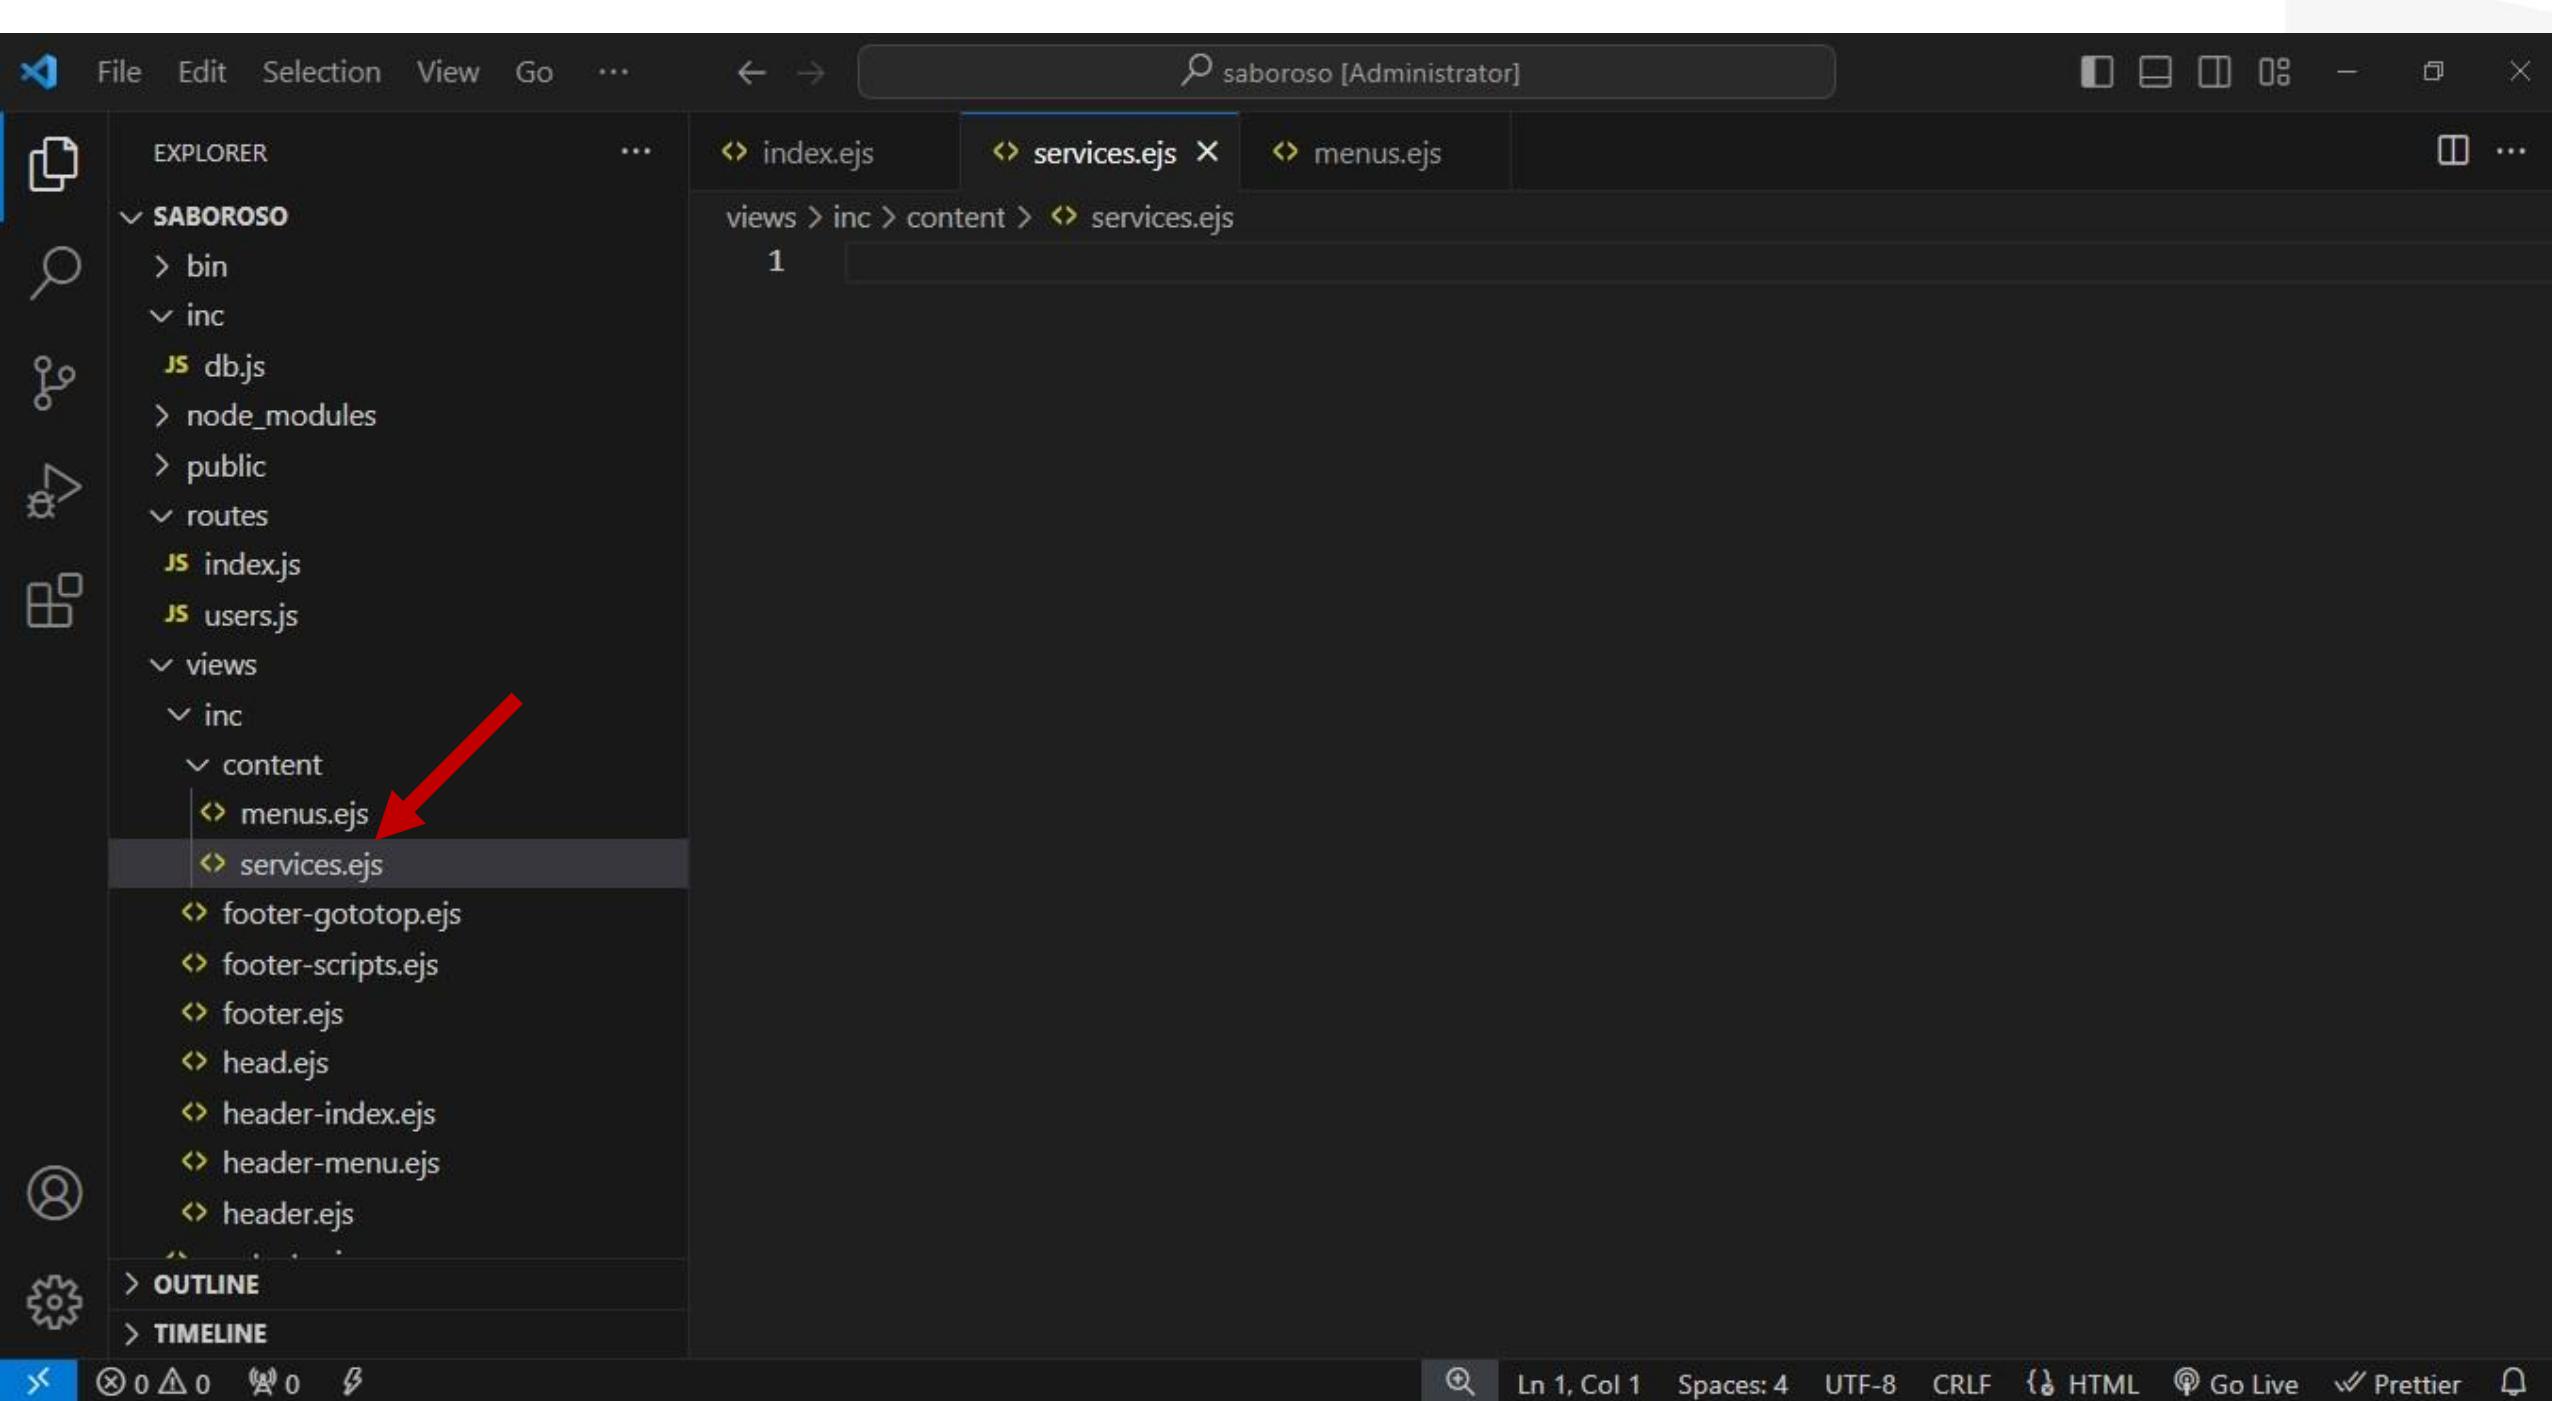

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer Sidebar:** Shows a tree structure of files and folders under the project "SABOROSO".
 - views
 - inc
 - content
 - index.ejs
 - error.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - footer-scripts.ejs
 - footer-gototop.ejs
 - head.ejs
 - contacts.ejs
 - services.ejs
 - menu.ejs
 - app.js
 - package-lock.json
 - package.json
- Code Editor:** The file "index.ejs" is open. The code is as follows:

```
<div class="gtco-loader"></div>
<div id="page">
  <%- include("inc/header-menu") -%>
  <%- include("inc/header-index") -%>
  <%- include("inc/content/menus") -%>
  <%- include("inc/content/services") -%>
  <div id="gtco-features"> ...
</div>
<div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)
  " data-stellar-background-ratio="0.5">...
</div>
<div id="gtco-counter" class="gtco-section">...
</div>
<div id="gtco-subscribe">...
</div>
```
- Status Bar:** Ln 19, Col 1 (1455 selected) Tab Size: 4 UTF-8 LF { HTML Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO

views

inc

content

footer-gototop.ejs

footer-scripts.ejs

footer.ejs

head.ejs

header-index.ejs

header-menu.ejs

header.ejs

contacts.ejs

error.ejs

index.ejs

menus.ejs

reservations.ejs

services.ejs

app.js

package-lock.json

package.json

OUTLINE

TIMELINE

index.ejs

services.ejs

menus.ejs

views > index.ejs > html > body > div#page > ? > ? > ? > ?

```
8 <div class="gtco-loader"></div>
9
10 <div id="page">
11
12 <%- include("inc/header-menu") -%>
13 <%- include("inc/header-index") -%>
14
15 <%- include("inc/content/menus") -%>
16 <%- include("inc/content/services") -%>
17
18
19
20
21
22 > <div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)
23 " data-stellar-background-ratio="0.5">...
24 </div>
25
26 > <div id="gtco-counter" class="gtco-section">...
27 </div>
28
29
30
31
32
33
34 > <div id="gtco-subscribe">...
35 </div>
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79 > <div id="gtco-subscribe">...
80 </div>
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
```

Ln 19, Col 1 Tab Size: 4 UTF-8 LF ⚡ HTML ⚡ Go Live ⚡ Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO

- inc
 - db.js
- node_modules
- public
- routes
 - index.js
 - users.js
- views
 - inc
 - content
 - menus.ejs
 - services.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
- OUTLINE
- TIMELINE


views > inc > content > services.ejs > div#gtco-features

```
1 <div id="gtco-features">
2   <div class="gtco-container">
3     <div class="row">
4       <div class="col-md-8 col-md-offset-2 text-center gtco-heading animate-box">
5         <h2 class="cursive-font">Nossos Serviços</h2>
6         <p>Mussum Ipsum, cacilds vidis litro abertis. Si num tem leite então bota uma pinga aí cumpadi!</p>
7       </div>
8     </div>
9     <div class="row">
10      <div class="col-md-4 col-sm-6">
11        <div class="feature-center animate-box" data-animate-effect="fadeIn">
12          <span class="icon">
13            <i class="ti-face-smile"></i>
14          </span>
15          <h3>Pessoas Felizes</h3>
16          <p>Mussum Ipsum, cacilds vidis litro abertis. Si num tem leite então bota uma pinga aí cumpadi!</p>
17        </div>
18      </div>
19      <div class="col-md-4 col-sm-6">
20        <div class="feature-center animate-box" data-animate-effect="fadeIn">
21          <span class="icon">
22            <i class="ti-thought"></i>
23          </span>
24          <h3>Culinária Criativa</h3>
```

Ln 41, Col 7 Spaces: 4 CRLF { HTML Go Live Prettier

The screenshot shows a code editor interface with a dark theme. The top navigation bar includes File, Edit, Selection, View, Go, and other standard options. A search bar at the top right contains the text "saboroso [Administrator]". The left sidebar, titled "EXPLORER", displays a project structure under "SABOROSO". The "views" folder contains "inc", "content", "menus.ejs", "services.ejs", "footer-gototop.ejs", "footer-scripts.ejs", "footer.ejs", "head.ejs", "header-index.ejs", "header-menu.ejs", "header.ejs", and "contacts.ejs". The "content" folder contains "menus.ejs" and "services.ejs", which are currently selected and highlighted in the sidebar. The main editor area shows the content of "services.ejs". The code is written in EJS (Embedded JavaScript) and HTML. It includes sections for "gtco-features" and "feature-center". A red arrow points from the bottom right towards the closing tag of the innermost div at line 41. The status bar at the bottom provides information about the current line (Ln 41, Col 7), spaces used (Spaces: 4), encoding (UTF-8), and file type (HTML). Other icons in the status bar include CRLF, Go Live, and Prettier.

```
<div>
  <div class="col-md-4 col-sm-6">
    <div class="feature-center animate-box" data-animate-effect="fadeIn">
      <span class="icon">
        <i class="ti-thought"></i>
      </span>
      <h3>Culinária Criativa</h3>
      <p>Mussum Ipsum, cacilds vidis litro abertis. Si num tem leite então bota uma pinga aí cumpadi!</p>
    </div>
  </div>
</div>
```

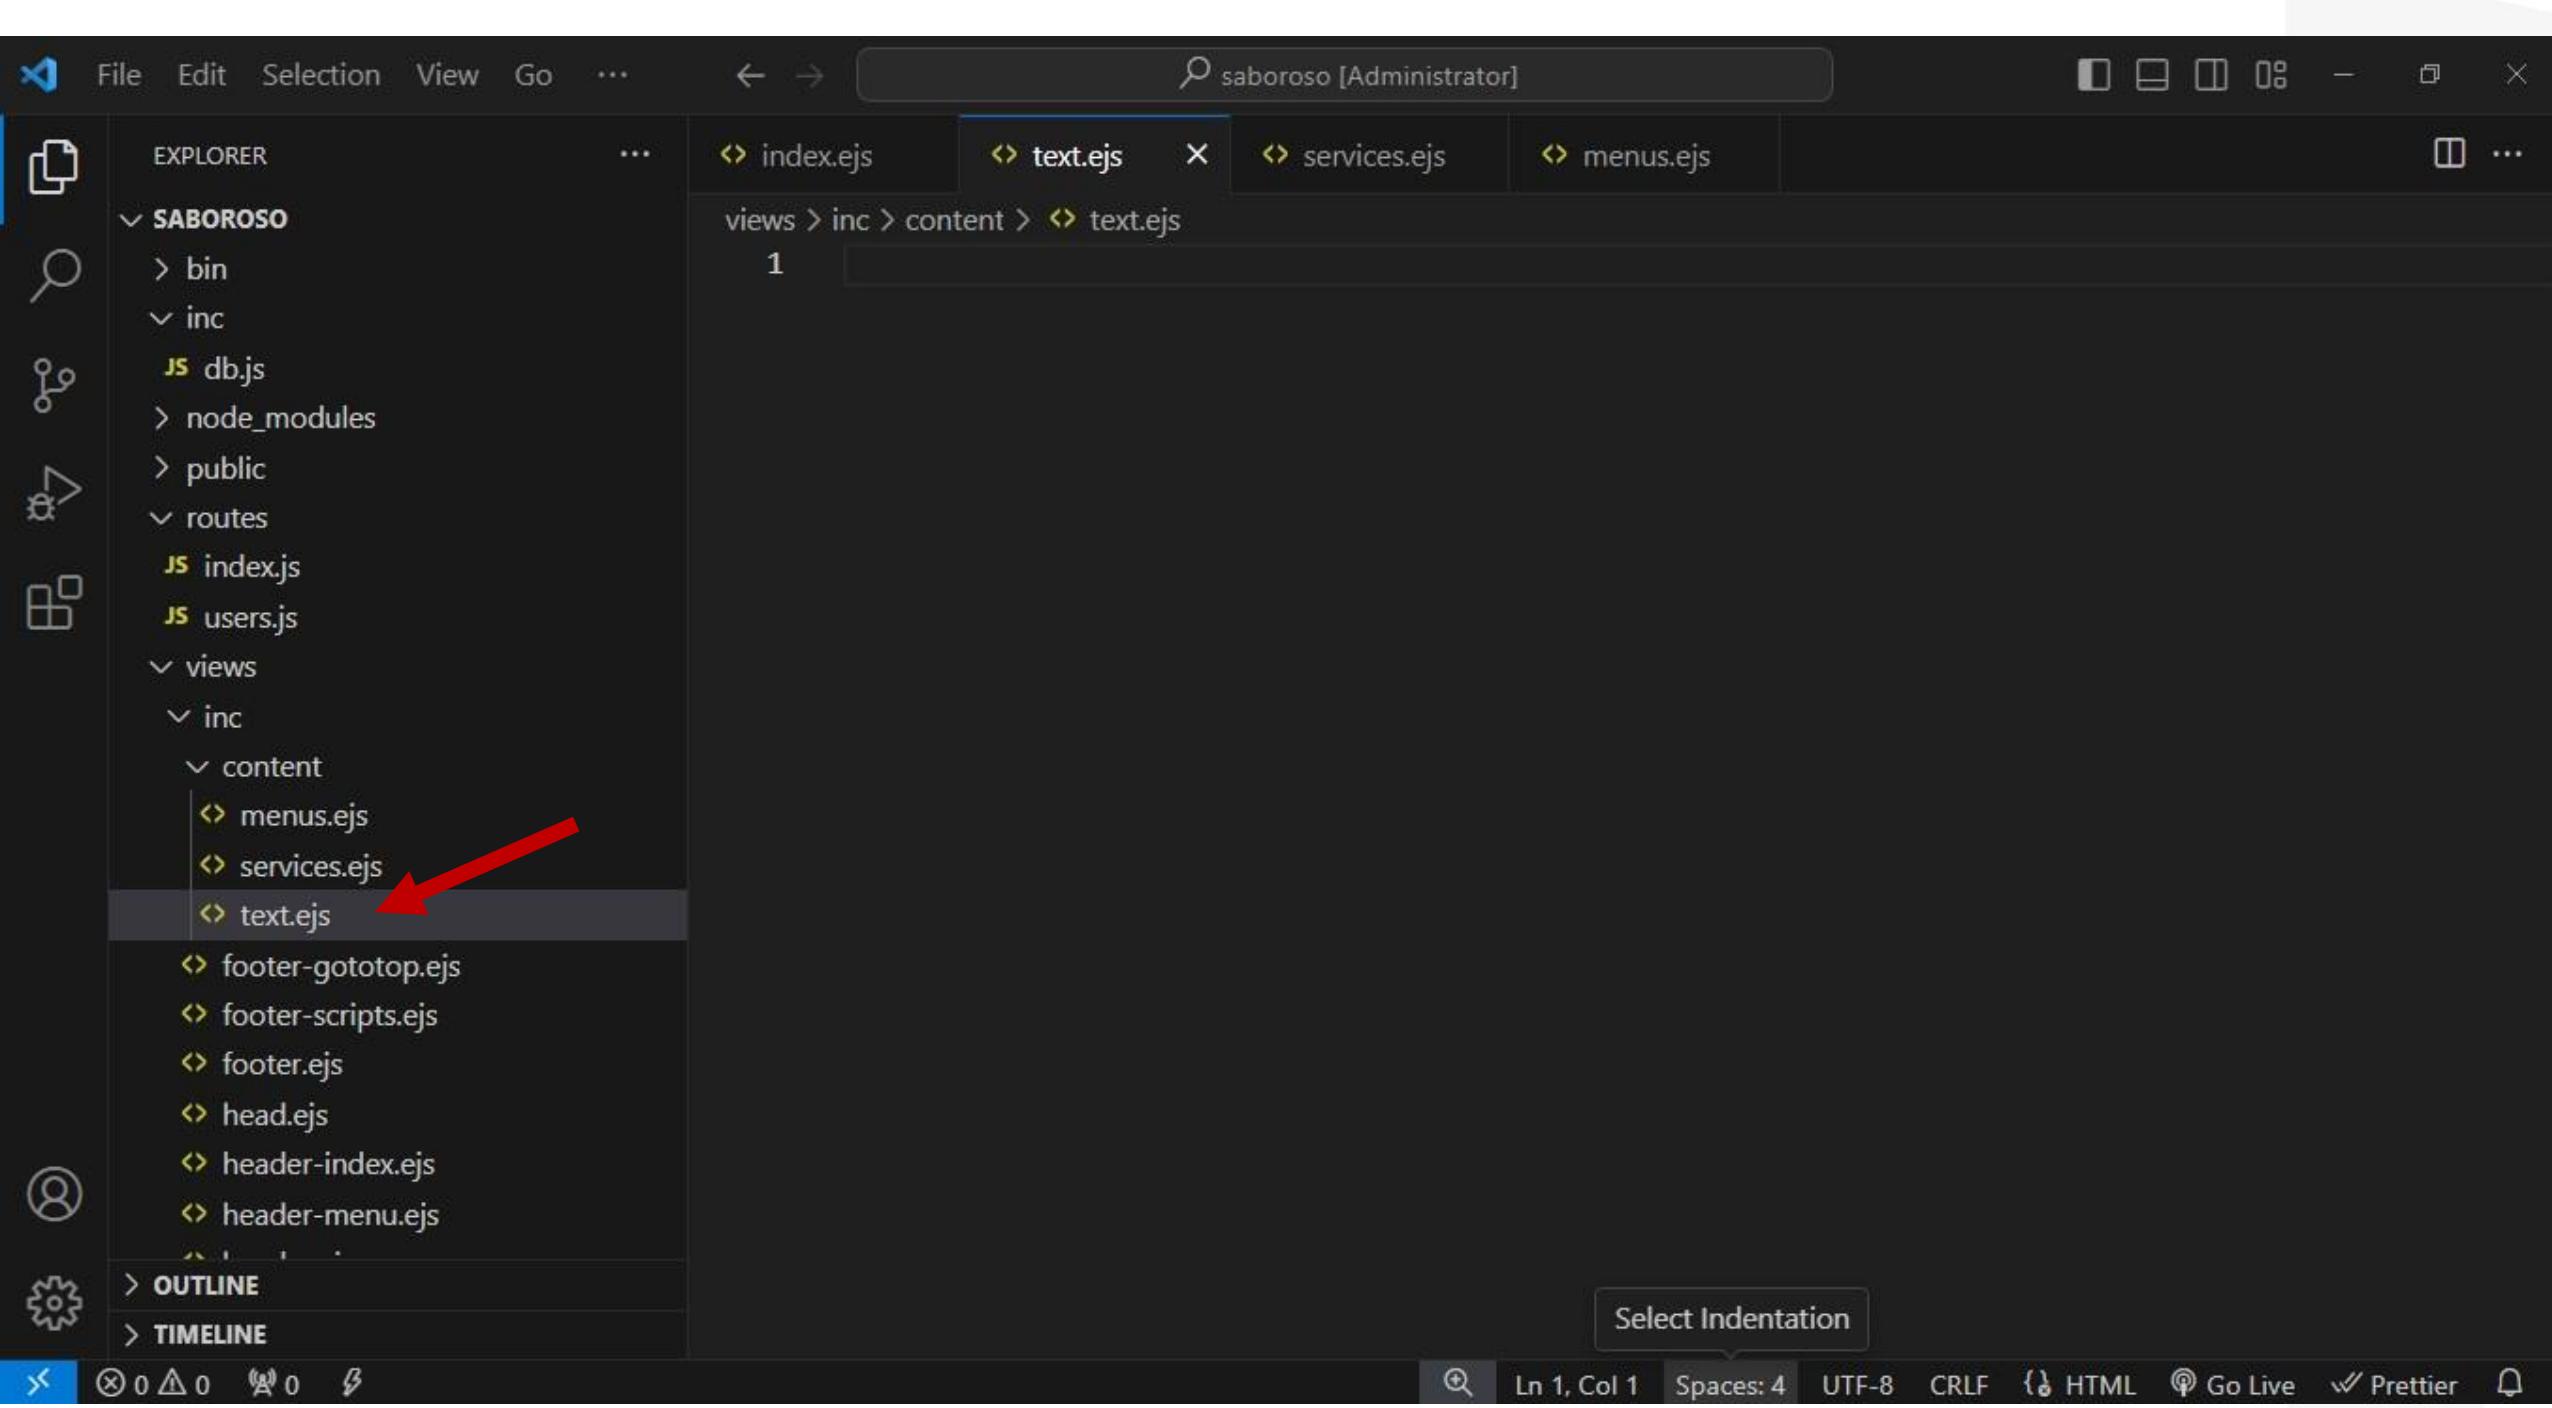

A screenshot of a code editor interface, likely Visual Studio Code, showing an EJS (Embedded JavaScript) file named `index.ejs`. The file is located in a folder structure under `views/index.ejs`.

The code in the editor is as follows:

```
<div id="page">
  <%- include("inc/header-menu") -%>
  <%- include("inc/header-index") -%>
  <%- include("inc/content/menus") -%>
  <%- include("inc/content/services") -%>
  <%- include("inc/content/text") -%>
<div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)
  , data-stellar-background-ratio="0.5">...
<div id="gtco-counter" class="gtco-section">...
<div id="gtco-subscribe">...
<%- include("inc/footer") -%>
```

A red arrow points to the line of code starting with `<div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)`, which defines a background image for a cover section.

A screenshot of a code editor interface, likely Visual Studio Code, showing an EJS (Embedded JavaScript) file named `index.ejs`. The file is located in the `views` directory of a project named `SABOROSO`.

The code editor displays the following content:

```
<div id="page">
  <%- include("inc/header-menu") -%>
  <%- include("inc/header-index") -%>
  <%- include("inc/content/menus") -%>
  <%- include("inc/content/services") -%>
  <%- include("inc/content/text") -%>
  <div id="gtco-counter" class="gtco-section">...
</div>
<div id="gtco-subscribe">...
</div>
<%- include("inc/footer") -%>
</div>
<%- include("inc/footer-gototop") -%>
<%- include("inc/footer-scripts") -%>
```

A red arrow points from the right side of the image towards the line number 19, which contains the opening tag `<div id="gtco-counter" class="gtco-section">...`.

A screenshot of the Visual Studio Code (VS Code) interface. The Explorer sidebar on the left shows a project structure under 'SABOROSO' with files like 'index.js', 'users.js', 'routes', 'views', 'inc', and various EJS files. The 'text.ejs' file is currently selected in the Explorer and is also the active tab in the main editor area. The editor shows the code for 'text.ejs', which includes a large background image and some text. A red arrow points from the 'text.ejs' entry in the Explorer to the same entry in the tabs bar at the top. Another red arrow points from the code in the editor to the closing tag '

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Fullscreen, Split, ...
- Explorer:** Shows a tree view of the project structure under the SABOROSO folder:
 - routes: index.js, users.js
 - views: inc (content, menus.ejs, services.ejs, text.ejs), footer-gototop.ejs, footer-scripts.ejs, footer.ejs, head.ejs, header-index.ejs, header-menu.ejs, header.ejs, contacts.ejs, error.ejs, index.ejs (selected), menus.ejs
- Code Editor:** The current file is index.ejs. The code includes several include statements for header and footer components. A red arrow points from the index.ejs tab in the Explorer to the footer-gototop.ejs include statement in the code editor.
- Status Bar:** Ln 18, Col 1, Tab Size: 4, UTF-8, LF, HTML, Go Live, Prettier

```
<div id="page">
  <%- include("inc/header-menu") -%>
  <%- include("inc/header-index") -%>
  <%- include("inc/content/menus") -%>
  <%- include("inc/content/services") -%>
  <%- include("inc/content/text") -%>
  <div id="gtco-counter" class="gtco-section">...
    </div>
  <div id="gtco-subscribe">...
    </div>
  <%- include("inc/footer") -%>
</div>
<%- include("inc/footer-gototop") -%>
<%- include("inc/footer-scripts") -%>
```


A screenshot of a code editor interface, likely Visual Studio Code, showing an ejs file named "index.ejs". The file contains EJS template code with various include statements. A red arrow points to the line of code: "<%- include('inc/content/facts') -%>". The code editor's sidebar shows a project structure under "SABOROSO" with files like "index.js", "users.js", and multiple "views" subfolders containing "inc" and "content" subfolders with files such as "menus.ejs", "services.ejs", "text.ejs", and "facts.ejs". The status bar at the bottom indicates the code is at line 18, column 1, with 38 selected characters, and the file is saved in UTF-8 format.

```
<div id="page">
  <%- include("inc/header-menu") -%>
  <%- include("inc/header-index") -%>
  <%- include("inc/content/menus") -%>
  <%- include("inc/content/services") -%>
  <%- include("inc/content/text") -%>
  <%- include("inc/content/facts") -%>
<div id="gtco-counter" class="gtco-section">...
</div>
<div id="gtco-subscribe">...
</div>
<%- include("inc/footer") -%>
</div>
<%- include("inc/footer-gototop") -%>
<%- include("inc/footer-scripts") -%>
```

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Print, ...
- Explorer:** Shows the project structure:
 - SABOROSO
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - content
 - facts.ejs
 - menus.ejs
 - services.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - OUTLINE
 - TIMELINE
- Editor:** The current file is facts.ejs, located at views > inc > content > facts.ejs. The file content is as follows:

```
1
```
- Status Bar:** Ln 1, Col 1, Spaces: 4, UTF-8, CRLF, HTML, Go Live, Prettier

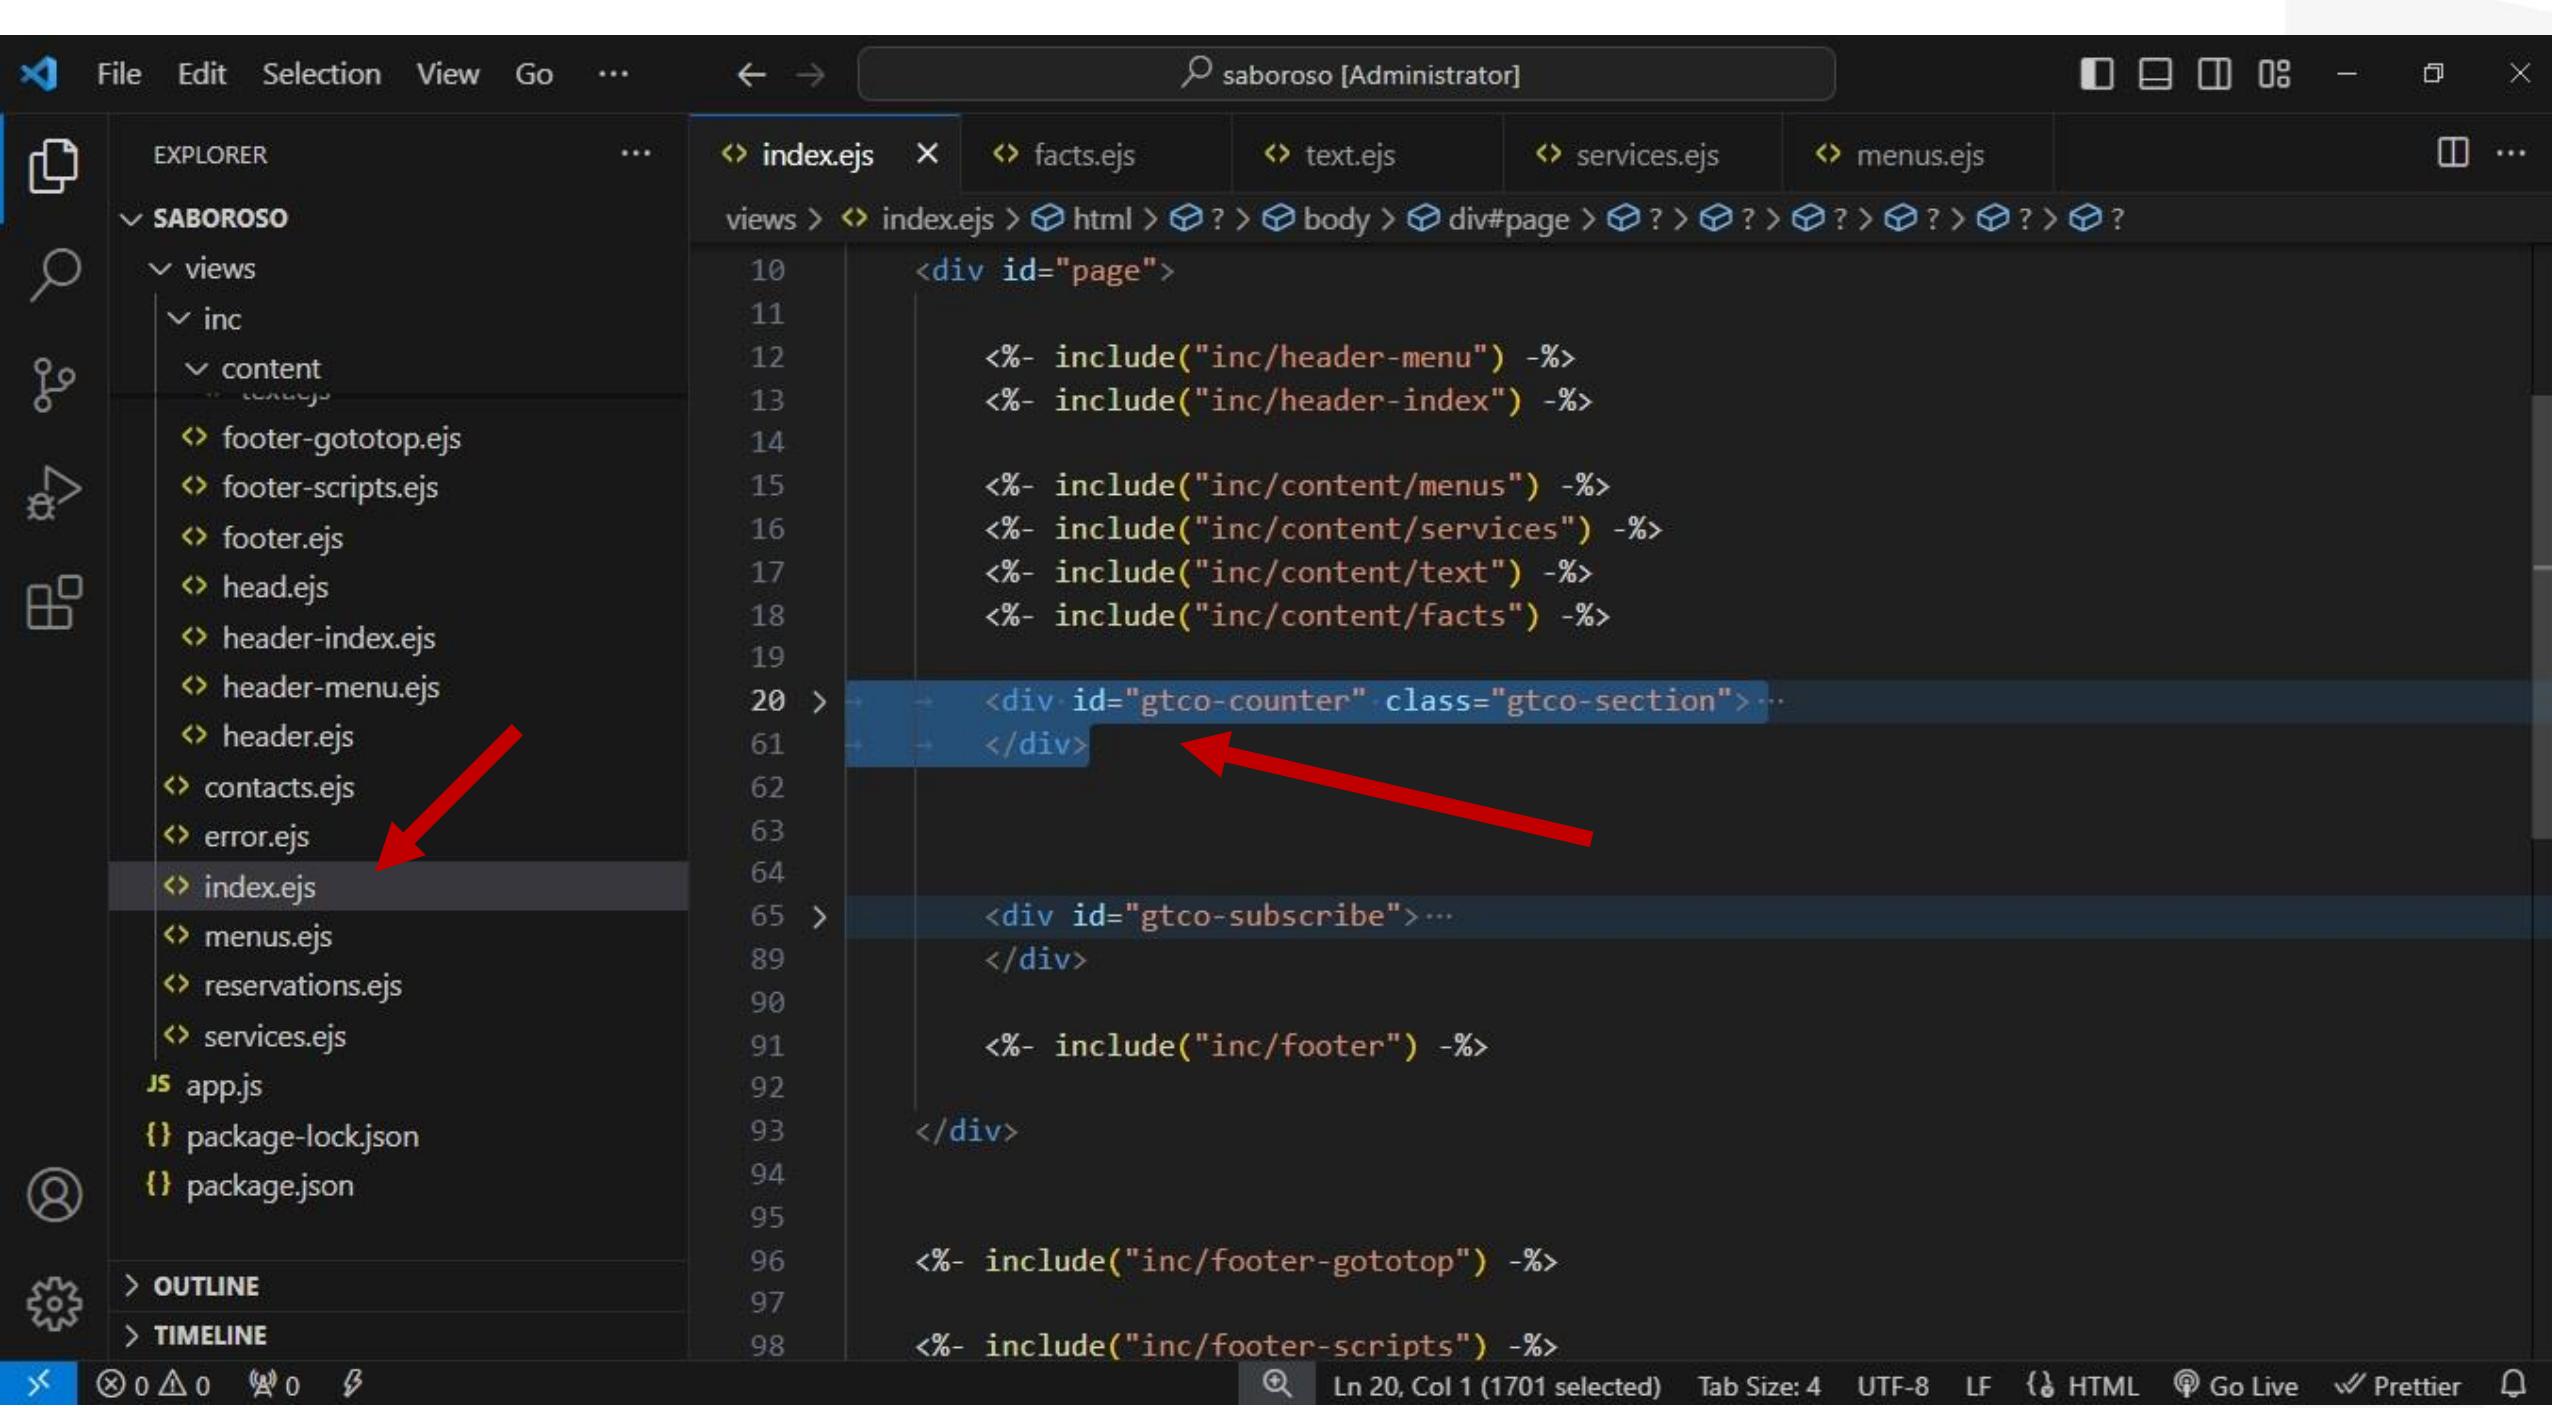

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO

- views
- inc
- content
- footer-gototop.ejs
- footer-scripts.ejs
- footer.ejs
- head.ejs
- header-index.ejs
- header-menu.ejs
- header.ejs
- contacts.ejs
- error.ejs
- index.ejs
- menus.ejs
- reservations.ejs
- services.ejs

JS app.js

{ package-lock.json

{ package.json

> OUTLINE

> TIMELINE

index.ejs facts.ejs text.ejs services.ejs menus.ejs

views > index.ejs > html > body > div#page > ? > ? > ? > ? > ? > ?

```
10 <div id="page">
11
12     <%- include("inc/header-menu") -%>
13     <%- include("inc/header-index") -%>
14
15     <%- include("inc/content/menus") -%>
16     <%- include("inc/content/services") -%>
17     <%- include("inc/content/text") -%>
18     <%- include("inc/content/facts") -%>
19
20 >     <div id="gtco-counter" class="gtco-section">...
61 >     </div>
62
63
64
65 >     <div id="gtco-subscribe">...
89 >     </div>
90
91     <%- include("inc/footer") -%>
92
93 >     </div>
94
95
96     <%- include("inc/footer-gototop") -%>
97
98     <%- include("inc/footer-scripts") -%>
```

Ln 20, Col 1 (1701 selected) Tab Size: 4 UTF-8 LF { HTML Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

- routes
- users.js
- views
- inc
- content
 - facts.ejs
 - menus.ejs
 - services.ejs
 - text.ejs
- footer-gototop.ejs
- footer-scripts.ejs
- footer.ejs
- head.ejs
- header-index.ejs
- header-menu.ejs
- header.ejs
- contacts.ejs
- error.ejs
- index.ejs
- menus.ejs

> OUTLINE

> TIMELINE

views > index.ejs > html > body > div#page > ? > ? > ? > ? > ? > ?

```
10 <div id="page">
11
12     <%- include("inc/header-menu") -%>
13     <%- include("inc/header-index") -%>
14
15     <%- include("inc/content/menus") -%>
16     <%- include("inc/content/services") -%>
17     <%- include("inc/content/text") -%>
18     <%- include("inc/content/facts") -%>
19
20
21
22
23     > <div id="gtco-subscribe">...
24     </div>
25
26     <%- include("inc/footer") -%>
27
28 </div>
29
30
31
32
33
34     <%- include("inc/footer-gototop") -%>
35
36     <%- include("inc/footer-scripts") -%>
```

Ln 20, Col 1 Tab Size: 4 UTF-8 LF { HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Top Bar:** Back, Forward, Search bar (saboroso [Administrator]), Window controls (minimize, maximize, close), and a tab bar with tabs for index.ejs, facts.ejs (highlighted in blue), text.ejs, services.ejs, and menus.ejs.
- Left Sidebar (EXPLORER):** Shows a tree view of the project structure under the 'SABOROSO' root.
 - routes
 - users.js
 - views
 - inc
 - content (fact.ejs is selected)
 - text.ejs
 - services.ejs
 - scripts.ejs
 - header.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
- Code Editor:** Displays the content of the selected file, fact.ejs.

```
<div id="gtco-counter" class="gtco-section">
  <div class="gtco-container">
    <div class="row">
      <div class="col-md-8 col-md-offset-2 text-center gtco-heading animate-box">
        <h2 class="cursive-font primary-color">Fatos</h2>
        <p>Delegadis gente finis, bibendum egestas augue arcu ut est. Cevadis im ampola pa arma uma pindureta!</p>
      </div>
    </div>
    <div class="row">
      <div class="col-md-3 col-sm-6 animate-box" data-animate-effect="fadeInUp">
        <div class="feature-center">
          <span class="counter js-counter" data-from="0" data-to="5" data-speed="5000" data-refresh-interval="50">1</span>
          <span class="counter-label">Avaliação Média</span>
        </div>
      </div>
      <div class="col-md-3 col-sm-6 animate-box" data-animate-effect="fadeInUp">
        <div class="feature-center">
          <span class="counter js-counter" data-from="0" data-to="43" data-speed="5000" data-refresh-interval="50">1</span>
          <span class="counter-label">Opções de Pratos</span>
        </div>
      </div>
    </div>
  </div>
</div>
```
- Bottom Status Bar:** Line 42, Col 7, Spaces: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Fullscreen, ...
- Explorer:** Shows a project structure under "SABOROSO".
 - routes: users.js
 - views: inc, content
 - content: facts.ejs (selected)
 - menus.ejs
 - services.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
- Code Editor:** The current file is facts.ejs. The code is an EJS template for a counter section.

```
<div class="feature-center">
  <span class="counter js-counter" data-from="0" data-to="43"
    data-speed="5000" data-refresh-interval="50">1</span>
  <span class="counter-label">Opções de Pratos</span>
</div>
<div class="col-md-3 col-sm-6 animate-box" data-animate-effect="fadeInUp">
  <div class="feature-center">
    <span class="counter js-counter" data-from="0" data-to="32"
      data-speed="5000" data-refresh-interval="50">1</span>
    <span class="counter-label">Chefes de Cozinha</span>
  </div>
  <div class="col-md-3 col-sm-6 animate-box" data-animate-effect="fadeInUp">
    <div class="feature-center">
      <span class="counter js-counter" data-from="0" data-to="1985"
        data-speed="5000" data-refresh-interval="50">1</span>
      <span class="counter-label">Desde</span>
    </div>
  </div>
</div>
</div>
```
- Status Bar:** Ln 42, Col 7, Spaces: 4, UTF-8, CRLF, HTML, Go Live, Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Minimize, Maximize, Close, Minimize, Maximize, Close.
- Left Sidebar (EXPLORER):**
 - SABOROSO
 - routes
 - users.js
 - views
 - inc
 - content
 - facts.ejs
 - menus.ejs
 - services.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - OUTLINE
 - TIMELINE
- Current File:** index.ejs
- Code Editor:** The code is an EJS template. The current line (Line 19) is highlighted with a blue background and contains the following code:

```
<%- include("inc/content/subscribe") -%>
```

A red arrow points from the left sidebar to the "index.ejs" entry in the Explorer bar. Another red arrow points from the right side of the screen to the highlighted line in the code editor.
- Bottom Status Bar:** Ln 19, Col 1 (42 selected) Tab Size: 4 UTF-8 LF { HTML Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

- > bin
- < inc
 - JS db.js
 - > node_modules
 - > public
- < routes
 - JS index.js
 - JS users.js
- < views
 - < inc
 - < content
 - facts.ejs
 - menus.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs

OUTLINE

TIMELINE

views > inc > content > subscribe.ejs

1

Ln 1, Col 1 Spaces: 4 CRLF { HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Minimize, Maximize, Close, Minimize, Maximize, Close.
- Left Sidebar (EXPLORER):**
 - SABOROSO
 - views
 - inc
 - content
 - index.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs** (highlighted with a red arrow)
 - menus.ejs
 - reservations.ejs
 - services.ejs
- app.js
- package-lock.json
- package.json

- Right Panel (Editor):**
- File tabs: index.ejs, subscribe.ejs, facts.ejs, text.ejs, services.ejs, menus.ejs.
- Path: views > index.ejs
- Code content:

```
10 <div id="page">
11     <%- include("inc/header-menu") -%>
12     <%- include("inc/header-index") -%>
13
14     <%- include("inc/content/menus") -%>
15     <%- include("inc/content/services") -%>
16     <%- include("inc/content/text") -%>
17     <%- include("inc/content/facts") -%>
18     <%- include("inc/content/subscribe") -%>
19
20
21
22
23
24 >     <div id="gtco-subscribe">...
25 >         </div>
26
27
28     <%- include("inc/footer") -%>
29
30 >     </div>
31
32
33
34
35     <%- include("inc/footer-gototop") -%>
36
37     <%- include("inc/footer-scripts") -%>
```
- Line numbers: 10 to 58.
- Status bar: Ln 24, Col 1 (838 selected), Tab Size: 4, UTF-8, LF, HTML, Go Live, Prettier.

A screenshot of a code editor interface, likely Visual Studio Code, displaying an EJS (Embedded JavaScript) file named `index.ejs`. The file is located in a folder structure under the `SABOROSO` view, specifically in the `views` directory.

The code in the file is as follows:

```
<div class="gtco-loader"></div>
<div id="page">
  <%- include("inc/header-menu") -%>
  <%- include("inc/header-index") -%>
  <%- include("inc/content/menus") -%>
  <%- include("inc/content/services") -%>
  <%- include("inc/content/text") -%>
  <%- include("inc/content/facts") -%>
  <%- include("inc/content/subscribe") -%>
  <%- include("inc/footer") -%>
</div>
<%- include("inc/footer-gototop") -%>
<%- include("inc/footer-scripts") -%>
</body>
</html>
```

A large red arrow points from the bottom right towards the line of code `<%- include("inc/footer") -%>`, highlighting it. The code editor's status bar at the bottom indicates the current line is 21, column 1, with tab size 4, UTF-8 encoding, and LF line endings.

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer Panel:** Shows a tree structure under the 'SABOROSO' root:
 - routes
 - views
 - inc
 - content
 - facts.ejs
 - menus.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
- Breadcrumb Navigation:** views > inc > content > subscribe.ejs > div#gtco-subscribe
- Code Editor:** The current file is 'subscribe.ejs'. The code displays a subscribe form with a heading and a form field for email input.
- Status Bar:** Ln 25, Col 7, Spaces: 4, UTF-8, CRLF, HTML, Go Live, Prettier

```
<div id="gtco-subscribe">
  <div class="gtco-container">
    <div class="row animate-box">
      <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
        <h2 class="cursive-font">Se inscrever</h2>
        <p>Receba as novidades do nosso restaurante</p>
      </div>
    </div>
    <div class="row animate-box">
      <div class="col-md-8 col-md-offset-2">
        <form class="form-inline">
          <div class="col-md-6 col-sm-6">
            <div class="form-group">
              <label for="email" class="sr-only">E-mail</label>
              <input type="email" class="form-control" id="email" placeholder="Seu E-mail">
            </div>
          </div>
          <div class="col-md-6 col-sm-6">
            <button type="submit" class="btn btn-default btn-block">Inscrever</button>
          </div>
        </form>
      </div>
    </div>
  </div>
</div>
```

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

- routes
- views
 - inc
 - content
 - facts.ejs
 - menus.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs

views > index.ejs > html > body > div#page > ? > ? > ? > ? > ? > ? > ? > ?

```
8     <div class="gtco-loader"></div>
9
10    <div id="page">
11
12        <%- include("inc/header-menu") -%>
13        <%- include("inc/header-index") -%>
14
15        <%- include("inc/content/menus") -%>
16        <%- include("inc/content/services") -%>
17        <%- include("inc/content/text") -%>
18        <%- include("inc/content/facts") -%>
19        <%- include("inc/content/subscribe") -%>
20
21        <%- include("inc/footer") -%>
22
23    </div>
24
25
26        <%- include("inc/footer-gototop") -%>
27
28        <%- include("inc/footer-scripts") -%>
29
30    </body>
31
32    </html>
33
```

Ln 21, Col 1 Tab Size: 4 UTF-8 LF { HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Fullscreen, ...
- Explorer Sidebar:** Shows a file tree under the 'SABOROSO' root.
 - routes
 - views
 - index.ejs (selected)
 - content (highlighted with a red arrow)
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
- Code Editor:** The current file is 'index.ejs'. The code is an EJS template for a page named 'page'. It includes sections for header menu, services, text, facts, and footer, and also includes footer-gototop and footer-scripts.
- Status Bar:** Ln 26, Col 42, Tab Size: 4, UTF-8, LF, HTML, Go Live, Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO routes views inc content footer-gototop.ejs footer-scripts.ejs footer.ejs head.ejs header-index.ejs header-menu.ejs header.ejs contacts.ejs error.ejs index.ejs menus.ejs reservations.ejs services.ejs app.js package-lock.json package.json > OUTLINE > TIMELINE

contacts.ejs x

views > contacts.ejs > html > ? > body > div#page > ? > ?

```
1 <!DOCTYPE HTML>
2 <html>
3   <%- include("inc/head") -%>
4   <body>
5     <div class="gtco-loader"></div>
6
7     <div id="page">
8
9       <%- include("inc/header-menu") -%>
10      <%- include("inc/header") -%>
11
12      <div class="gtco-section">
13        <div class="gtco-container">
14          <div class="row">
15            <div class="col-md-12">
16              <div class="col-md-6 animate-box">
17                <h3>Entre em Contato</h3>
18                <form action="#">
19                  <div class="row form-group">
20                    <div class="col-md-12">
21                      <label class="sr-only" for="name">Nome</label>
22                      <input type="text" id="name" class="form-control" placeholder="Seu nome">
23                    </div>
```

Ln 65, Col 1 (124 selected) Tab Size: 4 CRLF HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Fullscreen, Split, ...
- Explorer Panel (Left):** Shows a tree view of the project structure under "SABOROSO".
 - routes
 - views
 - inc
 - content
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
- Code Editor (Right):** The file "contacts.ejs" is open.

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>

  <div class="gtco-loader"></div>

  <div id="page">

    <%- include("inc/header-menu") -%>
    <%- include("inc/header") -%>

    <div class="gtco-section">...</div>

    <%- include("inc/footer") -%>
  </div>

  <%- include("inc/footer-gototop") -%>
  <%- include("inc/footer-scripts") -%>
  </body>
</html>
```

A red arrow points to line 13, which contains the opening tag of a new section: `<div class="gtco-section">...`.

- Status Bar:** Ln 13, Col 1 (1727 selected) Tab Size: 4 CRLF { HTML Go Live Prettier

A screenshot of a code editor interface, likely Visual Studio Code, showing a dark-themed workspace. The top navigation bar includes File, Edit, Selection, View, Go, and a three-dot menu. A search bar at the top right contains the text "saboroso [Administrator]". The left sidebar features a "EXPLORER" view with a tree structure of project files:

- SABOROSO
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - content
 - contacts.ejs
 - facts.ejs
 - menus.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
- OUTLINE
- TIMELINE

A red arrow points from the bottom of the "content" folder in the tree to the "contacts.ejs" file listed below it. The status bar at the bottom showsLn 1, Col 1, Spaces: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer:** Shows a tree view of files and folders under the SABOROSO project, including views, inc, content, footer-gototop.ejs, footer-scripts.ejs, footer.ejs, head.ejs, header-index.ejs, header-menu.ejs, header.ejs, contacts.ejs (selected), error.ejs, index.ejs, menus.ejs, reservations.ejs, services.ejs, app.js, package-lock.json, and package.json.
- Code Editor:** The contacts.ejs file is open. The code is an EJS template:

```
1  <!DOCTYPE HTML>
2  <html>
3  <%- include("inc/head") -%>
4  <body>
5
6  <div class="gtco-loader"></div>
7
8  <div id="page">
9
10 <%- include("inc/header-menu") -%>
11 <%- include("inc/header") -%>
12
13 > <div class="gtco-section">...</div>
14
15 <%- include("inc/footer") -%>
16
17 </div>
18
19 <%- include("inc/footer-gototop") -%>
20
21 <%- include("inc/footer-scripts") -%>
22
23 </body>
24
25 </html>
```
- Status Bar:** Ln 13, Col 1 (1727 selected) Tab Size: 4 CRLF { HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Fullscreen, ...
- Explorer:** Shows a tree view of files and folders under the "SABOROSO" project, including "views", "inc", and various EJS files like "index.ejs", "contacts.ejs", etc.
- Code Editor:** The current file is "contacts.ejs". The code is as follows:

```
1  <!DOCTYPE HTML>
2  <html>
3  |   <%- include("inc/head") -%>
4  |   <body>
5
6  |       <div class="gtco-loader"></div>
7
8  |       <div id="page">
9
10 |           <%- include("inc/header-menu") -%>
11 |           <%- include("inc/header") -%>
12
13 |           <%- include("inc/footer") -%>
14
15 |       </div>
16
17 |   </body>
18
19 |</html>
```
- Status Bar:** Ln 13, Col 1, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Fullscreen, Zoom, Refresh, Save, Undo, Redo.
- Explorer:** Shows the project structure under "SABOROSO".
 - bin
 - inc
 - db.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - content
 - contacts.ejs
 - facts.ejs
 - menus.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - OUTLINE
 - TIMELINE
- Code Editor:** The current file is "contacts.ejs...\\content".

```
views > inc > content > contacts.ejs > div.gtco-section
1   <div class="gtco-section">
2     <div class="gtco-container">
3       <div class="row">
4         <div class="col-md-12"> ← Red arrow points here
5           <div class="col-md-6 animate-box">
6             <h3>Entre em Contato</h3>
7             <form action="#">
8               <div class="row form-group">
9                 <div class="col-md-12">
10                <label class="sr-only" for="name">Nome</label>
11                <input type="text" id="name" class="form-control" placeholder="Seu nome">
12              </div>
13            </div>
14            <div class="row form-group">
15              <div class="col-md-12">
16                <label class="sr-only" for="email">E-mail</label>
17                <input type="text" id="email" class="form-control" placeholder="Endereço de e-mail">
18              </div>
19            </div>
20            <div class="row form-group">
21              <div class="col-md-12">
22                <label class="sr-only" for="message">Mensagem</label>
```
- Bottom Bar:** Line numbers (Ln 1 to Ln 24), Status bar (Ln 51, Col 7, Spaces: 4, UTF-8, CRLF, HTML, Go Live, Prettier).

A screenshot of a code editor interface, likely Visual Studio Code, showing an EJS template file named `contacts.ejs`. The file is located in the `views/inc/content` directory. The code contains HTML and EJS logic, including a form for sending a message and contact information.


```
<input type="submit" value="Enviar" class="btn btn-primary">
</div>
</form>
</div>
<div class="col-md-5 col-md-push-1 animate-box">
  <div class="gtco-contact-info">
    <h3>Informações de Contato</h3>
    <ul>
      <li class="address">Avenida, R. 1234, 56 - 1a andar - Centro, Odimais - RG, 00000-000</li>
      <li class="phone"><a href="tel://11987654321">(11) 98765-4321</a></li>
      <li class="email"><a href="mailto:contato@sproviders.com.br">contato@sproviders.com.br</a></li>
      <li class="url"><a href="#">sproviders.com.br</a></li>
    </ul>
  </div>
</div>
</div>
</div>
</div>
```

The cursor is positioned at the end of the line containing the closing tag for the fourth list item (``). A large red arrow points from the bottom right towards this cursor position.

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Search icon, Minimize, Maximize, Close.
- Explorer:** Shows a tree view of files and folders under "SABOROSO".
 - views
 - inc
 - content
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs** (highlighted)
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
- Code Editor:** The "contacts.ejs" tab is active.

```
<views> <contacts.ejs> <html> <?> <body> <div#page> <?> <?>  
1  <!DOCTYPE HTML>  
2  <html>  
3  |  <%- include("inc/head") -%>  
4  |  <body>  
5  |  
6  |  <div class="gtco-loader"></div>  
7  |  
8  |  <div id="page">  
9  |  
10 |  <%- include("inc/header-menu") -%>  
11 |  <%- include("inc/header") -%>  
12 |  
13 |  <%- include("inc/content/contacts") -%>  
14 |  
15 |  <%- include("inc/footer") -%>  
16 |  
17 |  </div>  
18 |  
19 |  
20 |  <%- include("inc/footer-gototop") -%>  
21 |  
22 |  <%- include("inc/footer-scripts") -%>  
23 |  
24 |  </body>  
25 |</html>
```
- Status Bar:** Ln 13, Col 1 (40 selected), Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

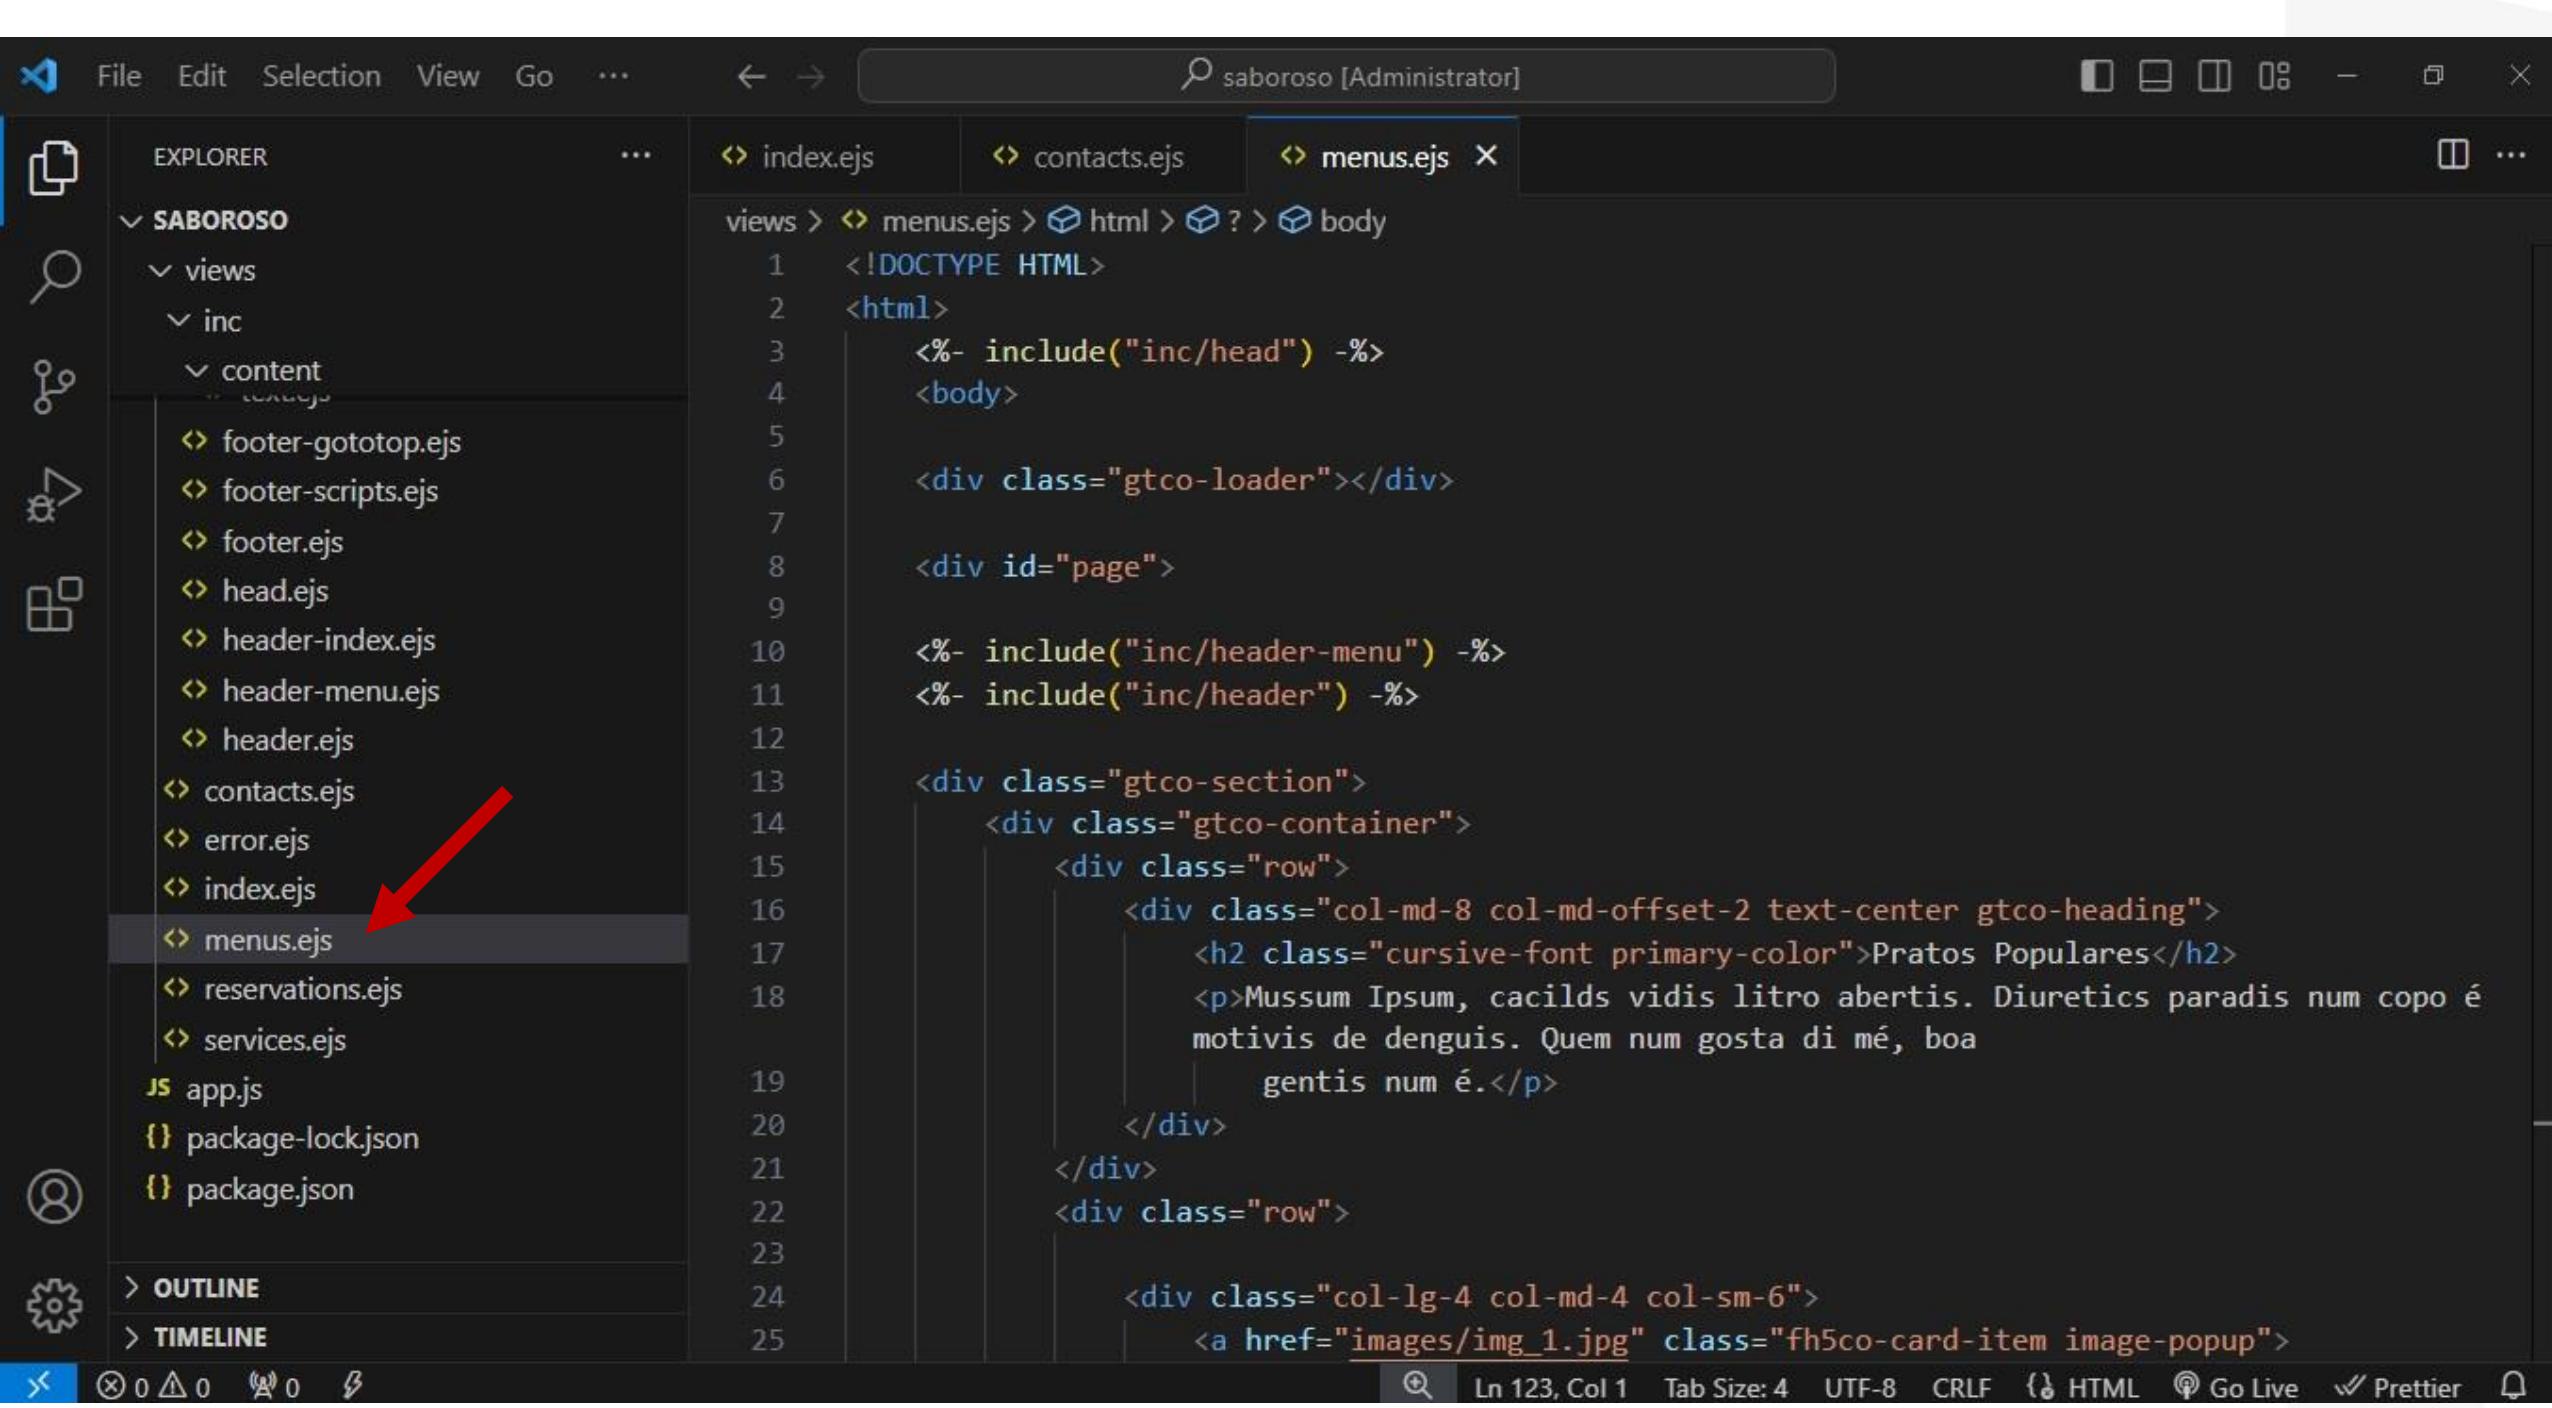

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Fullscreen, ...
- Explorer Sidebar:** Shows a tree view of files and folders under the project "SABOROSO".
 - views
 - inc
 - content
 - header.ejs
 - header-index.ejs
 - header-menu.ejs
 - index.ejs
 - menu.ejs
 - reservations.ejs
 - services.ejs
 - footer.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
- Outline Sidebar:** Shows sections > OUTLINE and > TIMELINE.
- Code Editor:** The current file is "menus.ejs". The code content is as follows:

```
1  <!DOCTYPE HTML>
2  <html>
3  |  <%- include("inc/head") -%>
4  |  <body>
5
6  |  <div class="gtco-loader"></div>
7
8  |  <div id="page">
9
10 |  <%- include("inc/header-menu") -%>
11 |  <%- include("inc/header") -%>
12
13 |  <div class="gtco-section">
14 |    <div class="gtco-container">
15 |      <div class="row">
16 |        <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
17 |          <h2 class="cursive-font primary-color">Pratos Populares</h2>
18 |          <p>Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é
19 |          motivis de denguis. Quem num gosta di mé, boa
20 |            gentis num é.</p>
21 |        </div>
22 |      </div>
23 |      <div class="row">
24 |        <div class="col-lg-4 col-md-4 col-sm-6">
25 |          <a href="images/img_1.jpg" class="fh5co-card-item image-popup">
```
- Bottom Status Bar:** Includes icons for search, file operations, and tabs, followed by Ln 123, Col 1, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier, and a refresh icon.

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

views

inc

content

footer-gototop.ejs

footer-scripts.ejs

footer.ejs

head.ejs

header-index.ejs

header-menu.ejs

header.ejs

contacts.ejs

error.ejs

index.ejs

menus.ejs

reservations.ejs

services.ejs

app.js

package-lock.json

package.json

OUTLINE

TIMELINE

index.ejs contacts.ejs menus.ejs

views > menus.ejs > html ? > body > div#page ? > ? > div.gtco-section > div.gtco-container > div.row

```
1  <!DOCTYPE HTML>
2  <html>
3  |   <%- include("inc/head") -%>
4  |   <body>
5  |
6  |       <div class="gtco-loader"></div>
7  |
8  |       <div id="page">
9  |
10 |           <%- include("inc/header-menu") -%>
11 |           <%- include("inc/header") -%>
12 |
13 |           <div class="gtco-section">
14 |               <div class="gtco-container">
15 |                   <div class="row">
16 |                       <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
17 |                           <h2 class="cursive-font primary-color">Pratos Populares</h2>
18 |                           <p>Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é
19 |                               motivis de denguis. Quem num gosta di mé, boa
20 |                                   gentis num é.</p>
21 |                   </div>
22 |               </div>
23 |
24 |               <div class="col-lg-4 col-md-4 col-sm-6">
25 |                   <a href="images/img_1.jpg" class="fh5co-card-item image-popup">
```

Ln 17, Col 60 (16 selected) Tab Size: 4 UTF-8 CRLF HTML Go Live Prettier

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>
    <div class="gtco-loader"></div>
    <div id="page">
      <%- include("inc/header-menu") -%>
      <%- include("inc/header") -%>
      <div class="gtco-section">...</div>
      <div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)" data-stellar-background-ratio="0.5">
        <div class="overlay"></div>
        <div class="gtco-container text-center">
          <div class="display-t">
            <div class="display-tc">
              <h1>&ldquo; Delegadis gente finis, bibendum egestas augue arcu ut est. Cevadis im ampola pa arma uma pindureta!&rdquo;</h1>
              <p>&mdash; Mussum, Humorista.</p>
            </div>
          </div>
        </div>
      </div>
    </div>
  </body>
</html>
```

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

views

inc

content

footer-gototop.ejs

footer-scripts.ejs

footer.ejs

head.ejs

header-index.ejs

header-menu.ejs

header.ejs

contacts.ejs

error.ejs

index.ejs

menus.ejs

reservations.ejs

services.ejs

app.js

package-lock.json

package.json

OUTLINE

TIMELINE

index.ejs contacts.ejs menus.ejs

views > menus.ejs > html ? body div#page ? ? ?

```
1  <!DOCTYPE HTML>
2  <html>
3    <%- include("inc/head") -%>
4    <body>
5
6      <div class="gtco-loader"></div>
7
8      <div id="page">
9
10        <%- include("inc/header-menu") -%>
11        <%- include("inc/header") -%>
12
13        <div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)" data-stellar-background-ratio="0.5">
14          <div class="overlay"></div>
15          <div class="gtco-container text-center">
16            <div class="display-t">
17              <div class="display-tc">
18                <h1>&ldquo; Delegadis gente finis, bibendum egestas augue arcu ut est.
19                  Cevadis im ampola pa arma uma pindureta!&rdquo;</h1>
20                <p>&mdash; Mussum, Humorista.</p>
21              </div>
22            </div>
23          </div>
24        </div>
```

Ln 13, Col 1 Tab Size: 4 UTF-8 CRLF { HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer:** Shows a tree view of files and folders under the 'SABOROSO' project, including 'views' (index.ejs, contacts.ejs, menus.ejs), 'inc' (content, footer-gototop.ejs, footer-scripts.ejs, footer.ejs, head.ejs, header-index.ejs, header-menu.ejs, header.ejs), and other files like app.js, package-lock.json, and package.json.
- Code Editor:** The 'menus.ejs' tab is active. The code is an EJS template:

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>

    <div class="gtco-loader"></div>

    <div id="page">

      <%- include("inc/header-menu") -%>
      <%- include("inc/header") -%>

      <%- include("inc/content/menus") -%>

      <div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)" data-stellar-background-ratio="0.5">
        <div class="overlay"></div>
        <div class="gtco-container text-center">
          <div class="display-t">
            <div class="display-tc">
              <h1>&ldquo; Delegadis gente finis, bibendum egestas augue arcu ut est. Cevadis im ampola pa arma uma pindureta!&rdquo;</h1>
              <p>&mdash; Mussum, Humorista.</p>
            </div>
          </div>
        </div>
      </div>
```
- Annotations:** A large red arrow points to the line of code: `<%- include("inc/content/menus") -%>`.
- Bottom Status Bar:** Shows line 13, column 1 (37 selected), Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbars:** Standard window control buttons (Minimize, Maximize, Close) and a tab bar with tabs for index.ejs, contacts.ejs, menus.ejs (selected), and others.
- Explorer:** Shows a tree view of files and folders under the project "SABOROSO". The "views" folder contains sub-folders "inc" and "content", and files like footer-gototop.ejs, footer-scripts.ejs, footer.ejs, head.ejs, header-index.ejs, header-menu.ejs, header.ejs, contacts.ejs, error.ejs, index.ejs, menus.ejs (selected), reservations.ejs, services.ejs, app.js, package-lock.json, and package.json.
- Code Editor:** The "menus.ejs" file is open. The code includes include statements for "inc/head", "inc/header-menu", "inc/header", and "inc/content/menus". It features a main container with a background image and an inner text area with a quote.

```
<%- include("inc/head") -%>
<body>

<div class="gtco-loader"></div>

<div id="page">

<%- include("inc/header-menu") -%>
<%- include("inc/header") -%>

<%- include("inc/content/menus") -%>

<div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)" data-stellar-background-ratio="0.5">
    <div class="overlay"></div>
    <div class="gtco-container text-center">
        <div class="display-t">
            <div class="display-tc">
                <h1>&ldquo; Delegadis gente finis, bibendum egestas augue arcu ut est.
                    Cevadis im ampola pa arma uma pindureta!&rdquo;</h1>
                <p>&mdash; Mussum, Humorista.</p>
            </div>
        </div>
    </div>
</div>
```
- Status Bar:** Shows line 20, column 132 (99 selected), Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

A red arrow points to the selected text block in the code editor, which contains the quote from Mussum: "Delegadis gente finis, bibendum egestas augue arcu ut est. Cevadis im ampola pa arma uma pindureta!"

A screenshot of the Visual Studio Code interface. The Explorer sidebar on the left shows a file tree with a node 'SABOROSO' expanded, containing 'views' and 'inc' folders. The 'inc' folder has a 'content' folder and several files: footer-gototop.ejs, footer-scripts.ejs, footer.ejs, head.ejs, header-index.ejs, header-menu.ejs, header.ejs, contacts.ejs, error.ejs, index.ejs, menus.ejs (which is selected and highlighted in grey), reservations.ejs, services.ejs, app.js, package-lock.json, and package.json. The Status Bar at the bottom shows 'Ln 15, Col 1 (471 selected)'.


The Editor tab bar at the top has three tabs: 'index.ejs', 'contacts.ejs', and 'menus.ejs'. The 'menus.ejs' tab is active. The code editor displays the 'menus.ejs' file with the following content:


```
views > menus.ejs > html > body > div#page > ? > ? > ?  
3 <%- include("inc/head") -%>  
4 <body>  
5  
6 <div class="gtco-loader"></div>  
7  
8 <div id="page">  
9  
10 <%- include("inc/header-menu") -%>  
11 <%- include("inc/header") -%>  
12  
13 <%- include("inc/content/menus") -%>  
14  
15 > <div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)" data-stellar-background-ratio="0.5">...</div>  
16  
17 <div id="gtco-subscribe">  
18 <div class="gtco-container">  
19 <div class="row animate-box">  
20 <div class="col-md-8 col-md-offset-2 text-center gtco-heading">  
21 <h2 class="cursive-font">Se inscrever</h2>  
22 <p>Receba as novidades do nosso restaurante</p>  
23 </div>  
24 </div>  
25 <div class="row animate-box">  
26 <div class="col-md-8 col-md-offset-2">
```


The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbars:** Standard Windows-style icons for minimize, maximize, and close.
- Left Sidebar (EXPLORER):**
 - SABOROSO folder
 - views
 - inc
 - content
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
 - OUTLINE and TIMELINE sections.
- Current File:** menus.ejs
- Code Content:**

```
views > menus.ejs > html > body > div#page > ? > ? > ?  
3   <%- include("inc/head") -%>  
4   <body>  
5  
6     <div class="gtco-loader"></div>  
7  
8     <div id="page">  
9  
10    <%- include("inc/header-menu") -%>  
11    <%- include("inc/header") -%>  
12  
13    <%- include("inc/content/menus") -%>  
14  
15    <div id="gtco-subscribe">  
16      <div class="gtco-container">  
17        <div class="row animate-box">  
18          <div class="col-md-8 col-md-offset-2 text-center gtco-heading">  
19            <h2 class="cursive-font">Se inscrever</h2>  
20            <p>Receba as novidades do nosso restaurante</p>  
21          </div>  
22        </div>  
23        <div class="row animate-box">  
24          <div class="col-md-8 col-md-offset-2">  
25            <form class="form-inline">  
26              <div class="col-md-6 col-sm-6">
```
- Bottom Status Bar:** Ln 15, Col 1, Tab Size: 4, CRLF, HTML, Go Live, Prettier

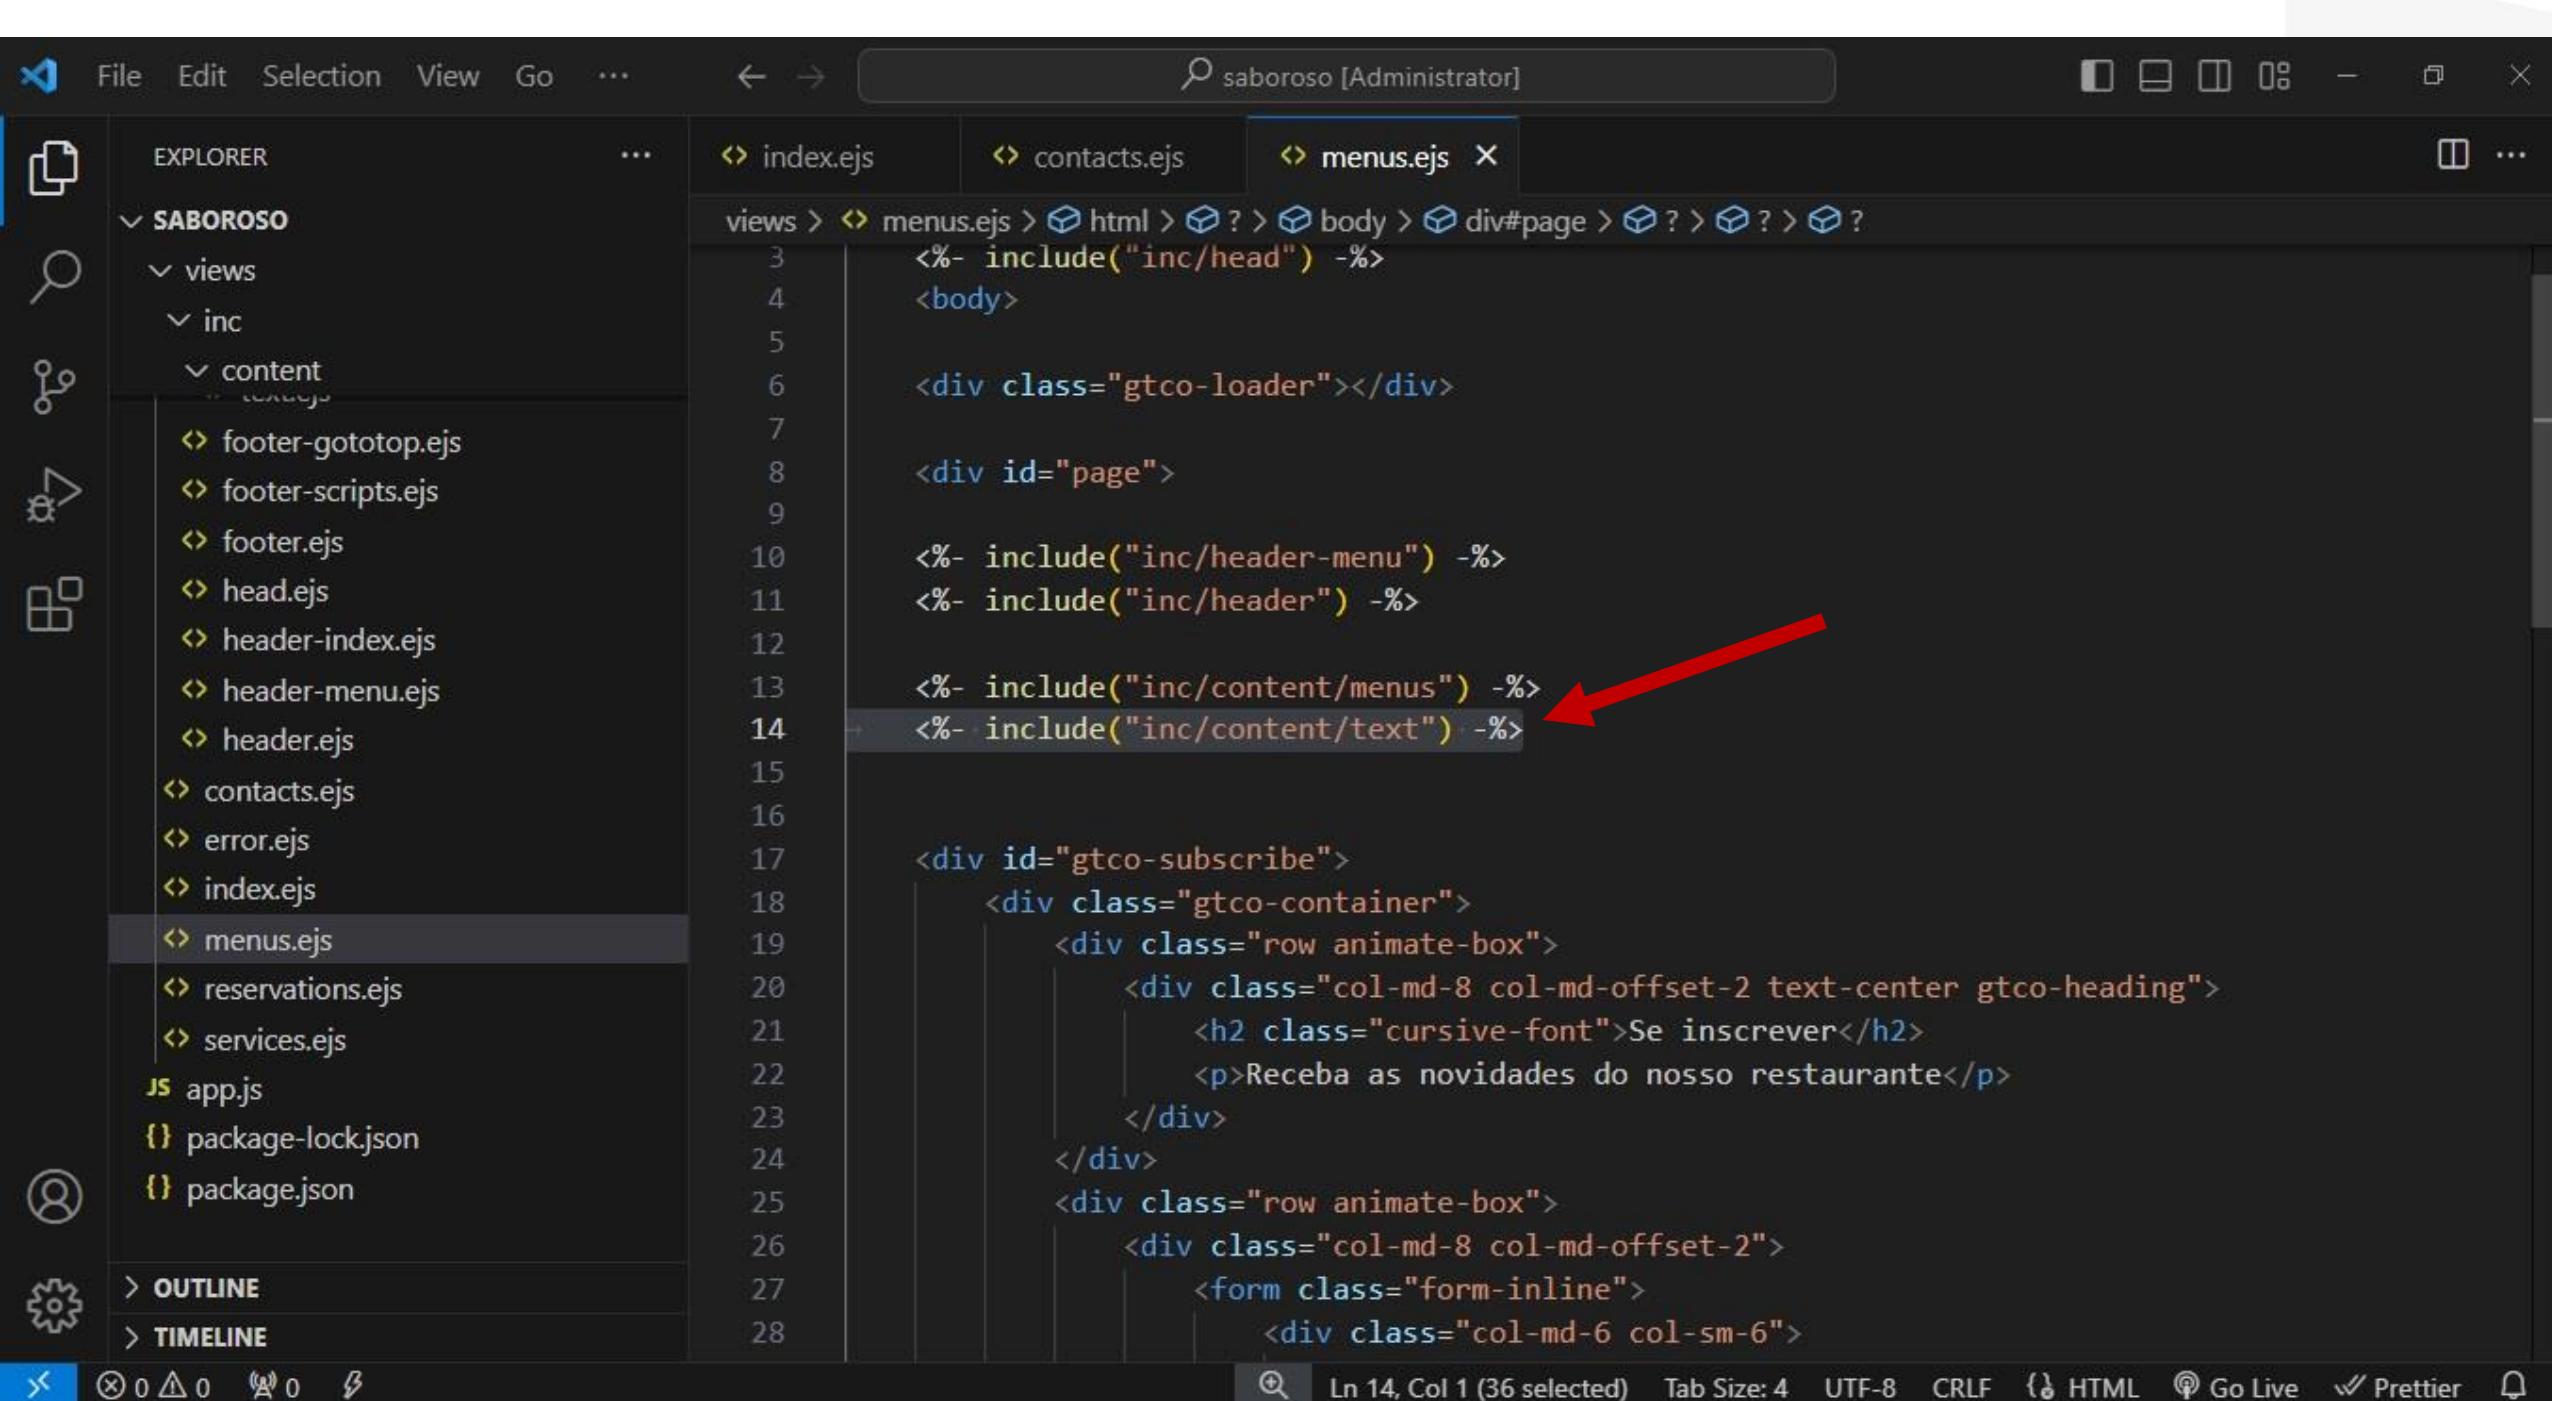

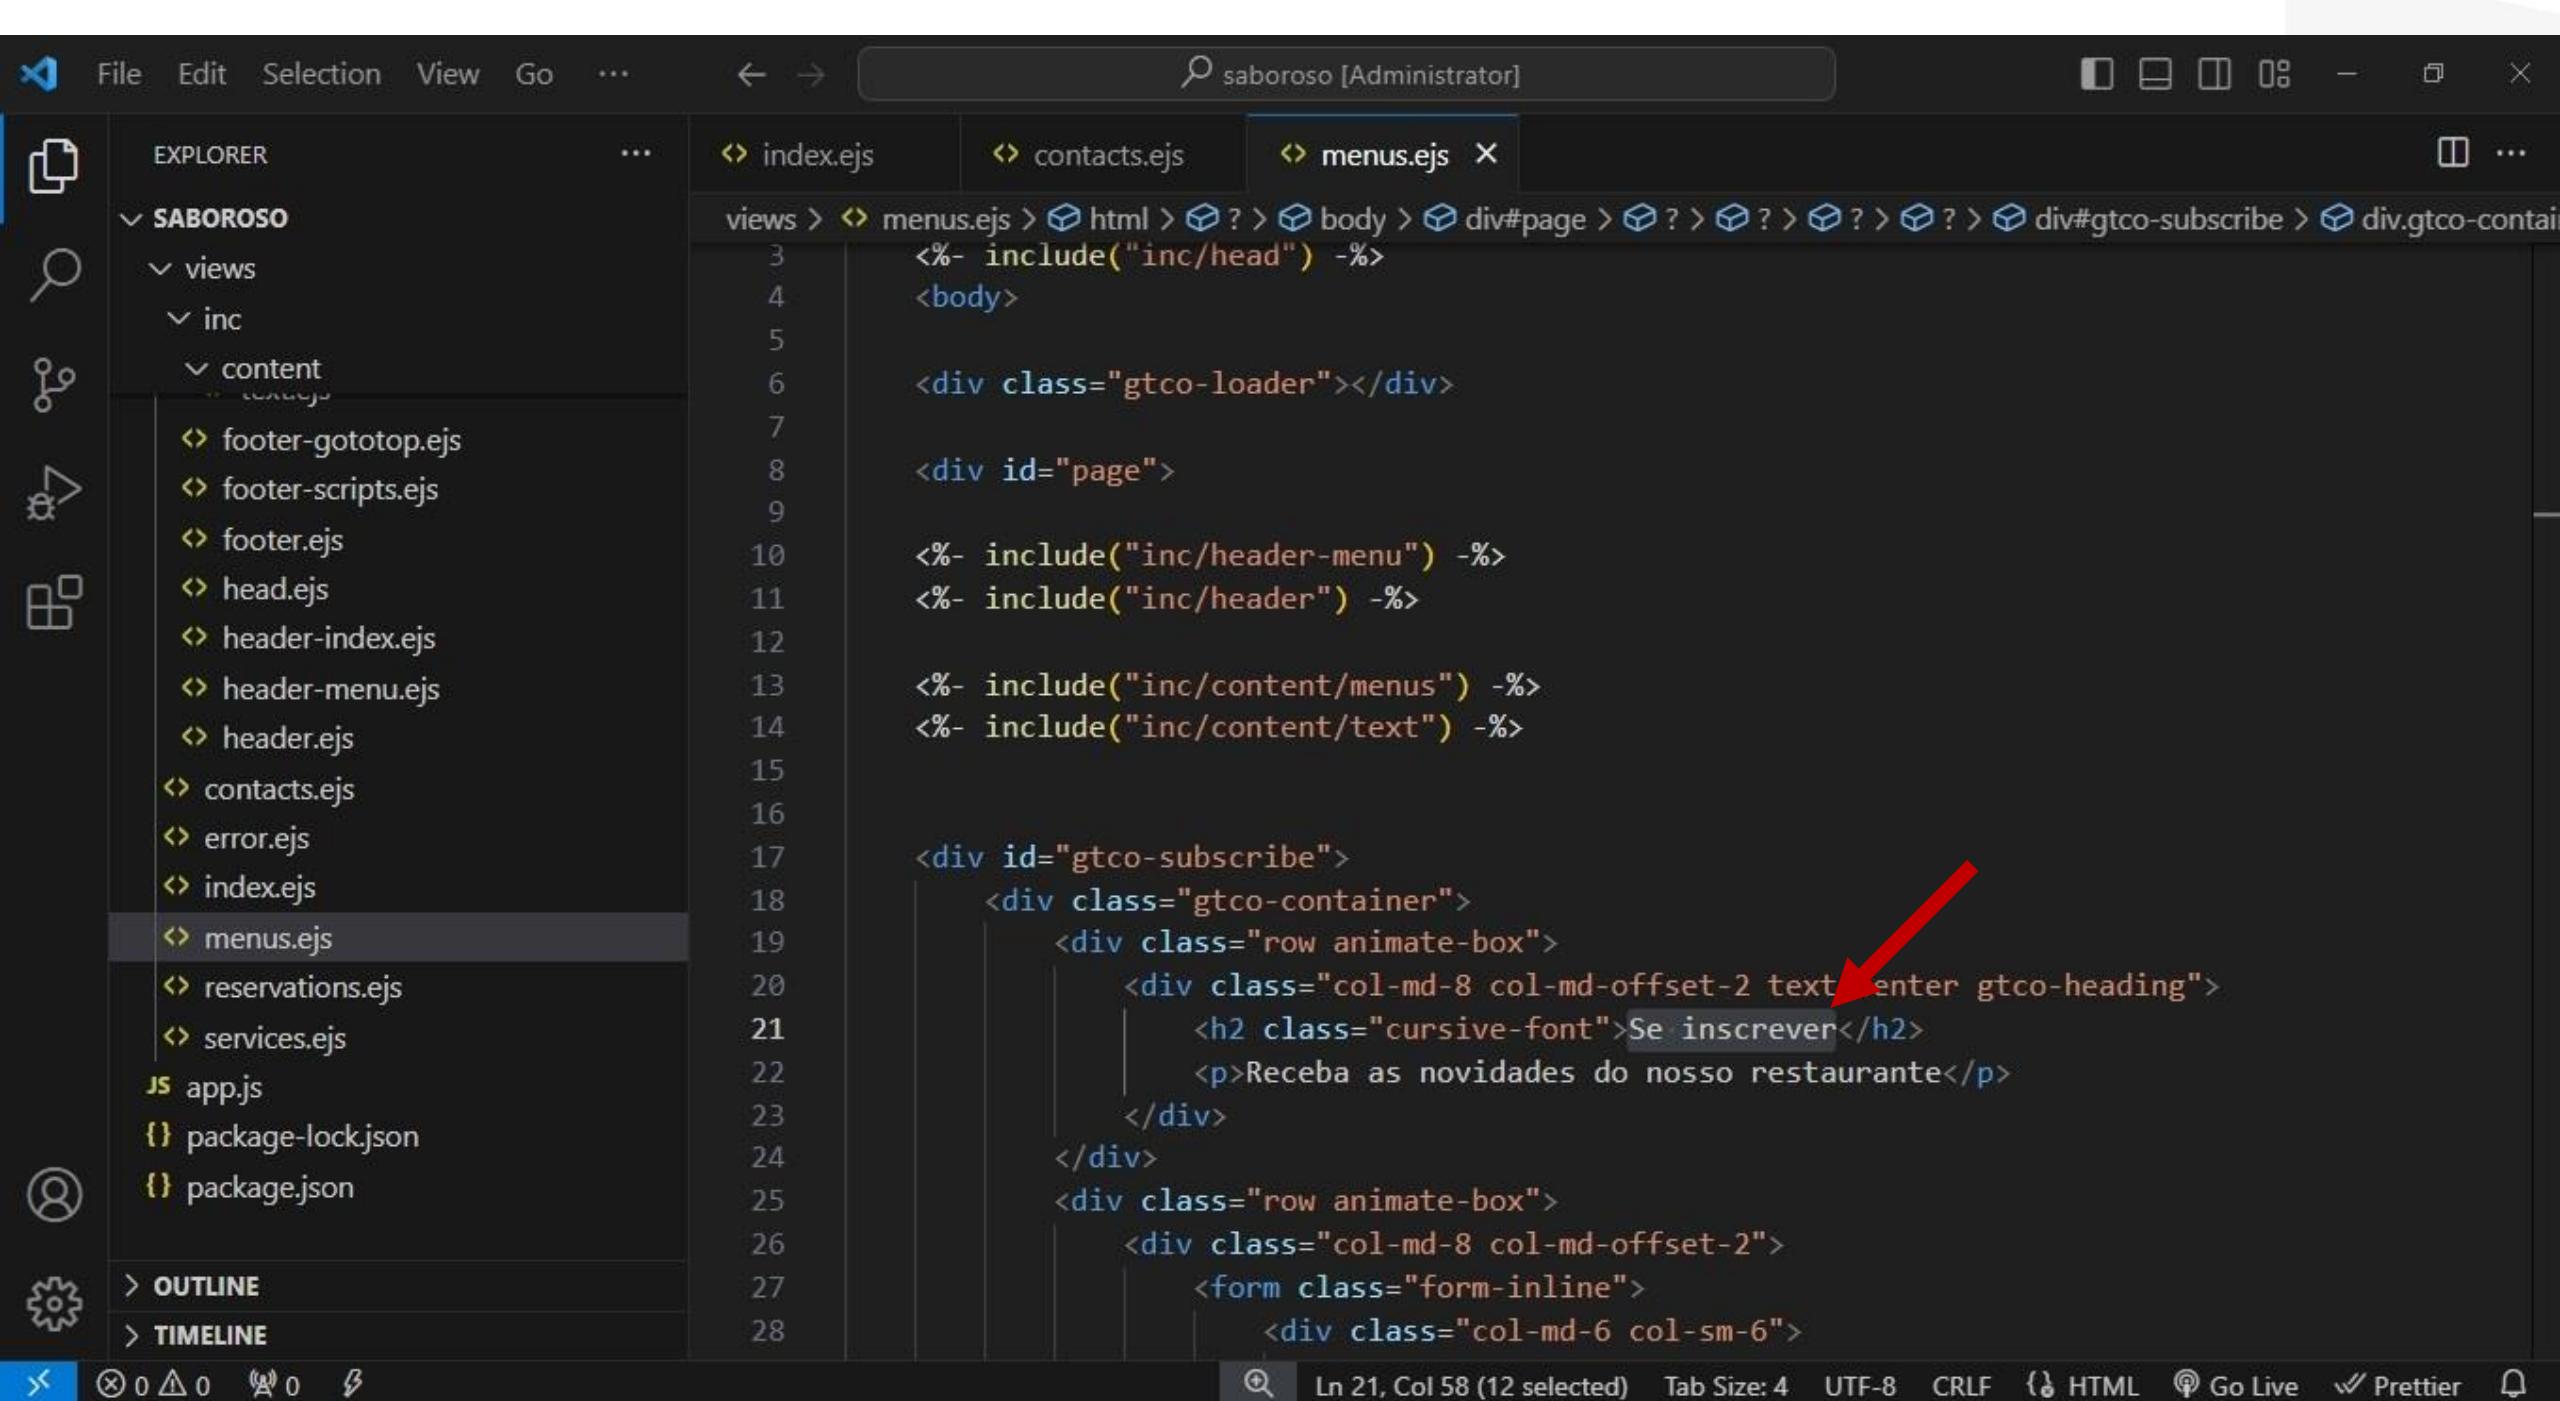

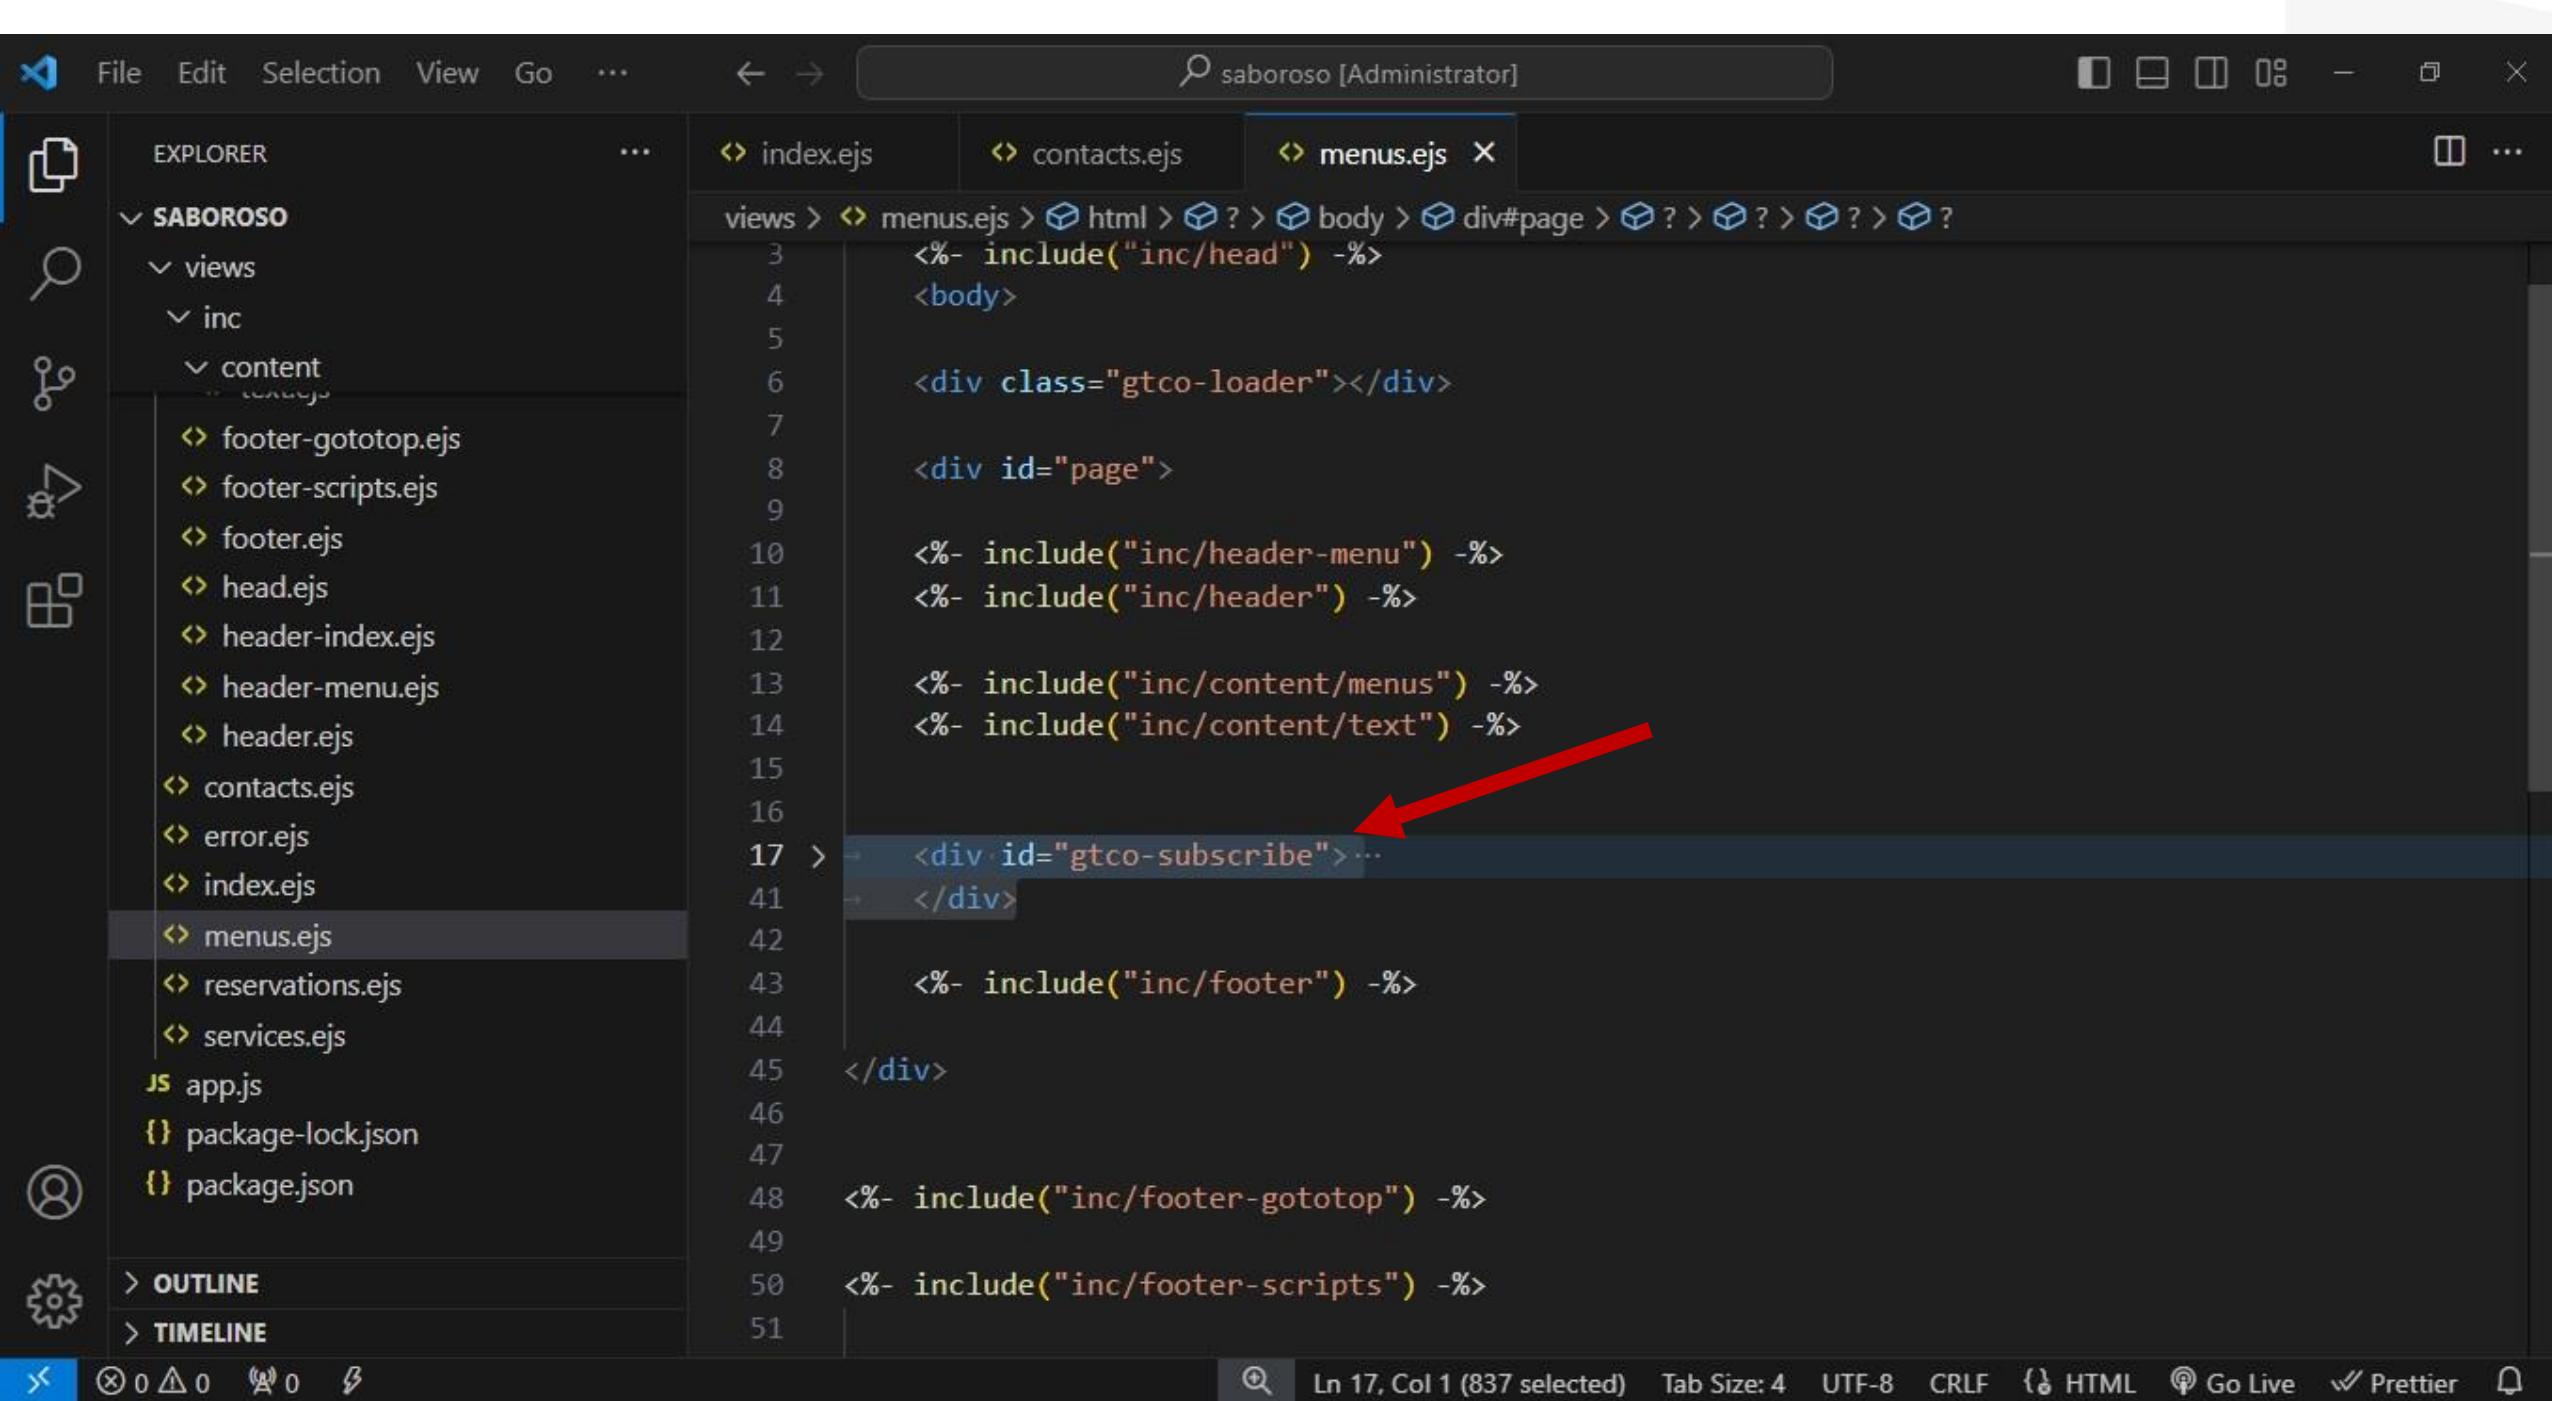

The screenshot shows a code editor window with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Fullscreen, ...
- Left Sidebar (EXPLORER):**
 - SABOROSO
 - views
 - inc
 - content
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs** (highlighted)
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
- Current File:** menus.ejs
- Code Content:**

```
views > menus.ejs > html > body > div#page > ? > ? > ? > ? > ?  
3   <%- include("inc/head") -%>  
4   <body>  
5  
6     <div class="gtco-loader"></div>  
7  
8     <div id="page">  
9  
10    <%- include("inc/header-menu") -%>  
11    <%- include("inc/header") -%>  
12  
13    <%- include("inc/content/menus") -%>  
14    <%- include("inc/content/text") -%>  
15  
16  
17    <%- include("inc/footer") -%>  
18  
19    </div>  
20  
21  
22  
23  
24    <%- include("inc/footer-gototop") -%>  
25  
26    <%- include("inc/footer-scripts") -%>  
27  
28  </body>
```
- Status Bar:** Line 17, Col 1, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

- views
- inc
 - content
- footer-gototop.ejs
- footer-scripts.ejs
- footer.ejs
- head.ejs
- header-index.ejs
- header-menu.ejs
- header.ejs
- contacts.ejs
- error.ejs
- index.ejs
- menus.ejs
- reservations.ejs
- services.ejs

JS app.js

{ package-lock.json

{ package.json

> OUTLINE

> TIMELINE

index.ejs contacts.ejs menus.ejs

views > menus.ejs > html > body > div#page > ? > ? > ? > ?

```
3 <%- include("inc/head") -%>
4 <body>
5
6 <div class="gtco-loader"></div>
7
8 <div id="page">
9
10 <%- include("inc/header-menu") -%>
11 <%- include("inc/header") -%>
12
13 <%- include("inc/content/menus") -%>
14 <%- include("inc/content/text") -%>
15 <%- include("inc/content/subscribe") -%> (Red arrow points here)
16 <%- include("inc/footer") -%>
17 </div>
18
19 <%- include("inc/footer-gototop") -%>
20
21 <%- include("inc/footer-scripts") -%>
22
23
24 </body>
25
26 </html>
```

Ln 15, Col 1 (41 selected) Tab Size: 4 CRLF { HTML Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

- views
- inc
- content
- footer-gototop.ejs
- footer-scripts.ejs
- footer.ejs
- head.ejs
- header-index.ejs
- header-menu.ejs
- header.ejs
- contacts.ejs
- error.ejs
- index.ejs
- menus.ejs
- reservations.ejs
- services.ejs

JS app.js

{ package-lock.json

{ package.json

> OUTLINE

> TIMELINE

index.ejs contacts.ejs menus.ejs

views > menus.ejs > html > ? > body > div#page

```
1  <!DOCTYPE HTML>
2  <html>
3  |   <%- include("inc/head") -%>
4  |   <body>
5
6  |       <div class="gtco-loader"></div>
7
8  |       <div id="page">
9
10 |           <%- include("inc/header-menu") -%>
11 |           <%- include("inc/header") -%>
12
13 |           <%- include("inc/content/menus") -%>
14 |           <%- include("inc/content/text") -%>
15 |           <%- include("inc/content/subscribe") -%>
16
17 |           <%- include("inc/footer") -%>
18
19 </div>
20
21
22 |           <%- include("inc/footer-gototop") -%>
23
24 |           <%- include("inc/footer-scripts") -%>
25
26     </body>
```

Ln 19, Col 7 Tab Size: 4 CRLF { HTML ⚡ Go Live ✓ Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, ...
- Explorer Sidebar:** Shows a tree view of files and folders under the 'SABOROSO' project.
 - views
 - inc
 - content
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs** (highlighted with a red arrow)
 - services.ejs
 - JS app.js
 - JSON package-lock.json
 - JSON package.json
- Code Editor:** The 'reservations.ejs' file is open, showing EJS template code.

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>

    <div class="gtco-loader"></div>

    <div id="page">

      <%- include("inc/header-menu") -%>
      <%- include("inc/header") -%>

      <div class="gtco-section" style="padding-bottom: 14em;">
        <div class="gtco-container">
          <div class="row">
            <div class="col-md-12">
              <div class="col-md-6 animate-box">
                <h3>Reserva de mesa</h3>
                <form action="#">
                  <div class="row form-group">
                    <div class="col-md-12">
                      <label for="inputName">Nome</label>
                      <input type="text" id="inputName" name="name" class="form-control">
                    </div>
                  </div>
                </form>
              </div>
            </div>
          </div>
        </div>
      </div>
    </body>
</html>
```
- Status Bar:** Ln 7, Col 5, Spaces: 4, UTF-8, CRLF, HTML, Go Live, Prettier

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbars:** Minimize, Maximize, Close, Fullscreen, Help, ...
- Explorer:** Shows a tree view of files and folders under the project "SABOROSO". The "views" folder is expanded, showing files like "index.ejs", "contacts.ejs", "menus.ejs", and "reservations.ejs". Inside "views", there's an "inc" folder containing "content", "footer-gototop.ejs", "footer-scripts.ejs", "footer.ejs", "head.ejs", "header-index.ejs", "header-menu.ejs", "header.ejs", "contacts.ejs", "error.ejs", "index.ejs", "menus.ejs", "reservations.ejs", "services.ejs", and "app.js".
- Code Editor:** The current file is "reservations.ejs". The code is an EJS template for a page. It includes includes for "inc/head", "inc/header-menu", "inc/header", and "inc/footer". It features a main content section with a padding-bottom of 14em, followed by footer includes for "inc/footer-gototop" and "inc/footer-scripts".
- Status Bar:** Line 13, Col 1 (3367 selected), Spaces: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>
    <div class="gtco-loader"></div>
    <div id="page">
      <%- include("inc/header-menu") -%>
      <%- include("inc/header") -%>
      <div class="gtco-section" style="padding-bottom: 14em;">
        <%- include("inc/footer") -%>
      </div>
      <%- include("inc/footer-gototop") -%>
      <%- include("inc/footer-scripts") -%>
    </body>
  </html>
```

A screenshot of a code editor interface, likely Visual Studio Code, showing a dark-themed workspace. The top navigation bar includes File, Edit, Selection, View, Go, and a three-dot menu. A search bar at the top right contains the text "saboroso [Administrator]". The left sidebar features icons for Explorer, Search, Open, Find, and others. The main area displays a file tree under the "SABOROSO" project root. The "views" folder contains "index.ejs", "contacts.ejs", "menus.ejs", "reservations.ejs", and "reservations.ejs" again under "content". A red arrow points to the second "reservations.ejs" entry in the "content" folder. The bottom status bar shows line 1, column 1, spaces: 4, CRLF, HTML, Go Live, Prettier, and a refresh icon.

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡ 🌐 🌐 🌐 🌐 - ⚡

EXPLORER ...

✓ SABOROSO

- > bin
- ✓ inc
 - JS db.js
- > node_modules
- > public
- ✓ routes
 - JS index.js
 - JS users.js
- ✓ views
 - ✓ inc
 - ✓ content
 - ↳ contacts.ejs
 - ↳ facts.ejs
 - ↳ menus.ejs
 - ↳ reservations.ejs
 - ↳ services.ejs
 - ↳ subscribe.ejs
 - ↳ text.ejs
 - ↳ footer-gototop.ejs
 - ↳ footer-scripts.ejs

✓ OUTLINE

✓ TIMELINE

views > inc > content > ↳ reservations.ejs

1

↳ contacts.ejs

↳ menus.ejs

↳ reservations.ejs

↳ reservations.ejs

↳ services.ejs

↳ subscribe.ejs

↳ text.ejs

↳ footer-gototop.ejs

↳ footer-scripts.ejs

...

Ln 1, Col 1 Spaces: 4 CRLF { HTML ⚡ Go Live ✓ Prettier

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbars:** Standard icons for file operations.
- Left Sidebar (EXPLORER):**
 - SABOROSO
 - views
 - inc
 - content
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs** (highlighted with a red arrow)
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
- Code Editor:** The current file is `reservations.ejs`. The code is as follows:

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>

    <div class="gtco-loader"></div>

    <div id="page">

      <%- include("inc/header-menu") -%>
      <%- include("inc/header") -%>

      <div class="gtco-section" style="padding-bottom: 14em;">
        <%- include("inc/footer") -%>
      </div>

      <%- include("inc/footer-gototop") -%>
      <%- include("inc/footer-scripts") -%>
    </body>
</html>
```

A red arrow points to the line `<div class="gtco-section" style="padding-bottom: 14em;">`, and another red arrow points to the line `<%- include("inc/footer") -%>`.
- Bottom Status Bar:** Ln 13, Col 1 (3367 selected) Spaces: 4 CRLF { HTML Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER SABOROSO views inc content footer-gototop.ejs footer-scripts.ejs footer.ejs head.ejs header-index.ejs header-menu.ejs header.ejs contacts.ejs error.ejs index.ejs menus.ejs reservations.ejs services.ejs app.js package-lock.json package.json

views > reservations.ejs > html > body > div#page > ? > ?

```
1  <!DOCTYPE HTML>
2  <html>
3  |   <%- include("inc/head") -%>
4  |   <body>
5
6  |       <div class="gtco-loader"></div>
7
8  |       <div id="page">
9
10 |           <%- include("inc/header-menu") -%>
11 |           <%- include("inc/header") -%>
12
13 |           <%- include("inc/footer") -%>
14
15 |       </div>
16
17 |   </body>
18
19
20 |   <%- include("inc/footer-gototop") -%>
21
22 |   <%- include("inc/footer-scripts") -%>
23
24 |       </body>
25 |   </html>
```

Ln 13, Col 1 Spaces: 4 CRLF { HTML Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO


- > node_modules
- > public
- routes
 - index.js
 - users.js
- views
 - inc
 - content
 - contacts.ejs
 - facts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - OUTLINE
 - TIMELINE

index.ejs contacts.ejs menus.ejs reservations.ejs views reservations.ejs ...\\content

views > inc > content > reservations.ejs > div.gtco-section

```
1 <div class="gtco-section" style="padding-bottom: 14em;">
2   <div class="gtco-container">
3     <div class="row">
4       <div class="col-md-12">
5         <div class="col-md-6 animate-box">
6           <h3>Reserva de mesa</h3>
7           <form action="#">
8             <div class="row form-group">
9               <div class="col-md-12">
10                 <label for="inputName">Nome</label>
11                 <input type="text" id="inputName" name="name" class="form-control">
12               </div>
13             </div>
14             <div class="row form-group">
15               <div class="col-md-12">
16                 <label for="inputEmail">E-mail</label>
17                 <input type="email" id="inputEmail" name="email" class="form-control">
18               </div>
19             </div>
20             <div class="row form-group">
21               <div class="col-md-12">
22                 <label for="inputPeople">Pessoas</label>
23                 <select id="inputPeople" name="people" class="form-control">
24                   <option value=""> -- selecione -- </option>
25                   <option value="1">1</option>
```

Ln 70, Col 7 Spaces: 4 CRLF { HTML Go Live Prettier

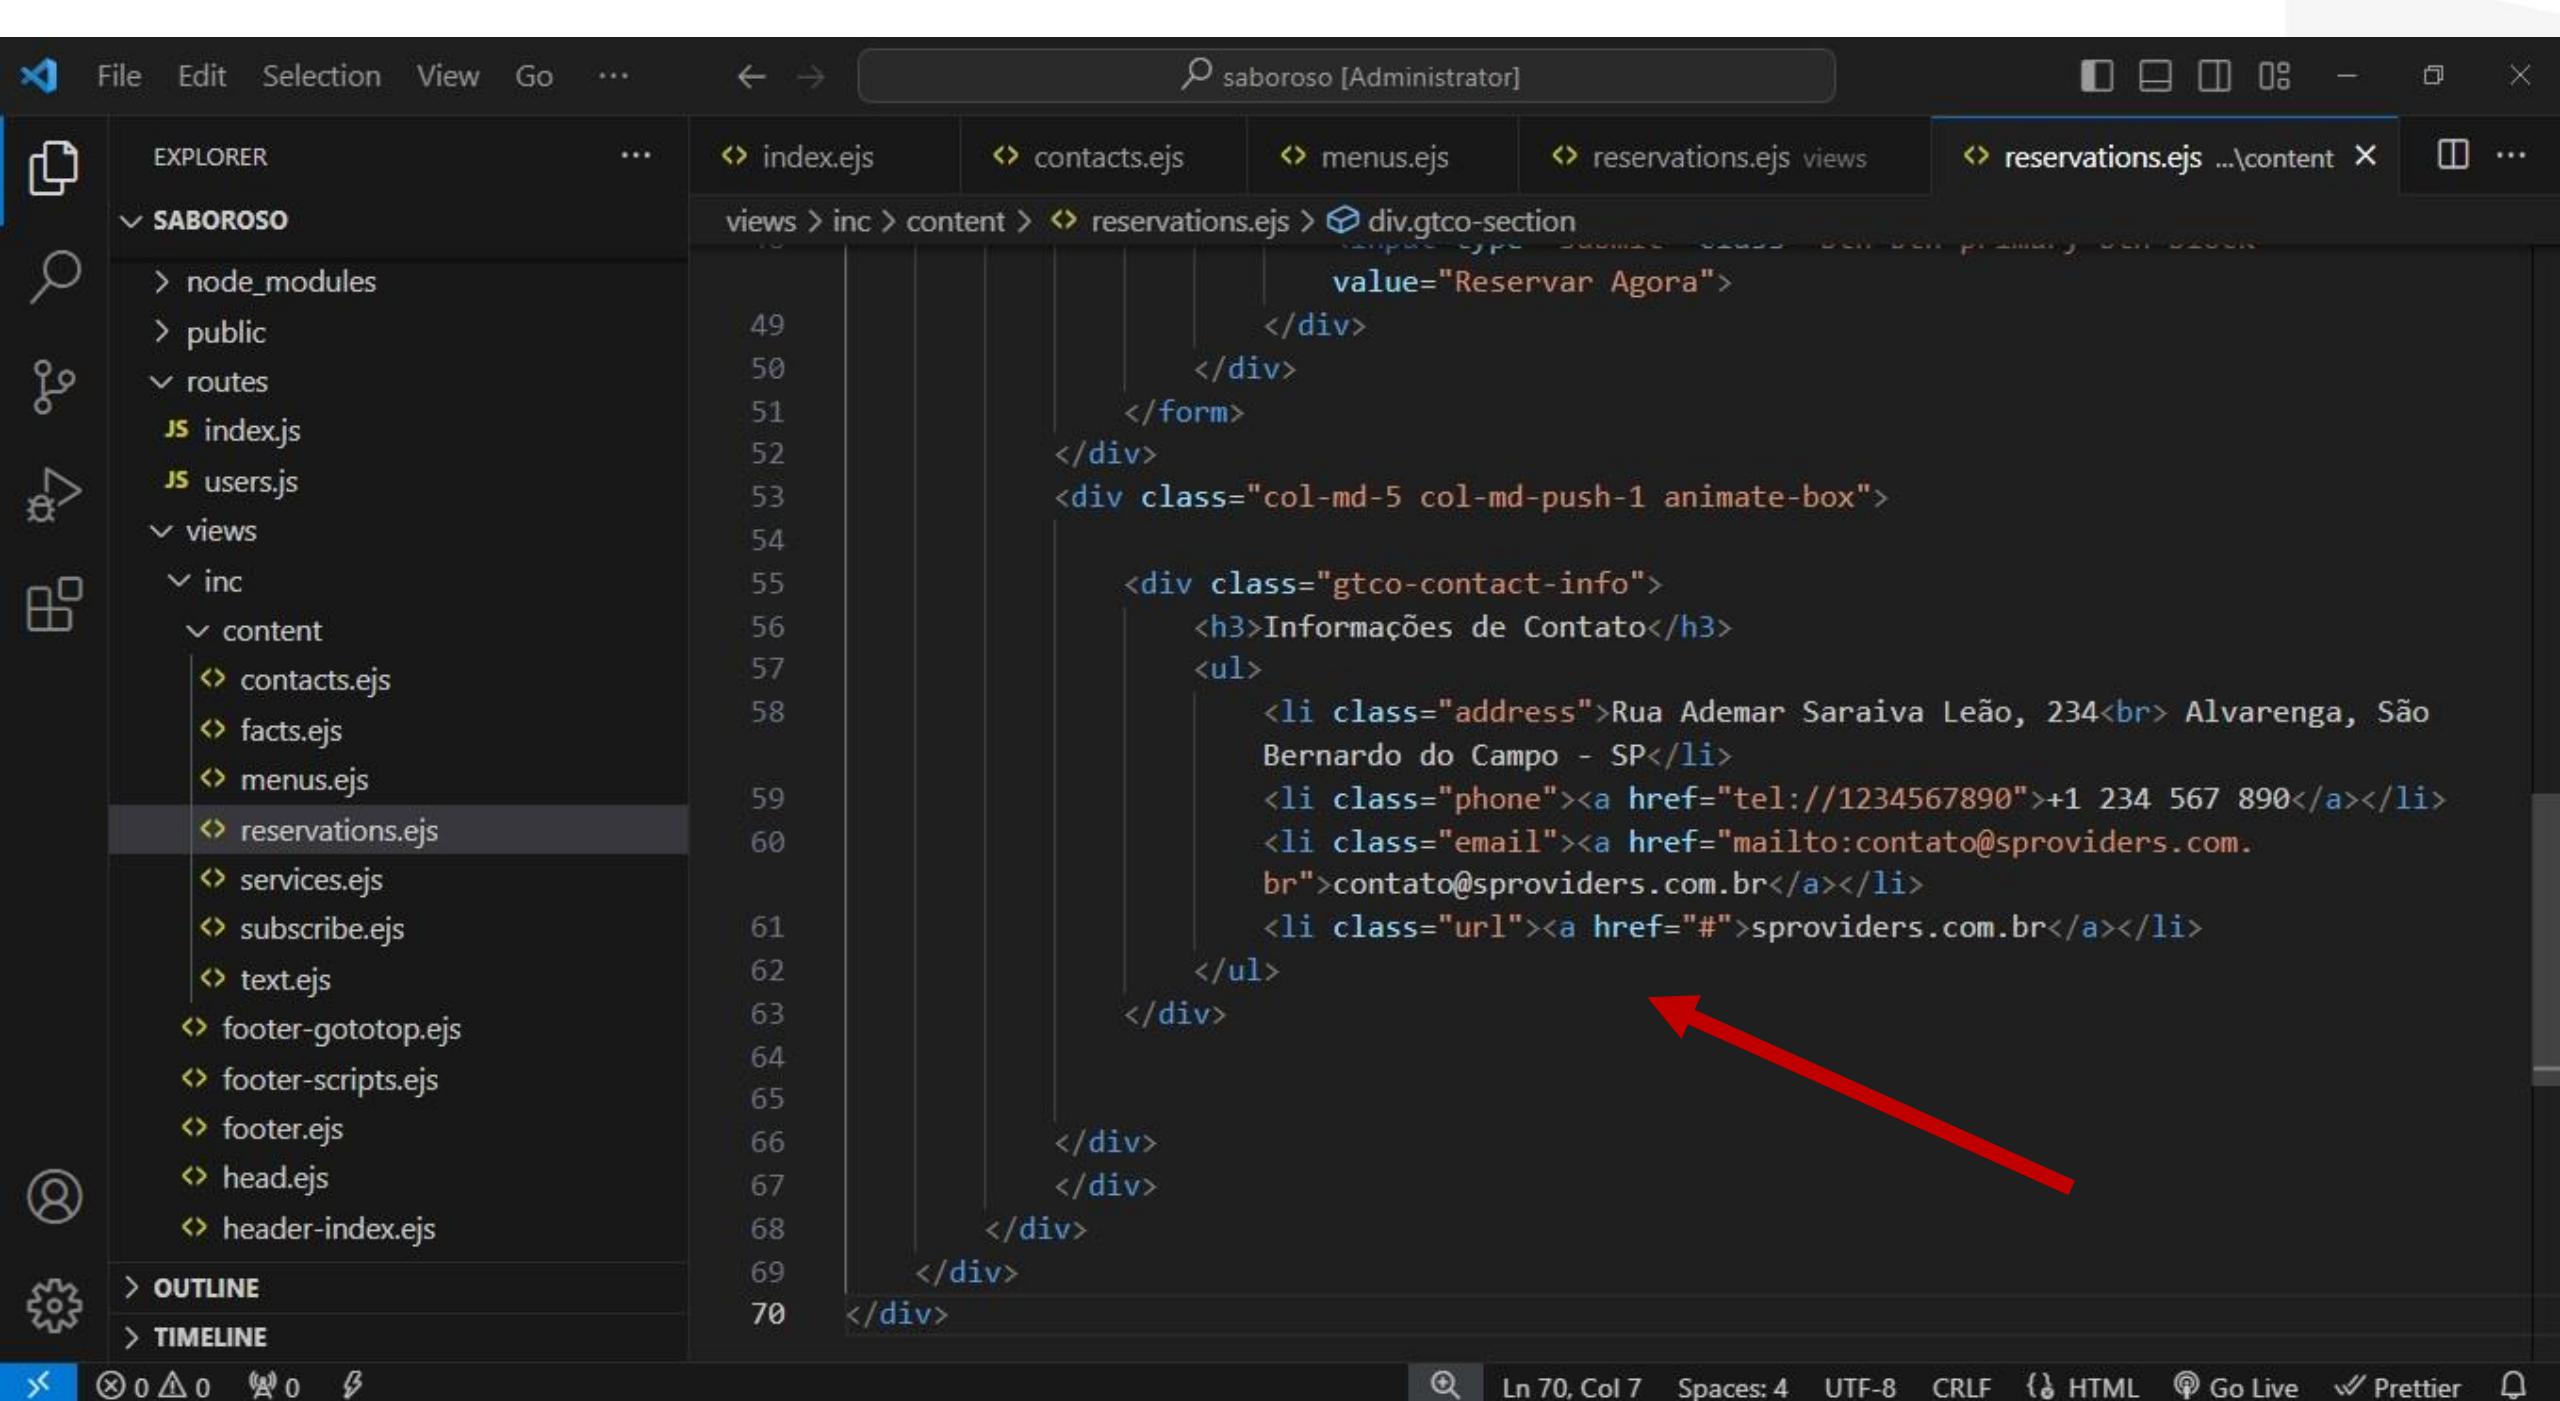

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer:** Shows a tree view of files and folders under the project "SABOROSO". The "views" folder contains sub-folders "inc" and "content", which further contain files like "footer-gototop.ejs", "header-index.ejs", etc. The file "reservations.ejs" is selected and highlighted in the list.
- Code Editor:** The main pane displays the contents of "reservations.ejs". The code includes standard HTML tags and JSP-like include statements. A red arrow points from the "reservations.ejs" entry in the Explorer to the include statement in the code editor. Another red arrow points to the include statement at line 13: `<%- include("inc/content/reservations") -%>`.
- Status Bar:** Shows line 13, column 1 (47 selected), and other settings like Spaces: 4, UTF-8, CRLF, and HTML.

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Search icon, Minimize, Maximize, Close.
- Explorer Sidebar:** Shows a tree view of files and folders under the project "SABOROSO".
 - views
 - inc
 - content
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs** (highlighted with a red arrow)
 - JS
 - app.js
 - JSON
 - package-lock.json
 - package.json
- Code Editor:** The "services.ejs" file is open, displaying EJS template code.

```
<!DOCTYPE HTML>
<%- include("inc/head") -%>
<body>

<div class="gtco-loader"></div>

<div id="page">

<%- include("inc/header-menu") -%>
<%- include("inc/header") -%>

<div id="gtco-features">
    <div class="gtco-container">
        <div class="row">
            <div class="col-md-8 col-md-offset-2 text-center gtco-heading animate-box">
                <h2 class="cursive-font">Nossos Serviços</h2>
                <p>Mussum Ipsum, cacilds vidis litro abertis. Si num tem leite então bota uma pinga aí cumpadi!</p>
            </div>
        </div>
        <div class="row">
            <div class="col-md-4 col-sm-6">
                <div class="feature-center animate-box" data-animate-effect="fadeIn">
                    <span class="icon">
                        <i class="ti-face-smile" data-animate-effect="fadeIn"></i>
                    </span>
                </div>
            </div>
        </div>
    </div>
</div>
```
- Status Bar:** Select Encoding, Ln 127, Col 38, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer:** Shows a tree view of files and folders under the project "SABOROSO".
 - views
 - index.ejs
 - contacts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs**
 - inc
 - content
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs**
 - app.js
 - package-lock.json
 - package.json
- Code Editor:** The "services.ejs" file is open.

```
<!DOCTYPE HTML>
<%- include("inc/head") -%>
<body>

<div class="gtco-loader"></div>

<div id="page">

<%- include("inc/header-menu") -%>
<%- include("inc/header") -%>

<div id="gtco-features">
  <div class="gtco-container">
    <div class="row">
      <div class="col-md-8 col-md-offset-2 text-center gtco-heading animate-box">
        <h2 class="cursive-font">Nossos Serviços</h2>
        <p>Mussum Ipsum, cacilds vidis litro abertis. Si num tem leite então bota uma pinga aí cumpadi!</p>
      </div>
    </div>
    <div class="row">
      <div class="col-md-4 col-sm-6">
        <div class="feature-center animate-box" data-animate-effect="fadeIn">
          <span class="icon">
            <i class="ti-face-smile"></i>
          </span>
        </div>
      </div>
    </div>
  </div>
</div>
```
- Status Bar:** Ln 16, Col 61 (15 selected), Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier

File Edit Selection View Go ... ← → saboroso [Administrator] □ □ □ □ - □ ×

EXPLORER ... index.ejs contacts.ejs menus.ejs reservations.ejs services.ejs ×


SABOROSO views > services.ejs > body > div#page > ? > ?

views > services.ejs > body > div#page > ? > ?

```
1 1<!DOCTYPE HTML>
2 2<%- include("inc/head") -%>
3 3<body>
4 4
5 5<div class="gtco-loader"></div>
6 6
7 7<div id="page">
8 8
9 9<%- include("inc/header-menu") -%>
10 10<%- include("inc/header") -%>
11 11<div id="gtco-features">...
12 12</div>
13 13
14 14
15 15
16 16
17 17
18 18
19 19
20 20
21 21
22 22
23 23
24 24
25 25
26 26
27 27
28 28
29 29
30 30
31 31
32 32<div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)" data-stellar-background-ratio="0.5">
33 33<div class="overlay"></div>
34 34<div class="gtco-container text-center">
35 35<div class="display-t">
36 36<div class="display-tc">
37 37<h1>&ldquo; Delegadis gente finis, bibendum egestas augue arcu ut est. Cevadis im ampola pa arma uma pindureta!&rdquo;</h1>
38 38<p>&mdash; Mussum, Humorista.</p>
39 39</div>
40 40</div>
```

JS app.js 85
{} package-lock.json 86
{} package.json 87
> OUTLINE 88
> TIMELINE 89
x 0 △ 0 ⌂ 0 ⌂ 90

Ln 12, Col 1 (2545 selected) Tab Size: 4 CRLF { HTML ⌂ Go Live ⌂ Prettier

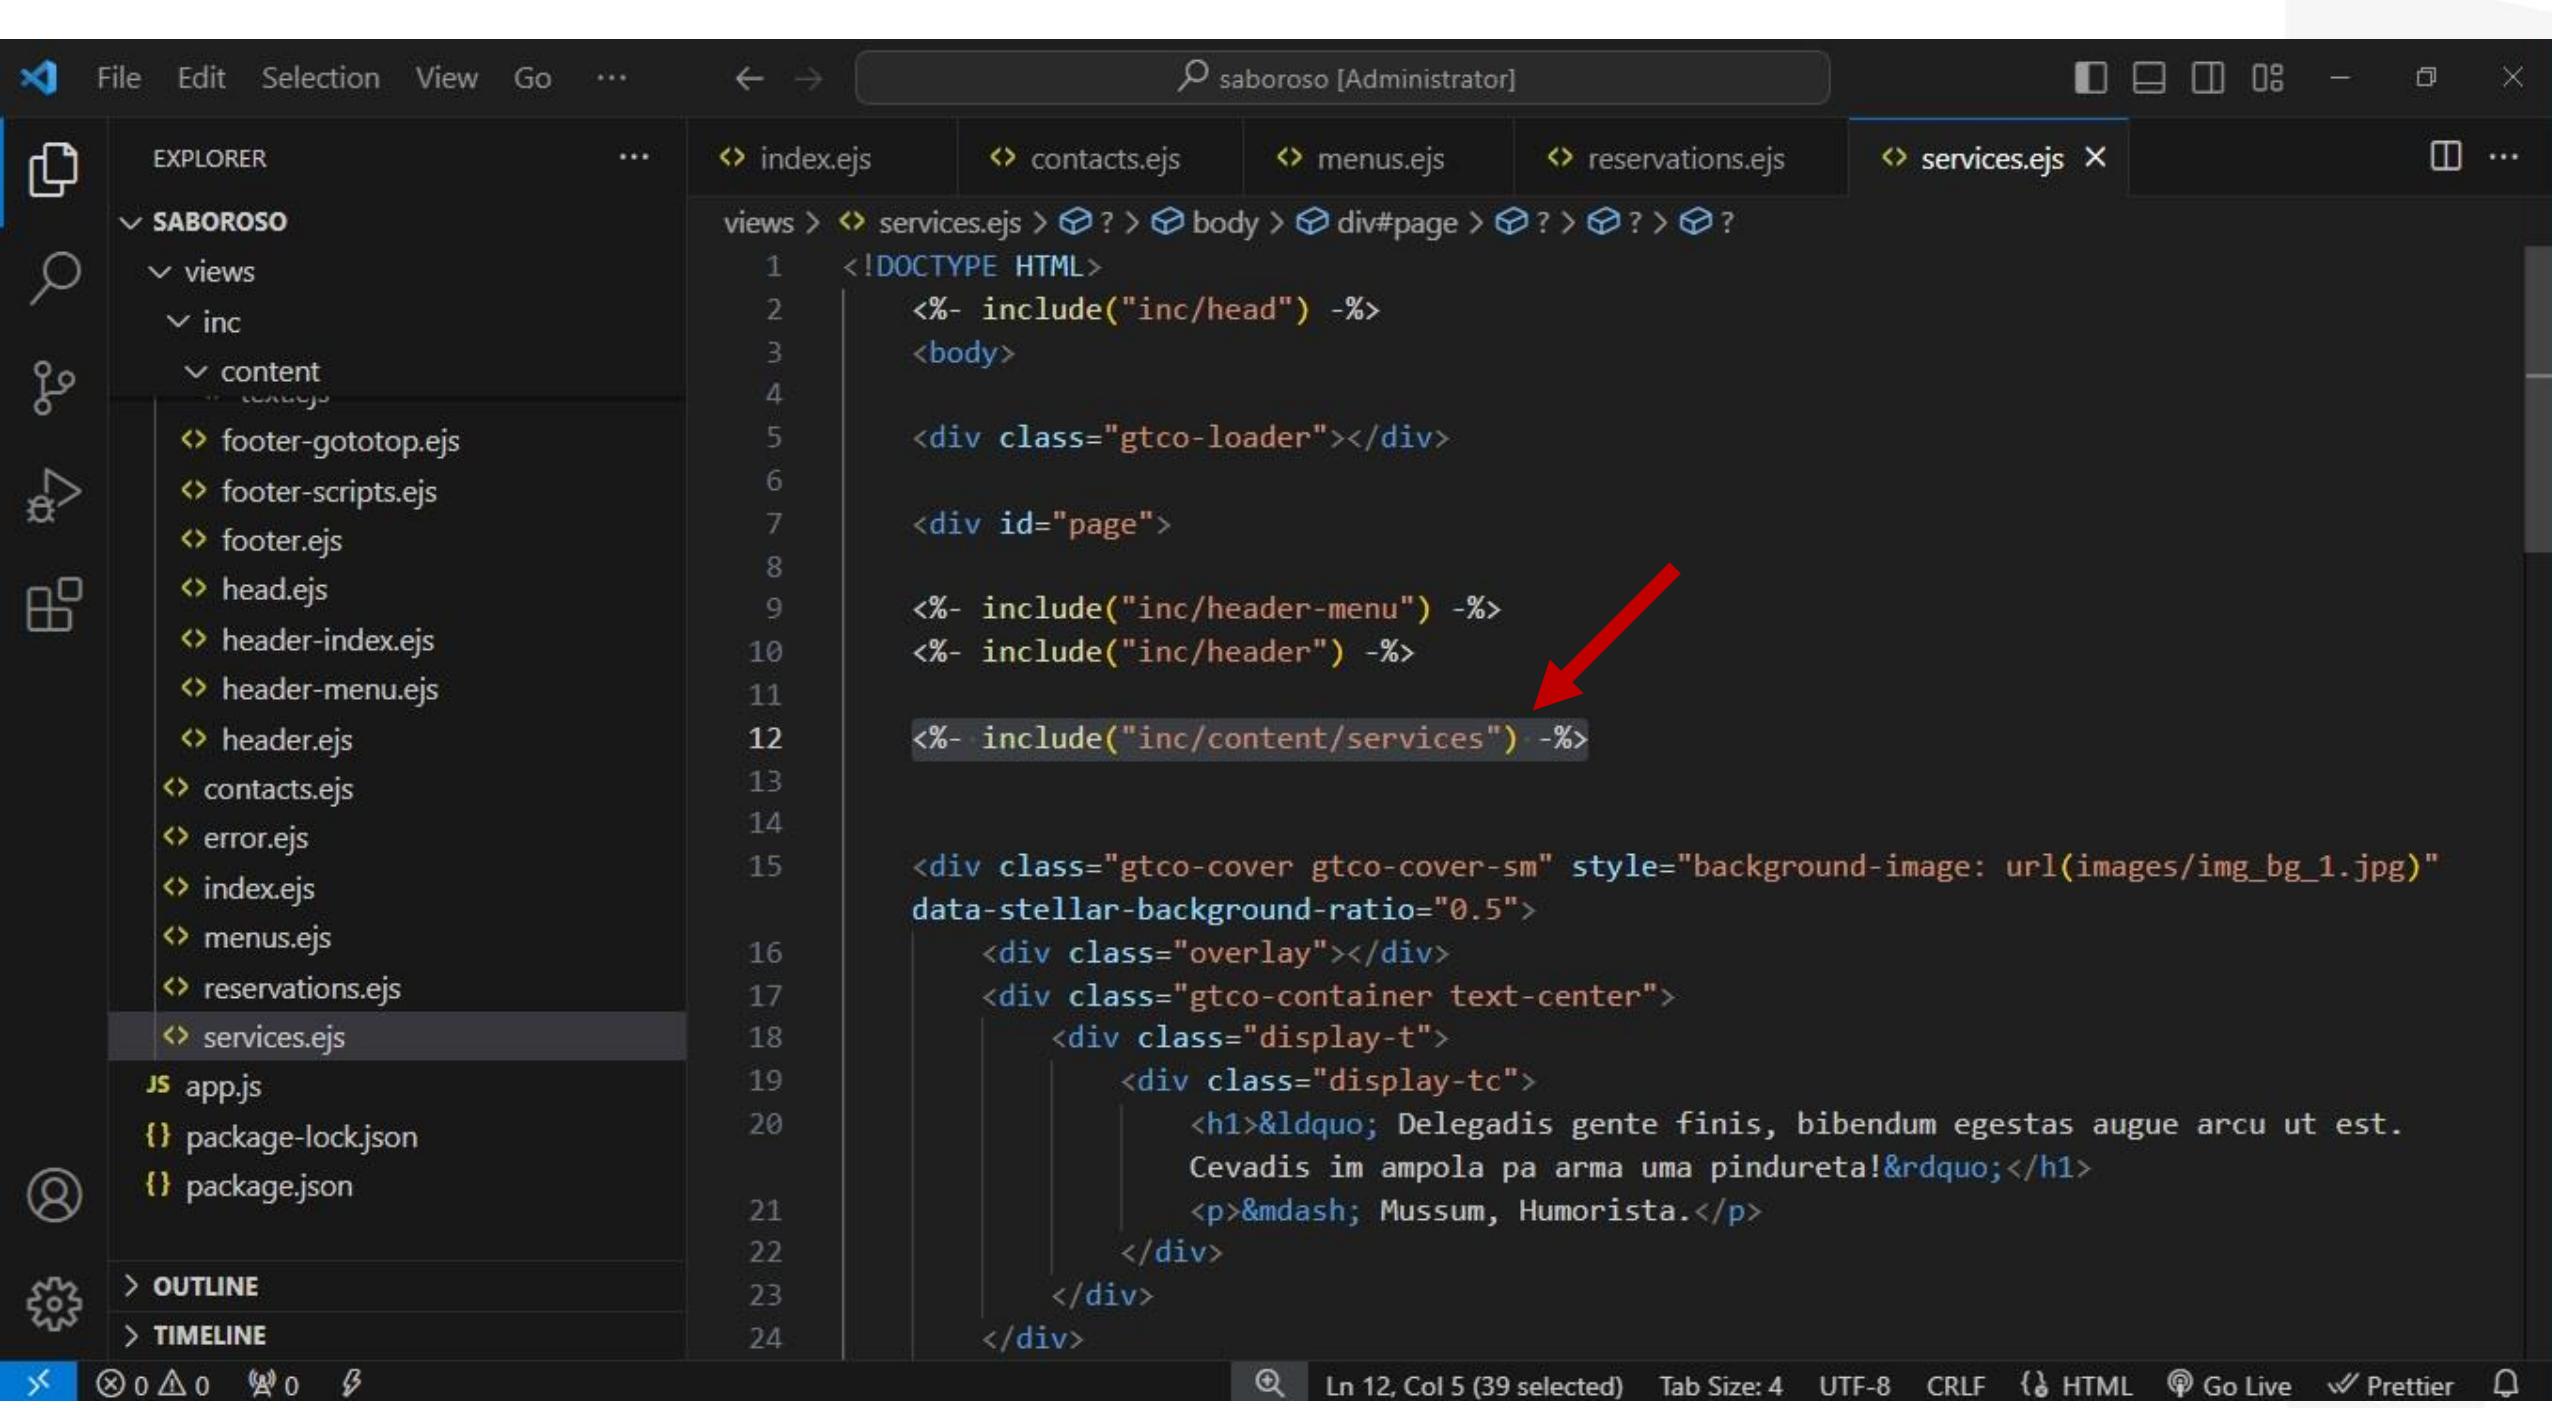

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer View (Left):** Shows a project structure under "SABOROSO".
 - views
 - inc
 - content
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs** (selected)
 - app.js
 - package-lock.json
 - package.json
- Code Editor View (Right):** Displays the contents of the selected file, "services.ejs".

```
<!DOCTYPE HTML>
<%- include("inc/head") -%>
<body>

<div class="gtco-loader"></div>

<div id="page">
<%- include("inc/header-menu") -%>
<%- include("inc/header") -%>

<%- include("inc/content/services") -%>

<div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)" data-stellar-background-ratio="0.5">
<div class="overlay"></div>
<div class="gtco-container text-center">
<div class="display-t">
<div class="display-tc">
<h1>&ldquo; Delegadis gente finis, bibendum egestas augue arcu ut est. Cevadis im ampola pa arma uma pindureta!&rdquo;</h1>
<p>&mdash; Mussum, Humorista.</p>
</div>
</div>
</div>
```
- Status Bar:** Ln 12, Col 5 (39 selected), Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier

A screenshot of a code editor interface, likely Visual Studio Code, showing the file `services.ejs` in the `views` directory of a project named `SABOROSO`. The code is written in EJS (Embedded JavaScript) and HTML.

```
<!DOCTYPE HTML>
<%- include("inc/head") -%>
<body>

<div class="gtco-loader"></div>

<div id="page">

<%- include("inc/header-menu") -%>
<%- include("inc/header") -%>

<%- include("inc/content/services") -%>

<div class="gtco-cover gtco-cover-sm" style="background-image: url(images/img_bg_1.jpg)";
    data-stellar-background-ratio="0.5">...
</div>

<div id="gtco-subscribe">
    <div class="gtco-container">
        <div class="row animate-box">
            <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
                <h2 class="cursive-font">Se inscrever</h2>
                <p>Receba as novidades do nosso restaurante</p>
            </div>
        </div>
    </div>
</div>
```

The code editor has several features visible:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Icons:** Explorer, Search, Find, Open, Save, Close, Minimize, Maximize, Fullscreen, Close Tab.
- Left Sidebar:** Shows the project structure under `SABOROSO`, including `views`, `inc`, and various EJS files like `index.ejs`, `contacts.ejs`, `menus.ejs`, `reservations.ejs`, and `services.ejs`.
- Bottom Status Bar:** Shows line 15, column 1 (471 selected), Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

A large red arrow points to line 15 of the code, highlighting the opening tag of the main content container.

The screenshot shows a code editor window with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Home, Stop, Refresh, Minimize, Maximize, Close.
- Left Sidebar (EXPLORER):** Shows the project structure under SABOROSO / views / inc / content. Files listed include footer-gototop.ejs, footer-scripts.ejs, footer.ejs, head.ejs, header-index.ejs, header-menu.ejs, header.ejs, contacts.ejs, error.ejs, index.ejs, menus.ejs, reservations.ejs, services.ejs, app.js, package-lock.json, and package.json.
- Current File:** services.ejs
- Code Editor:** Displays the following EJS code:

```
<!DOCTYPE HTML>
<%- include("inc/head") -%>
<body>

<div class="gtco-loader"></div>

<div id="page">

<%- include("inc/header-menu") -%>
<%- include("inc/header") -%>

<%- include("inc/content/services") -%><%- include("inc/content/text") -%>

<div id="gtco-subscribe">
  <div class="gtco-container">
    <div class="row animate-box">
      <div class="col-md-8 col-md-offset-2 text-center gtco-heading">
        <h2 class="cursive-font">Se inscrever</h2>
        <p>Receba as novidades do nosso restaurante</p>
      </div>
    </div>
    <div class="row animate-box">
      <div class="col-md-8 col-md-offset-2">
```
- Bottom Status Bar:** Line 13, Col 1 (36 selected), Tab Size: 4, CRLF, HTML, Go Live, Prettier.

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

views

inc

content

footer-gototop.ejs

footer-scripts.ejs

footer.ejs

head.ejs

header-index.ejs

header-menu.ejs

header.ejs

contacts.ejs

error.ejs

index.ejs

menus.ejs

reservations.ejs

services.ejs

app.js

package-lock.json

package.json

OUTLINE

TIMELINE

index.ejs contacts.ejs menus.ejs reservations.ejs services.ejs

views > services.ejs > body > div#page > ? > ? > ? > ?

```
1 1 <!DOCTYPE HTML>
2 2   <%- include("inc/head") -%>
3 3   <body>
4 4
5 5     <div class="gtco-loader"></div>
6 6
7 7     <div id="page">
8 8
9 9       <%- include("inc/header-menu") -%>
10 10      <%- include("inc/header") -%>
11 11
12 12      <%- include("inc/content/services") -%>
13 13      <%- include("inc/content/text") -%>
14 14
15 15
16 16
17 17     <div id="gtco-subscribe">...
18 18     </div>
19 19
20 20   <%- include("inc/footer") -%>
21 21
22 22 </div>
23 23
24 24
25 25
26 26
27 27
28 28 <%- include("inc/footer-gototop") -%>
29 29
```

Ln 17, Col 1 (837 selected) Tab Size: 4 CRLF ⚡ HTML ⚡ Go Live ⚡ Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO


views > services.ejs

index.ejs contacts.ejs menus.ejs reservations.ejs services.ejs

```
views > services.ejs > body > div#page > ? > ? > ? > ?
```

```
1  <!DOCTYPE HTML>
2  <%- include("inc/head") -%>
3  <body>
4
5  <div class="gtco-loader"></div>
6
7  <div id="page">
8
9  <%- include("inc/header-menu") -%>
10 <%- include("inc/header") -%>
11
12 <%- include("inc/content/services") -%>
13 <%- include("inc/content/text") -%>
14 <%- include("inc/content/subscribe") -%>
15
16 <%- include("inc/footer") -%>
17
18 </div>
19
20 <%- include("inc/footer-gototop") -%>
21
22 <%- include("inc/footer-scripts") -%>
23
24 </body>
25
26 </html>
```

Ln 14, Col 1 (41 selected) Tab Size: 4 CRLF { HTML Go Live Prettier

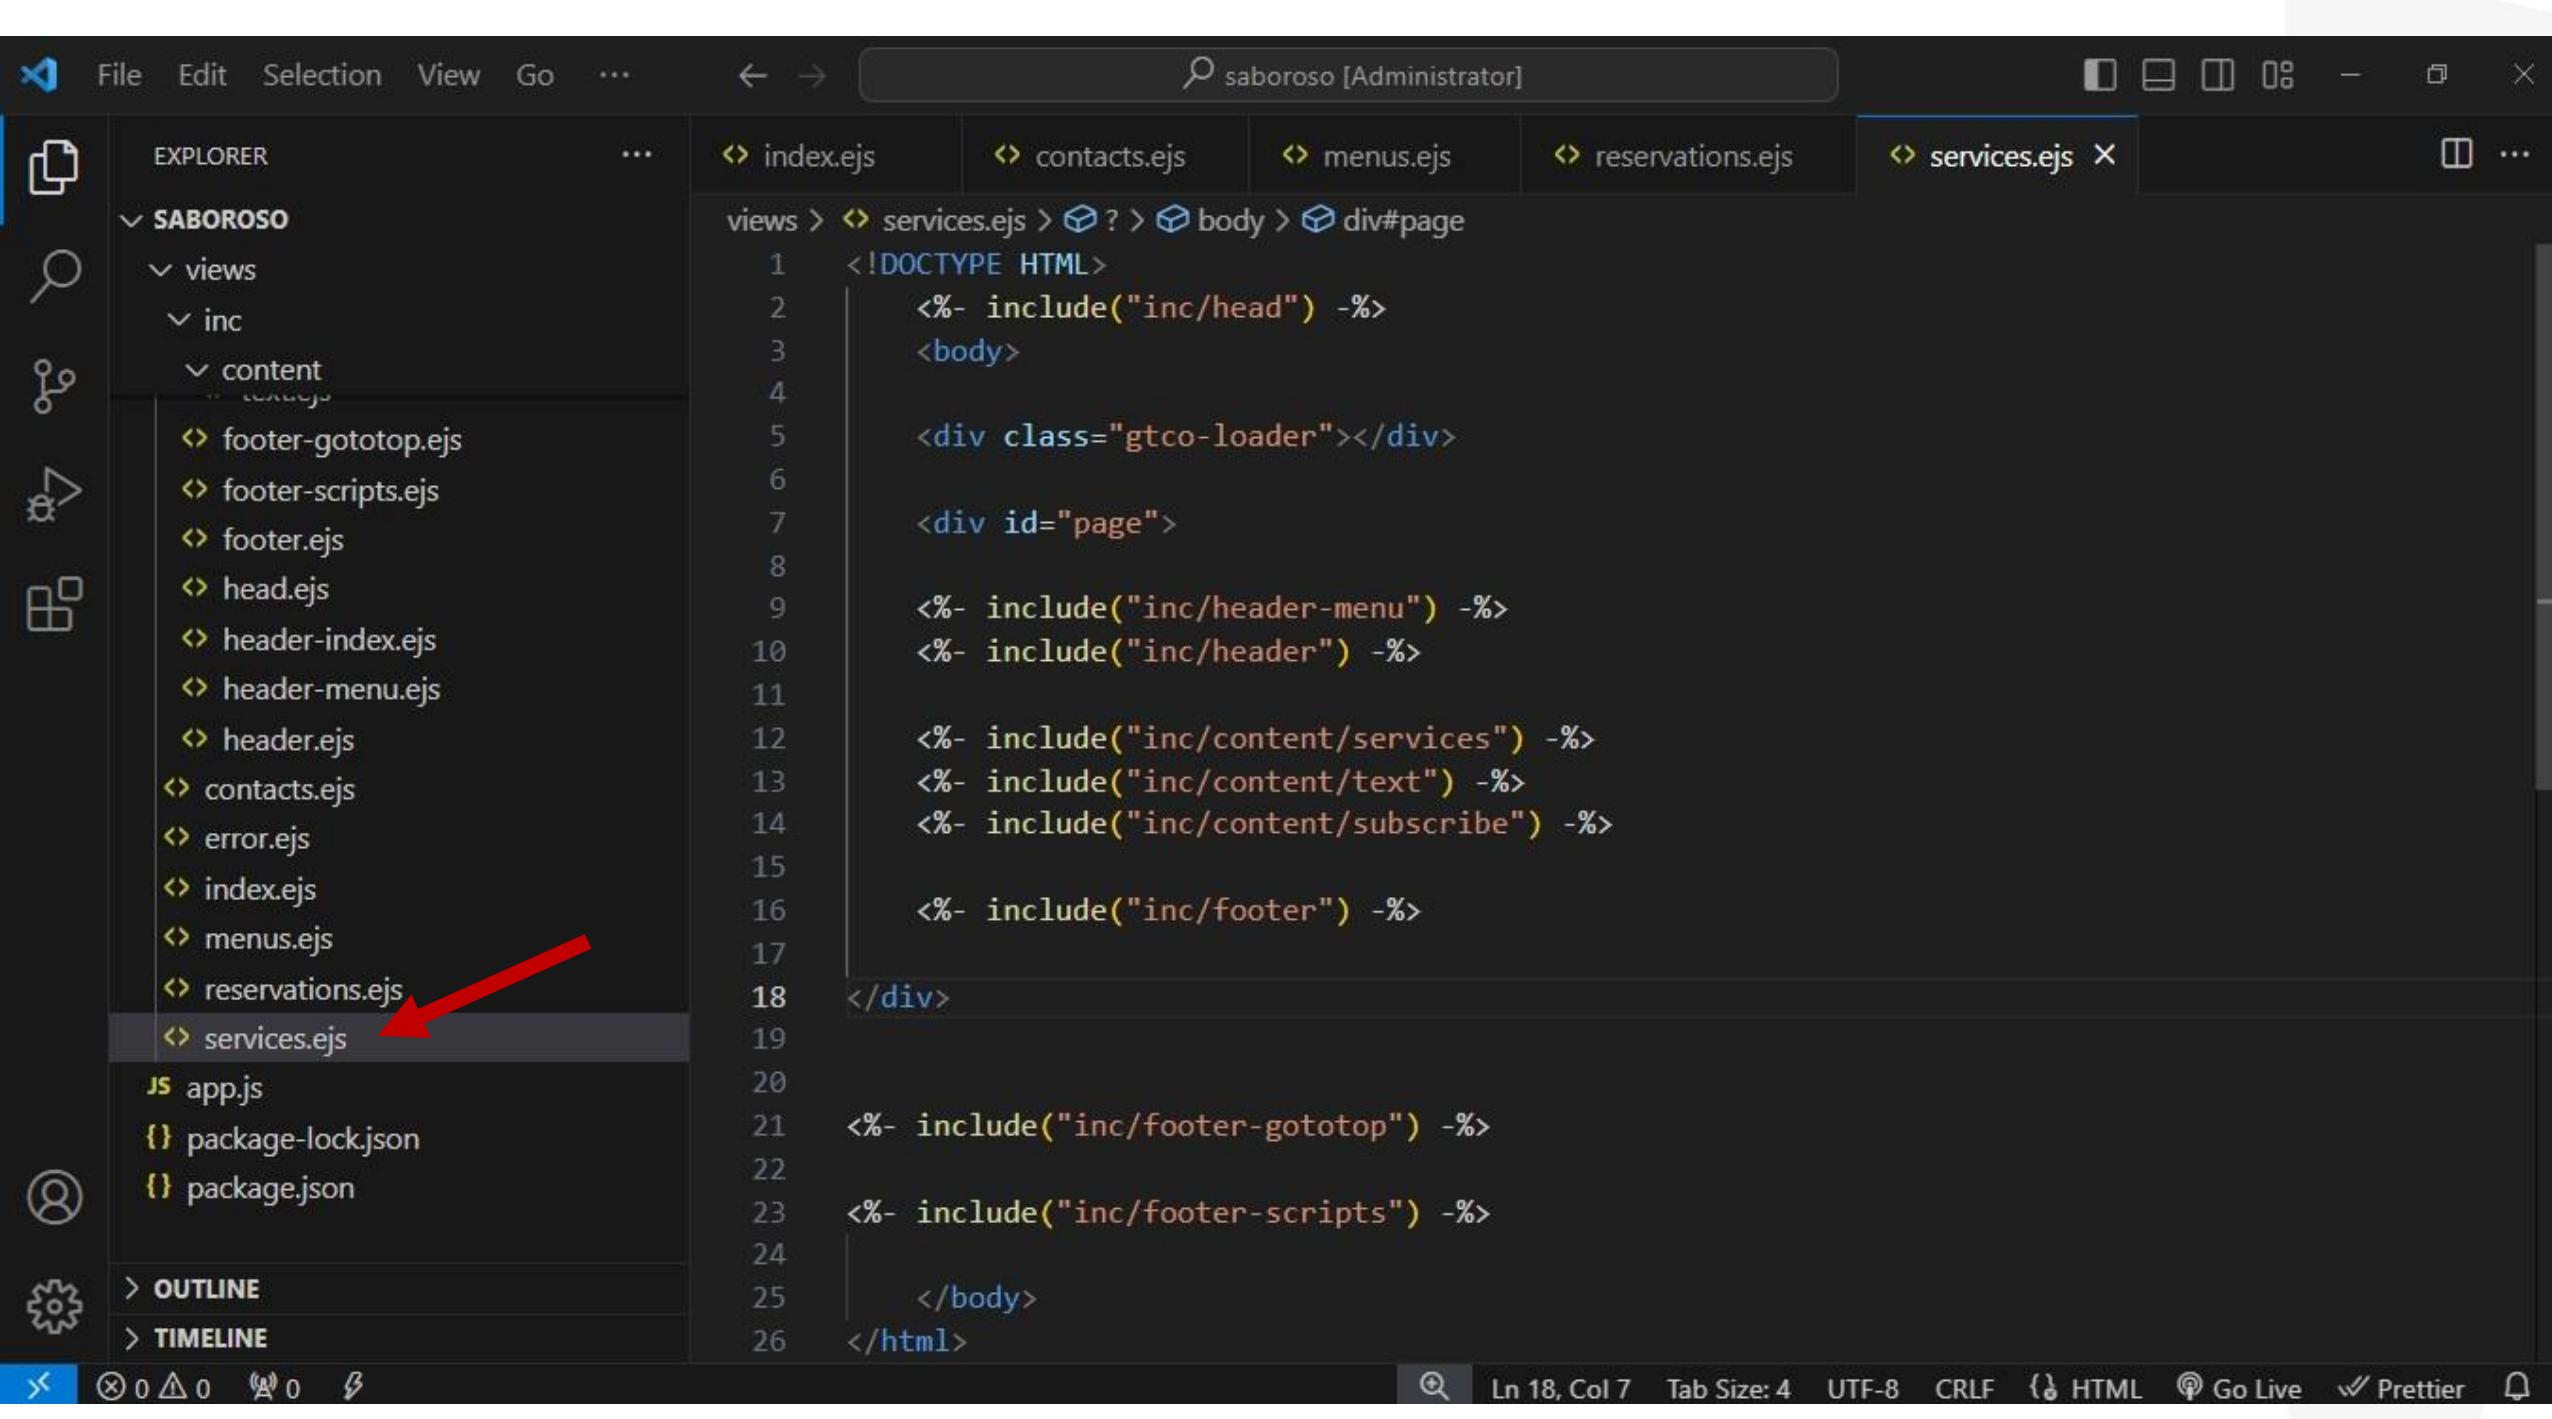

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbars:** Minimize, Maximize, Close, Print, Copy, Paste, Find, Replace, Undo, Redo.
- Left Sidebar (EXPLORER):**
 - SABOROSO
 - views
 - inc
 - content
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs** (highlighted with a red arrow)
 - app.js
 - package-lock.json
 - package.json
- Central Area:** A code editor showing the content of the selected file, "services.ejs".

```
<!DOCTYPE HTML>
<%- include("inc/head") -%>
<body>

<div class="gtco-loader"></div>

<div id="page">

<%- include("inc/header-menu") -%>
<%- include("inc/header") -%>


<%- include("inc/content/services") -%>
<%- include("inc/content/text") -%>
<%- include("inc/content/subscribe") -%>

<%- include("inc/footer") -%>

</div>

<%- include("inc/footer-gototop") -%>
<%- include("inc/footer-scripts") -%>

</body>
</html>
```
- Bottom Status Bar:** Ln 18, Col 7, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

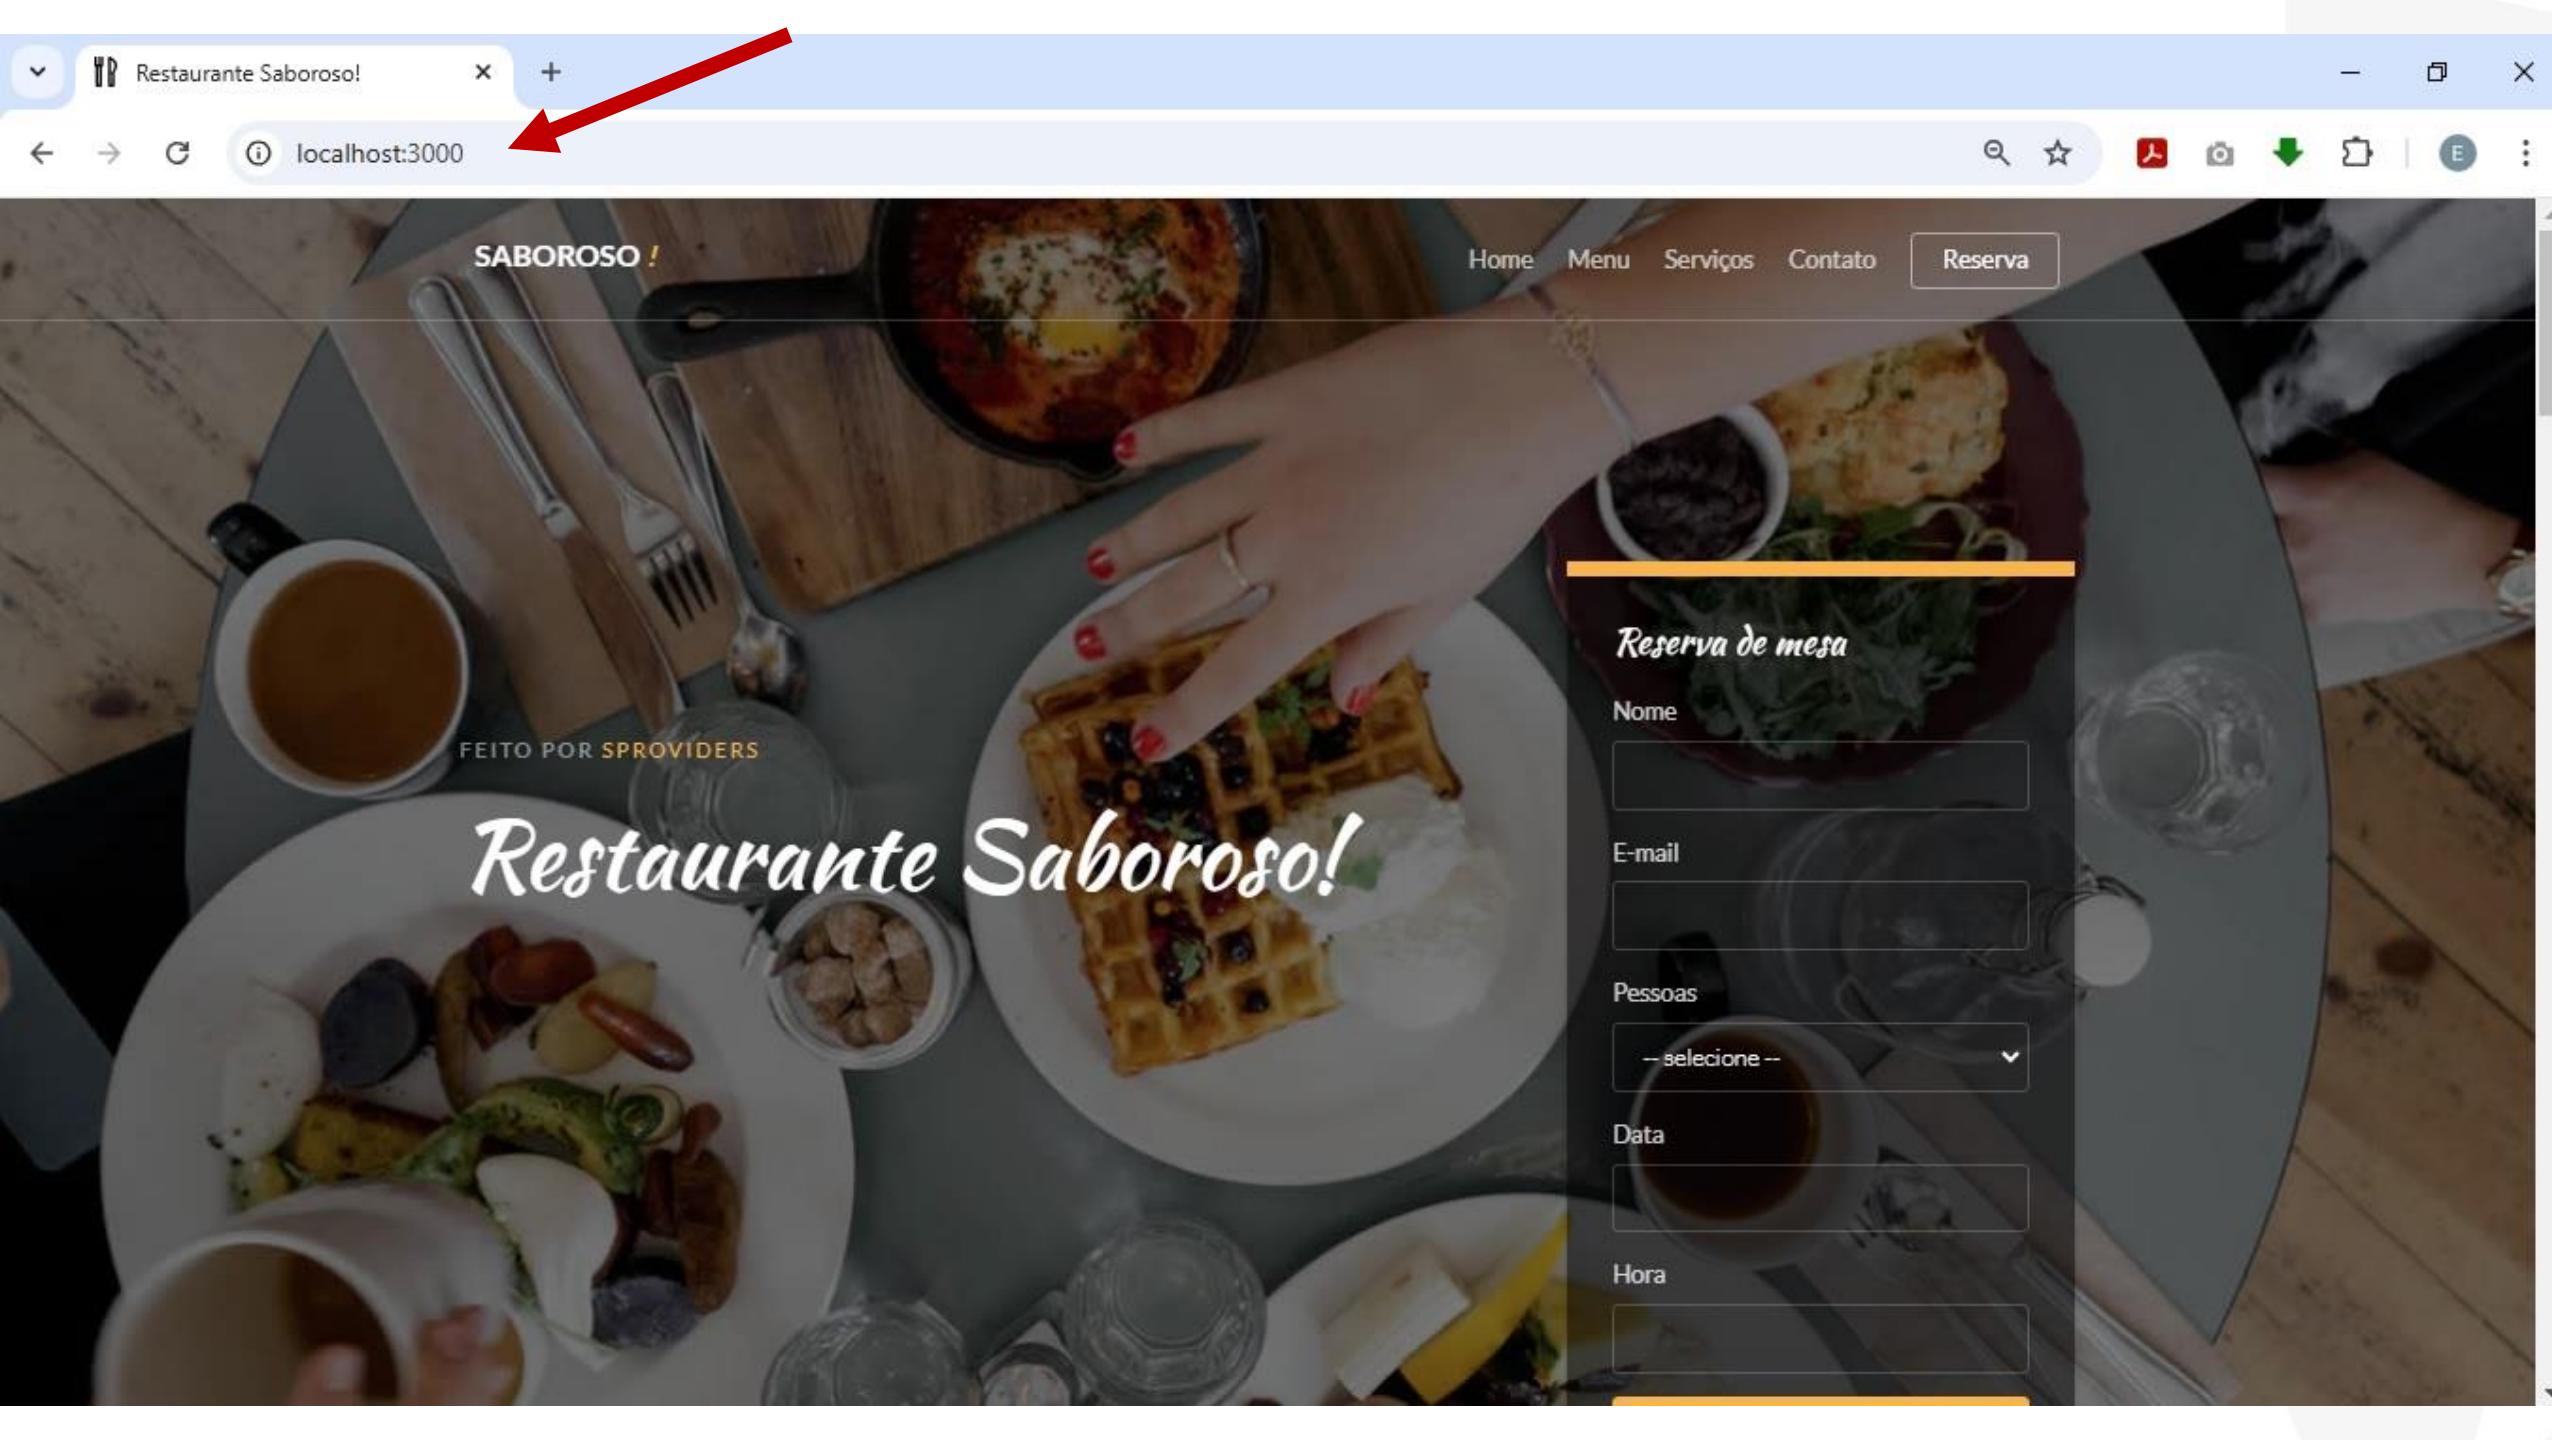

SABOROSO !

Home Menu Serviços Contato

Reserva

FEITO POR SPROVIDERS

Restaurante Saboroso!

Reserva de mesa


Nome

E-mail

Pessoas

Data

Hora

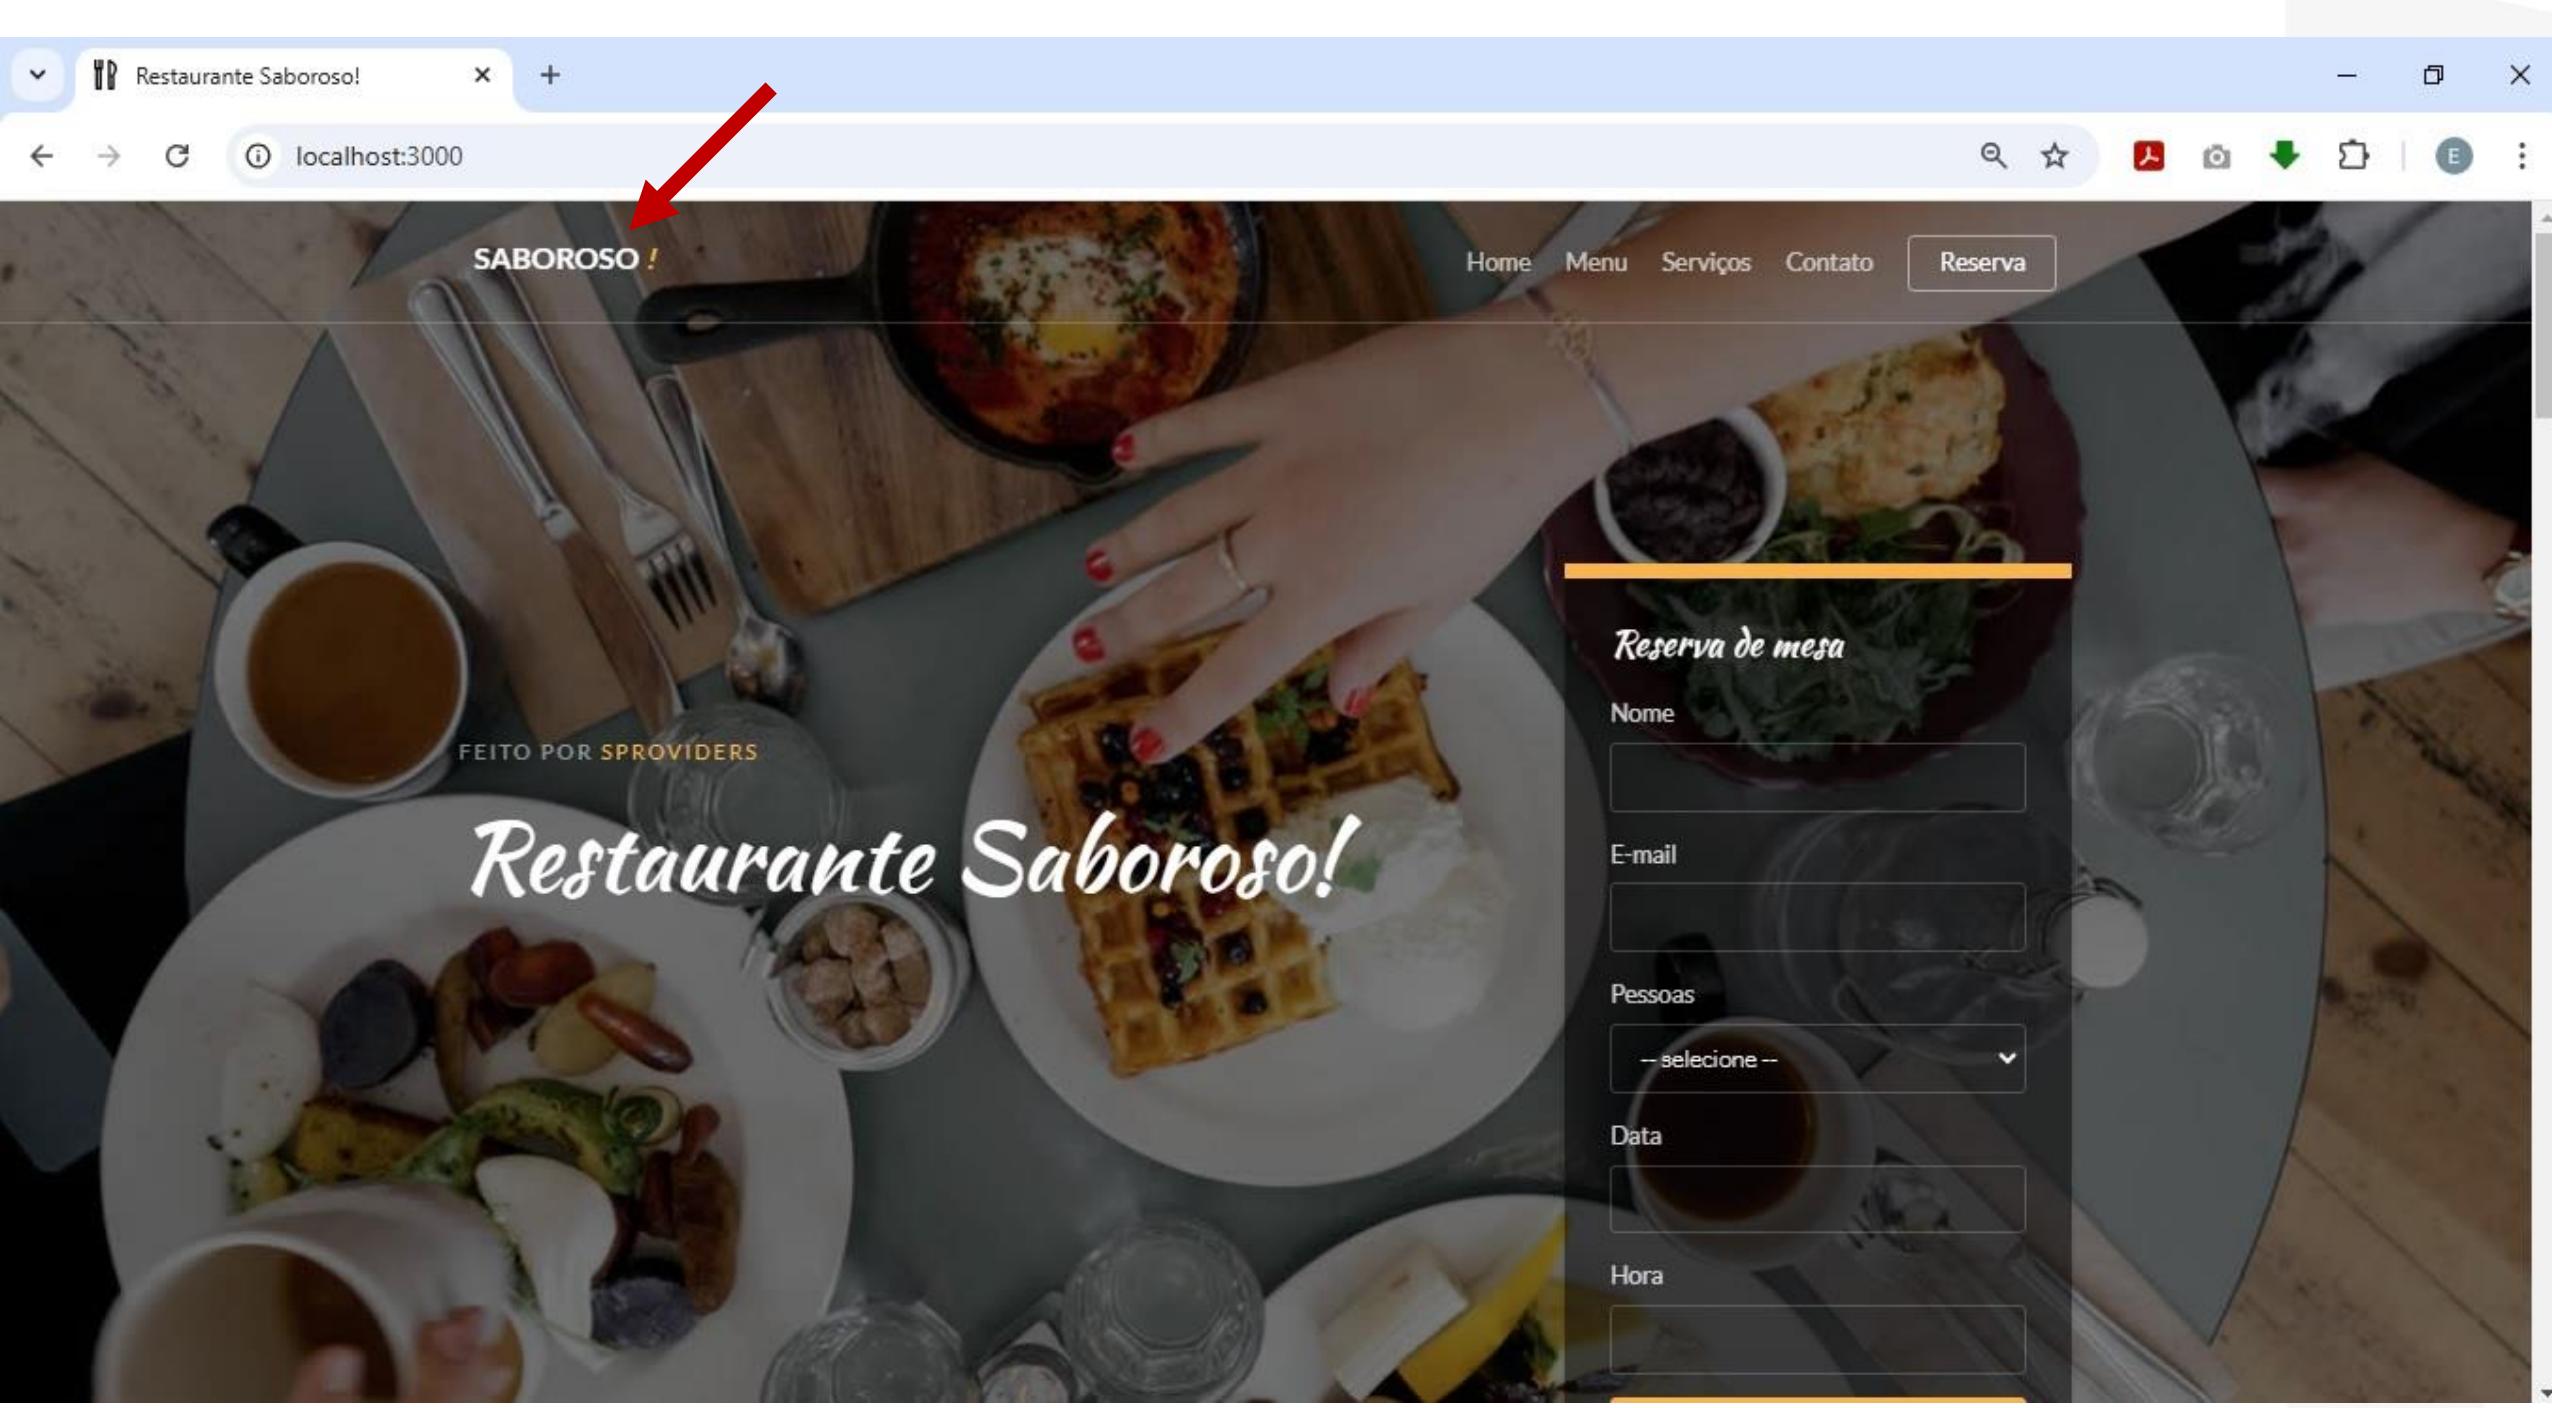

Pratos Populares

Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de denguis. Quem num gosta dí mé, boa gentis num é.



Bife de Costela com molho

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

45.35



Chilli com Carne

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.40



Hambúrguer com Fritas

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.80

Nossos Serviços

Mussum Ipsum, cacilds vidis litro abertis. Si num tem leite então bota uma pinga
af cumpadi!



Pessoas Felizes

Mussum Ipsum, cacilds vidis litro abertis. Si
num tem leite então bota uma pinga ai
cumpadi!



Culinária Criativa

Mussum Ipsum, cacilds vidis litro abertis. Si
num tem leite então bota uma pinga ai
cumpadi!



Delivery

Mussum Ipsum, cacilds vidis litro abertis. Si
num tem leite então bota uma pinga ai
cumpadi!





“ Delegadis gente finis, bibendum egestas
augue arcu ut est. Cevadis im ampola pa
arma uma pindureta!”

— Mussum, Humorista.

Fatos



Fatos

Delegadis gente finis, bibendum egestas augue arcu ut est. Cevadis im ampola pa
arma uma pindureta!

5

AVALIAÇÃO MÉDIA

43


OPÇÕES DE PRATOS

32

CHEFES DE COZINHA

1985

DESDE



Se inscrever

Receba as novidades do nosso restaurante

Seu E-mail

INSCREVER

ENTRAR EM CONTATO

+1 234 567 890

✉ contato@sproviders.com.br

💬 Chat

REDES SOCIAIS





Seu E-mail

INSCREVER

ENTRAR EM CONTATO

+1234 567 890

contato@sproviders.com.br


Chat

REDES SOCIAIS



© 2024 SProviders. Todos os Direitos Reservados.

Desenvolvido por SProviders.com.br

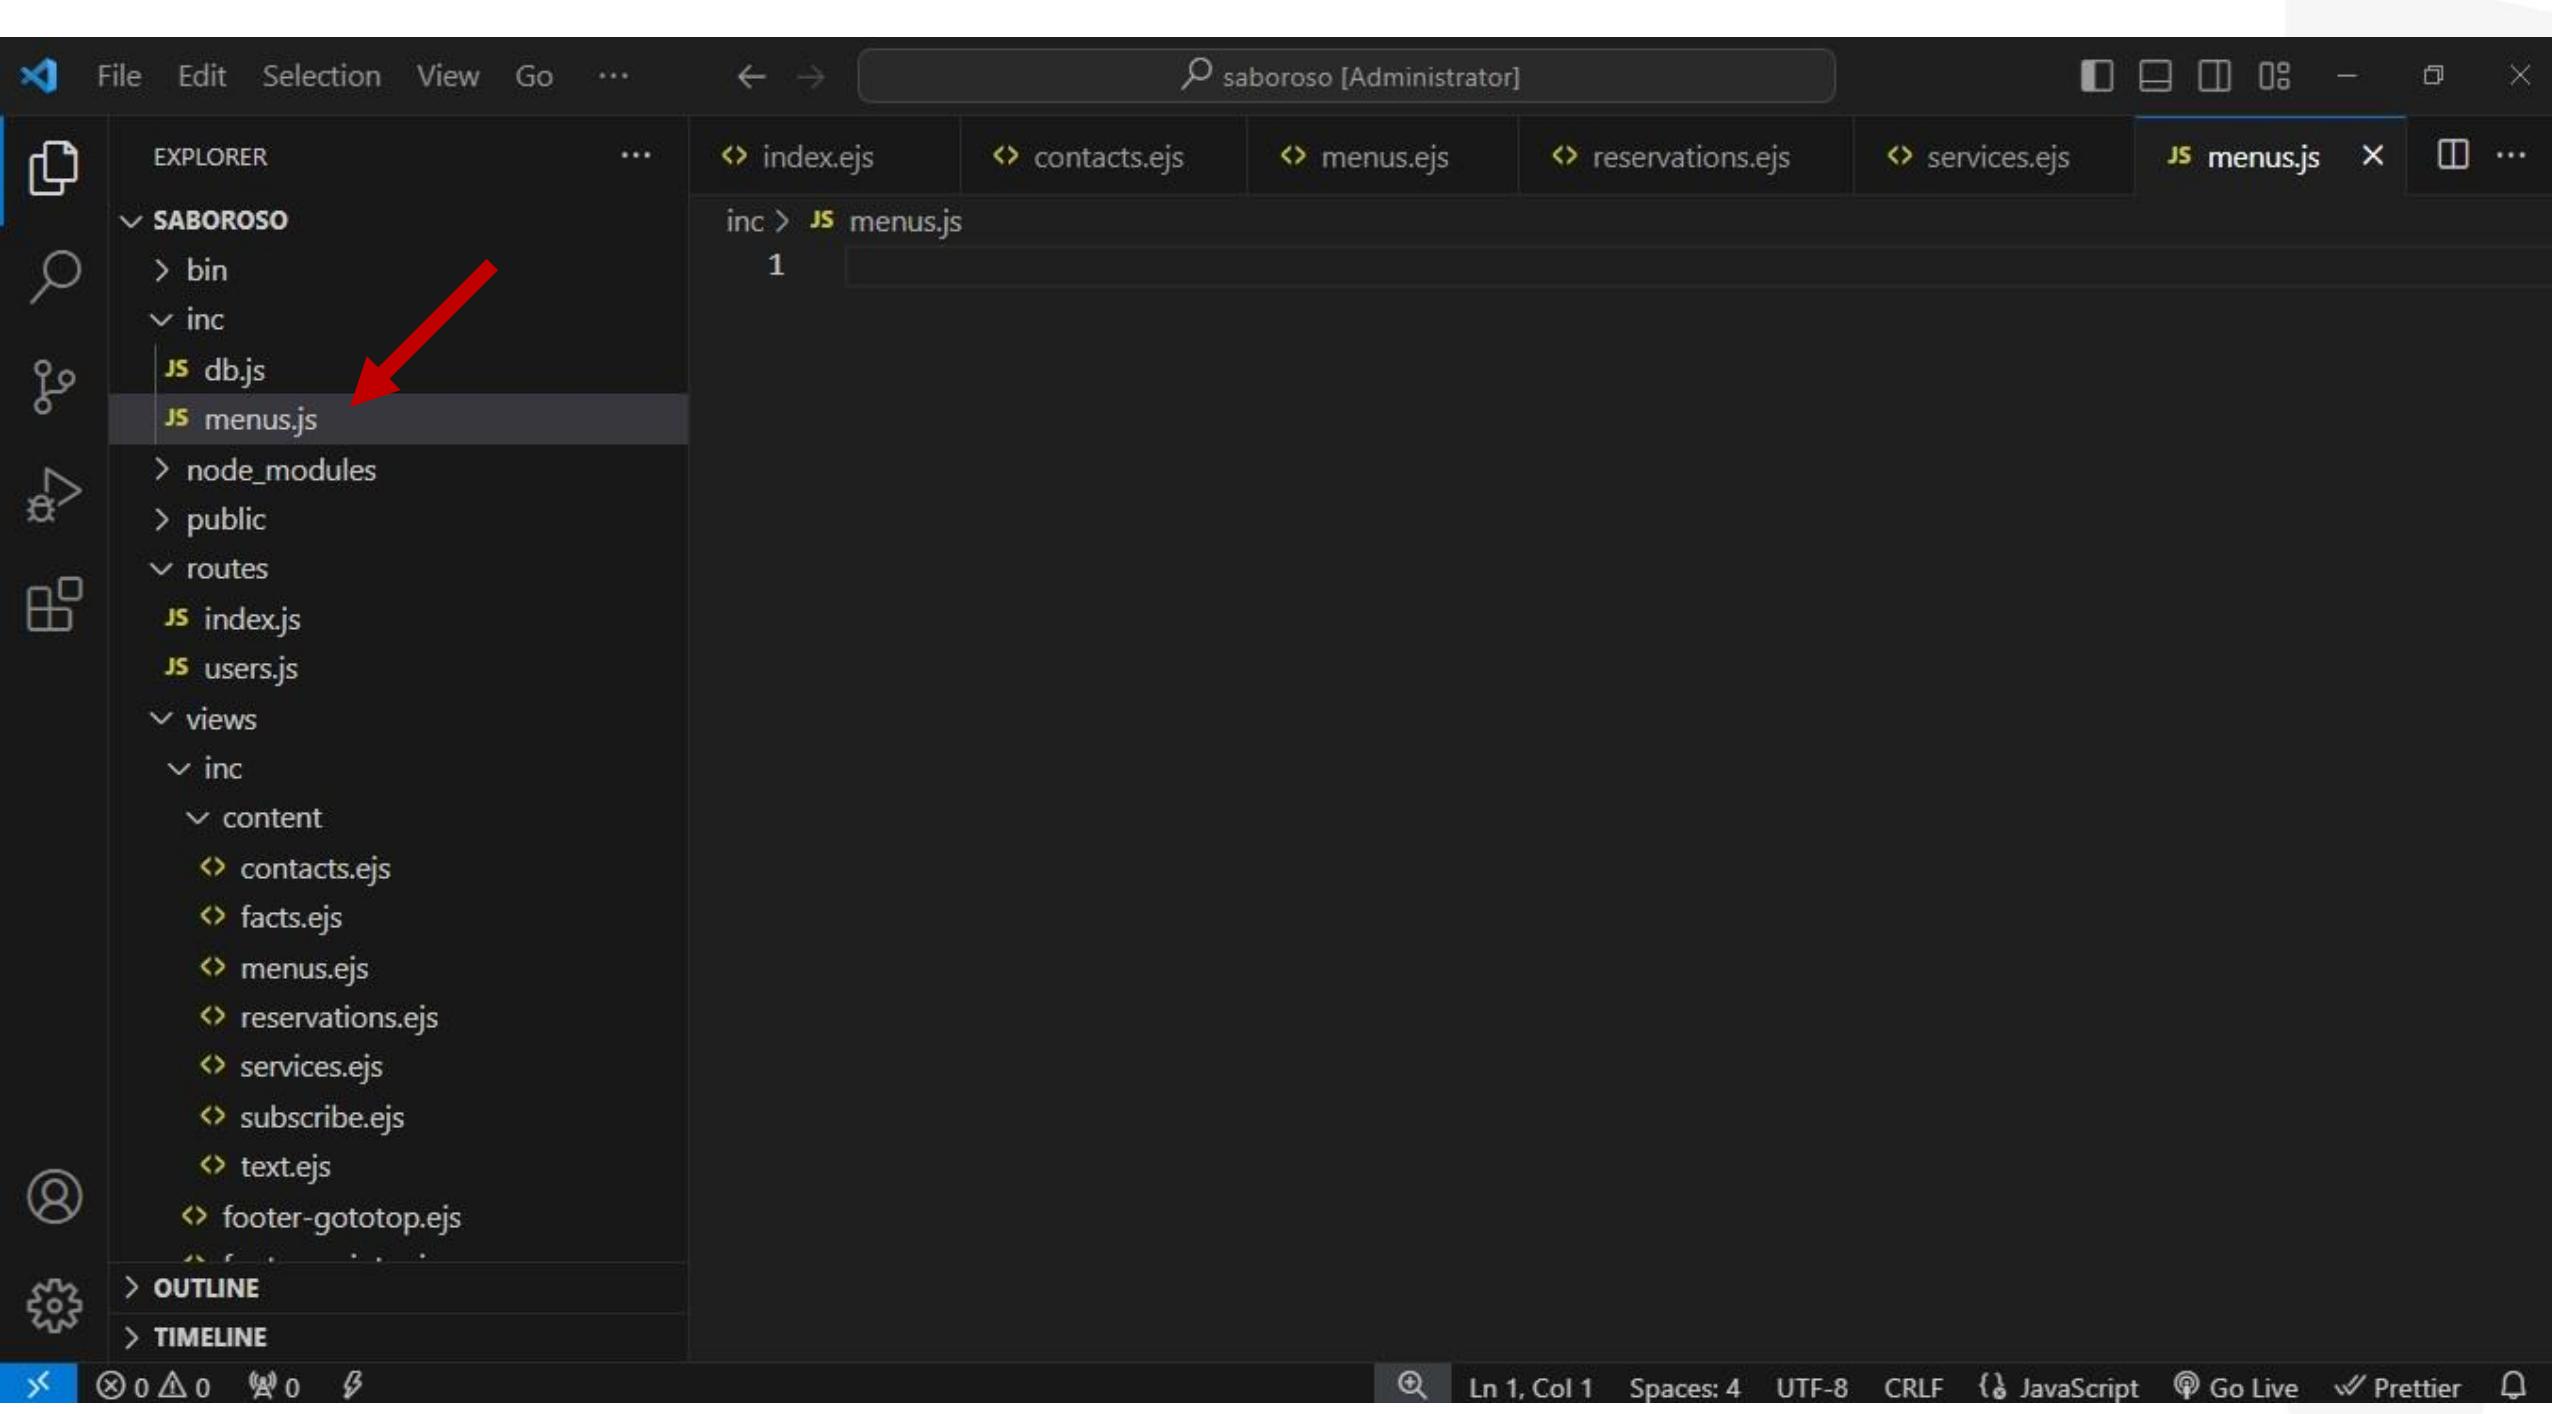

File Edit Selection View Go ... ← → 🔍 saboroso [Administrator] ⚡

EXPLORER ... index.ejs contacts.ejs menus.ejs reservations.ejs services.ejs JS menus.js X ⌂ ...

SABOROSO

- > bin
- < inc
- JS db.js
- JS menus.js
- > node_modules
- > public
- < routes
- JS index.js
- JS users.js
- < views
- < inc
- < content
- JS contacts.ejs
- JS facts.ejs
- JS menus.ejs
- JS reservations.ejs
- JS services.ejs
- JS subscribe.ejs
- JS texte.js
- JS footer-gototop.ejs
- ...

inc > JS menus.js > [?] <unknown> > getMenus

```
1 let conn = require('../db');
2
3 module.exports = {
4   getMenus() {
5     return new Promise((resolve, reject) => {
6       ...
7     })
8   }
9 }
10 }
11 }
12 }
13 }
```

Ln 8, Col 13 Spaces: 4 UTF-8 CRLF { JavaScript Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO


- > bin
- ✓ inc
- JS db.js
- JS menus.js
- > node_modules
- > public
- ✓ routes
- JS index.js **index.js**
- JS users.js
- ✓ views
- ✓ inc
- ✓ content
- ▷ contacts.ejs
- ▷ facts.ejs
- ▷ menus.ejs
- ▷ reservations.ejs
- ▷ services.ejs
- ▷ subscribe.ejs
- ▷ text.ejs
- ▷ footer-gototop.ejs

routes > JS index.js > router.get('/')

```
1 var conn = require('../inc/db')
2 var express = require('express');
3 var router = express.Router();
4
5 /* GET home page. */
6 router.get('/', function(req, res, next) {
7   conn.query(`SELECT * FROM tb_menus ORDER BY title
8   , (err, results)=> {
9     if (err) {
10       console.log(err);
11     }
12     res.render('index', {
13       title: 'Restaurante Saboroso!',
14       menus: results
15     });
16   });
17 });
18
19 router.get('/contacts', function(req, res, next) {
```

Select End of Line Sequence

Ln 8, Col 1 (228 selected) Spaces: 2 UTF-8 LF { JavaScript Go Live Prettier

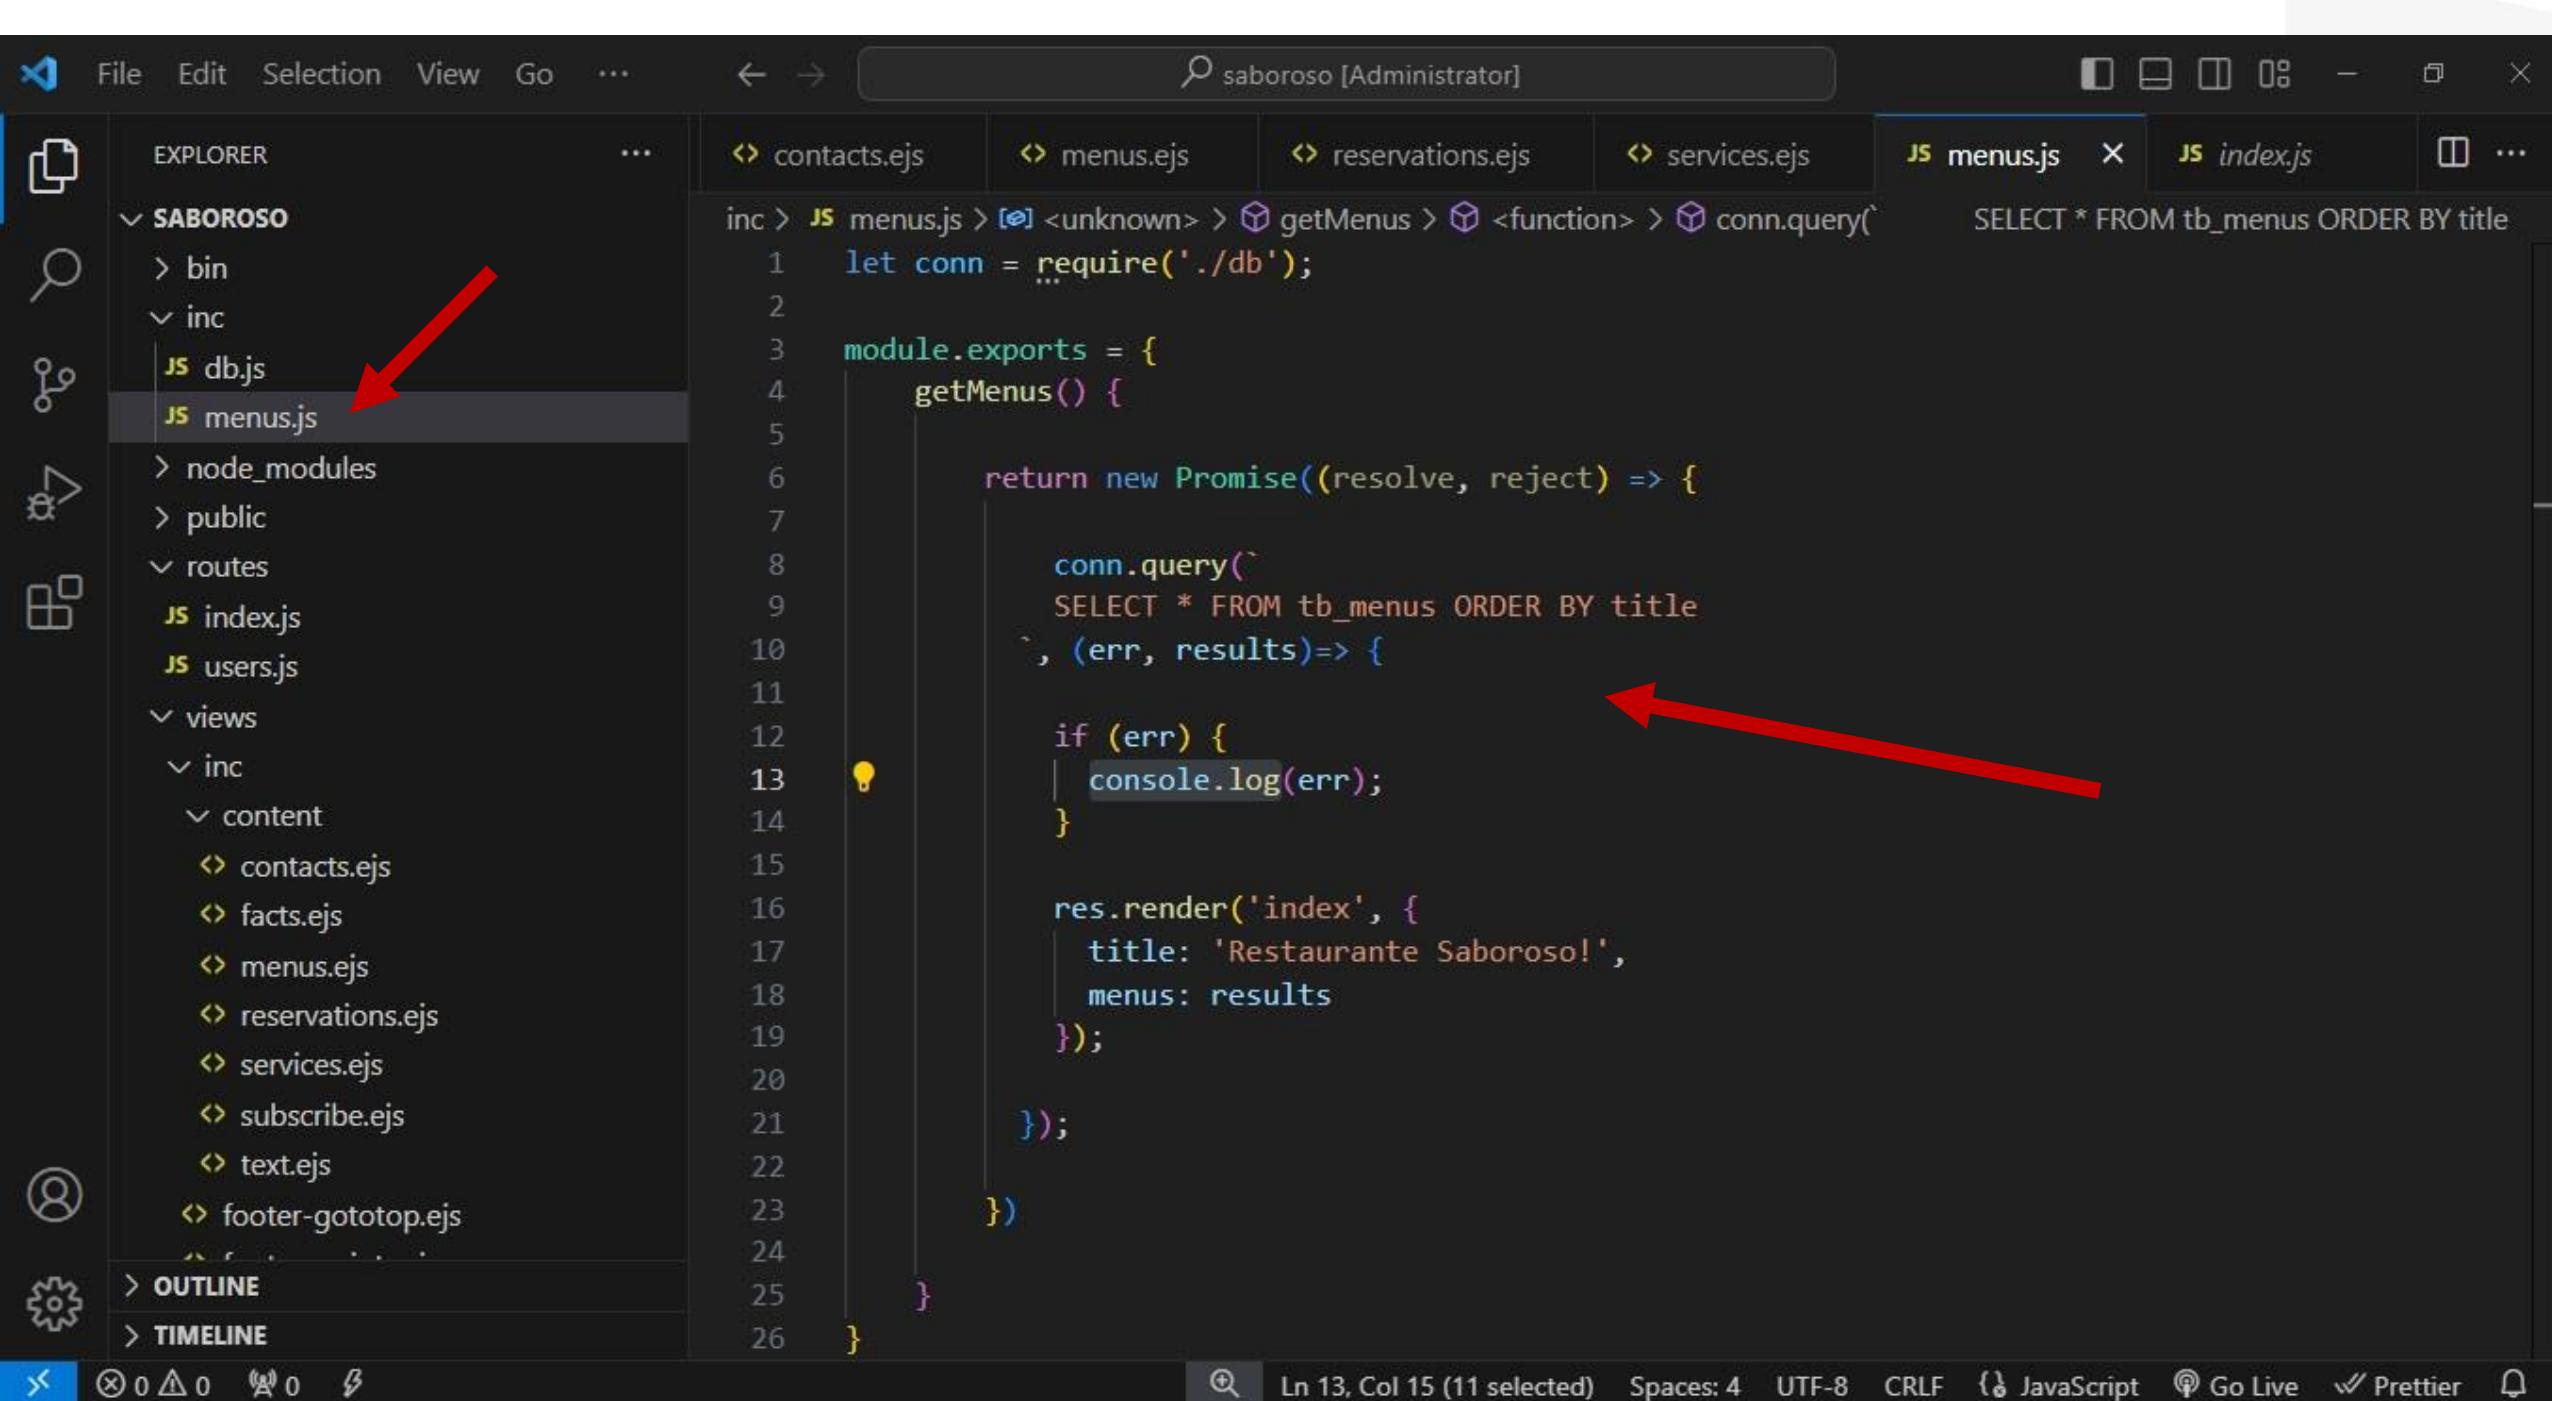

A screenshot of the Visual Studio Code (VS Code) interface. The top bar shows the title "saboroso [Administrator]" and standard window controls. The left sidebar contains icons for Explorer, Search, Open, and Outline/Timeline. The Explorer view shows a project structure under "SABOROSO" with files like "bin", "inc", "db.js", "menus.js", "node_modules", "public", "routes", "index.js", and "users.js". The "views" folder contains "inc" and "content" subfolders with files such as "contacts.ejs", "facts.ejs", "menus.ejs", "reservations.ejs", "services.ejs", "subscribe.ejs", "text.ejs", "footer-gototop.ejs", and others. The "OUTLINE" and "TIMELINE" sections are also visible.

The main editor area displays the "menus.js" file. The code uses promises to query a database and render a template. A red arrow points to the line "reject(err);", which is highlighted in blue. Another red arrow points to the "err" variable in the "if (err)" condition. The code is as follows:

```
1  let conn = require('../db');
2
3  module.exports = {
4      getMenus() {
5          return new Promise((resolve, reject) => {
6              conn.query(`SELECT * FROM tb_menus ORDER BY title
7              `, (err, results)=> {
8                  if (err) {
9                      reject(err);
10                 }
11
12                 res.render('index', {
13                     title: 'Restaurante Saboroso!',
14                     menus: results
15                 });
16             });
17         }
18     }
19 };
20
21
22
23
24
25
26 }
```

The status bar at the bottom shows "Ln 13, Col 15 (6 selected)" and other settings like "Spaces: 4", "UTF-8", "CRLF", "JavaScript", "Go Live", and "Prettier".

A screenshot of the Visual Studio Code (VS Code) interface. The top bar shows the title "saboroso [Administrator]" and standard window controls. The left sidebar contains icons for Explorer, Search, Open, and Outline/Timeline. The Explorer view shows a file tree for a project named "SABOROSO". The "views" folder contains "index.js" and "users.js", which are highlighted in yellow. The "routes" folder contains "index.js" and "users.js", and the "views" folder contains "content" which includes "contacts.ejs", "facts.ejs", "menus.ejs", "reservations.ejs", "services.ejs", "subscribe.ejs", "text.ejs", "footer-gototop.ejs", and "index.ejs". The main editor area displays a JavaScript file named "menus.js". The code is as follows:

```
1  let conn = require('../db');
2
3  module.exports = {
4      getMenus() {
5          return new Promise((resolve, reject) => {
6              conn.query(
7                  'SELECT * FROM tb_menus ORDER BY title',
8                  (err, results)=> {
9                      if (err) {
10                          reject(err);
11                      }
12                      res.render('index', {
13                          title: 'Restaurante Saboroso!',
14                          menus: results
15                      });
16                  });
17              });
18          });
19      });
20  });
21  });
22  });
23  });
24  });
25  });
26  }
```

A red arrow points from the bottom right towards a tooltip that appears over the "res.render" call at line 16. The tooltip shows the function signature and parameters: "res.render('index', { title: 'Restaurante Saboroso!', menus: results })". The status bar at the bottom indicates the current line is 16, column 1, with 128 selected characters, and the file is saved in UTF-8 CRLF format.

A screenshot of the Visual Studio Code (VS Code) interface. The top bar shows the menu: File, Edit, Selection, View, Go, ... followed by navigation icons (back, forward, search). The title bar displays "saboroso [Administrator]". The right side of the title bar has window control buttons (minimize, maximize, close) and a tab bar with tabs for "menu.js" (selected), "index.js", and others.

The left sidebar (Explorer) shows the project structure:

- EXPLORER
- SABOROSO
 - > bin
 - < inc
 - JS db.js
 - JS menus.js (selected)
 - > node_modules
 - > public
 - < routes
 - JS index.js
 - JS users.js
 - < views
 - < inc
 - < content
 - JS contacts.ejs
 - JS facts.ejs
 - JS menus.ejs
 - JS reservations.ejs
 - JS services.ejs
 - JS subscribe.ejs
 - JS text.ejs
 - JS footer-gototop.ejs

The main code editor area contains the following JavaScript code:

```
inc > JS menus.js > [?] <unknown> > ⚡ getMenus > ⚡ <function> > ⚡ conn.query(`SELECT * FROM tb_menus ORDER BY title`)  
1   let conn = require('../db');  
2  
3   module.exports = {  
4     getMenus() {  
5       return new Promise((resolve, reject) => {  
6         conn.query(`  
7           SELECT * FROM tb_menus ORDER BY title  
8         `, (err, results)=> {  
9           if (err) {  
10             reject(err);  
11           }  
12           resolve(results);  
13         })  
14       }  
15     }  
16   };  
17  
18 }  
19  
20 }  
21 }  
22 }  
23 };
```

A red arrow points to the line of code "resolve(results);". A yellow lightbulb icon is also visible near the same line.

The bottom status bar shows: Ln 16, Col 1 (29 selected) Spaces: 4 UTF-8 CRLF { JavaScript Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the file path "saboroso [Administrator]". The left sidebar (Explorer) lists the project structure under "SABOROSO", including "inc", "node_modules", "public", "routes", "views", and various files like "index.js", "users.js", "contacts.ejs", etc. The main editor area displays a JavaScript file named "menus.js". The code is as follows:

```
1  let conn = require('../db');
2
3  module.exports = {
4      getMenus() {
5          return new Promise((resolve, reject) => {
6              conn.query(`
7                  SELECT * FROM tb_menus ORDER BY title
8              `, (err, results)=> {
9                  if (err) {
10                      reject(err);
11                  }
12                  resolve(results);
13              });
14          });
15      }
16  };
17
18  module.exports = {
19      getOne(id) {
20          return new Promise((resolve, reject) => {
21              conn.query(`SELECT * FROM tb_menus WHERE id = ${id}`);
22          });
23      }
24  };

```

A red arrow points from the status bar at the bottom to a yellow lightbulb icon in the gutter of line 18, indicating a potential issue or suggestion.

The status bar at the bottom shows the current line and column: "Ln 18, Col 1 (46 selected)". It also includes icons for search, file operations, and extensions like "JavaScript", "Go Live", and "Prettier".

A screenshot of the Visual Studio Code interface. The Explorer sidebar on the left shows a file tree for a project named 'SABOROSO'. The 'routes' folder is expanded, showing files like 'index.js' and 'users.js'. The 'views' folder is also expanded, showing subfolders 'inc' and 'content', and files such as 'contacts.ejs', 'facts.ejs', 'menus.ejs', 'reservations.ejs', 'services.ejs', 'subscribe.ejs', 'text.ejs', 'footer-gototop.ejs', 'footer-scripts.ejs', 'footer.ejs', 'head.ejs', 'header-index.ejs', and 'header-menu.ejs'. The 'OUTLINE' and 'TIMELINE' sections are also visible at the bottom of the sidebar.


The main editor area displays a JavaScript file named 'menus.js'. A red arrow points from the 'menus.ejs' entry in the Explorer to the 'getMenus()' function in the code. The code uses a Promise to query a database for menu items.


```
inc > JS menus.js > [?] <unknown> > ⚡ getMenus
1 let conn = ...require('../db');
2
3 module.exports = {
4   getMenus() {
5
6     return new Promise((resolve, reject) => {
7
8       conn.query(`SELECT * FROM tb_menus ORDER BY title
9      `, (err, results)=> {
10
11         if (err) {
12           reject(err);
13         }
14
15         resolve(results);
16
17       });
18
19     });
20
21   }
22
23 };
```

The status bar at the bottom shows the current file is 'menus.js', the line and column are 'Ln 4, Col 15 (10 selected)', and the encoding is 'UTF-8'. It also includes icons for Go Live and Prettier.

A screenshot of the Visual Studio Code interface. The Explorer sidebar on the left shows a file tree for a project named 'SABOROSO'. The 'routes' folder contains two files: 'index.js' (which is selected and highlighted with a red arrow) and 'users.js'. Other files listed include 'lex.ejs', 'contacts.ejs', 'menus.ejs', 'reservations.ejs', 'services.ejs', and several EJS files like 'fact.ejs', 'menu.ejs', etc. The Editor tab at the top has tabs for 'lex.ejs', 'contacts.ejs', 'menus.ejs', 'reservations.ejs', 'services.ejs', 'menus.js', and 'index.js'. The main code editor shows the content of the 'index.js' file, which is a Node.js script using Express and MySQL. The Status Bar at the bottom shows file statistics (0 changes, 0 warnings, 0 errors), line and column numbers (Ln 17, Col 38), and various language and tooling settings.

```
routes > JS index.js > router.get('/') callback > conn.query(` SELECT * FROM tb_menus ORDER BY title `) callback
1  var conn = require('../inc/db')
2  var express = require('express');
3  var router = express.Router();
4
5  /* GET home page. */
6  router.get('/', function(req, res, next) {
7
8    conn.query(`SELECT * FROM tb_menus ORDER BY title
9      , (err, results)=> {
10
11      if (err) {
12        console.log(err);
13      }
14
15      res.render('index', {
16        title: 'Restaurante Saboroso!',
17        menus: results
18      });
19    });
20
21  });
22
23 });
24
25 router.get('/contacts', function(req, res, next) {
26
27   res.render('contacts',{
28     title: 'Contato - Restaurante Saboroso!',
29     background: "images/img_bg_3.jpg",
30     h1: "Diga um oi!"
31   });
32 });
```

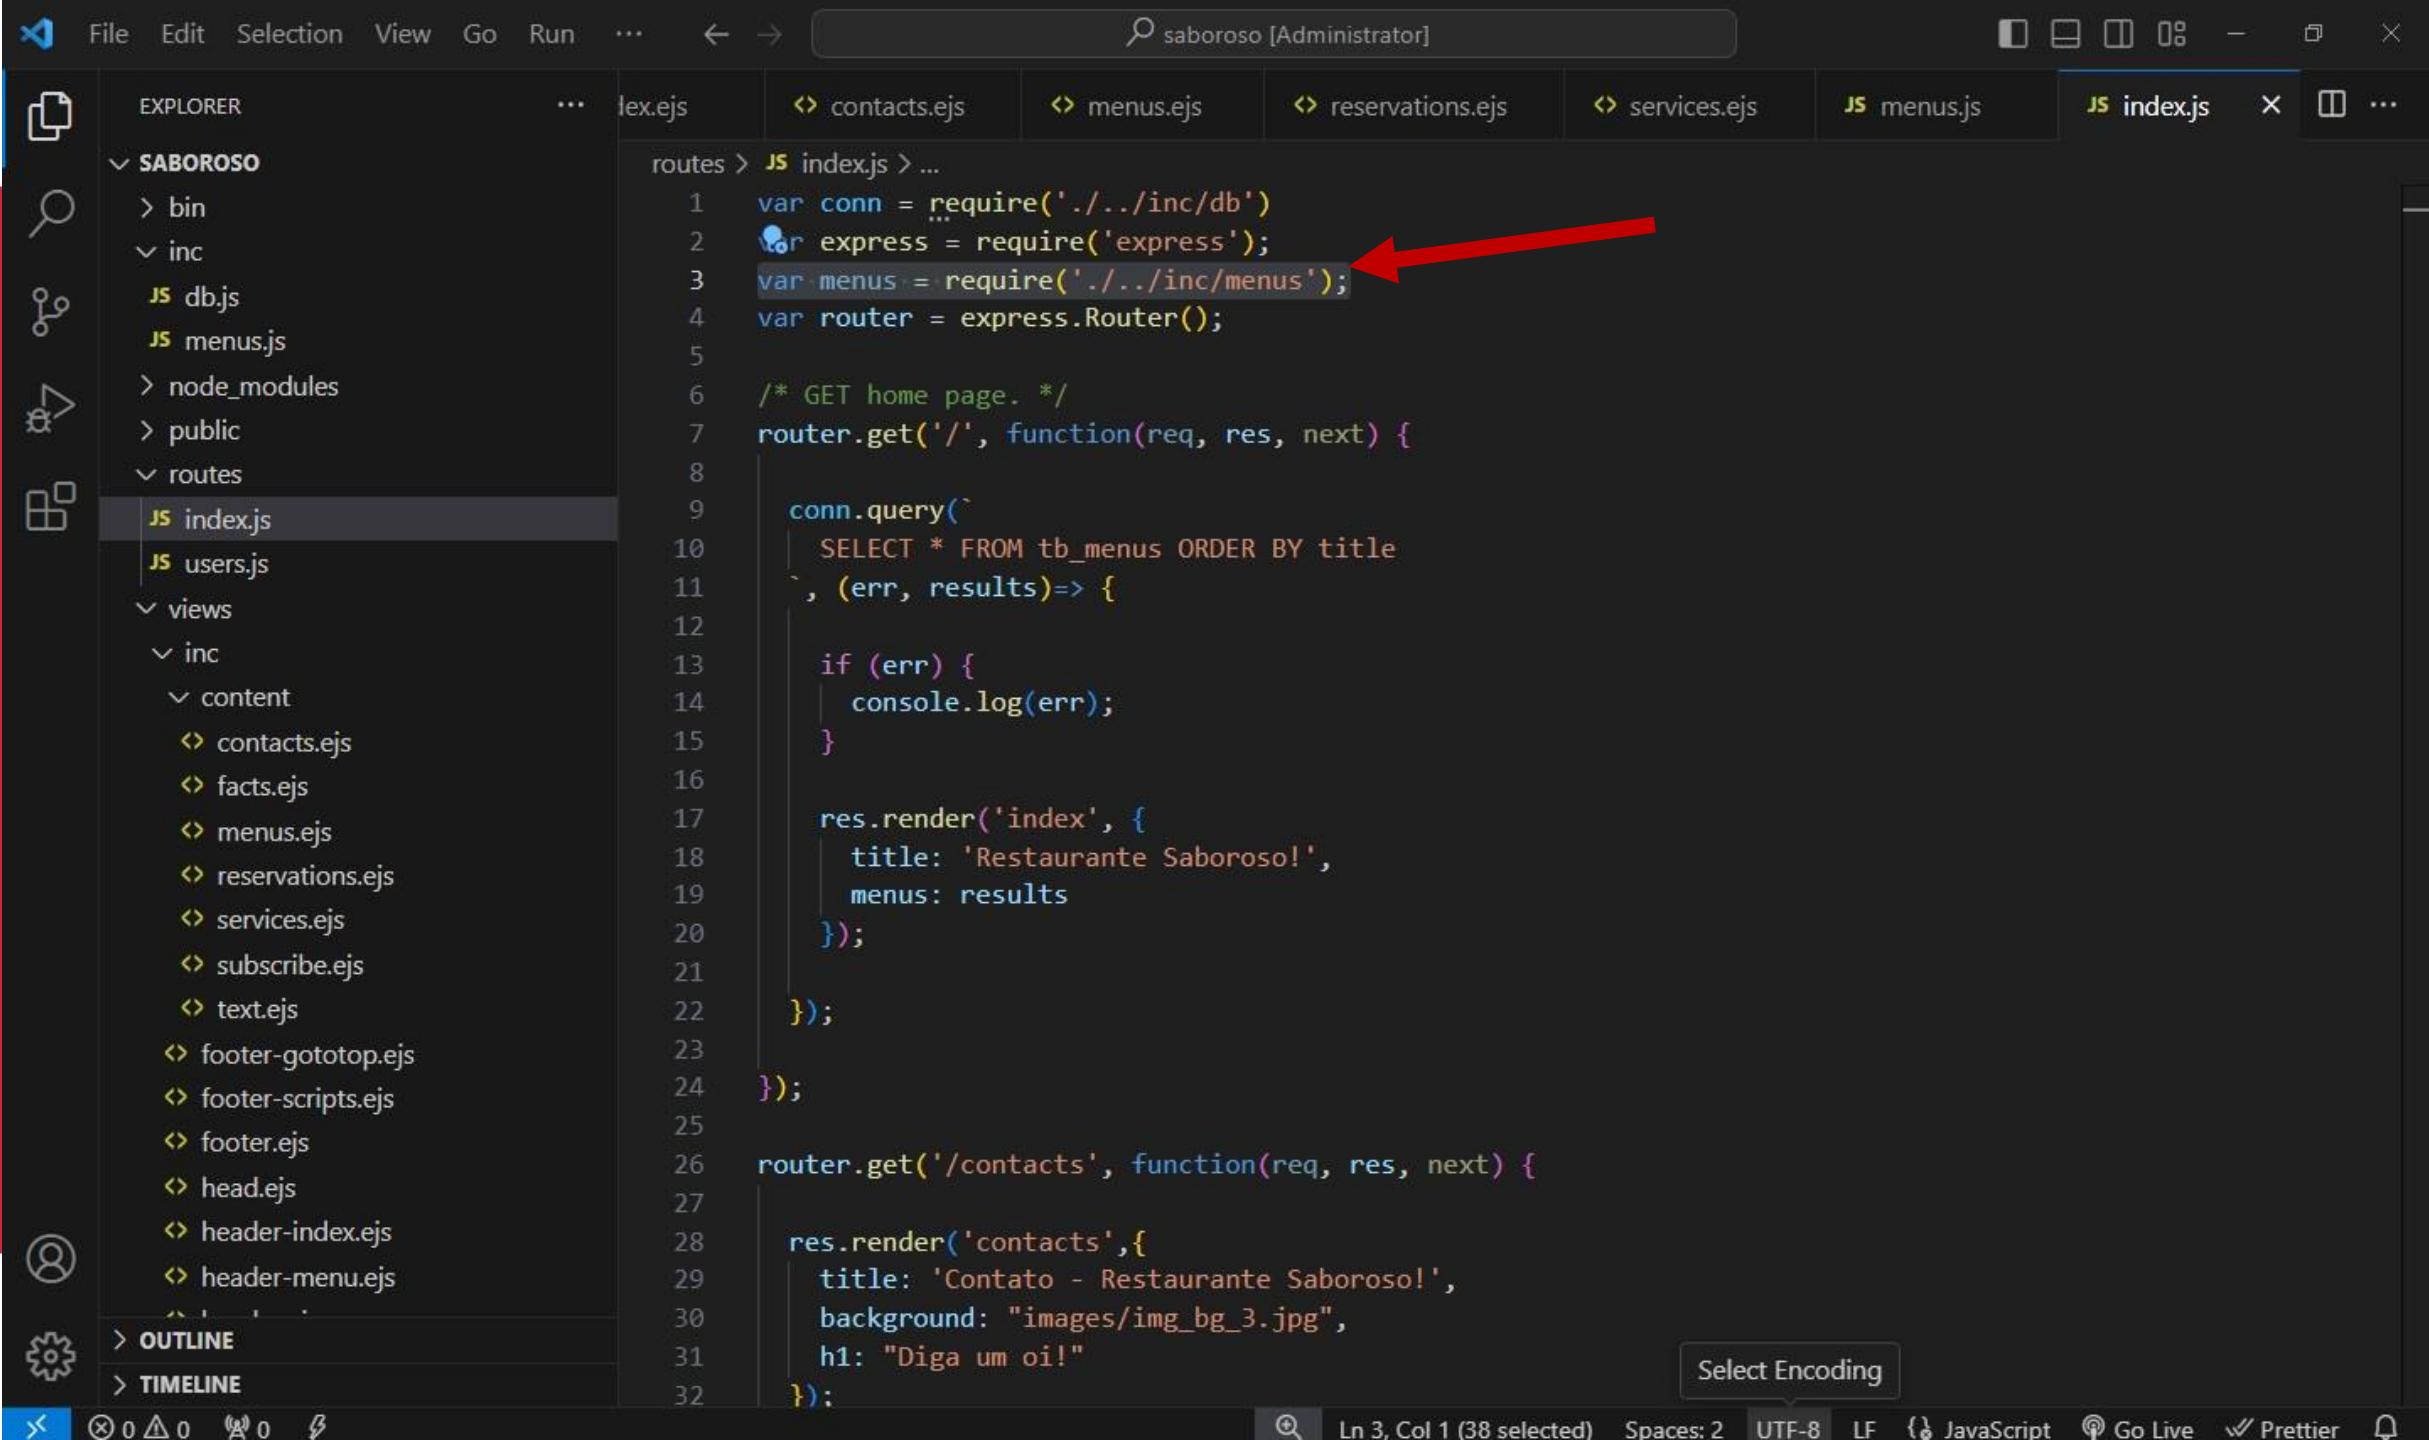

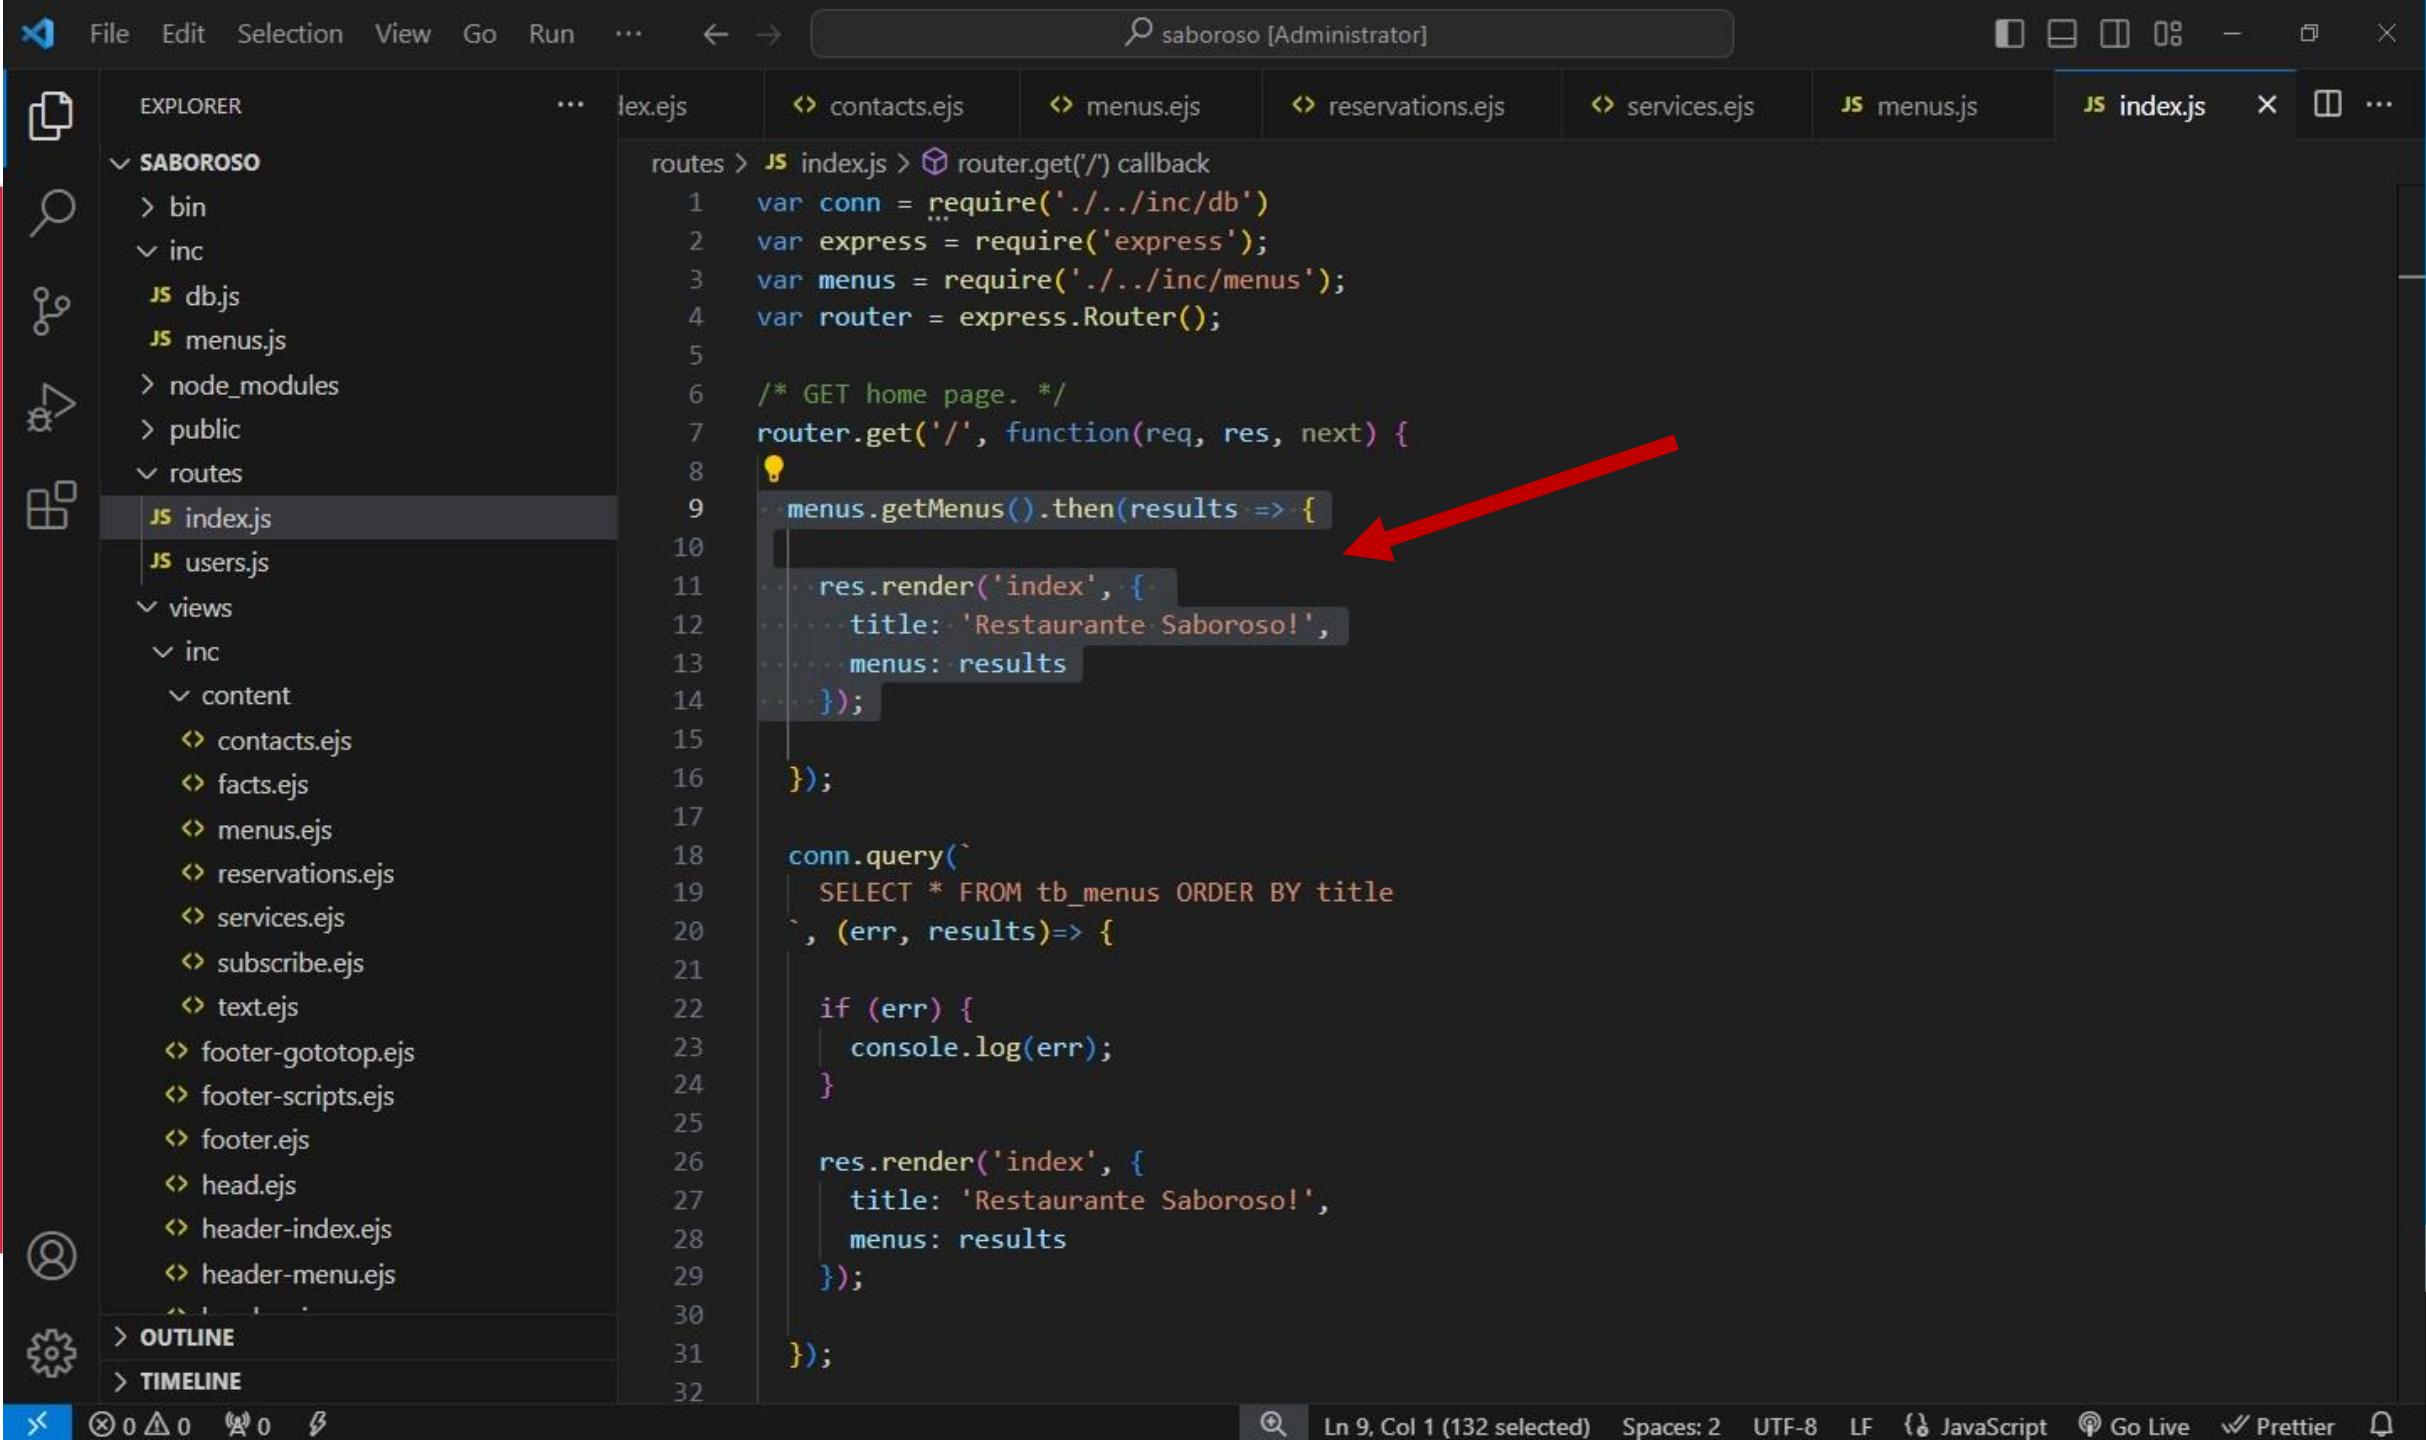

File Edit Selection View Go Run ... ← → saboroso [Administrator] ⚡ 🔍


EXPLORER ... lex.ejs contacts.ejs menus.ejs reservations.ejs services.ejs menus.js index.js


SABOROSO

- > bin
- ✓ inc
 - JS db.js
 - JS menus.js
- > node_modules
- > public
- ✓ routes
 - JS index.js
 - JS users.js
- ✓ views
 - ✓ inc
 - ✓ content
 - ↳ contacts.ejs
 - ↳ facts.ejs
 - ↳ menus.ejs
 - ↳ reservations.ejs
 - ↳ services.ejs
 - ↳ subscribe.ejs
 - ↳ text.ejs
 - ↳ footer-gotop.ejs
 - ↳ footer-scripts.ejs
 - ↳ footer.ejs
 - ↳ head.ejs
 - ↳ header-index.ejs
 - ↳ header-menu.ejs

```
routes > JS index.js > router.get('/') callback
6  /* GET home page. */
7  router.get('/', function(req, res, next) {
8
9    menus.getMenus().then(results => {
10
11      res.render('index', {
12        title: 'Restaurante Saboroso!',
13        menus: results
14      });
15
16    });
17
18    conn.query(`SELECT * FROM tb_menus ORDER BY title
19    , (err, results)=> {
20
21      if (err) {
22        console.log(err);
23      }
24
25      res.render('index', {
26        title: 'Restaurante Saboroso!',
27        menus: results
28      );
29
30    });
31
32  });
33
34
35  router.get('/contacts', function(req, res, next) {
```



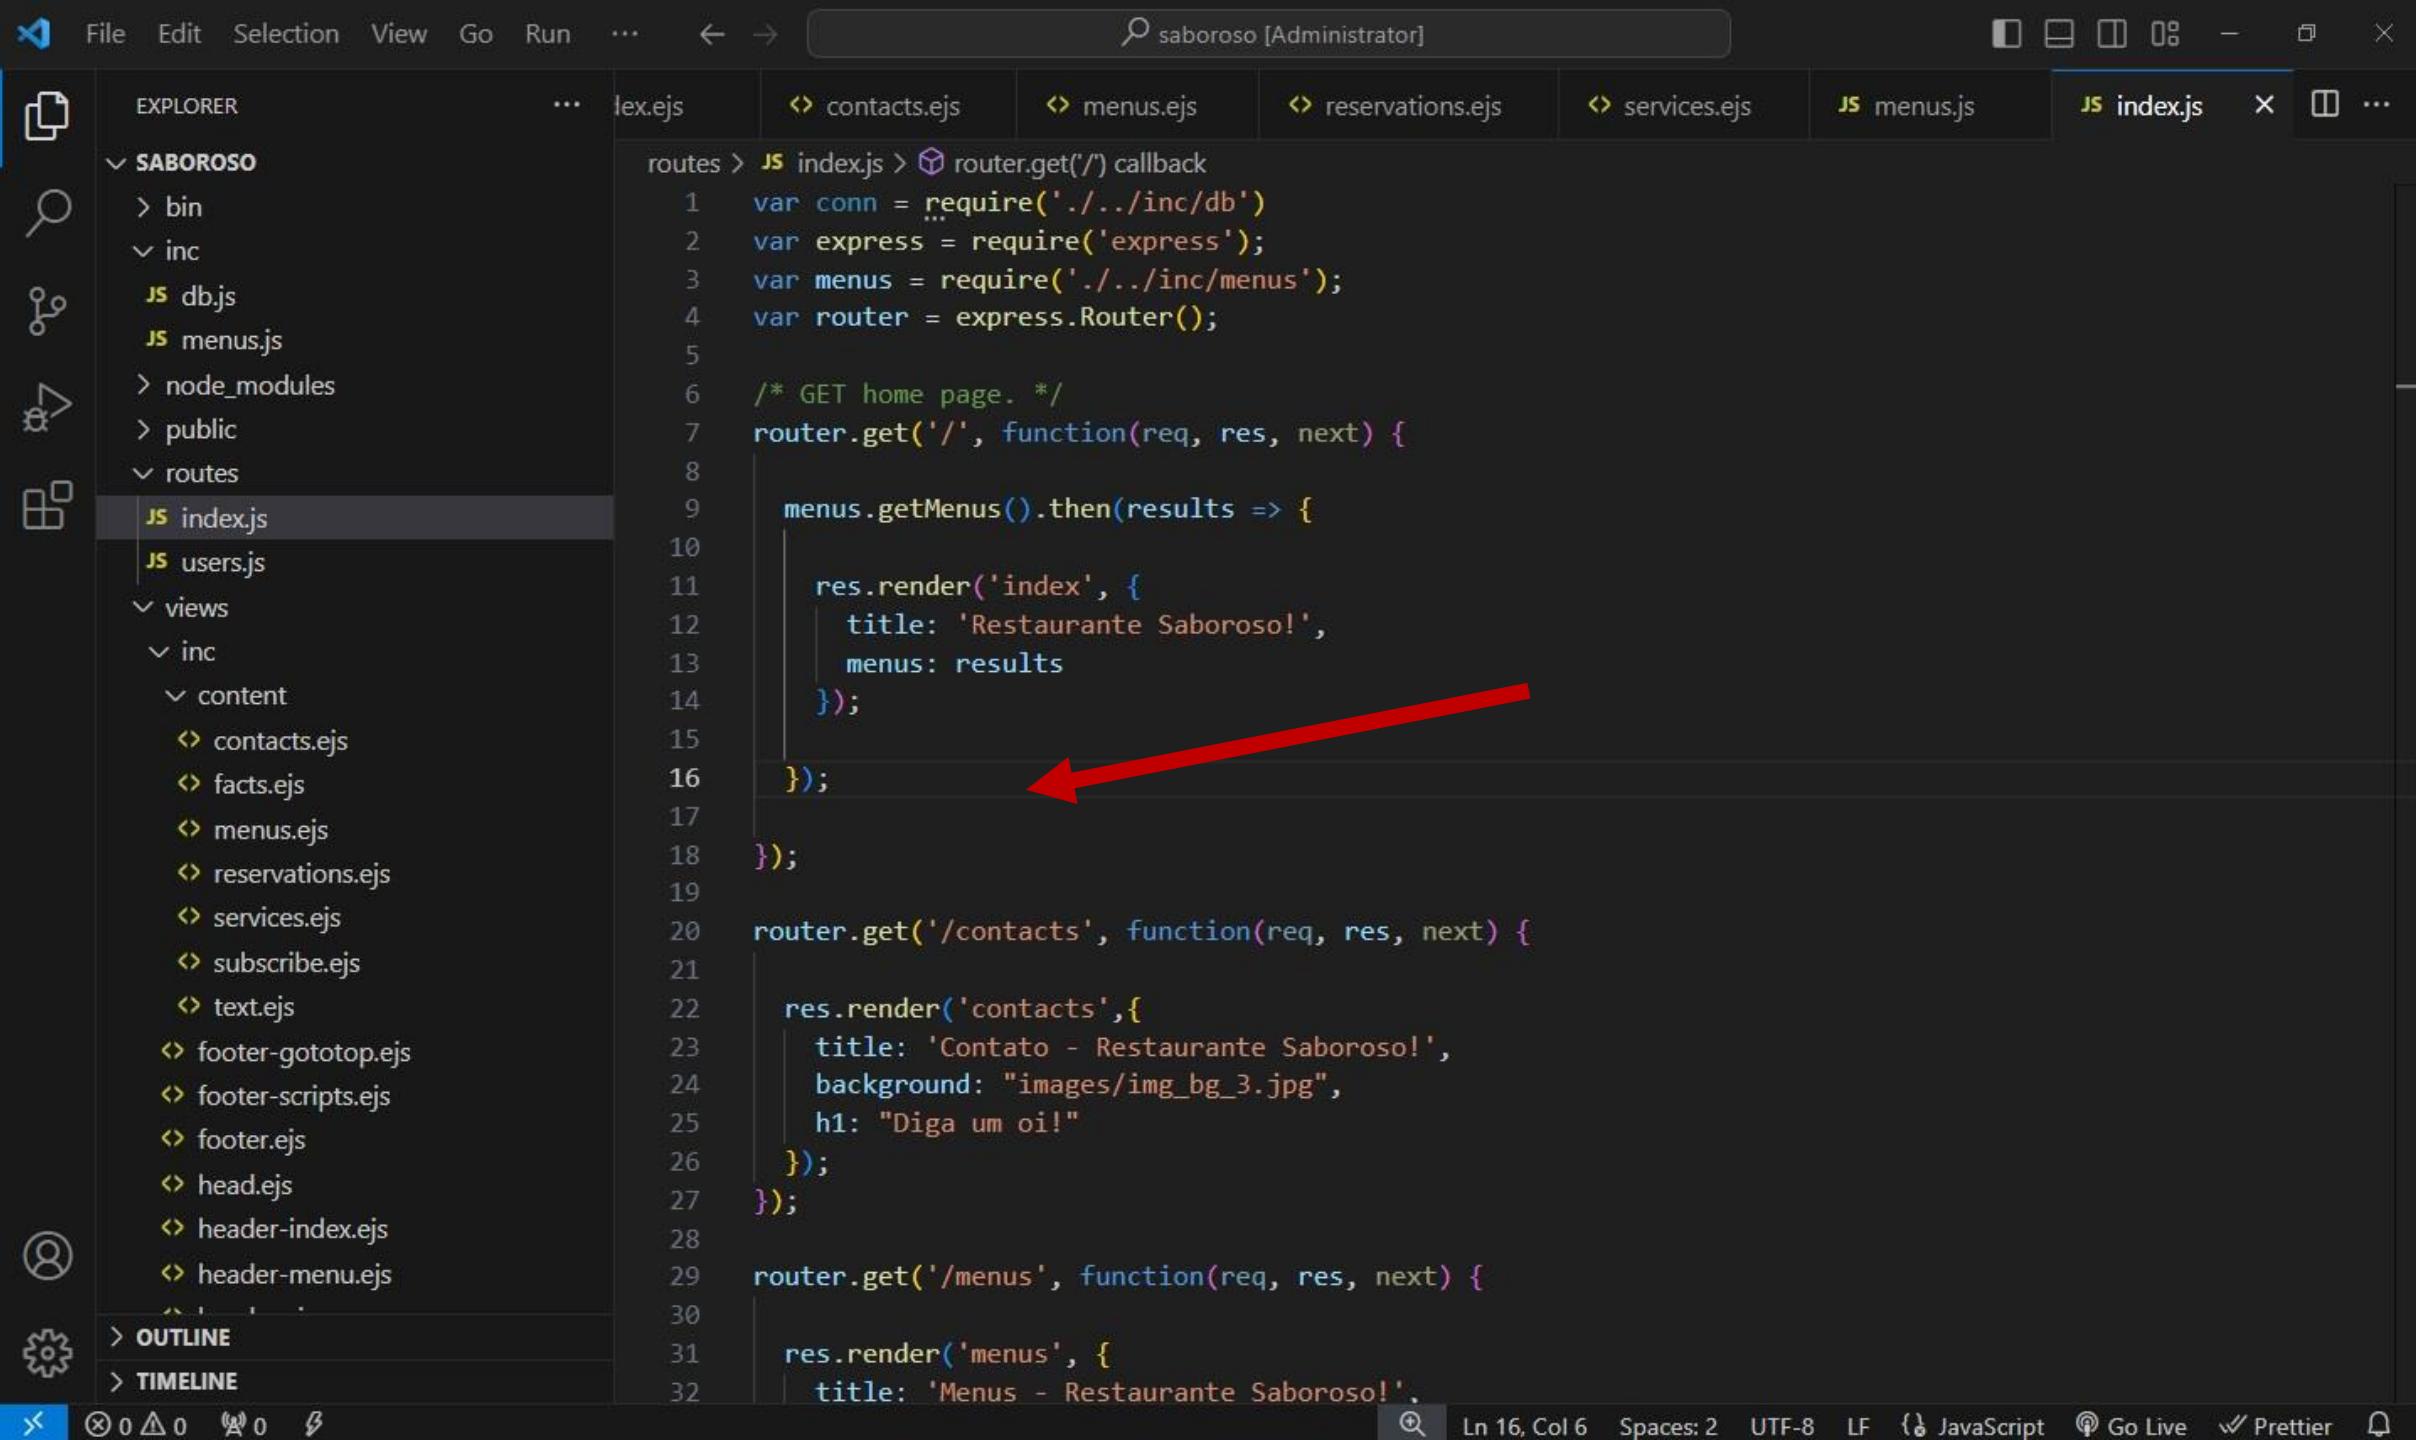

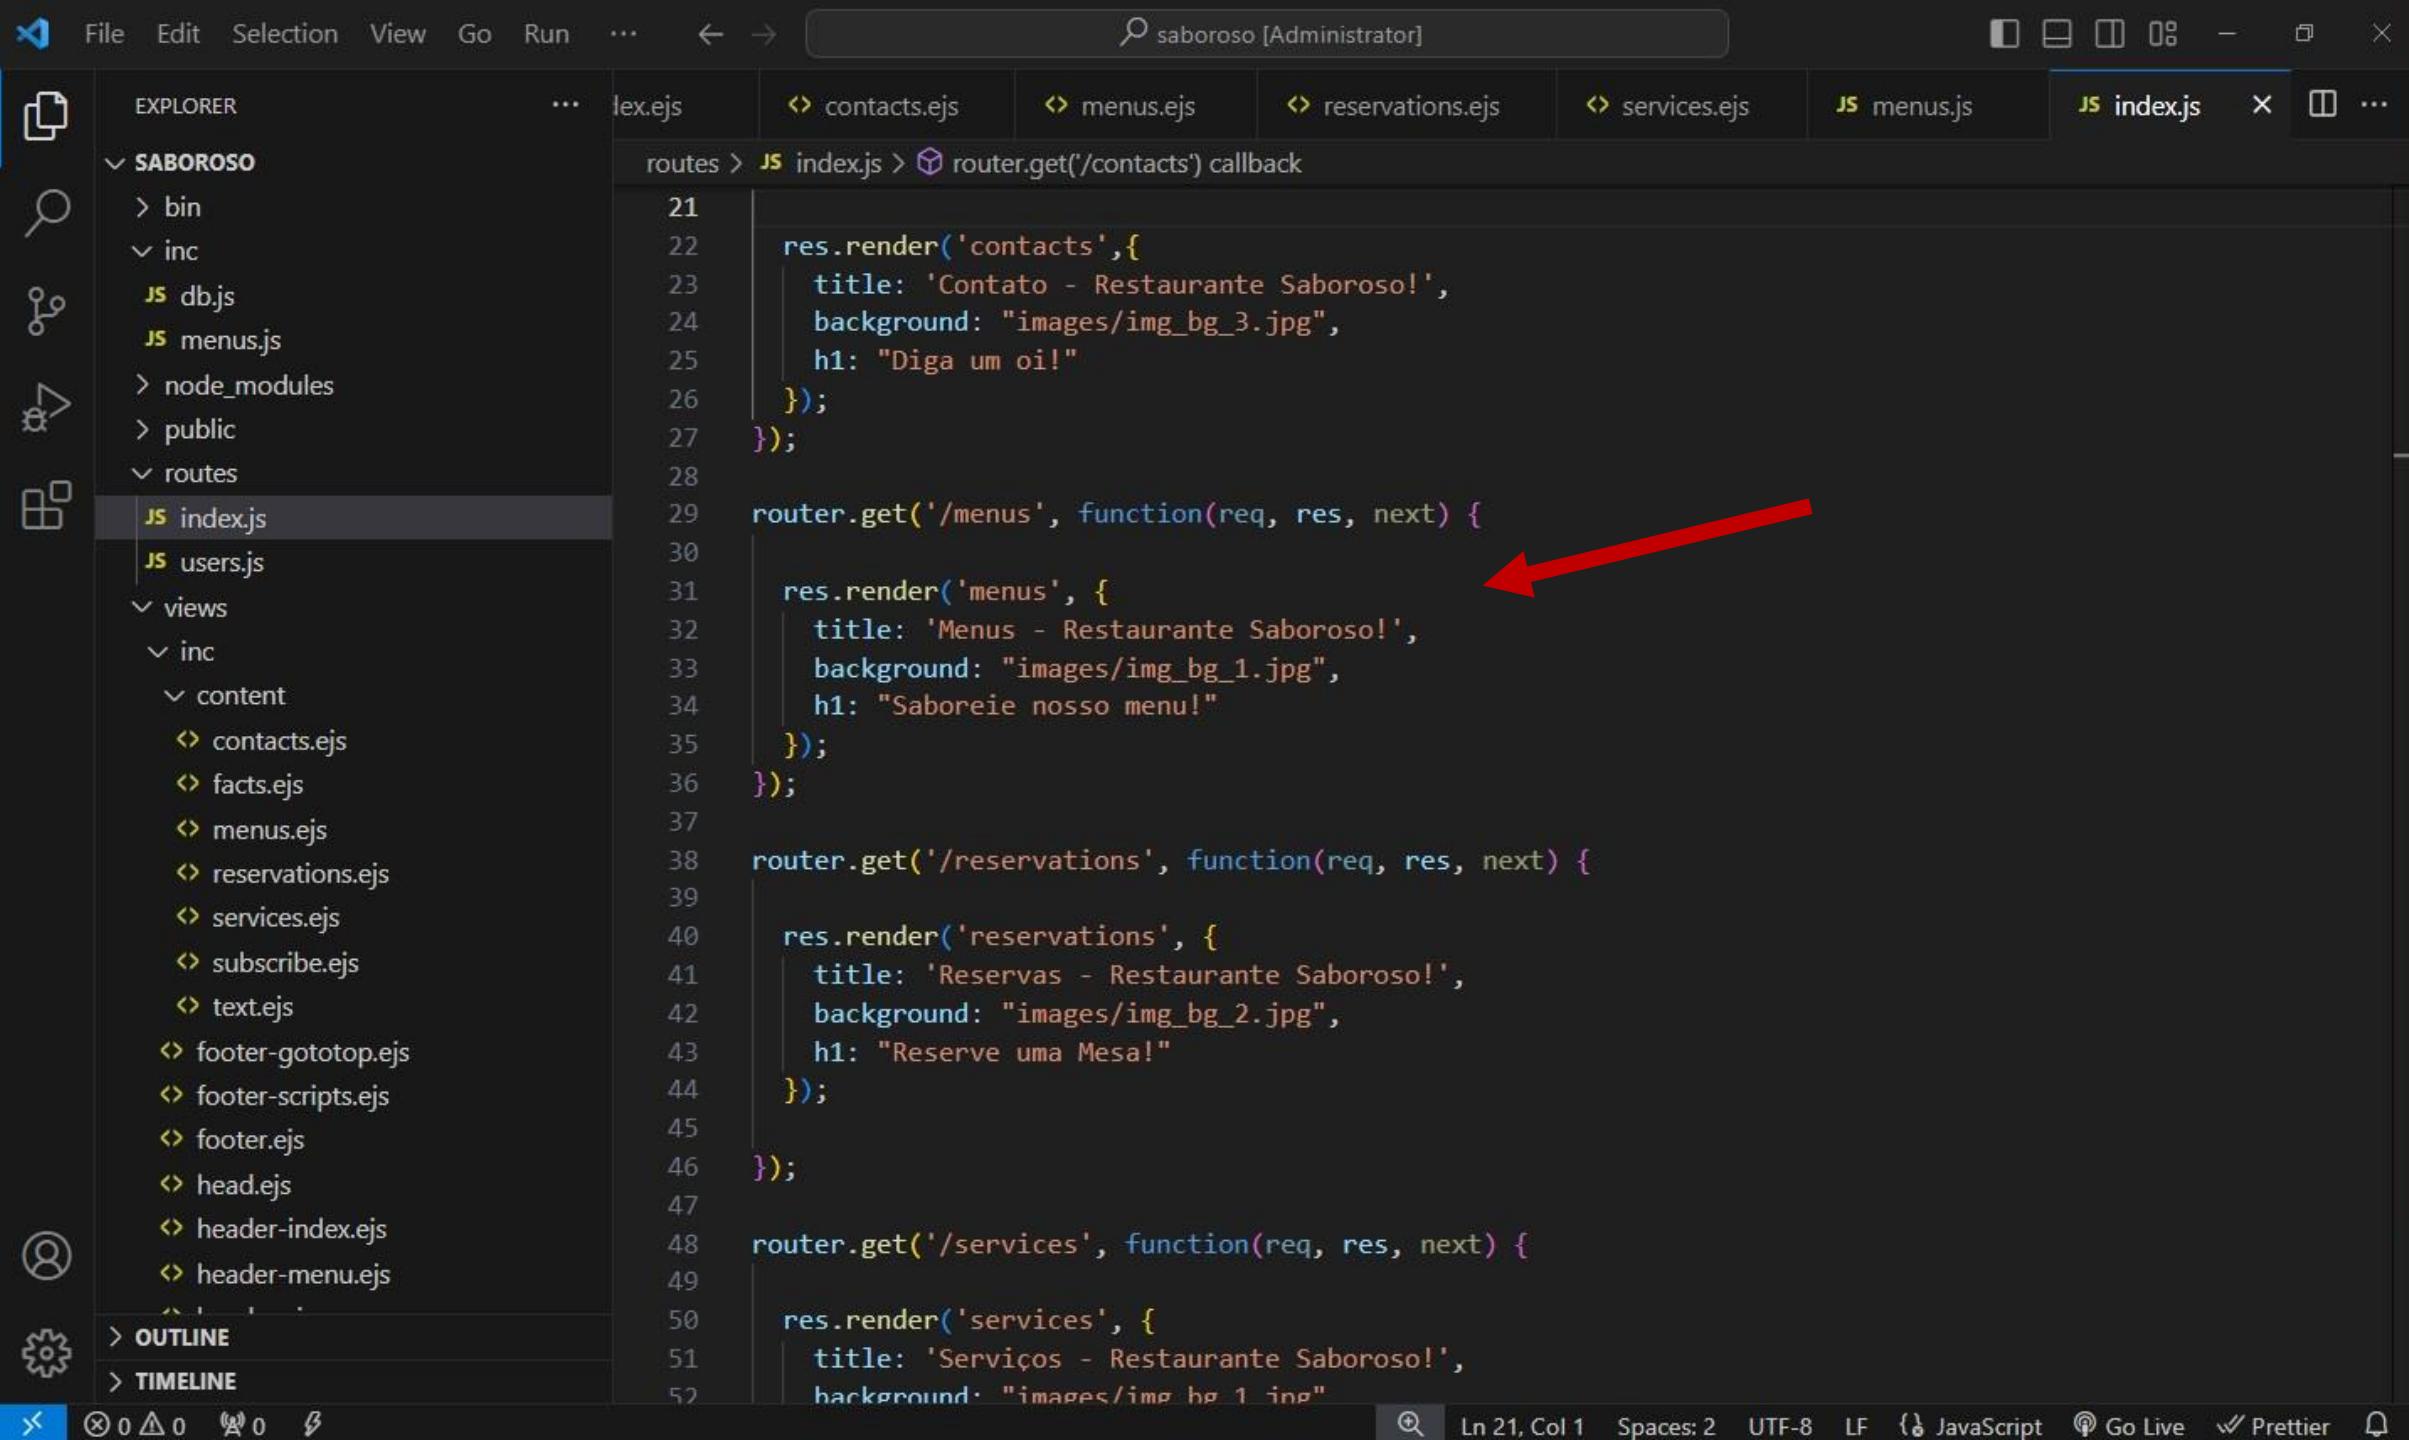

File Edit Selection View Go Run ... ← → saboroso [Administrator] ⚡

EXPLORER ... lex.ejs contacts.ejs menus.ejs reservations.ejs services.ejs menus.js index.js ...

SABOROSO > bin > inc db.js menus.js > node_modules > public > routes > index.js users.js > views > inc > content contacts.ejs facts.ejs menus.ejs reservations.ejs services.ejs subscribe.ejs text.ejs footer-gototop.ejs footer-scripts.ejs footer.ejs head.ejs header-index.ejs header-menu.ejs > OUTLINE > TIMELINE

routes > JS index.js > router.get('/menus') callback

```
17
18 });
19
20 router.get('/contacts', function(req, res, next) {
21
22   res.render('contacts',{
23     title: 'Contato - Restaurante Saboroso!',
24     background: "images/img_bg_3.jpg",
25     h1: "Diga um oi!"
26   });
27 });
28
29 router.get('/menus', function(req, res, next) {
30
31   menus.getMenus().then(results => {
32
33     res.render('menus', {
34       title: 'Menus - Restaurante Saboroso!',
35       background: "images/img_bg_1.jpg",
36       h1: "Saboreie nosso menu!"
37     });
38   });
39 });
40 });
41 });
42 });
43
44 router.get('/reservations', function(req, res, next) {
45
46   res.render('reservations', {
47     title: 'Reservas - Restaurante Saboroso!',
```



File Edit Selection View Go Run ... ← → saboroso [Administrator] □ □ □ □ - □ ×

EXPLORER ... menus.ejs views reservations.ejs services.ejs menus.js index.js × menus.ejs ...\\content ...

SABOROSO

inc db.js menus.js node_modules public routes index.js users.js

views inc content contacts.ejs facts.ejs menus.ejs reservations.ejs services.ejs subscribe.ejs text.ejs footer-gotop.ejs footer-scripts.ejs footer.ejs head.ejs header-index.ejs header-menu.ejs header.ejs


OUTLINE

TIMELINE

routes > JS index.js > router.get('/menus') callback > then() callback > h1

```
17
18 });
19
20 router.get('/contacts', function(req, res, next) {
21
22   res.render('contacts', {
23     title: 'Contato - Restaurante Saboroso!',
24     background: "images/img_bg_3.jpg",
25     h1: "Diga um oi!"
26   });
27 });
28
29 router.get('/menus', function(req, res, next) {
30
31   menus.getMenus().then(results => {
32
33     res.render('menus', {
34       title: 'Menus - Restaurante Saboroso!',
35       background: "images/img_bg_1.jpg",
36       h1: "Saboreie nosso menu!",
37       menus: results
38     });
39   });
40 });
41
42 });
43
44 router.get('/reservations', function(req, res, next) {
45
46   res.render('reservations', {
47     title: 'Reservas - Restaurante Saboroso!',
```

Ln 36, Col 33 (42 selected) Spaces: 2 UTF-8 LF { JavaScript Go Live Prettier

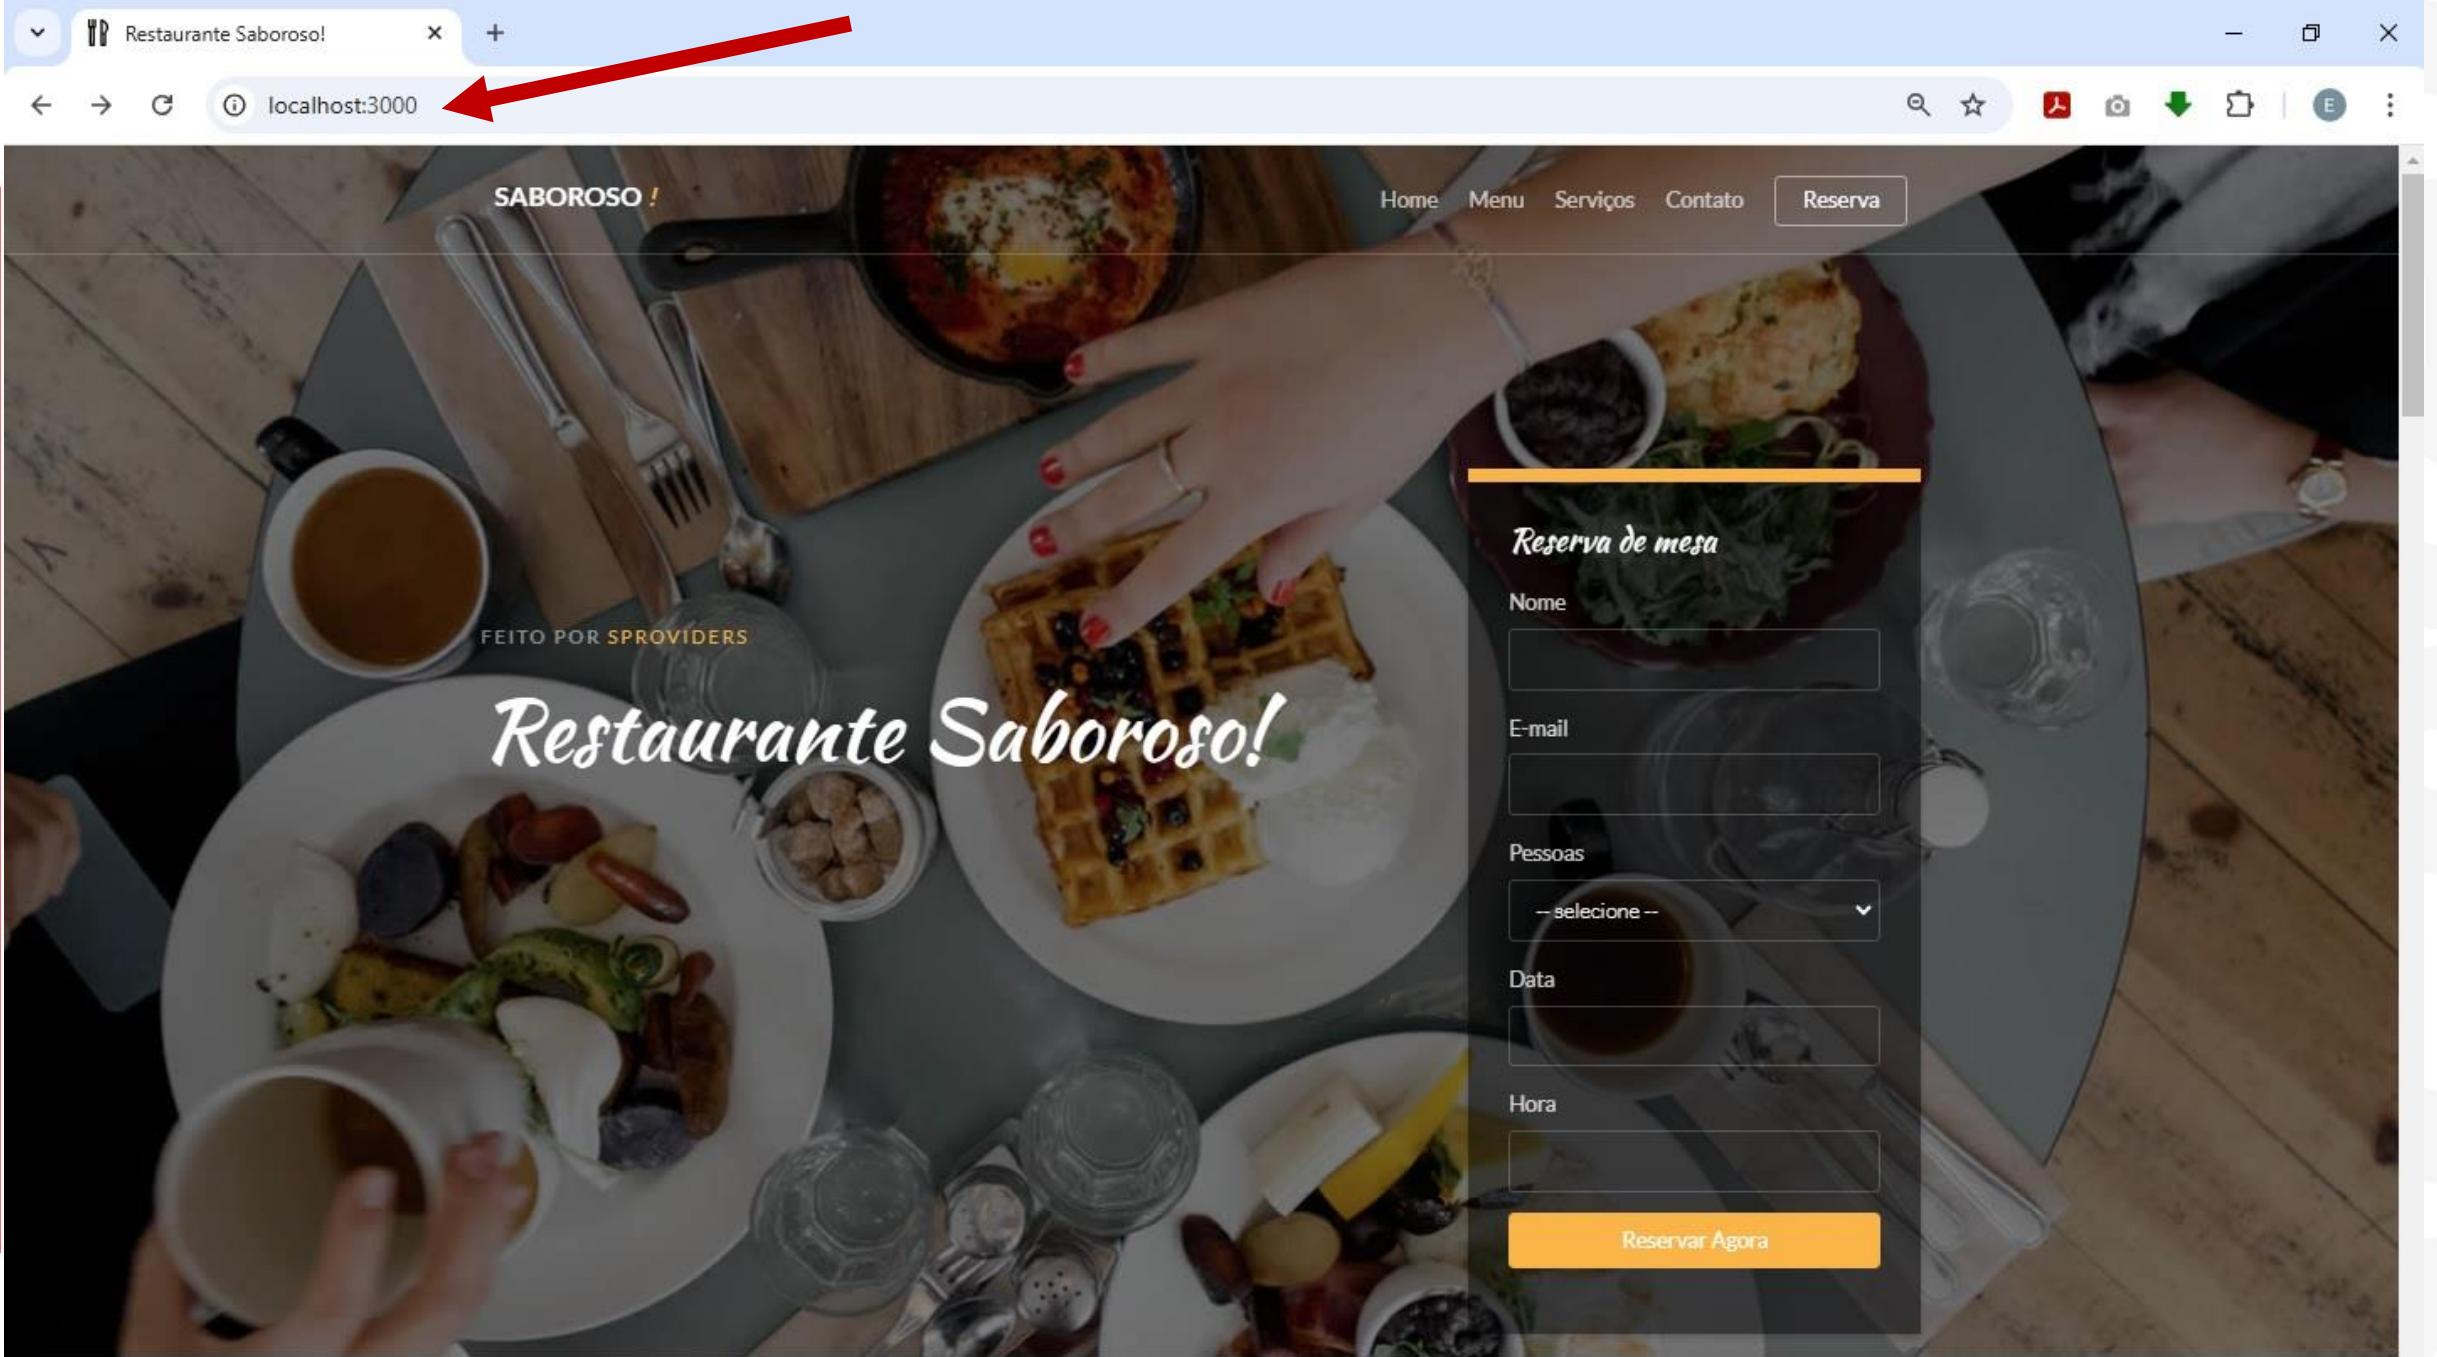

Pratos Populares

Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de denguis. Quem num gosta di mé, boa gentis num é.



Bife de Costela com molho

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

45.35



Chilli com Carne

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.40




Hambúrguer com Fritas

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.80



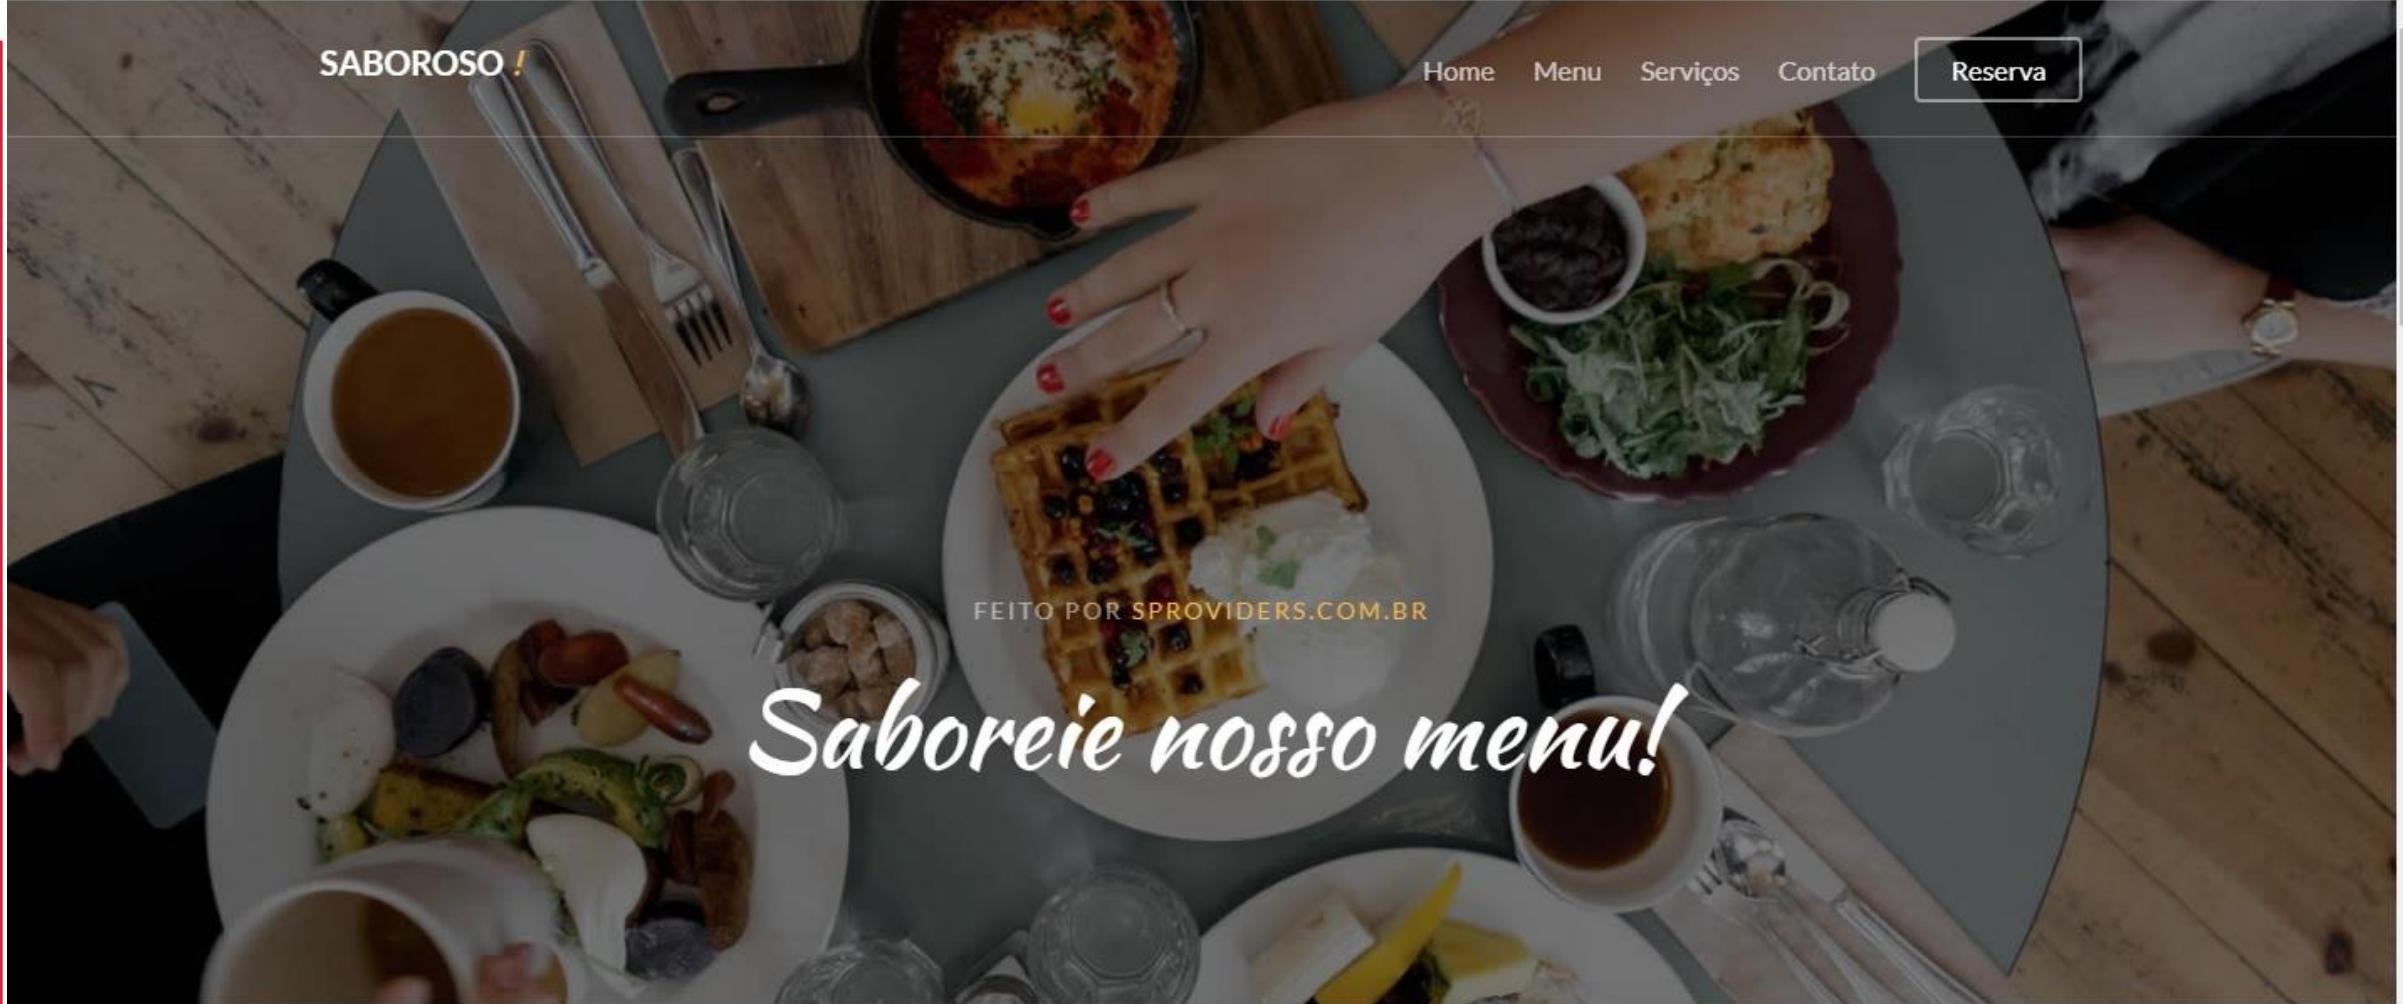

Pratos Populares

Pratos Populares

Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de denguis. Quem num gosta di mé, boa gentis num é.



Bife de Costela com molho

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

45.35



Chilli com Carne

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.40




Hambúrguer com Fritas

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.80



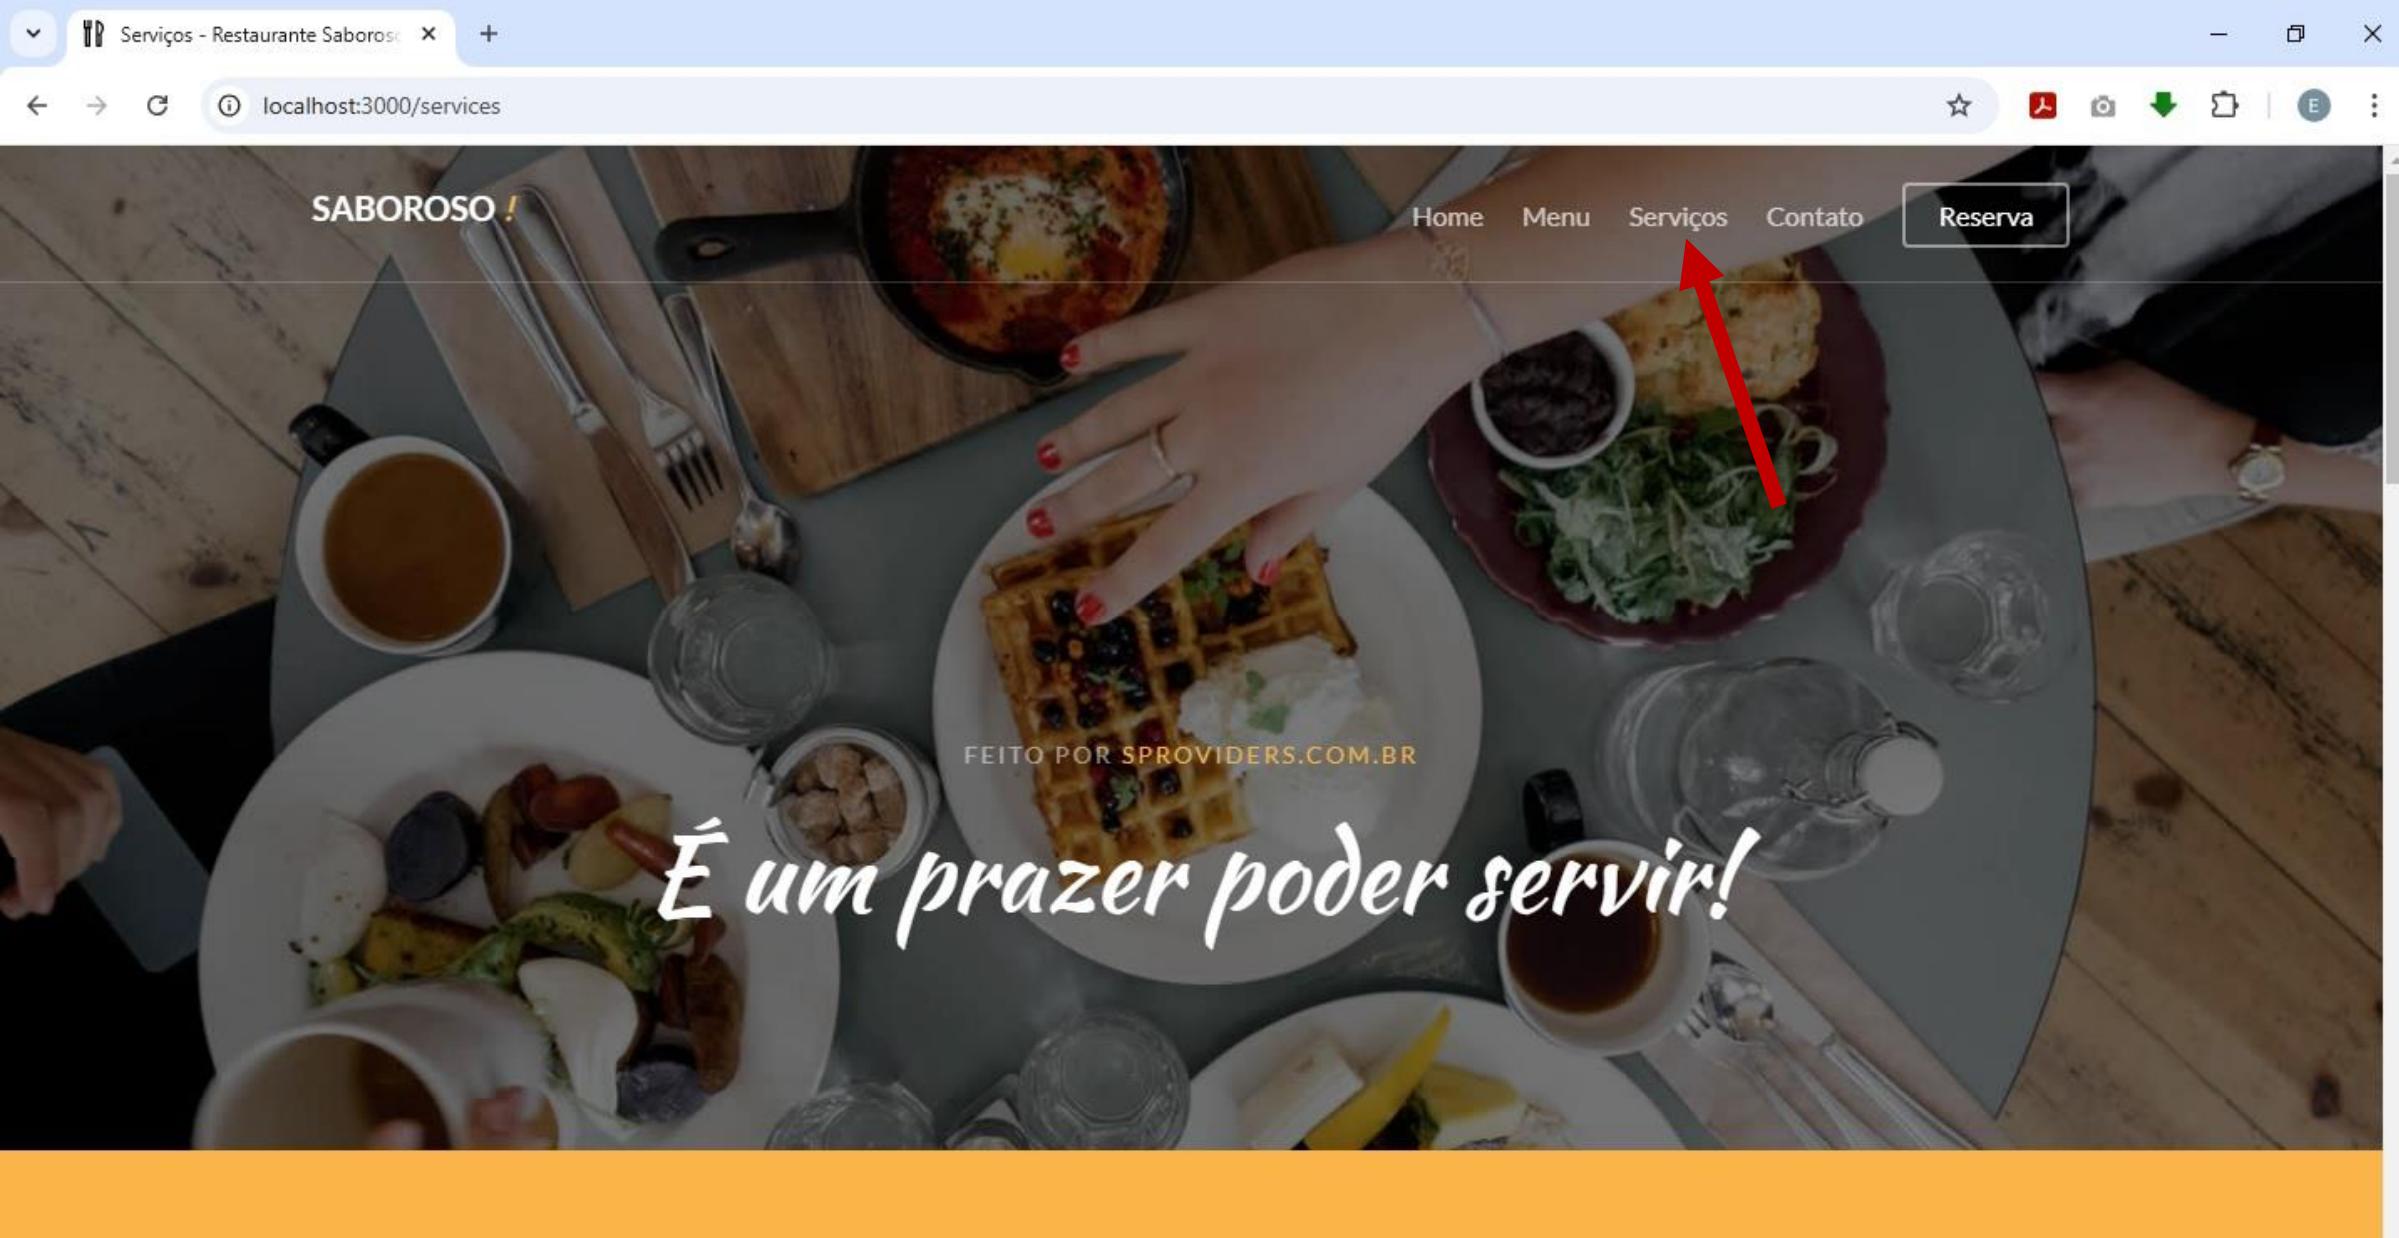


SABOROSO!


Home Menu Serviços Contato

Reserva

É um prazer poder servir!

FEITO POR SPROVIDERS.COM.BR

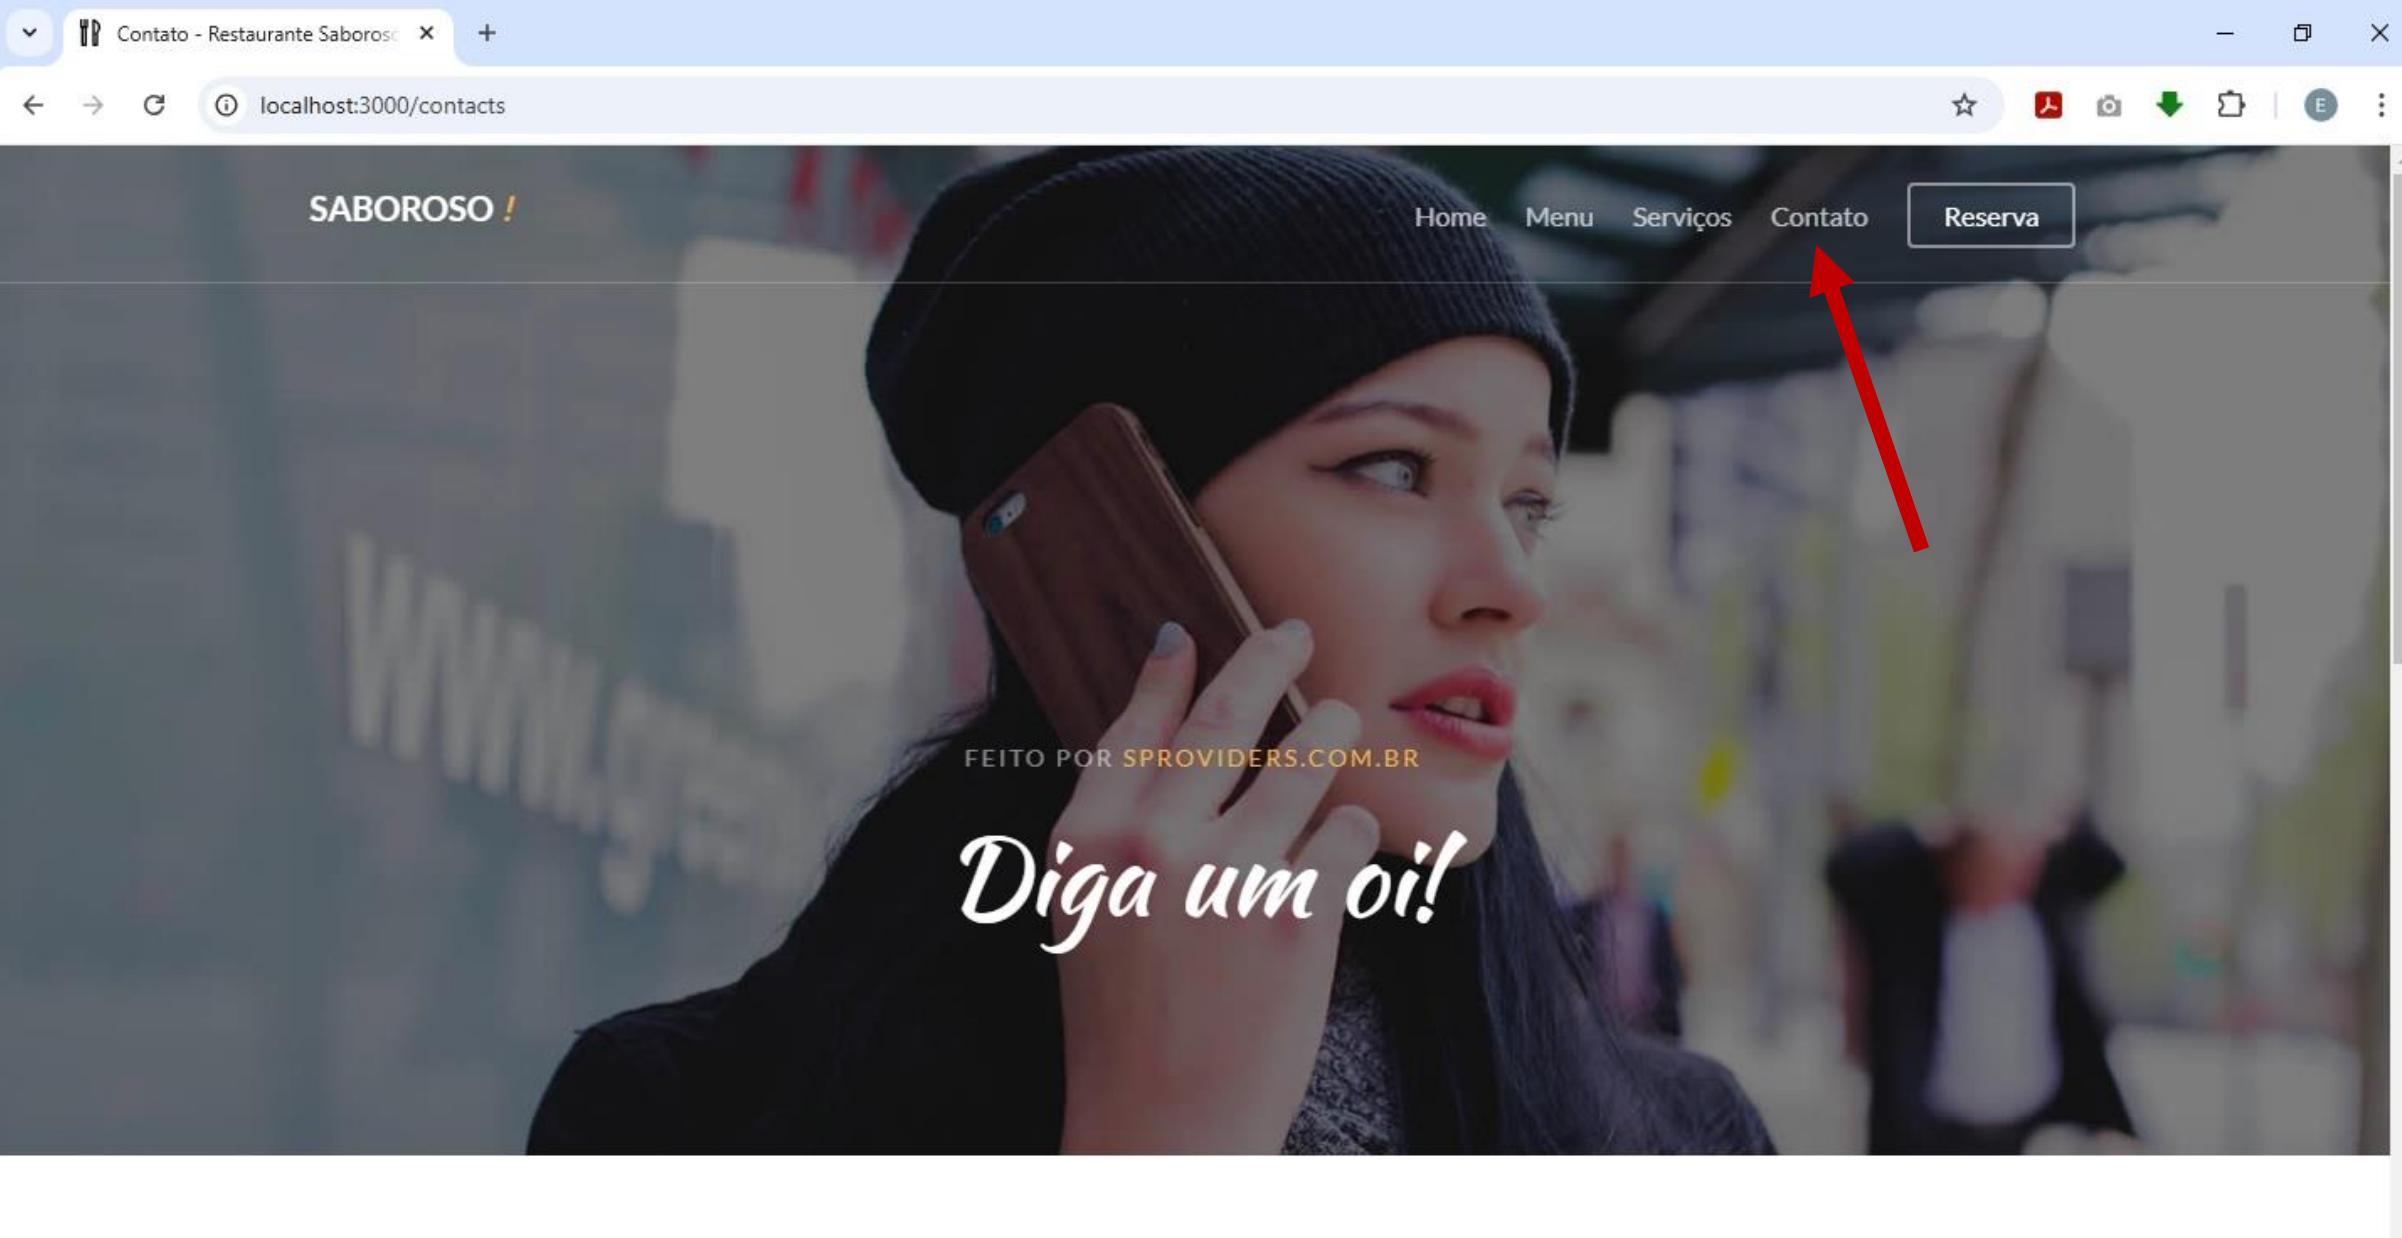

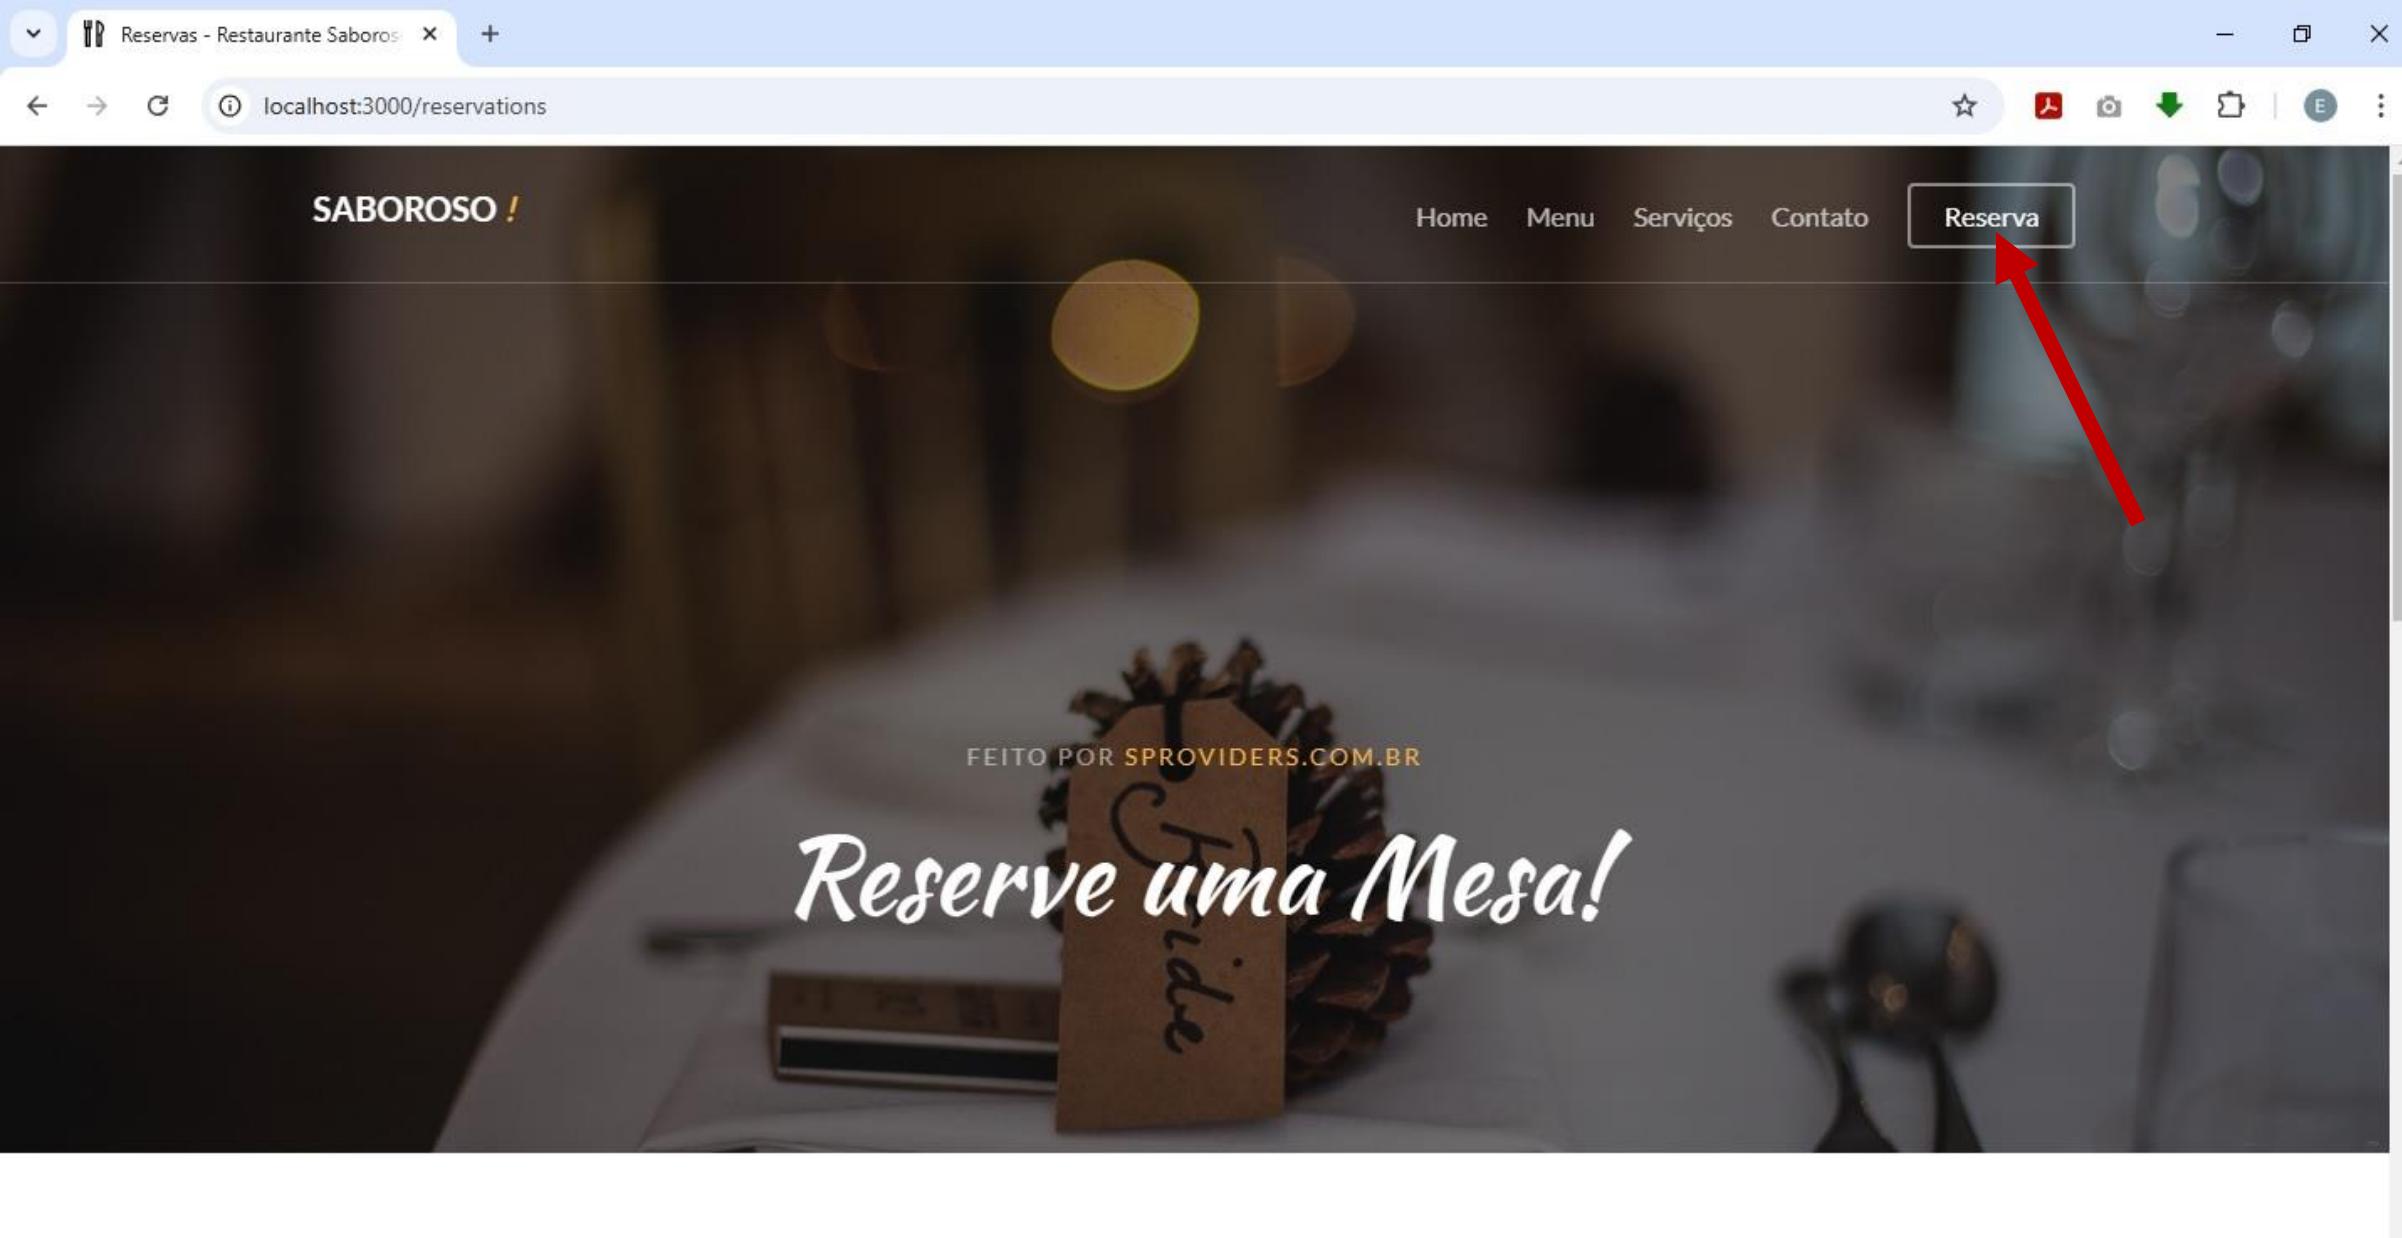

Reserva de mesa

Nome

E-mail

Pessoas

Data

Hora

Reservar Agora

Informações de Contato



R. 1234, 56 - 1^a andar
Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br

UC: Projetos

Assunto:

Projeto Restaurante – BackEnd

09 – Refatorando o Header e Footer

Reduzindo os Includes

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Explorer (Left Panel):**
 - EXPLORER
 - SABOROSO
 - views
 - inc
 - content
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gotop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs** (highlighted)
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
 - OUTLINE
 - TIMELINE
 - Editor (Right Panel):**
 - index.ejs (active tab)
 - contacts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs

views > index.ejs > html > ? > body > ?

```
1  <!DOCTYPE HTML>
2  <html>
3
4  <%- include("inc/head") -%>
5
6  <body>
7
8      <div class="gtco-loader"></div>
9
10     <div id="page">
11
12         <%- include("inc/header-menu") -%>
13         <%- include("inc/header-index") -%>
14
15         <%- include("inc/content/menus") -%>
16         <%- include("inc/content/services") -%>
17         <%- include("inc/content/text") -%>
18         <%- include("inc/content/facts") -%>
19         <%- include("inc/content/subscribe") -%>
20
21         <%- include("inc/footer") -%>
22
23     </div>
24
25
26         <%- include("inc/footer-gotop") -%>
27
28         <%- include("inc/footer-scripts") -%>
29
30     </body>
31
32 </html>
```
- Bottom Status Bar:** Ln 26, Col 42, Tab Size: 4, UTF-8, LF, HTML, Go Live, Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close
- Left Sidebar (EXPLORER):**
 - SABOROSO
 - views
 - inc
 - content
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gotop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs** (highlighted with a red arrow)
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - JS app.js
 - { package-lock.json
 - { package.json
- Bottom Left:** OUTLINE, TIMELINE
- Bottom Right:** Ln 22, Col 38, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier

The code editor tab for "contacts.ejs" is active, displaying the following code:

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>

    <div class="gtco-loader"></div>

    <div id="page">

      <%- include("inc/header-menu") -%>
      <%- include("inc/header") -%>

      <%- include("inc/content/contacts") -%>

      <%- include("inc/footer") -%>

    </div>

    <%- include("inc/footer-gotop") -%>
    <%- include("inc/footer-scripts") -%>

  </body>
</html>
```

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Top Navigation:** tabs for index.ejs, contacts.ejs, menus.ejs (highlighted), reservations.ejs, services.ejs.
- Left Sidebar (EXPLORER):** Shows the project structure under 'SABOROSO'. The 'views' folder contains 'inc' which has 'content' and several files: menus.ejs, reservations.ejs, services.ejs, subscribe.ejs, text.ejs, footer-gototop.ejs, footer-scripts.ejs, footer.ejs, head.ejs, header-index.ejs, header-menu.ejs, header.ejs, contacts.ejs, error.ejs, index.ejs, menus.ejs (selected and highlighted in grey), reservations.ejs, services.ejs. Below these are app.js, package-lock.json, and package.json.
- Right Editor Area:** Displays the content of the 'menus.ejs' file. The code is an EJS template for a page, structured as follows:

```
<!DOCTYPE HTML>
<html>
  <%- include("inc/head") -%>
  <body>

    <div class="gtco-loader"></div>

    <div id="page">

      <%- include("inc/header-menu") -%>
      <%- include("inc/header") -%>

      <%- include("inc/content/menus") -%>
      <%- include("inc/content/text") -%>
      <%- include("inc/content/subscribe") -%>

      <%- include("inc/footer") -%>

    </div>

    <%- include("inc/footer-gototop") -%>
    <%- include("inc/footer-scripts") -%>
  </body>
</html>
```
- Bottom Status Bar:** Includes icons for file operations, a search bar, and status text: Ln 19, Col 7, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Top Navigation:** tabs for index.ejs, contacts.ejs, menus.ejs, reservations.ejs (active), services.ejs
- Left Sidebar (EXPLORER):** Shows the project structure under SABOROSO:
 - views
 - inc
 - content
 - index.ejs
 - menu.ejs
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gotop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menu.ejs
 - reservations.ejs
 - services.ejs
 - JS app.js
 - { package-lock.json
 - { package.json
- Bottom Navigation:** tabs for OUTLINE and TIMELINE
- Status Bar:** Ln 20, Col 38, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Open, ...
- Explorer Sidebar:** Shows a tree view of the project structure under "SABOROSO".
 - views
 - index.ejs
 - contacts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - inc
 - content
 - index.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gotop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - JS app.js
 - { package-lock.json
 - { package.json
- Outline:** > OUTLINE
- Timeline:** > TIMELINE

- Editor Area:** Displays the content of the "services.ejs" file.

```
<!DOCTYPE HTML>
<%- include("inc/head") -%>
<body>

<div class="gtco-loader"></div>

<div id="page">

<%- include("inc/header-menu") -%>
<%- include("inc/header") -%>

<%- include("inc/content/services") -%>
<%- include("inc/content/text") -%>
<%- include("inc/content/subscribe") -%>

<%- include("inc/footer") -%>

</div>

<%- include("inc/footer-gotop") -%>
<%- include("inc/footer-scripts") -%>

</body>
</html>
```
- Status Bar:** Ln 18, Col 7, Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier

A screenshot of a code editor interface, likely Visual Studio Code, showing a dark-themed workspace. The top navigation bar includes File, Edit, Selection, View, Go, Run, and other standard options. A search bar at the top right contains the text "saboroso [Administrator]". The left sidebar features icons for Explorer, Search, Find, and others. The main area displays a file tree under the "SABOROSO" project. The "views" folder contains several sub-folders and files, with "inc" being expanded. Inside "inc", there are files like "content", "contacts.ejs", "facts.ejs", "menus.ejs", "reservations.ejs", "services.ejs", "subscribe.ejs", "text.ejs", "footer-gototop.ejs", "footer-scripts.ejs", "footer.ejs", "head.ejs", "header-index.ejs", "header-menu.ejs", "header.ejs", and "page-header.ejs". A red arrow points to the "page-header.ejs" file, which is currently selected. The status bar at the bottom shows file statistics (Ln 1, Col 1), encoding (UTF-8), and various live preview and Prettier icons.

```
<> index.ejs <> page-header.ejs X <> contacts.ejs <> menus.ejs <> reservations.ejs <> services.ejs
```

views > inc > <> page-header.ejs

1

EXPLORER ... <> index.ejs <> page-header.ejs X <> contacts.ejs <> menus.ejs <> reservations.ejs <> services.ejs ...

SABOROSO D+ E+ ⌂ ⌂ ⌂

routes

JS index.js

JS users.js

views

inc

content

<> contacts.ejs

<> facts.ejs

<> menus.ejs

<> reservations.ejs

<> services.ejs

<> subscribe.ejs

<> text.ejs

<> footer-gototop.ejs

<> footer-scripts.ejs

<> footer.ejs

<> head.ejs

<> header-index.ejs

<> header-menu.ejs

<> header.ejs

<> page-header.ejs

<> contacts.ejs

<> error.ejs


<> index.ejs

<> menus.ejs

> OUTLINE

> TIMELINE

X 0 △ 0 ⌂ 0 ⌂ 1 Spaces: 4 UTF-8 CRLF ⌂ HTML ⌂ Go Live ⌂ Prettier ⌂

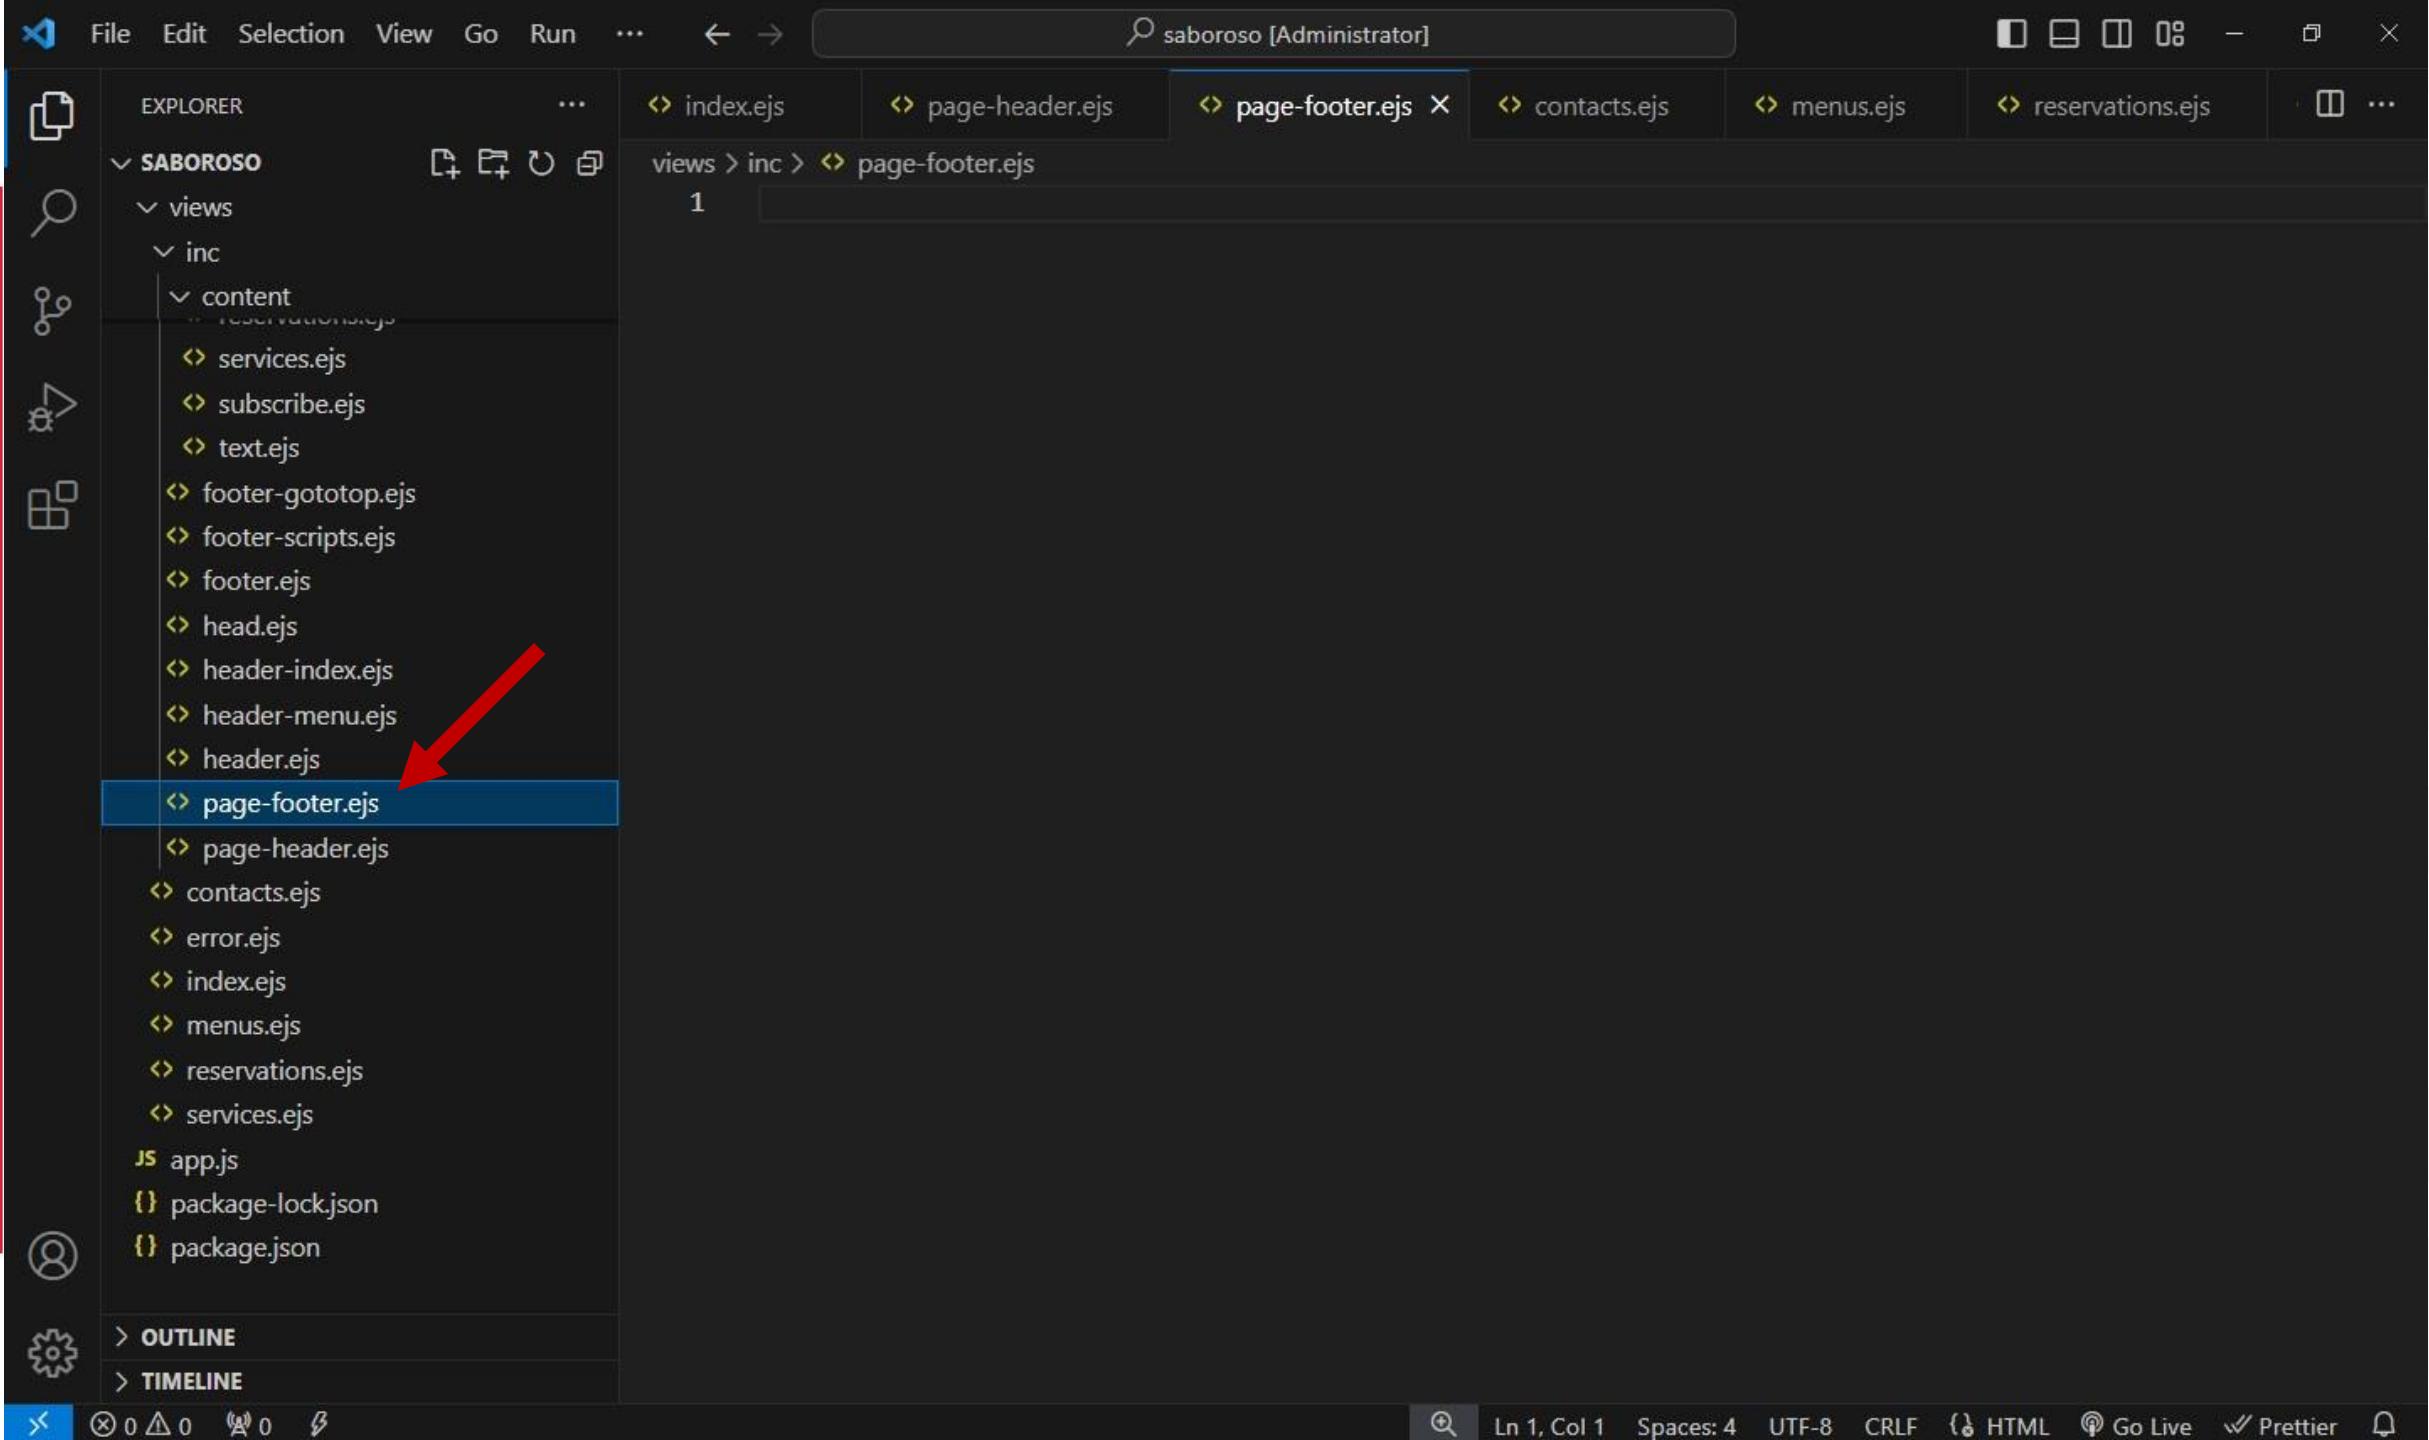

The screenshot shows a code editor interface with the title bar "saboroso [Administrator]". The left sidebar contains icons for File, Edit, Selection, View, Go, Run, and a search function. The "EXPLORER" section shows a project structure under "SABOROSO":

- views
 - inc
 - content
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - page-footer.ejs
 - page-header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs** (highlighted)
 - menus.ejs
 - reservations.ejs
 - services.ejs

Below the views folder are files: app.js, package-lock.json, and package.json.

The main editor area displays the content of the selected file, "index.ejs":

```
1 <!DOCTYPE HTML>
2 <html>
3
4 <%- include("inc/head") -%>
5
6 <body>
7
8   <div class="gtco-loader"></div>
9
10  <div id="page">
11
12    <%- include("inc/header-menu") -%>
13    <%- include("inc/header-index") -%>
14
15    <%- include("inc/content/menus") -%>
16    <%- include("inc/content/services") -%>
17    <%- include("inc/content/text") -%>
18    <%- include("inc/content/facts") -%>
19    <%- include("inc/content/subscribe") -%>
20
21    <%- include("inc/footer") -%>
22
23  </div>
24
25
26  <%- include("inc/footer-gototop") -%>
27
28  <%- include("inc/footer-scripts") -%>
29
30</body>
31
32</html>
```

A red arrow points from the "index.ejs" entry in the Explorer sidebar to the file tab in the top navigation bar. Another red arrow points to the first line of the code, which contains the include directive: "<%- include("inc/head") -%>".

File Edit Selection View Go Run ... ← → saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

views > index.ejs > ...

```
1
2
3      <%- include("inc/content/menus") -%>
4      <%- include("inc/content/services") -%>
5      <%- include("inc/content/text") -%>
6      <%- include("inc/content/facts") -%>
7      <%- include("inc/content/subscribe") -%>
8
9          <%- include("inc/footer") -%>
10
11     </div>
12
13
14     <%- include("inc/footer-gototop") -%>
15
16     <%- include("inc/footer-scripts") -%>
17
18 </body>
19
20 </html>
21
```

index.ejs

page-header.ejs

page-footer.ejs

contacts.ejs

menus.ejs

reservations.ejs

...

views > index.ejs > ...

1
2
3 <%- include("inc/footer") -%>

...

views > footer.ejs > ...

1
2
3 <%- include("inc/footer") -%>

...

views > footer-gototop.ejs > ...

1
2
3 <%- include("inc/footer-gototop") -%>

...

views > footer-scripts.ejs > ...

1
2
3 <%- include("inc/footer-scripts") -%>

...

views > footer.ejs > ...

1
2
3 <%- include("inc/footer") -%>

...

views > head.ejs > ...

1
2
3 <%- include("inc/head") -%>

...

views > header-index.ejs > ...

1
2
3 <%- include("inc/header-index") -%>

...

views > header-menu.ejs > ...

1
2
3 <%- include("inc/header-menu") -%>

...

views > header.ejs > ...

1
2
3 <%- include("inc/header") -%>

...

views > page-footer.ejs > ...

1
2
3 <%- include("inc/page-footer") -%>

...

views > page-header.ejs > ...

1
2
3 <%- include("inc/page-header") -%>

...

views > contacts.ejs > ...

1
2
3 <%- include("inc/contacts") -%>

...

views > error.ejs > ...

1
2
3 <%- include("inc/error") -%>

...

views > index.ejs > ...

1
2
3 <%- include("inc/index") -%>

...

views > menus.ejs > ...

1
2
3 <%- include("inc/menus") -%>

...

views > reservations.ejs > ...

1
2
3 <%- include("inc/reservations") -%>

...

views > services.ejs > ...

1
2
3 <%- include("inc/services") -%>

...

JS app.js

{ } package-lock.json

{ } package.json

OUTLINE

TIMELINE

Ln 1, Col 1 Tab Size: 4 UTF-8 LF HTML Go Live Prettier

The screenshot shows a code editor interface with a dark theme. On the left is an Explorer sidebar containing a file tree. The tree shows a project structure under 'SABOROSO' with 'views' expanded, revealing 'inc' and its contents: 'content', 'reservations.ejs', 'services.ejs', 'subscribe.ejs', 'text.ejs', 'footer-gotop.ejs', 'footer-scripts.ejs', 'footer.ejs', 'head.ejs', 'header-index.ejs', 'header-menu.ejs', 'header.ejs', 'page-footer.ejs', 'page-header.ejs', 'contacts.ejs', 'error.ejs', 'index.ejs', 'menus.ejs', 'reservations.ejs', 'services.ejs', 'app.js', 'package-lock.json', and 'package.json'. A red arrow points to the 'page-header.ejs' file in the tree. The main editor area displays the 'page-header.ejs' file content:

```
views > inc > page-header.ejs > html > ? > body > div#page > ? > ?
1  <!DOCTYPE HTML>
2  <html>
3
4  <%- include("inc/head") -%>
5
6  <body>
7
8      <div class="gtco-loader"></div>
9
10     <div id="page">
11
12         <%- include("inc/header-menu") -%>
13         <%- include("inc/header-index") -%>
```

At the bottom of the editor, there are status bars for 'Ln 13, Col 44', 'Spaces: 4', 'UTF-8', 'CRLF', 'HTML', 'Go Live', and 'Prettier'.

The screenshot shows a code editor interface with a dark theme. On the left is the Explorer sidebar, which lists files and folders under the 'SABOROSO' project. The 'views' folder contains several EJS files, including 'index.ejs', 'page-header.ejs', 'page-footer.ejs', 'contacts.ejs', 'menus.ejs', and 'reservations.ejs'. Below these are 'inc' and 'content' subfolders with various files like 'services.ejs', 'subscribe.ejs', 'text.ejs', etc. At the bottom of the sidebar are 'app.js', 'package-lock.json', and 'package.json'. The main area shows the content of the 'index.ejs' file. The code includes standard HTML structure with EJS script tags for including header, footer, and other components. Two red arrows highlight specific parts of the code: one pointing from the 'index.ejs' entry in the Explorer to the footer inclusion line in the editor, and another pointing from the footer inclusion line back to the 'index.ejs' entry in the editor.


```
<%- include("inc/content/menus") -%>
<%- include("inc/content/services") -%>
<%- include("inc/content/text") -%>
<%- include("inc/content/facts") -%>
<%- include("inc/content/subscribe") -%>
<%- include("inc/footer") -%>
</div>
<%- include("inc/footer-gototop") -%>
<%- include("inc/footer-scripts") -%>
</body>
</html>
```

A screenshot of the Visual Studio Code (VS Code) interface. The top navigation bar includes File, Edit, Selection, View, Go, Run, and a search bar labeled "saboroso [Administrator]". The left sidebar features the Explorer, Search, Problems, and Activity Bar. The Explorer shows a project structure under "SABOROSO": views, inc (content, services.ejs, subscribe.ejs, text.ejs), footer-gototop.ejs, footer-scripts.ejs, footer.ejs, head.ejs, header-index.ejs, header-menu.ejs, header.ejs, page-footer.ejs, page-header.ejs, contacts.ejs, error.ejs, index.ejs (selected), menus.ejs, reservations.ejs, and services.ejs. Below these are app.js, package-lock.json, and package.json. The bottom status bar displays file statistics: 0 0 0 0, and icons for Go Live and Prettier.

The main editor area displays the content of "index.ejs". The code consists of several include statements:

```
1 <%- include("inc/content/menus") -%>
2 <%- include("inc/content/services") -%>
3 <%- include("inc/content/text") -%>
4 <%- include("inc/content/facts") -%>
5 <%- include("inc/content/subscribe") -%>
```

A large red arrow points from the status bar at the bottom to the editor area, highlighting the "index.ejs" tab.

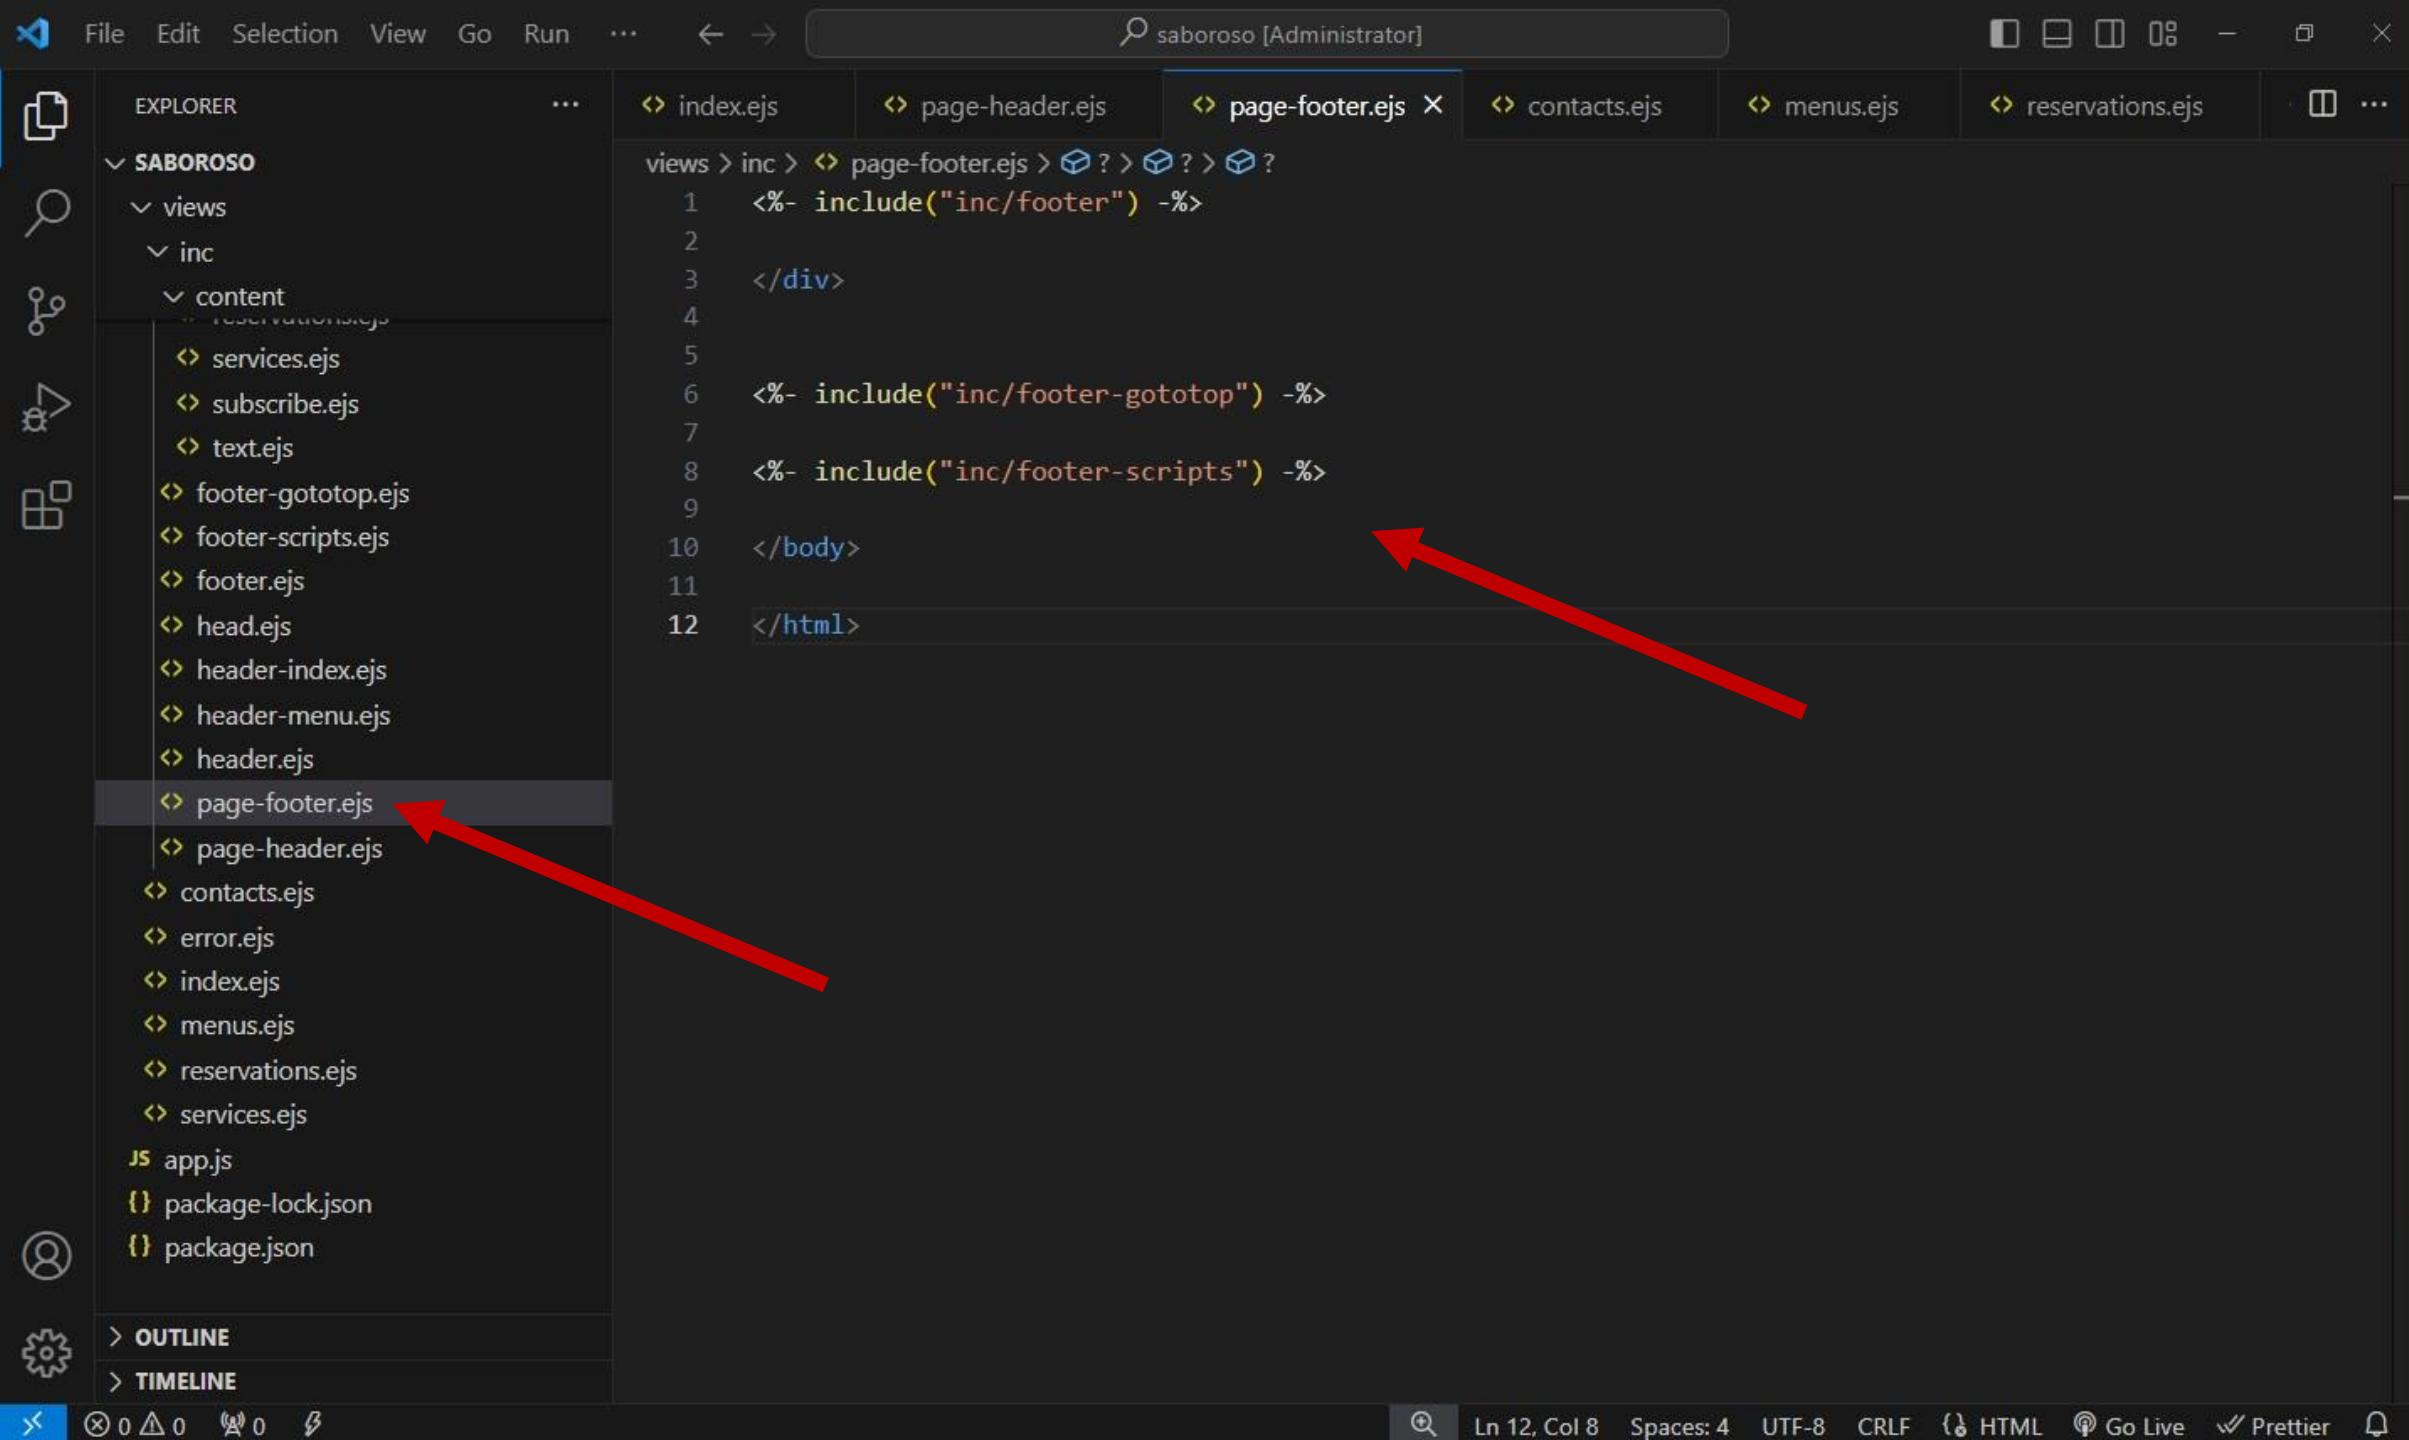

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Explorer Bar (Left):**
 - EXPLORER
 - SABOROSO
 - views
 - inc
 - content
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - page-footer.ejs
 - page-header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - JS app.js
 - { package-lock.json
 - { package.json
 - OUTLINE
 - TIMELINE
- Code Editor (Right):**
 - index.ejs
 - page-header.ejs
 - page-footer.ejs
 - contacts.ejs** (highlighted)
 - menus.ejs
 - reservations.ejs

The contacts.ejs tab is active. The code content is as follows:

```
1  <!DOCTYPE HTML>
2  <html>
3  |   <%- include("inc/head") -%>
4  |   <body>
5
6      <div class="gtco-loader"></div>
7
8      <div id="page">
9
10         <%- include("inc/header-menu") -%>
11         <%- include("inc/header") -%> ← Red arrow points here
12
13         <%- include("inc/content/contacts") -%>
14
15         <%- include("inc/footer") -%>
16
17     </div>
18
19
20     <%- include("inc/footer-gototop") -%>
21
22     <%- include("inc/footer-scripts") -%>
23
24         </body>
25     </html>
```

A red arrow points from the left margin to the line containing the include("inc/header") directive.

File Edit Selection View Go Run ... ← → saboroso [Administrator] ⚡

EXPLORER ...

SABOROSO

- views
- inc
- content
- reservations.ejs
- services.ejs
- subscribe.ejs
- text.ejs
- footer-gototop.ejs
- footer-scripts.ejs
- footer.ejs
- head.ejs
- header-index.ejs
- header-menu.ejs
- header.ejs
- page-footer.ejs
- page-header.ejs
- contacts.ejs
- error.ejs
- index.ejs
- menus.ejs
- reservations.ejs
- services.ejs

JS app.js

{ } package-lock.json

{ } package.json

> OUTLINE

> TIMELINE

index.ejs page-header.ejs ✘ page-footer.ejs contacts.ejs menus.ejs reservations.ejs ...

views > inc > page-header.ejs > html > ? > body > div#page > ? > ?

```
1  <!DOCTYPE HTML>
2  <html>
3
4  <%- include("inc/head") -%>
5
6  <body>
7
8      <div class="gtco-loader"></div>
9
10     <div id="page">
11
12         <%- include("inc/header-menu") -%>
13         <%- include("inc/header-index") -%>
14
15         <%- include("inc/header") -%>
```

Ln 15, Col 1 (37 selected) Spaces: 4 UTF-8 CRLF { HTML ⚡ Go Live ✓ Prettier

A screenshot of the Visual Studio Code interface. The Explorer sidebar on the left shows a file tree with a dark theme. The current file is `page-header.ejs`, which is selected in the editor tab bar at the top. The editor pane displays the contents of `page-header.ejs`. A red arrow points from the status bar at the bottom right towards the code in the editor.

The code in the editor is:

```
1  <!DOCTYPE HTML>
2  <html>
3
4  <%- include("inc/head") -%>
5
6  <body>
7
8      <div class="gtco-loader"></div>
9
10     <div id="page">
11
12         <%- include("inc/header-menu") -%>
13
14         <% if (isHome) { %>
15             <%- include("inc/header-index") -%>
16         <% } else { %>
17             <%- include("inc/header") -%>
18         <% } %>
19
20
21
22
```

The status bar at the bottom right shows the following information:

- Ln 14, Col 1 (160 selected)
- Spaces: 4
- UTF-8
- CRLF
- HTML
- Go Live
- Prettier

A screenshot of the Visual Studio Code interface. The Explorer sidebar on the left shows a file tree for a project named 'SABOROSO'. The 'routes' folder contains 'index.js' and 'users.js', with 'index.js' currently selected and highlighted with a red arrow pointing to it. Other files in 'routes' include 'contact.ejs', 'facts.ejs', 'menus.ejs', 'reservations.ejs', 'services.ejs', 'subscribe.ejs', 'text.ejs', 'footer-gototop.ejs', 'footer-scripts.ejs', 'footer.ejs', 'head.ejs', 'header-index.ejs', and 'header-menu.ejs'. The main editor area displays the content of 'index.js'. The status bar at the bottom shows file statistics: 0 changes, 0 additions, 0 deletions, and a save icon.

```
routes > index.js > router.get('/menus') callback
1 var conn = require('../inc/db')
2 var express = require('express');
3 var menus = require('../inc/menus');
4 var router = express.Router();
5
6 /* GET home page. */
7 router.get('/', function(req, res, next) {
8
9     menus.getMenus().then(results => {
10
11         res.render('index', {
12             title: 'Restaurante Saboroso!',
13             menus: results
14         });
15     });
16 });
17 );
18 );
19
20 router.get('/contacts', function(req, res, next) {
21
22     res.render('contacts', {
23         title: 'Contato - Restaurante Saboroso!',
24         background: "images/img_bg_3.jpg",
25         h1: "Diga um oi!"
26     });
27 );
28
29 router.get('/menus', function(req, res, next) {
30
31     menus.getMenus().then(results => {
```

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the file path "saboroso [Administrator]". The left sidebar contains icons for Explorer, Search, Open, and Outline/Timeline. The Explorer view shows a project structure under "SABOROSO" with files like "index.js", "db.js", "menus.js", "node_modules", "public", "routes", "users.js", "views", and various "inc" and "content" files. The "routes" folder is currently selected. The main editor area displays a JavaScript file named "index.js". The code is as follows:

```
routes > index.js > router.get('/') callback > then() callback > menus
1 var conn = require('../inc/db')
2 var express = require('express');
3 var menus = require('../inc/menus');
4 var router = express.Router();
5
6 /* GET home page. */
7 router.get('/', function(req, res, next) {
8
9     menus.getMenus().then(results => {
10
11         res.render('index', {
12             title: 'Restaurante Saboroso!',
13             menus: results,
14             isHome: true // Red arrow points here
15         });
16     });
17 });
18 });
19 });
20
21 router.get('/contacts', function(req, res, next) {
22
23     res.render('contacts', {
24         title: 'Contato - Restaurante Saboroso!',
25         background: "images/img_bg_3.jpg",
26         h1: "Diga um oi!"
27     });
28 });
29
30 router.get('/menus', function(req, res, next) {
31
32     menus.getMenus().then(results => {
```

The line "isHome: true" is highlighted with a red arrow pointing to it from the bottom right.



EXPLORER

...

↳ index.ejs X JS index.js ↳ page-header.ejs ↳ page-footer.ejs ↳ contacts.ejs ↳ menus.ejs ↳ re ⌂ ...



SABOROSO

views

inc

content
... reservations.ejs

services.ejs

subscribe.ejs

text.ejs

footer-gototop.ejs

footer-scripts.ejs

footer.ejs

head.ejs

header-index.ejs

header-menu.ejs

header.ejs

page-footer.ejs

page-header.ejs

contacts.ejs

error.ejs

↳ index.ejs

↳ menus.ejs

↳ reservations.ejs

↳ services.ejs

JS app.js

{ } package-lock.json

{ } package.json



> OUTLINE

> TIMELINE



⊗ 0 △ 0 ⌂ 0 ⌂



1

2

<%- include("inc/content/menus") -%>
<%- include("inc/content/services") -%>
<%- include("inc/content/text") -%>
<%- include("inc/content/facts") -%>
<%- include("inc/content/subscribe") -%>

3

4

5

6

7

8

9

10



Ln 10, Col 1

Tab Size: 4

UTF-8

LF

{ } HTML

Go Live

Prettier



A screenshot of the Visual Studio Code (VS Code) interface. The top bar shows the title "saboroso [Administrator]" and standard menu options like File, Edit, Selection, View, Go, Run, etc. The left sidebar contains icons for Explorer, Search, Open, Find, and Outline/Timeline. The Explorer view shows a project structure under "SABOROSO": "views" (with "index.ejs" selected), "inc" (containing "content", "services.ejs", "subscribe.ejs", "text.ejs", "footer-gototop.ejs", "footer-scripts.ejs", "footer.ejs", "head.ejs", "header-index.ejs", "header-menu.ejs", "header.ejs", "page-footer.ejs", "page-header.ejs", "contacts.ejs", "error.ejs", "index.ejs", "menus.ejs", "reservations.ejs", and "services.ejs"), and "JS" (containing "app.js", "package-lock.json", and "package.json"). The main editor area displays the file "index.ejs" with the following content:

```
<%- include("inc/page-header") -%>
<%- include("inc/content/menus") -%>
<%- include("inc/content/services") -%>
<%- include("inc/content/text") -%>
<%- include("inc/content/facts") -%>
<%- include("inc/content/subscribe") -%>
<%- include("inc/page-footer") -%>
```

Two red arrows point from the "views" icon in the Explorer sidebar to the two instances of the "include" directive in the "index.ejs" code, highlighting the scope of the current selection.

The screenshot shows a Visual Studio Code interface with the following details:

- File Explorer (Left):** Shows a project structure under "SABOROSO". The "views" folder contains "inc" which further contains "content" with files like "reservations.ejs", "services.ejs", etc. Other files in "views" include "index.ejs", "page-header.ejs", "page-footer.ejs", "contacts.ejs", "menus.ejs", "app.js", "package-lock.json", and "package.json".
- Search Bar (Top):** Displays "saboroso [Administrator]".
- Code Editor (Center):** The active file is "page-header.ejs". The code includes several include statements:
 - Line 4: `<%- include("inc/head") -%>` (highlighted by a red arrow)
 - Line 11: `<%- include("inc/header-menu") -%>` (highlighted by a red arrow)
 - Line 14: `<% if (isHome) { %>` (highlighted by a red arrow)
 - Line 15: `<%- include("inc/header-index") -%>` (highlighted by a red arrow)
 - Line 16: `<% } else { %>` (highlighted by a red arrow)
 - Line 17: `<%- include("inc/header") -%>` (highlighted by a red arrow)
 - Line 18: `<% } %>` (highlighted by a red arrow)
- Status Bar (Bottom):** Shows "Ln 4, Col 18 (4 selected)" and other status indicators.

The screenshot shows the VS Code interface with the file `page-header.ejs` open. The code uses EJS templating syntax. Red arrows point from the bottom of the image to specific lines in the code, highlighting the inclusion of other files:

```
1  <!DOCTYPE HTML>
2  <html>
3
4  <%- include("head") -%>
5  <body>
6
7      <div class="gtco-loader"></div>
8
9      <div id="page">
10
11          <%- include("header-menu") -%>
12
13
14          <% if (isHome) { %>
15              <%- include("header-index") -%>
16          <% } else { %>
17              <%- include("header") -%>
18          <% } %>
19
20
21
22
```

The file structure on the left shows the project directory `SABOROSO` containing `views`, `inc`, and several EJS files. The file `page-header.ejs` is selected.

The screenshot shows a Visual Studio Code (VS Code) interface with a dark theme. The top bar includes the standard menu (File, Edit, Selection, View, Go, Run, etc.) and a search bar. The left sidebar contains icons for Explorer, Search, Problems, and Outline/Timeline.

The Explorer sidebar on the left lists the project structure under the 'SABOROSO' folder:

- views
- inc
 - content
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - page-footer.ejs
 - page-header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
- JS app.js
- { package-lock.json
- { package.json

```
views > inc > page-footer.ejs > ?  
1  <%- include("inc/footer") -%>  
2   ?  
3  </div>  
4  
5  <%- include("inc/footer-gototop") -%>  
6  
7  <%- include("inc/footer-scripts") -%>  
8  
9  </body>  
10 </html>  
11  
12
```

The screenshot shows a dark-themed interface of the Visual Studio Code code editor. The top navigation bar includes File, Edit, Selection, View, Go, Run, and a search bar labeled "saboroso [Administrator]". The left sidebar has icons for Explorer, Search, Find, and Outline/Timeline.

The Explorer view on the left shows a project structure under "SABOROSO":


- views
 - inc
 - content
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - page-footer.ejs
 - page-header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs

JS app.js and JSON files package-lock.json and package.json are also listed.

The main editor area displays the file "page-footer.ejs" with the following content:

```
1 <%- include("footer") -%>
2
3 </div>
4
5 <%- include("footer-gototop") -%>
6
7 <%- include("footer-scripts") -%>
8
9 </body>
10
11 </html>
```

Three red arrows point from the bottom right towards the include statements at lines 5, 8, and 10, highlighting them.

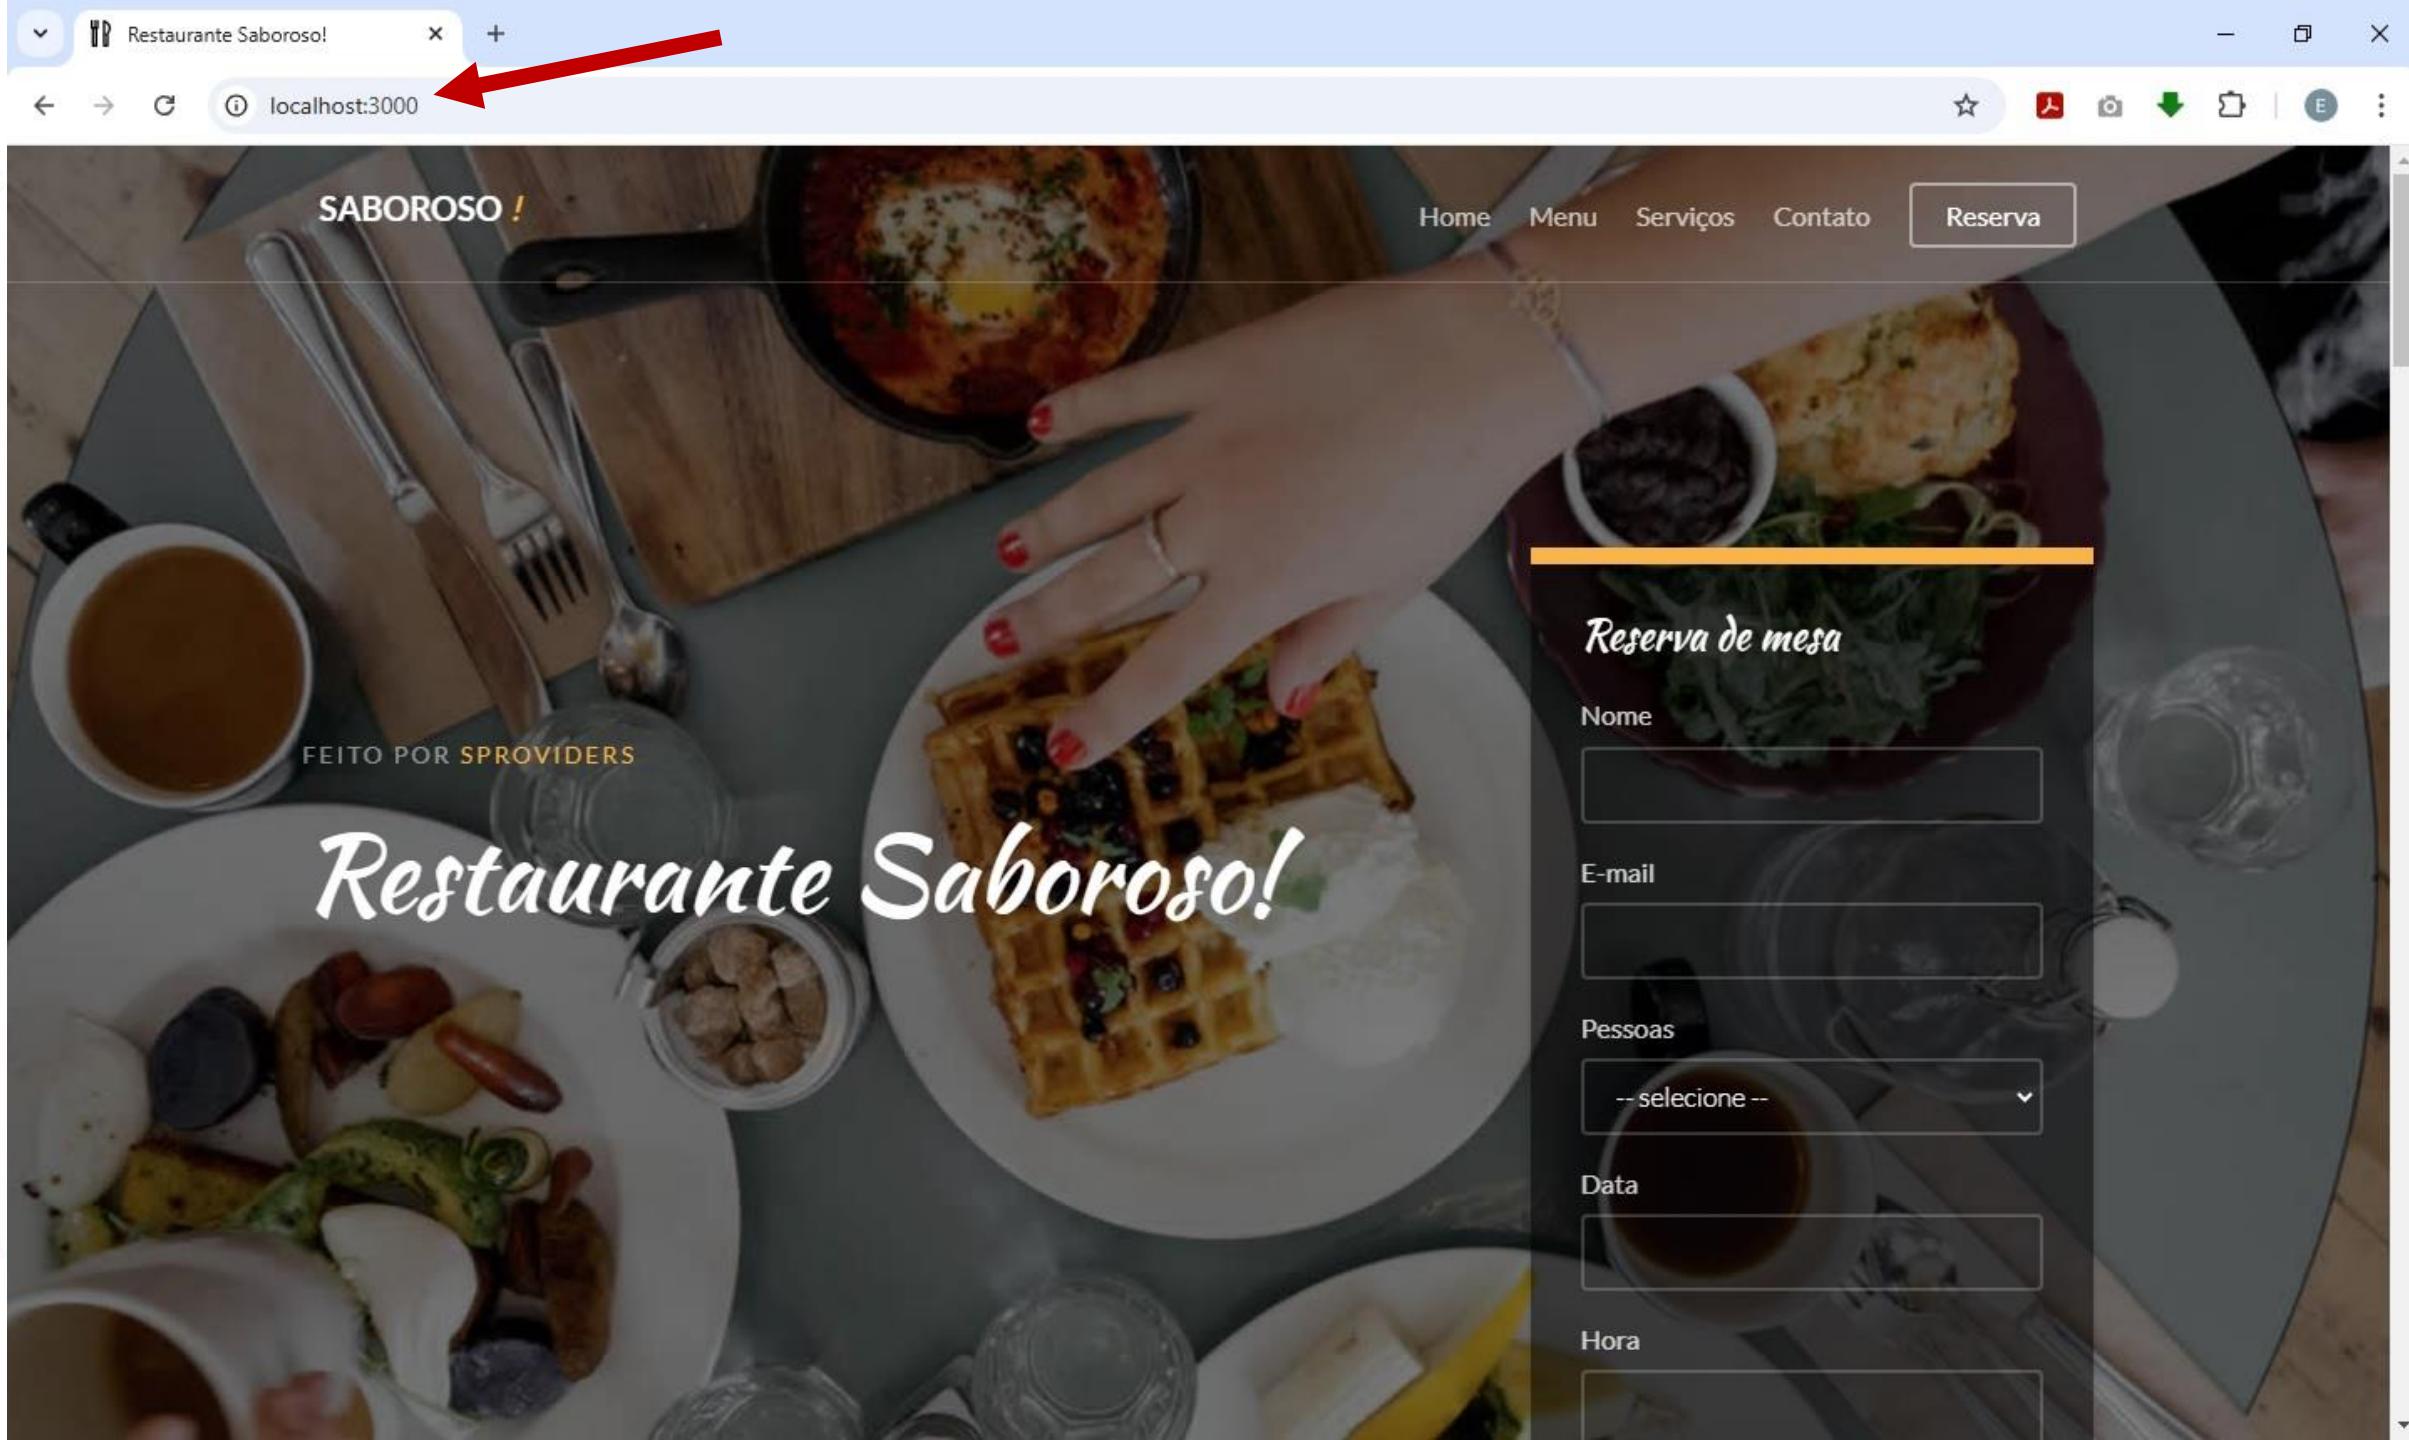

Pratos Populares

Mussum Ipsum, cacilds vidis litro abertis. Diuretics paradis num copo é motivis de denguis. Quem num gosta di mé, boa gentis num é.



Bife de Costela com molho

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

45.35



Chilli com Carne

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.40



Hambúrguer com Fritas

Vide electram sadipscing et per. Aenean aliquam molestie leo, vitae iaculis nisl.

29.80





EXPLORER ...

SABOROSO

views
 inc
 content
 reservations.ejsservices.ejs
subscribe.ejs
text.ejs
footer-gototop.ejs
footer-scripts.ejs
footer.ejs
head.ejs
header-index.ejs
header-menu.ejs
header.ejs
page-footer.ejs
page-header.ejs
contacts.ejserror.ejs
index.ejs
menus.ejs
reservations.ejs
services.ejsapp.js
{} package-lock.json
{} package.json

> OUTLINE

> TIMELINE

index.ejs index.js page-header.ejs page-footer.ejs contacts.ejs menus.ejs re ...

```
views > contacts.ejs > html > ? > body > div#page > ? > ? > ? > ?  
1  <!DOCTYPE HTML>  
2  <html>  
3  |  <%- include("inc/head") -%>  
4  |  <body>  
5  |  
6  |  <div class="gtco-loader"></div>  
7  |  
8  |  <div id="page">  
9  |  
10 |  <%- include("inc/header-menu") -%>  
11 |  <%- include("inc/header") -%>  
12 |  
13 |  <%- include("inc/content/contacts") -%>  
14 |  
15 |  <%- include("inc/footer") -%>  
16 |  
17 |</div>  
18 |  
19 |  
20 |  <%- include("inc/footer-gototop") -%>  
21 |  
22 |  <%- include("inc/footer-scripts") -%>  
23 |  
24 |  </body>  
25 |</html>
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer (Left):** Shows the project structure under the 'SABOROSO' folder. The 'views' folder contains several EJS files: 'index.ejs', 'page-header.ejs', 'page-footer.ejs', 'contacts.ejs', 'menus.ejs', and 'reservations.ejs'. It also includes 'services.ejs', 'subscribe.ejs', 'text.ejs', 'footer-gototop.ejs', 'footer-scripts.ejs', 'header.ejs', 'head.ejs', 'header-index.ejs', 'header-menu.ejs', 'header.ejs', 'page-footer.ejs', 'page-header.ejs', 'contacts.ejs', 'error.ejs', and 'index.ejs'. The 'index.ejs' file is currently selected, indicated by a red arrow.
- Code Editor (Center):** Displays the content of the 'index.ejs' file. The code includes EJS tags for including other files:

```
<%- include("inc/page-header") -%>
<%- include("inc/content/menus") -%>
<%- include("inc/content/services") -%>
<%- include("inc/content/text") -%>
<%- include("inc/content/facts") -%>
<%- include("inc/content/subscribe") -%>
<%- include("inc/page-footer") -%>
```
- Search Bar (Top):** Contains the text 'saboroso [Administrator]'.- Top Bar:** Includes standard VS Code menu items like File, Edit, Selection, View, Go, Run, etc., and a search bar.
- Bottom Bar:** Shows status information: 'Ln 1, Col 1 (34 selected)', 'Tab Size: 4', 'UTF-8', 'LF', 'HTML', 'Go Live', 'Prettier', and a bell icon for notifications.

File Edit Selection View Go Run ... ↶ ↷ saboroso [Administrator] ⚡

EXPLORER

SABOROSO

- views
- inc
 - content
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gotop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - page-footer.ejs
 - page-header.ejs
- contacts.ejs
- error.ejs
- index.ejs
- menus.ejs
- reservations.ejs
- services.ejs

JS app.js

{ package-lock.json

{ package.json

> OUTLINE

> TIMELINE

index.ejs index.js page-header.ejs page-footer.ejs contacts.ejs x menus.ejs re ...

views > contacts.ejs > ...

```
1 <!DOCTYPE HTML>
2 <html>
3   <%- include("inc/head") -%>
4   <body>
5     ...
6   <div class="gtco-loader"></div>
7
8   <div id="page">
9     ...
10    <%- include("inc/header-menu") -%>
11    <%- include("inc/header") -%>
12
13    <%- include("inc/content/contacts") -%>
14
15    <%- include("inc/footer") -%>
16
17  </div>
18
19  <%- include("inc/footer-gotop") -%>
20
21  <%- include("inc/footer-scripts") -%>
22
23    </body>
24
25</html>
```

Ln 1, Col 1 (192 selected) Tab Size: 4 UTF-8 CRLF { HTML Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows "saboroso [Administrator]". The left sidebar (Explorer) displays a file tree with a dark theme. The main editor area shows the file "views > contacts.ejs". The code in the editor is:

```
1 <%- include("inc/page-header") -%>
2
3     <%- include("inc/content/contacts") -%>
4
5     <%- include("inc/footer") -%>
6
7 </div>
8
9
10 <%- include("inc/footer-gototop") -%>
11
12 <%- include("inc/footer-scripts") -%>
13
14     </body>
15 </html>
16
17
```

A red arrow points to the first line of code, which is the opening tag of the first include statement. The file "contacts.ejs" is currently selected in the Explorer sidebar.

File Edit Selection View Go Run ... ↶ ↷ saboroso [Administrator] ⌂ ⌃ ⌄ ⌅ ⌆ ⌇

EXPLORER ... index.ejs JS index.js page-header.ejs page-footer.ejs contacts.ejs × menus.ejs re ⌋ ...

SABOROSO views > contacts.ejs ? ? ? ? ? ?

```
1 <%- include("inc/page-header") -%>
2
3 <%- include("inc/content/contacts") -%>
4
5 → <%- include("inc/footer") -%>
6
7 </div>
8
9
10 <%- include("inc/footer-gototop") -%>
11
12 → <%- include("inc/footer-scripts") -%>
13
14 → </body>
15 </html>
16
17
```

views > contacts.ejs ? ? ? ? ? ?

services.ejs
subscribe.ejs
text.ejs
footer-gototop.ejs
footer-scripts.ejs
footer.ejs
head.ejs
header-index.ejs
header-menu.ejs
header.ejs
page-footer.ejs
page-header.ejs
contacts.ejs
error.ejs
index.ejs
menus.ejs
reservations.ejs
services.ejs

JS app.js
{} package-lock.json
{} package.json

> OUTLINE
> TIMELINE

Ln 17, Col 1 (149 selected) Tab Size: 4 UTF-8 CRLF ⌂ HTML ⌂ Go Live ⌂ Prettier

The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer (Left):** Shows the project structure under "SABOROSO". The "index.ejs" file is currently selected, highlighted with a dark grey background.
- Code Editor (Center):** Displays the content of the "index.ejs" file. The code includes several include statements:

```
<%- include("inc/page-header") -%>
<%- include("inc/content/menus") -%>
<%- include("inc/content/services") -%>
<%- include("inc/content/text") -%>
<%- include("inc/content/facts") -%>
<%- include("inc/content/subscribe") -%>
<%- include("inc/page-footer") -%>
```
- Status Bar (Bottom):** Shows the current file path: "views > index.ejs", line count: "Ln 9, Col 1 (34 selected)", tab size: "Tab Size: 4", encoding: "UTF-8", line separator: "LF", file type: "HTML", and status: "Go Live".

Two red arrows point to the "index.ejs" file in the Explorer sidebar and the "index.ejs" tab in the code editor, highlighting the current selection.

The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer (Left):** Shows the project structure under "SABOROSO". The "views" folder contains "index.ejs", "index.js", "page-header.ejs", "page-footer.ejs", and "contacts.ejs". Inside "inc", there are "content", "services.ejs", "subscribe.ejs", "text.ejs", "footer-gotop.ejs", "footer-scripts.ejs", "footer.ejs", "head.ejs", "header-index.ejs", "header-menu.ejs", "header.ejs", "page-footer.ejs", "page-header.ejs", and "contacts.ejs".
- Search Bar:** "saboroso [Administrator]"
- Code Editor (Top Tabs):** index.ejs, index.js (highlighted in yellow), page-header.ejs, page-footer.ejs, contacts.ejs (highlighted in yellow), menus.ejs, re
- Code Editor (Bottom):** views > contacts.ejs > ? > ? > ?
1 <%- include("inc/page-header") -%>
2
3 <%- include("inc/content/contacts") -%>
4
5 <%- include("inc/page-footer") -%>
6
- Bottom Status Bar:** Select Indentation, 2 selections (68 characters selected), Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier

Red arrows point from the "contacts.ejs" file in the Explorer to the three include statements in the code editor.

```
<%- include("inc/page-header") -%>
<%- include("inc/content/contacts") -%>
<%- include("inc/page-footer") -%>
```

File Edit Selection View Go Run ... ← → saboroso [Administrator] - X

EXPLORER

SABOROSO

- views
- inc
 - content
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - page-footer.ejs
 - page-header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
- app.js
- { package-lock.json
- { package.json

OUTLINE

TIMELINE

index.ejs index.js page-header.ejs page-footer.ejs contacts.ejs menus.ejs re ...

views > menus.ejs ...

```
1 <!DOCTYPE HTML>
2 <html>
3   <%- include("inc/head") -%>
4   <body>
5     ...
6   <div class="gtco-loader"></div>
7
8   <div id="page">
9
10    <%- include("inc/header-menu") -%>
11    <%- include("inc/header") -%>
12
13    <%- include("inc/content/menus") -%>
14    <%- include("inc/content/text") -%>
15    <%- include("inc/content/subscribe") -%>
16
17    <%- include("inc/footer") -%>
18
19  </div>
20
21
22  <%- include("inc/footer-gototop") -%>
23
24  <%- include("inc/footer-scripts") -%>
25
26  </body>
27 </html>
```

2 selections (337 characters selected) Tab Size: 4 UTF-8 CRLF HTML Go Live Prettier

The screenshot shows a Visual Studio Code (VS Code) interface with the following details:

- File Explorer (Left):** Shows a project structure under "SABOROSO". The "views" folder contains files like index.ejs, page-header.ejs, page-footer.ejs, contacts.ejs, menus.ejs, reservations.ejs, services.ejs, subscribe.ejs, text.ejs, footer-gotop.ejs, footer-scripts.ejs, footer.ejs, head.ejs, header-index.ejs, header-menu.ejs, header.ejs, page-footer.ejs, page-header.ejs, contacts.ejs, error.ejs, index.ejs, menus.ejs (which is currently selected), reservations.ejs, services.ejs, app.js, package-lock.json, and package.json.
- Search Bar (Top Center):** Displays "saboroso [Administrator]".
- Code Editor (Main Area):** The file "menus.ejs" is open. The code is as follows:

```
1 <%- include("inc/page-header") -%>
2
3 <%- include("inc/content/menus") -%>
4 <%- include("inc/content/text") -%>
5 <%- include("inc/content/subscribe") -%>
6
7 <%- include("inc/page-footer") -%>
```
- Annotations:** Two large red arrows point to the include statements at lines 1 and 7. The first arrow points to the line containing "<%- include(\"inc/page-header\") -%>". The second arrow points to the line containing "<%- include(\"inc/page-footer\") -%>".
- Bottom Status Bar:** Shows "2 selections (68 characters selected)", "Tab Size: 4", "UTF-8", "CRLF", "HTML", "Go Live", "Prettier", and a gear icon for settings.

The screenshot shows a dark-themed interface of Visual Studio Code. In the Explorer sidebar on the left, there is a tree view of files and folders. A red arrow points from the 'reservations.ejs' file in the tree down to its corresponding code editor tab. Another red arrow points from the code editor tab back up towards the 'views' folder in the tree, indicating the file's location.

File Edit Selection View Go Run ... ↶ ↷ saboroso [Administrator] ⚡ 🔍

EXPLORER

SABOROSO

- views > <> reservations.ejs > ...
- index.js
- <> page-header.ejs
- <> page-footer.ejs
- <> contacts.ejs
- <> menus.ejs
- <> reservations.ejs X

views > <> reservations.ejs > ...

```
1  <!DOCTYPE HTML>
2  <html>
3  <%- include("inc/head") -%>
4  <body>
5  <div class="gtco-loader"></div>
6  <div id="page">
7  <%- include("inc/header-menu") -%>
8  <%- include("inc/header") -%>
9
10 <%- include("inc/content/reservations") -%>
11
12 <%- include("inc/footer") -%>
13
14
15 <%- include("inc/footer-gototop") -%>
16
17 </div>
18
19 <%- include("inc/footer-gototop") -%>
20
21 <%- include("inc/footer-scripts") -%>
22
23
24 </body>
25 </html>
```

JS index.js

{ } package-lock.json

{ } package.json

OUTLINE

TIMELINE

✖ 0 △ 0 ⌂ 0 ⌂

🔍 2 selections (338 characters selected) Tab Size: 4 UTF-8 CRLF { HTML ⚡ Go Live ⚡ Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The top bar shows the title "saboroso [Administrator]" and standard window controls. The left sidebar contains icons for Explorer, Search, Find, Open, and others. The Explorer view shows a project structure under "SABOROSO":

- views
 - index.js
 - page-header.ejs
 - page-footer.ejs
 - contacts.ejs
 - menus.ejs
 - reservations.ejs
- inc
 - content
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - page-footer.ejs
 - page-header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs

- JS app.js
- { package-lock.json
- { package.json

The "OUTLINE" and "TIMELINE" views are also visible at the bottom of the sidebar.

The main editor area displays the file "views > reservations.ejs". The code contains three include statements:

```
<%- include("inc/page-header") -%>
<%- include("inc/content/reservations") -%>
<%- include("inc/page-footer") -%>
```

Three red arrows point from the "reservations.ejs" entry in the Explorer view to the three include statements in the editor. A fourth red arrow points from the "reservations.ejs" entry in the Explorer view towards the bottom-left corner of the screen.

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Explorer Sidebar:** Shows a tree structure under "SABOROSO".
 - views
 - inc
 - content
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - header.ejs
 - page-footer.ejs
 - page-header.ejs
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - { package-lock.json
 - { package.json
- OUTLINE
- TIMELINE

- Code Editor:** The current tab is "services.ejs". The code is an EJS template with the following structure:

```
<!DOCTYPE HTML>
<%- include("inc/head") -%>
<body>
<div class="gtco-loader"></div>

<div id="page">

<%- include("inc/header-menu") -%>
<%- include("inc/header") -%>

<%- include("inc/content/services") -%>
<%- include("inc/content/text") -%>
<%- include("inc/content/subscribe") -%>

<%- include("inc/footer") -%>

</div>

<%- include("inc/footer-gototop") -%>
<%- include("inc/footer-scripts") -%>

</body>
</html>
```
- Status Bar:** 2 selections (329 characters selected), Tab Size: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

File Edit Selection View Go Run ... ← → saboroso [Administrator] Select Encoding

EXPLORER ... page-header.ejs page-footer.ejs contacts.ejs menus.ejs reservations.ejs services.ejs ...

SABOROSO views > services.ejs ?

1 <%- include("inc/page-header") -%> 2 3 4 5 6 7 8 9

```
<%- include("inc/content/services") -%>
<%- include("inc/content/text") -%>
<%- include("inc/content/subscribe") -%>
```

<%- include("inc/page-footer") -%>

services.ejs

JS app.js

{ } package-lock.json

{ } package.json

> OUTLINE


> TIMELINE


2 selections (68 characters selected) Tab Size: 4 UTF-8 CRLF { HTML Go Live Prettier

The screenshot shows a code editor interface with a dark theme. On the left is an Explorer sidebar containing a file tree. A red arrow points from the 'views' folder in the tree to the 'page-header.ejs' file in the main code editor pane. The code editor shows the following EJS template:

```
<!DOCTYPE HTML>
<html>
<%- include("head") -%>
<body>
  <div class="gtco-loader"></div>
  <div id="page">
    <%- include("header-menu") -%>
    <% if (isHome) { %>
      <%- include("header-index") -%>
    <% } else { %>
      <%- include("header") -%>
    <% } %>
  </div>
</body>
</html>
```

The code editor includes standard navigation and search tools at the bottom, such as file tabs, line and column counters, and a status bar indicating the current file is 'saboroso [Administrator]'.

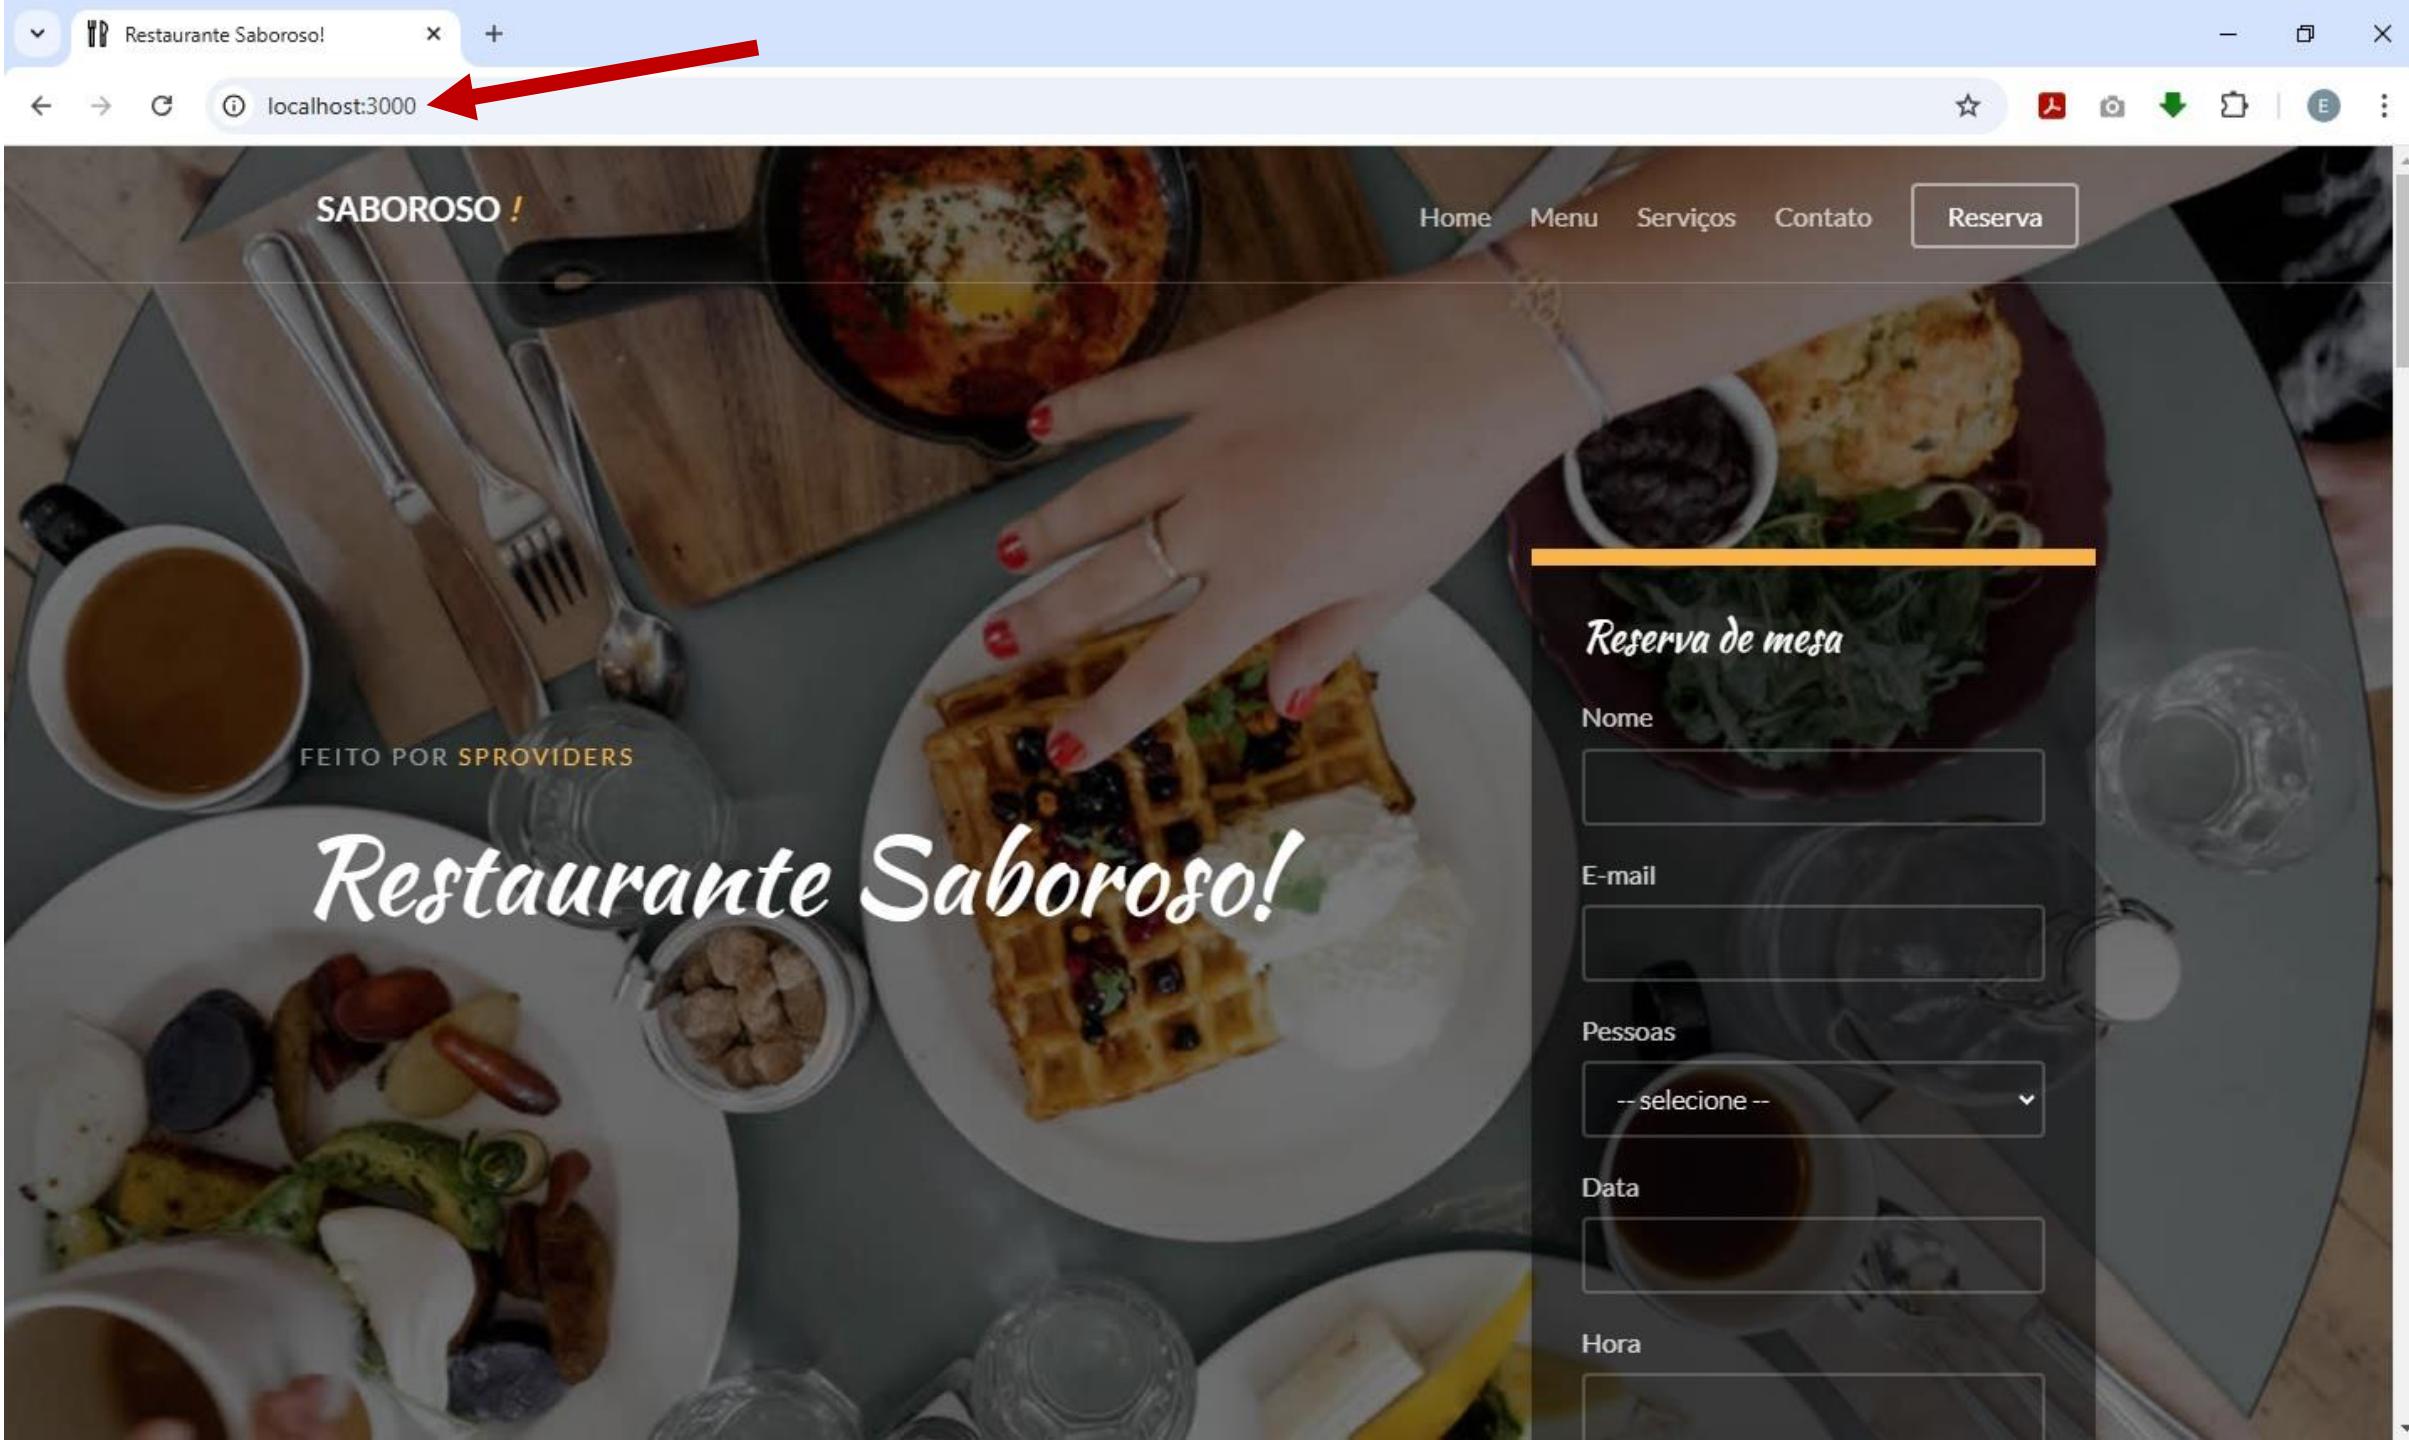

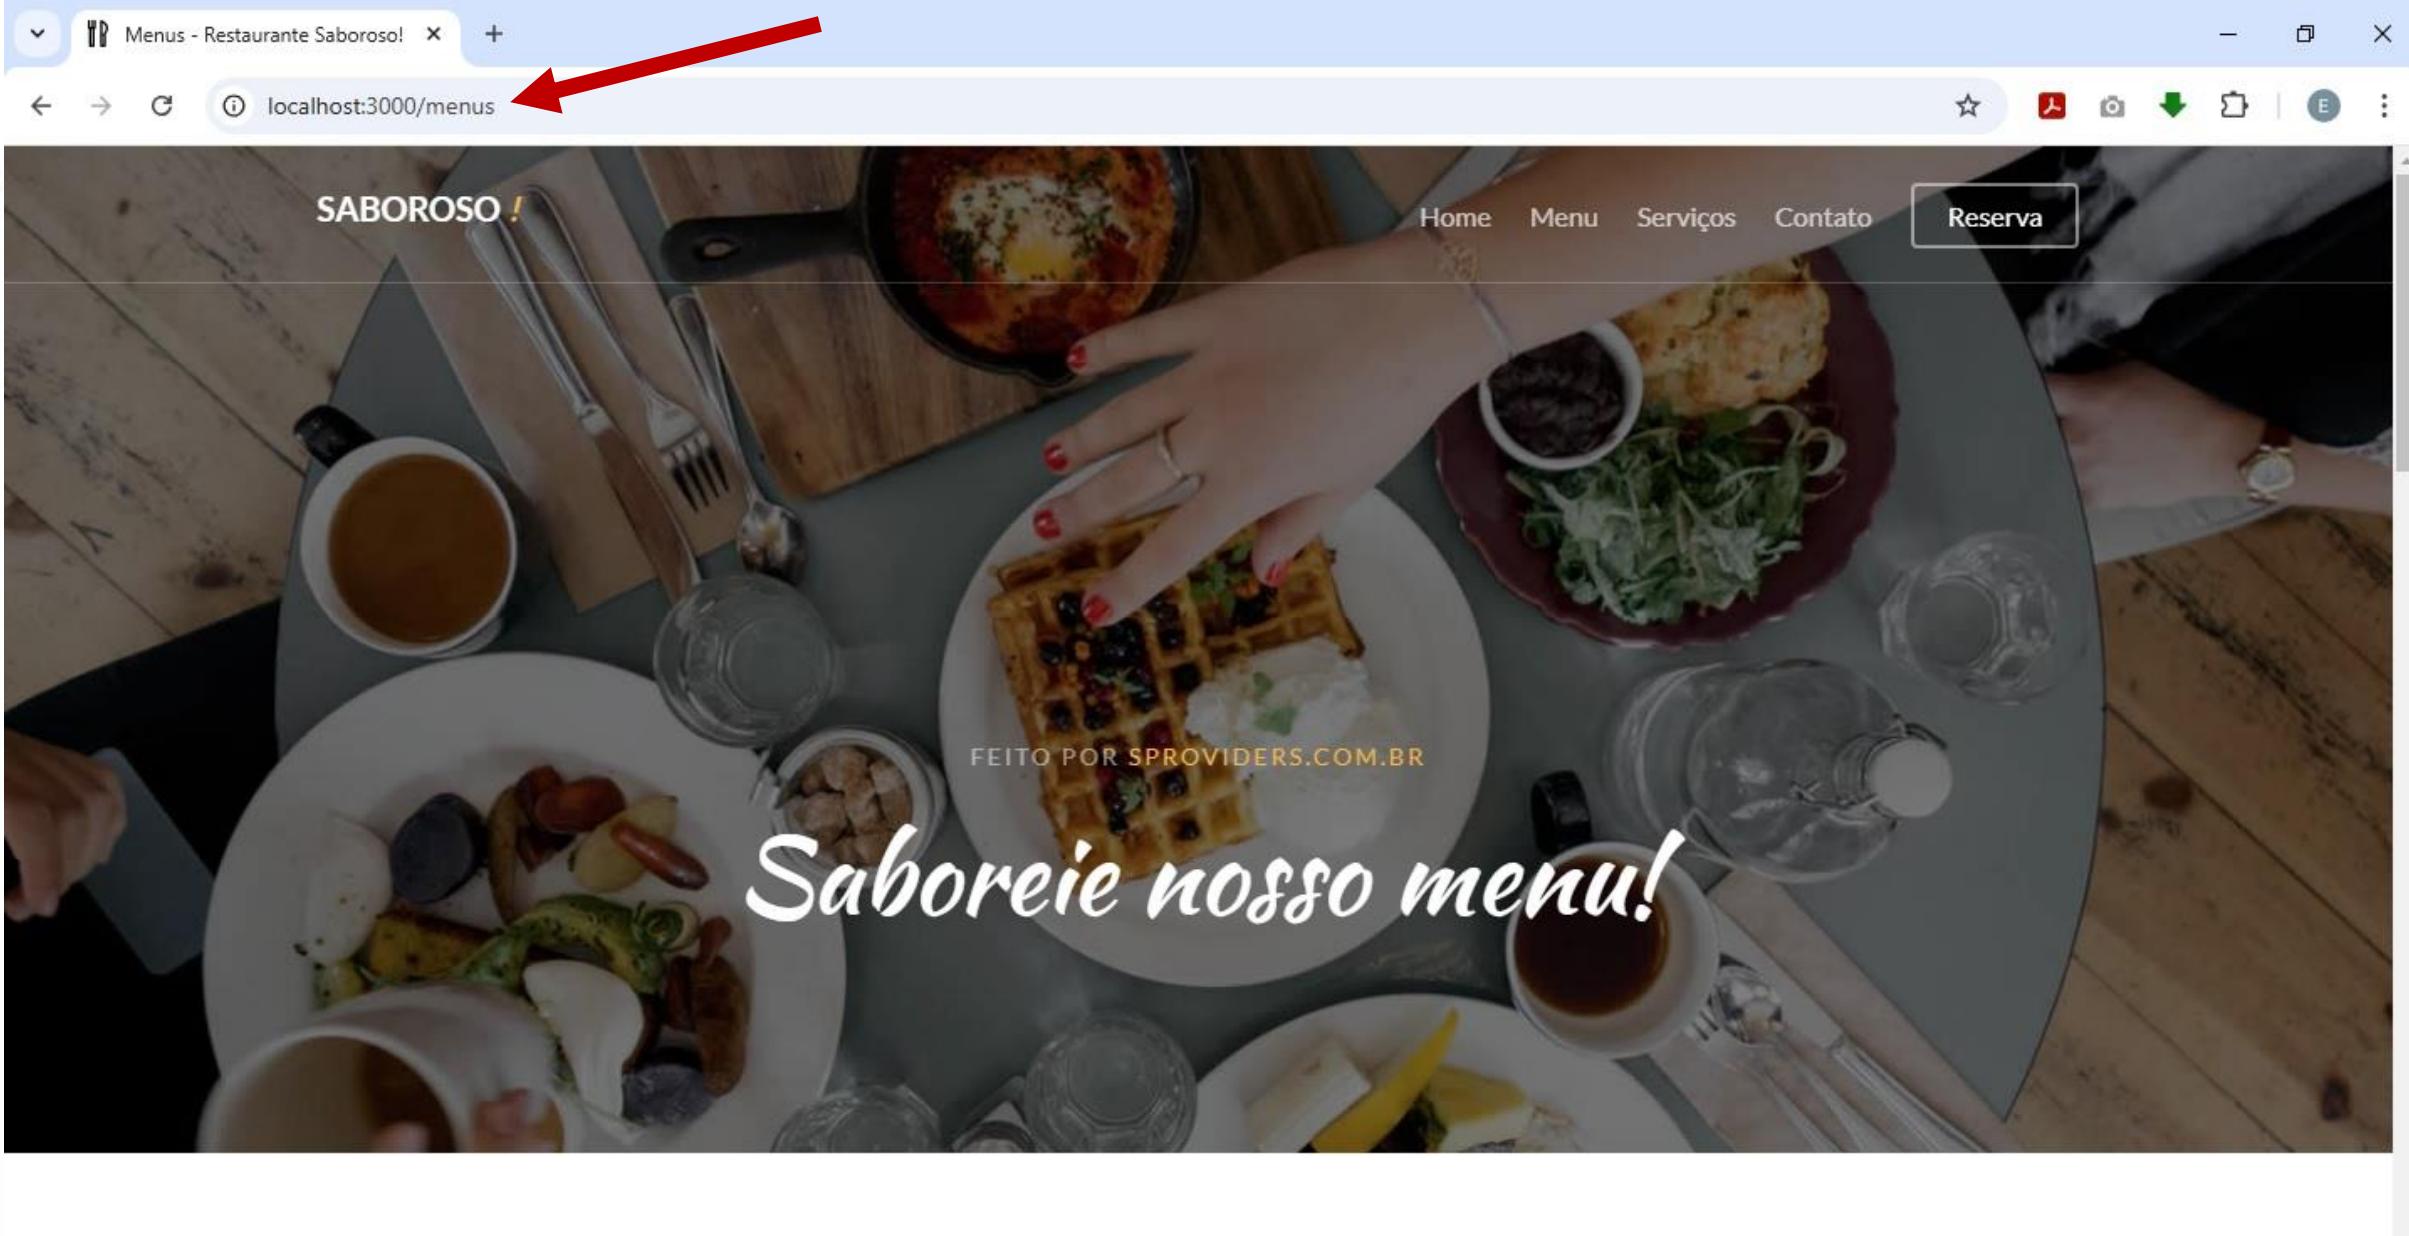

Pratos Populares



SABOROSO!


Home Menu Serviços Contato

Reserva

FEITO POR SPROVIDERS.COM.BR

É um prazer poder servir!



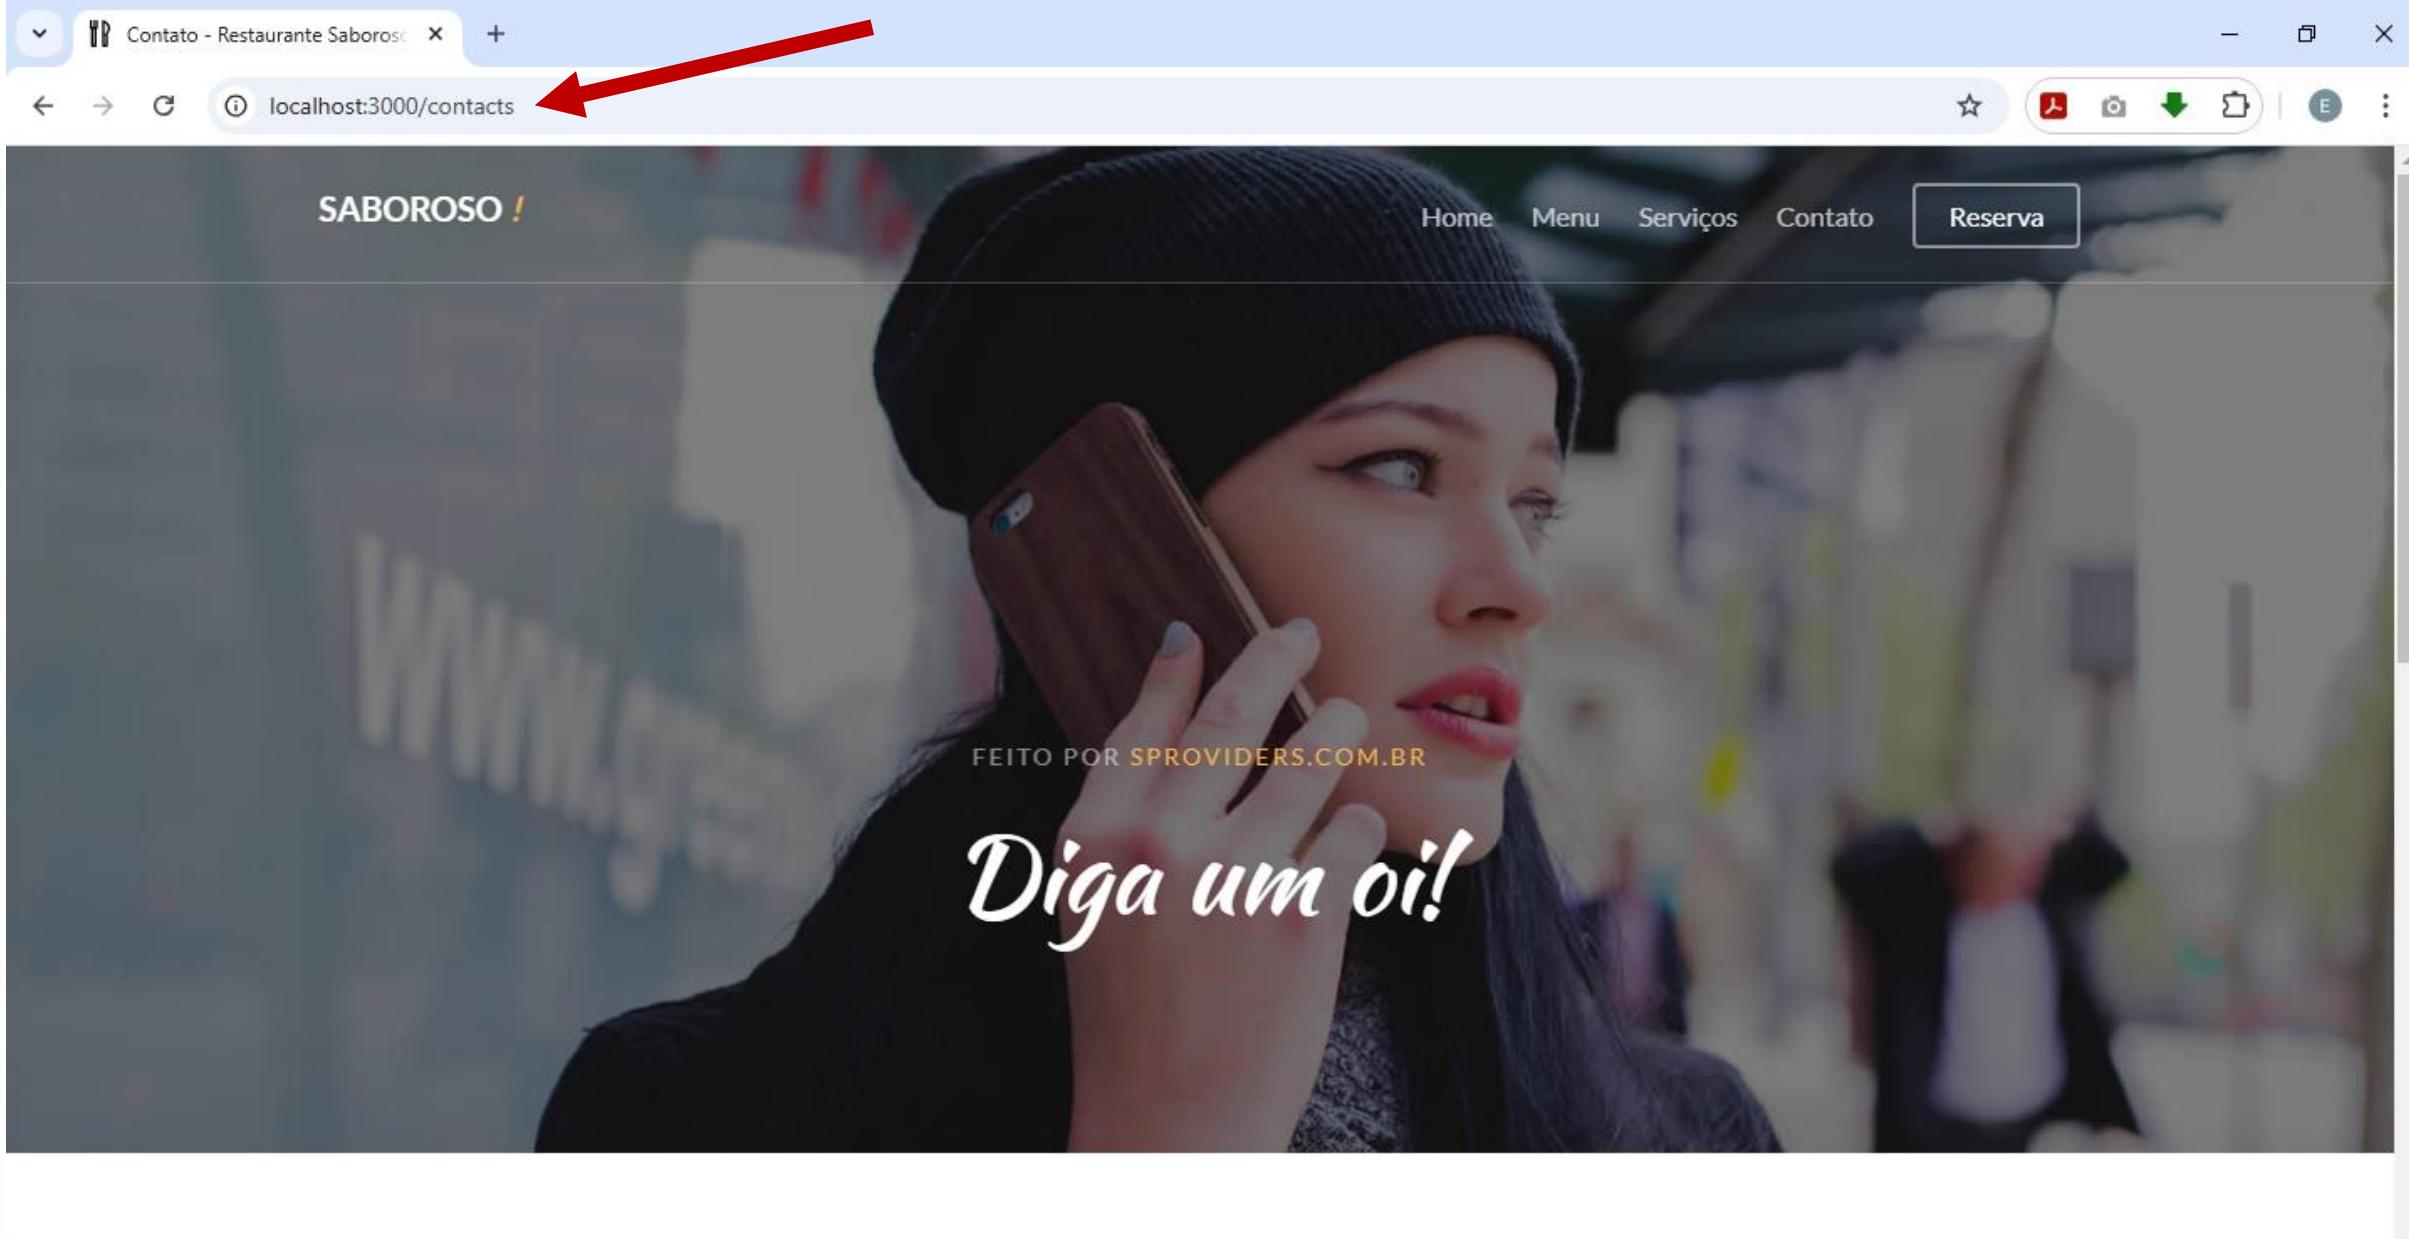


SABOROSO !

Home Menu Serviços Contato

Reserva

FEITO POR SPROVIDERS.COM.BR

Diga um oi!

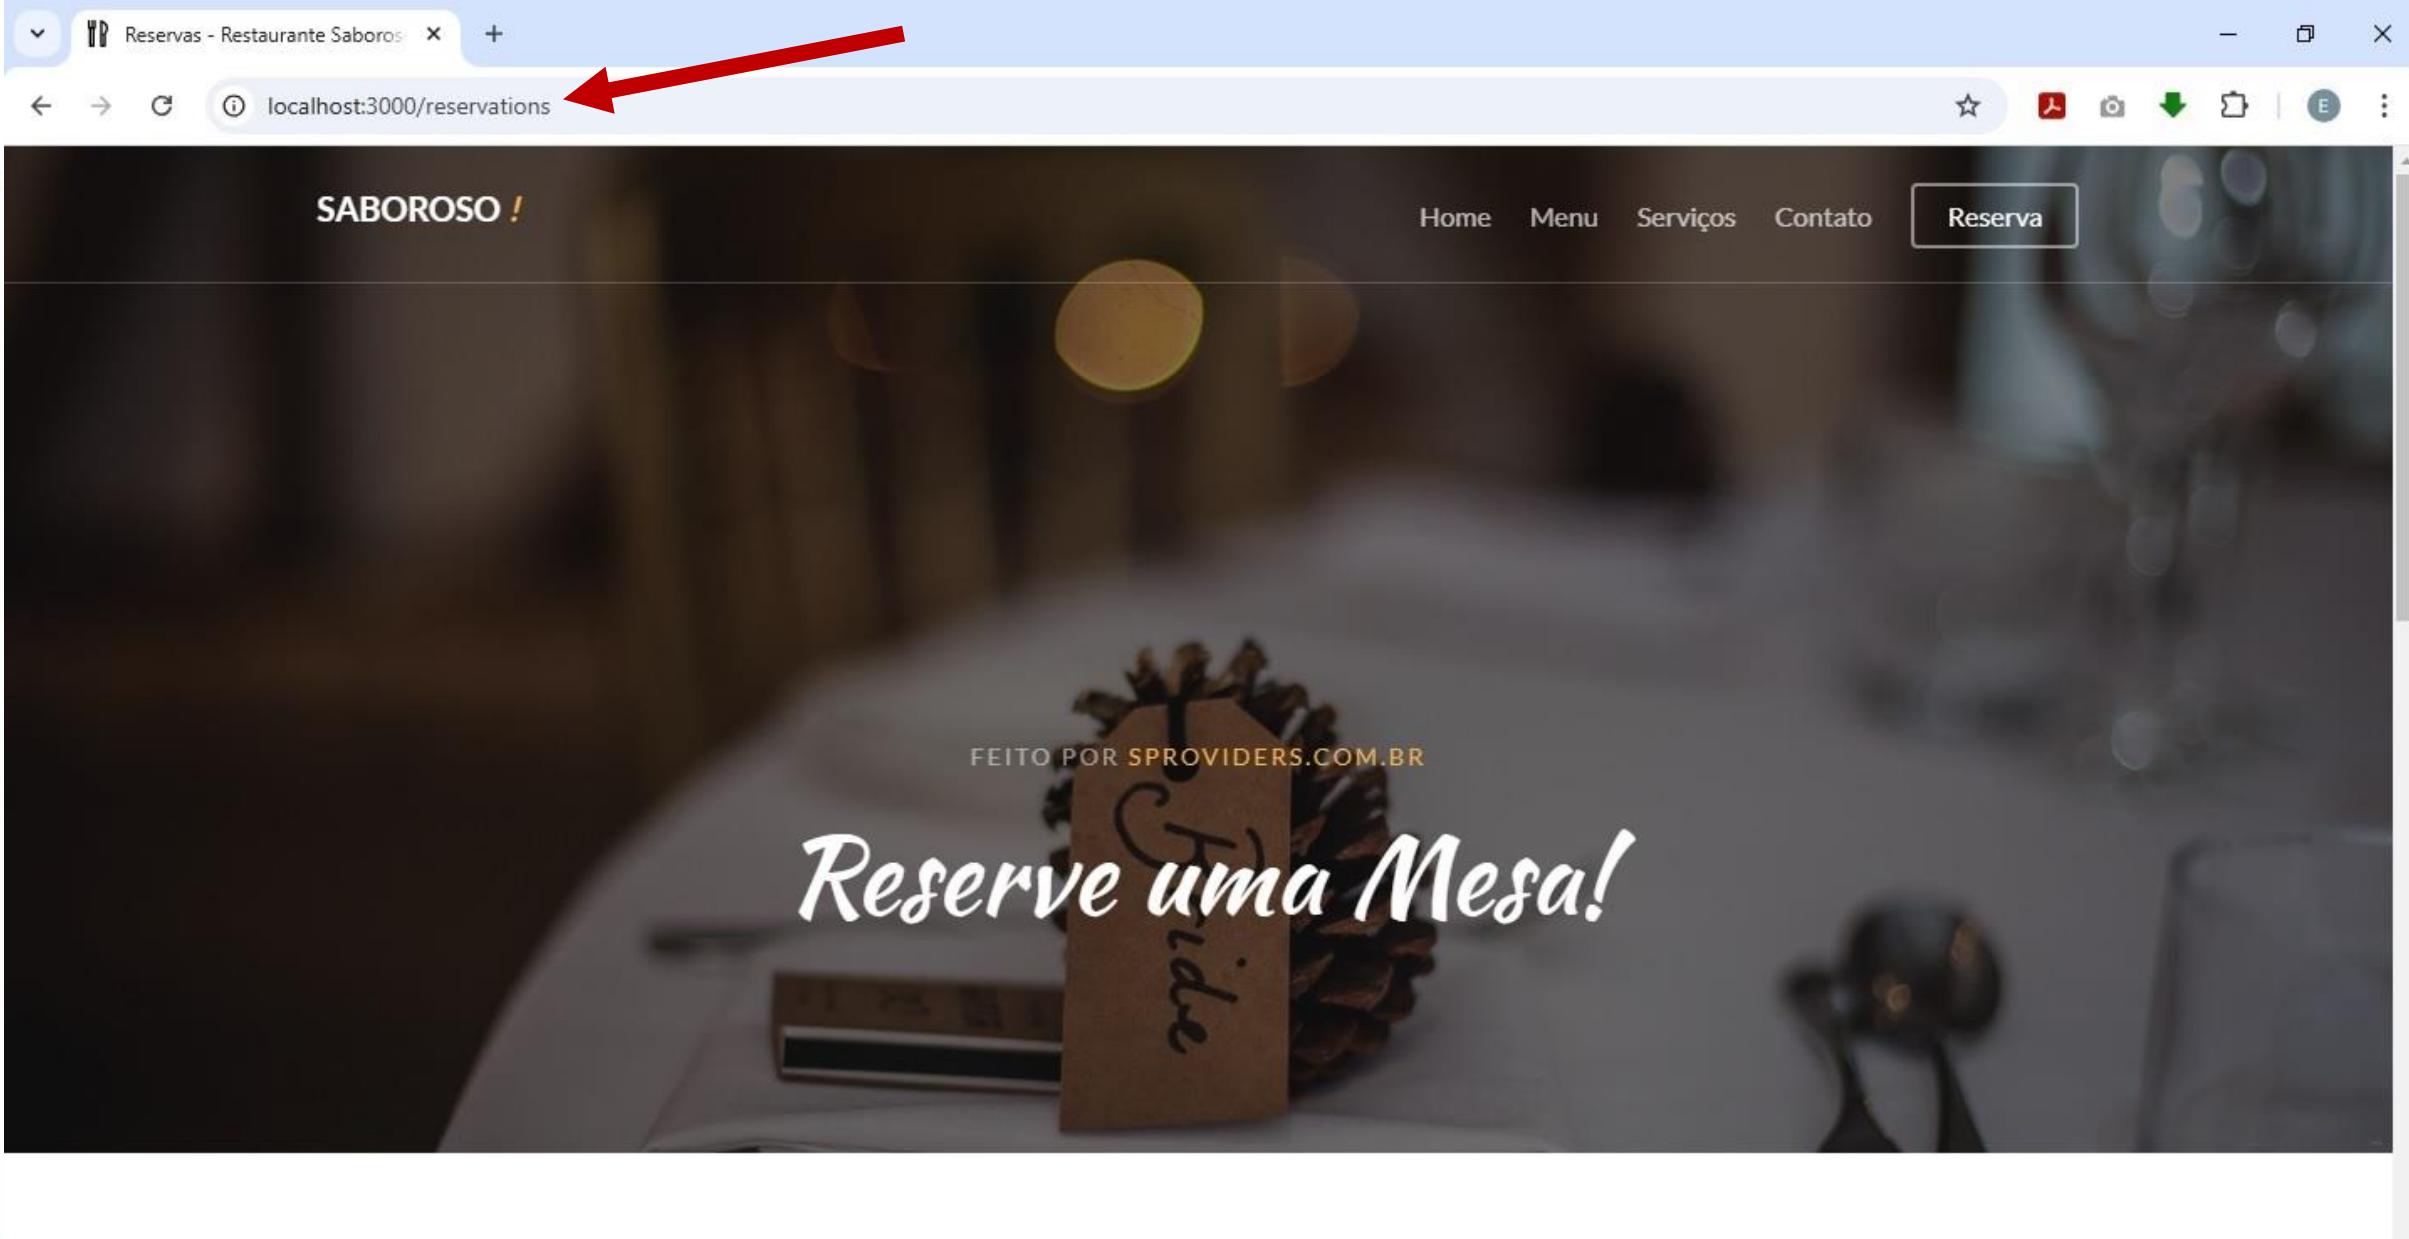

UC: Projetos

Assunto:

Projeto Restaurante – BackEnd

**10 – Efetuando Reserva com Método POST
para o MySQL**

A screenshot of the Visual Studio Code (VS Code) interface. The Explorer sidebar on the left shows a project structure for a Node.js application named 'SABOROSO'. The 'routes' folder contains 'index.js' and 'users.js'. The 'views' folder contains several EJS files: 'inc', 'error.ejs', 'index.ejs', 'menus.ejs', 'reservations.ejs', and 'services.ejs'. Other files in the root include 'app.js', 'package-lock.json', and 'package.json'. The 'OUTLINE' and 'TIMELINE' sections are also visible.

The main editor pane displays the 'index.js' file. The code defines an Express router and sets up routes for the home page and contacts page, rendering EJS templates with menu data.

```
routes > JS index.js > ...
1 var conn = ...
2 var express = require('express');
3 var menus = require('../inc/menus');
4 var router = express.Router();
5
6 /* GET home page. */
7 router.get('/', function(req, res, next) {
8   menus.getMenus().then(results => {
9     res.render('index', {
10       title: 'Restaurante Saboroso!',
11       menus: results,
12       isHome: true
13     });
14   });
15 });
16 });
17 });
18 });
19 });
20
21 router.get('/contacts', function(req, res, next) {
22
23   res.render('contacts', {
24     title: 'Contato - Restaurante Saboroso!',
25     background: "images/img_bg_3.jpg",
26     h1: "Diga um oi!"
```

The status bar at the bottom shows the current file is 'index.js', line 7, column 11, with 3 selected characters. It also indicates the file is in JavaScript mode, has 2 spaces per tab, uses LF line endings, and is connected to a 'Go Live' session. The status bar also includes icons for file operations like save, close, and refresh.

```
routes > JS index.js > ...
1 var conn = require('../inc/db')
2 var express = require('express');
3 var menus = require('../inc/menus');
4 var router = express.Router();
5
6 /* GET home page. */
7 router.get('/', function(req, res, next) {
8
9     menus.getMenus().then(results => {
10
11         res.render('index', {
12             title: 'Restaurante Saboroso!',
13             menus: results,
14             isHome: true
15         });
16
17     });
18
19 });
20
21 router.get('/contacts', function(req, res, next) {
22
23     res.render('contacts', {
24         title: 'Contato - Restaurante Saboroso!',
25         background: "images/img_bg_3.jpg",
26         h1: "Diga um oi!"
27     });
28
29 });
30
31 module.exports = router;
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer (Left):** Shows the project structure under the folder "SABOROSO". The "routes" folder contains "index.js" and "users.js", which is highlighted with a red arrow pointing from the Explorer sidebar.
- Editor (Center):** Displays the content of "index.js". The code uses Express.js to define two routes: one for the home page and one for contacts. It imports necessary modules, creates a Router instance, and defines route handlers using the `get` method.
- Status Bar (Bottom):** Shows the file path ("saboroso [Administrator]"), line number (Ln 7, Col 1), selected text count (6 selected), and encoding (UTF-8). It also includes icons for Prettier, Go Live, and other extensions.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the window title "saboroso [Administrator]". The left sidebar, titled "EXPLORER", displays a file tree for a project named "SABOROSO". The "app.js" file is selected in the tree, highlighted with a red arrow. The main editor area shows the content of "app.js":

```
JS app.js    X
JS app.js > ...
1 var createError = require('http-errors');
2 var express = require('express');
3 var path = require('path');
4 var cookieParser = require('cookie-parser');
5 var logger = require('morgan');
6
7 var indexRouter = require('./routes/index');
8 var usersRouter = require('./routes/users');
9
10 var app = express();
11
12 // view engine setup
13 app.set('views', path.join(__dirname, 'views'));
14 app.set('view engine', 'ejs');
15
16 app.use(logger('dev'));
17 app.use(express.json());
18 app.use(express.urlencoded({ extended: false }));
19 app.use(cookieParser());
20 app.use(express.static(path.join(__dirname, 'public')));
21
22 app.use('/', indexRouter);
23 app.use('/users', usersRouter);
24
25 // catch 404 and forward to error handler
26 app.use(function(req, res, next) {
```

The code uses ES6 imports and exports. A red arrow points from the "app.js" entry in the Explorer sidebar to the corresponding line in the editor. Another red arrow points to the line "var indexRouter = require('./routes/index');".

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS app.js X

SABOROSO

- > bin
- ✓ inc
- JS db.js
- JS menus.js
- > node_modules
- > public
- ✓ routes
- JS index.js
- JS users.js
- ✓ views
- > inc
- ↳ contacts.ejs
- ↳ error.ejs
- ↳ index.ejs
- ↳ menus.ejs
- ↳ reservations.ejs
- ↳ services.ejs

JS app.js

{} package-lock.json

{} package.json

> OUTLINE

> TIMELINE

JS app.js > ...

```
10 var app = express();
11
12 // view engine setup
13 app.set('views', path.join(__dirname, 'views'));
14 app.set('view engine', 'ejs');
15
16 app.use(logger('dev'));
17 app.use(express.json());
18 app.use(express.urlencoded({ extended: false }));
19 app.use(cookieParser());
20 app.use(express.static(path.join(__dirname, 'public')));
21
22 app.use('/', indexRouter);
23 app.use('/users', usersRouter);
24
25 // catch 404 and forward to error handler
26 app.use(function(req, res, next) {
27   next(createError(404));
28 });
29
30 // error handler
31 app.use(function(err, req, res, next) {
32   // set locals, only providing error in development
33   res.locals.message = err.message;
34   res.locals.error = req.app.get('env') === 'development' ? err : {};
35 })
```

Ln 22, Col 1 (26 selected) Spaces: 2 UTF-8 LF { JavaScript Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close
- Left Sidebar (EXPLORER):** Shows the project structure under "SABOROSO".
 - bin
 - inc
 - db.js
 - menus.js
 - node_modules
 - public
 - routes
 - index.js (highlighted with a red arrow)
 - users.js
 - views
 - inc
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
- Title Bar:** JS index.js
- Code Editor:** Displays the contents of the index.js file.

```
routes > JS index.js > ...
39   });
40   });
41   });
42   });
43   });
44   );
45 router.get('/reservations', function(req, res, next) {
46
47   res.render('reservations', {
48     title: 'Reservas - Restaurante Saboroso!',
49     background: "images/img_bg_2.jpg",
50     h1: "Reserve uma Mesa!"
51   });
52   });
53 });
54
55 router.get('/services', function(req, res, next) {
56
57   res.render('services', {
58     title: 'Serviços - Restaurante Saboroso!',
59     background: "images/img_bg_1.jpg",
60     h1: "É um prazer poder servir!"
61   });
62   });
63 });

Ln 45, Col 26 (12 selected) Spaces: 2 UTF-8 LF JavaScript Go Live Prettier
```

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer Bar (Left):** Shows the project structure under the 'SABOROSO' root:
 - bin
 - inc
 - db.js
 - menus.js
 - node_modules
 - public
 - routes
 - index.js (selected)
 - users.js
 - views
 - inc
 - contacts.ejs
 - error.ejs
 - index.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - app.js
 - package-lock.json
 - package.json
- Code Editor (Right):** The file 'index.js' contains the following code:

```
41  });
42  );
43  );
44  );
45 router.get('/reservations', function(req, res, next) {
46
47   res.render('reservations', {
48     title: 'Reservas - Restaurante Saboroso!',
49     background: "images/img_bg_2.jpg",
50     h1: "Reserve uma Mesa!"
51   });
52
53 });
54
55 router.get('/services', function(req, res, next) {
56
57   res.render('services', {
58     title: 'Serviços - Restaurante Saboroso!',
59     background: "images/img_bg_1.jpg",
60     h1: "É um prazer poder servir!"
61   });
62
63 });
64
65 module.exports = router;
```

A red arrow points to the code block for the '/reservations' route.
- Bottom Status Bar:** Ln 45, Col 1 (211 selected) Spaces: 2 UTF-8 LF JavaScript Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the file path "routes > JS index.js > router.post('/reservations') callback" and the search term "saboroso [Administrator]". The left sidebar (Explorer) lists the project structure under the folder "SABOROSO", including "bin", "inc", "db.js", "menus.js", "node_modules", "public", "routes" (which contains "index.js" and "users.js"), and "views" (which contains "inc", "contacts.ejs", "error.ejs", "index.ejs", "menus.ejs", "reservations.ejs", "services.ejs"). The main editor area displays the "index.js" file with the following code:

```
routes > JS index.js > router.post('/reservations') callback
    43  });
    44
    45  router.get('/reservations', function(req, res, next) {
    46
    47    res.render('reservations', {
    48      title: 'Reservas - Restaurante Saboroso!',
    49      background: "images/img_bg_2.jpg",
    50      h1: "Reserve uma Mesa!"
    51    });
    52
    53  );
    54
    55  router.post('/reservations', function(req, res, next) {
    56    res.send(req.body);
    57
    58  );
    59
    60
    61  router.get('/services', function(req, res, next) {
    62
    63    res.render('services', {
    64      title: 'Serviços - Restaurante Saboroso!',
    65      background: "images/img_bg_1.jpg",
    66      h1: "É um prazer poder servir!"
    67    );
    68
```

A red arrow points from the bottom right towards the line of code "res.send(req.body);". The status bar at the bottom shows "2 selections (25 characters selected)" and various file and encoding details.

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS index.js JS app.js X JS app.js > ...

SABOROSO

- > bin
- ✓ inc
- JS db.js
- JS menus.js
- > node_modules
- > public
- ✓ routes
- JS index.js
- JS users.js
- ✓ views
- > inc
- ↳ contacts.ejs
- ↳ error.ejs
- ↳ index.ejs
- ↳ menus.ejs
- ↳ reservations.ejs
- ↳ services.ejs

JS app.js { } package-lock.json { } package.json > OUTLINE > TIMELINE

```
10 var app = express();
11
12 // view engine setup
13 app.set('views', path.join(__dirname, 'views'));
14 app.set('view engine', 'ejs');
15
16 app.use(logger('dev'));
17 app.use(express.json()); ←
18 app.use(express.urlencoded({ extended: false }));
19 app.use(cookieParser());
20 app.use(express.static(path.join(__dirname, 'public')));
21
22 app.use('/', indexRouter);
23 app.use('/users', usersRouter);
24
25 // catch 404 and forward to error handler
26 app.use(function(req, res, next) {
27   next(createError(404));
28 });
29
30 // error handler
31 app.use(function(err, req, res, next) {
32   // set locals, only providing error in development
33   res.locals.message = err.message;
34   res.locals.error = req.app.get('env') === 'development' ? err : {};
35 })
```

Ln 17, Col 1 (74 selected) Spaces: 2 UTF-8 LF { } JavaScript Go Live Prettier Select Encoding

A screenshot of the Visual Studio Code (VS Code) interface. The Explorer sidebar on the left shows a file tree for a project named "SABOROSO". The "routes" folder contains "index.js" (which is currently selected, highlighted in blue), "users.js", and "app.js". Other folders like "bin", "inc", "db.js", "menus.js", "node_modules", "public", and "views" also contain various files. The Editor tab bar at the top has tabs for "index.js" (active) and "app.js". The main editor area displays the content of "index.js". The code implements Express.js routes for handling reservations and services. A red arrow points from the "index.js" entry in the Explorer to the "index.js" tab in the Editor. Another red arrow points from the "res.send(req.body);" line in the code to the "req" parameter in the "router.post" call.

```
routes > JS index.js > ...
43   });
44
45   router.get('/reservations', function(req, res, next) {
46
47     res.render('reservations', {
48       title: 'Reservas - Restaurante Saboroso!',
49       background: "images/img_bg_2.jpg",
50       h1: "Reserve uma Mesa!"
51     });
52
53   );
54
55   router.post('/reservations', function(req, res, next) {
56
57     res.send(req.body);
58
59   );
60
61   router.get('/services', function(req, res, next) {
62
63     res.render('services', {
64       title: 'Serviços - Restaurante Saboroso!',
65       background: "images/img_bg_1.jpg",
66       h1: "É um prazer poder servir!"
67     );
68
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Icons:** Explorer, Find, Open, Close, Minimize, Maximize, Close, Help.
- Left Sidebar (Explorer):**
 - SABOROSO
 - bin
 - inc
 - db.js
 - menus.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - content
 - contacts.ejs
 - facts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - OUTLINE
 - TIMELINE
- Editor:** JS index.js (tab) and JS reservations.ejs (tab, active). The code in reservations.ejs is:

```
<div class="gtco-section" style="padding-bottom: 14em;">
  <div class="gtco-container">
    <div class="row">
      <div class="col-md-12">
        <div class="col-md-6 animate-box">
          <h3>Reserva de mesa</h3>
          <form action="#">
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputName">Nome</label>
                <input type="text" id="inputName" name="name" class="form-control">
              </div>
            </div>
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputEmail">E-mail</label>
                <input type="email" id="inputEmail" name="email" class="form-control">
              </div>
            </div>
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputPeople">Pessoas</label>
                <select id="inputPeople" name="people" class="form-control">
                  <option value=""> -- selecione -- </option>
                  <option value="1">1</option>
                </select>
              </div>
            </div>
          </form>
        </div>
      </div>
    </div>
  </div>
</div>
```
- Bottom Status Bar:** 0 0 ▲ 0 ⚡ 0 🔍 Ln 7, Col 1 (33 selected) Spaces: 4 CRLF { HTML Go Live Prettier

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Home, Stop, Refresh, Minimize, Maximize, Close.
- Explorer:** Shows a tree view of the project structure under the folder "SABOROSO".
 - bin
 - inc
 - db.js
 - menus.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - content
 - contacts.ejs
 - facts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
- Code Editor:** The file "reservations.ejs" is open, showing the following code:

```
> content > <div class="gtco-section" style="padding-bottom: 14em;">
  <div class="gtco-container">
    <div class="row">
      <div class="col-md-12">
        <div class="col-md-6 animate-box">
          <h3>Reserva de mesa</h3>
          <form action="/reservations" method="post">
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputName">Nome</label>
                <input type="text" id="inputName" name="name" class="form-control">
              </div>
            </div>
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputEmail">E-mail</label>
                <input type="email" id="inputEmail" name="email" class="form-control">
              </div>
            </div>
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputPeople">Pessoas</label>
                <select id="inputPeople" name="people" class="form-control">
                  <option value=""> -- selecione -- </option>
                  <option value="1">1</option>
                </select>
              </div>
            </div>
          </form>
        </div>
      </div>
    </div>
  </div>
</div>
```
- Status Bar:** Ln 7, Col 1 (59 selected) Spaces: 4 UTF-8 CRLF { HTML Go Live Prettier

The screenshot shows a Microsoft Visual Studio Code (VS Code) interface. The title bar displays the path "routes > JS index.js > ...". The left sidebar (EXPLORER) shows a project structure for "SABOROSO" with files like bin, inc, db.js, menus.js, node_modules, public, routes (containing index.js and users.js), and views (containing inc, content, facts.ejs, menus.ejs, reservations.ejs, services.ejs, subscribe.ejs, text.ejs, footer-gototop.ejs). Two red arrows point from the sidebar to the "reservations" route definitions in the code editor.

```
routes > JS index.js > ...
43  });
44
45 router.get('/reservations', function(req, res, next) {
46
47   res.render('reservations', {
48     title: 'Reservas - Restaurante Saboroso!',
49     background: "images/img_bg_2.jpg",
50     h1: "Reserve uma Mesa!"
51   });
52
53 });
54
55 router.post('/reservations', function(req, res, next) {
56
57   res.send(req.body);
58
59 });
60
61 router.get('/services', function(req, res, next) {
62
63   res.render('services', {
64     title: 'Serviços - Restaurante Saboroso!',
65     background: "images/img_bg_1.jpg",
66     h1: "É um prazer poder servir!"
67   });
68 }
```

The status bar at the bottom shows the current file is "index.js", line 55, column 14, with 14 selected. It also indicates "Spaces: 2", "UTF-8", "LF", "JavaScript", "Go Live", and "Prettier" are active.

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer:** Shows the project structure under 'SABOROSO'. The 'views' folder is expanded, showing 'inc' and other files like 'index.js', 'users.js', 'reservations.ejs', etc.
- Editor:** The 'header-index.ejs' file is open in the editor tab. The code is as follows:

```
<span class="intro-text-small">Feito por<br><a href="#" target="_blank">SProviders</a></span>
<h1 class="cursive-font">Restaurante Saboroso!</h1>
</div>
<div class="col-md-4 col-md-push-1 animate-box" data-animate-effect="fadeInRight">
  <div class="form-wrap">
    <div class="tab">
      <div class="tab-content">
        <div class="tab-content-inner active" data-content="signup">
          <h3 class="cursive-font">Reserva de mesa</h3>
          <form action="#">
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputName">Nome</label>
                <input type="text" id="inputName" name="name" class="form-control">
              </div>
            </div>
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputEmail">E-mail</label>
                <input type="email" id="inputEmail" name="email" class="form-control">
              </div>
            </div>
          </form>
        </div>
      </div>
    </div>
  </div>
</div>
```


Annotations:

- A red arrow points from the 'header-index.ejs' entry in the Explorer to the same file in the Editor tab.
- A red arrow points to the opening form tag on line 23: <form action="#">.

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Fullscreen, ...
- Explorer:** Shows a tree view of the project structure under the name "SABOROSO".
 - routes:** index.js, users.js
 - views:** inc (content, contacts.ejs, facts.ejs, menus.ejs, reservations.ejs, services.ejs, subscribe.ejs, text.ejs), footer-gototop.ejs, footer-scripts.ejs, footer.ejs, head.ejs, header-index.ejs (selected), header-menu.ejs, header.ejs
- Code Editor:** The active tab is "header-index.ejs". The code is as follows:

```
<div class="col-md-4 col-md-push-1 animate-box" data-animate-effect="fadeInRight">
  <div class="form-wrap">
    <div.tab>
      <div.tab-content>
        <div.tab-content-inner.active>
          <span class="intro-text-small">Feito por<br/><a href="#" target="_blank">SProviders</a></span>
          <h1 class="cursive-font">Restaurante Saboroso!</h1>
        </div>
        <div class="col-md-4 col-md-push-1 animate-box" data-animate-effect="fadeInRight">
          <div class="form-wrap">
            <div.tab>
              <div.tab-content>
                <div.tab-content-inner active data-content="signup">
                  <h3 class="cursive-font">Reserva de mesa</h3>
                  <form action="/reservations" method="post">
                    <div class="row form-group">
                      <div class="col-md-12">
                        <label for="inputName">Nome</label>
                        <input type="text" id="inputName" name="name" class="form-control">
                      </div>
                    </div>
                    <div class="row form-group">
                      <div class="col-md-12">
                        <label for="inputEmail">E-mail</label>
                        <input type="email" id="inputEmail" name="email" class="form-control">
                      </div>
                    </div>
                  </form>
                </div>
              </div>
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>
```
- Status Bar:** Ln 23, Col 40 (43 selected), Spaces: 4, UTF-8, CRLF, HTML, Go Live, Prettier

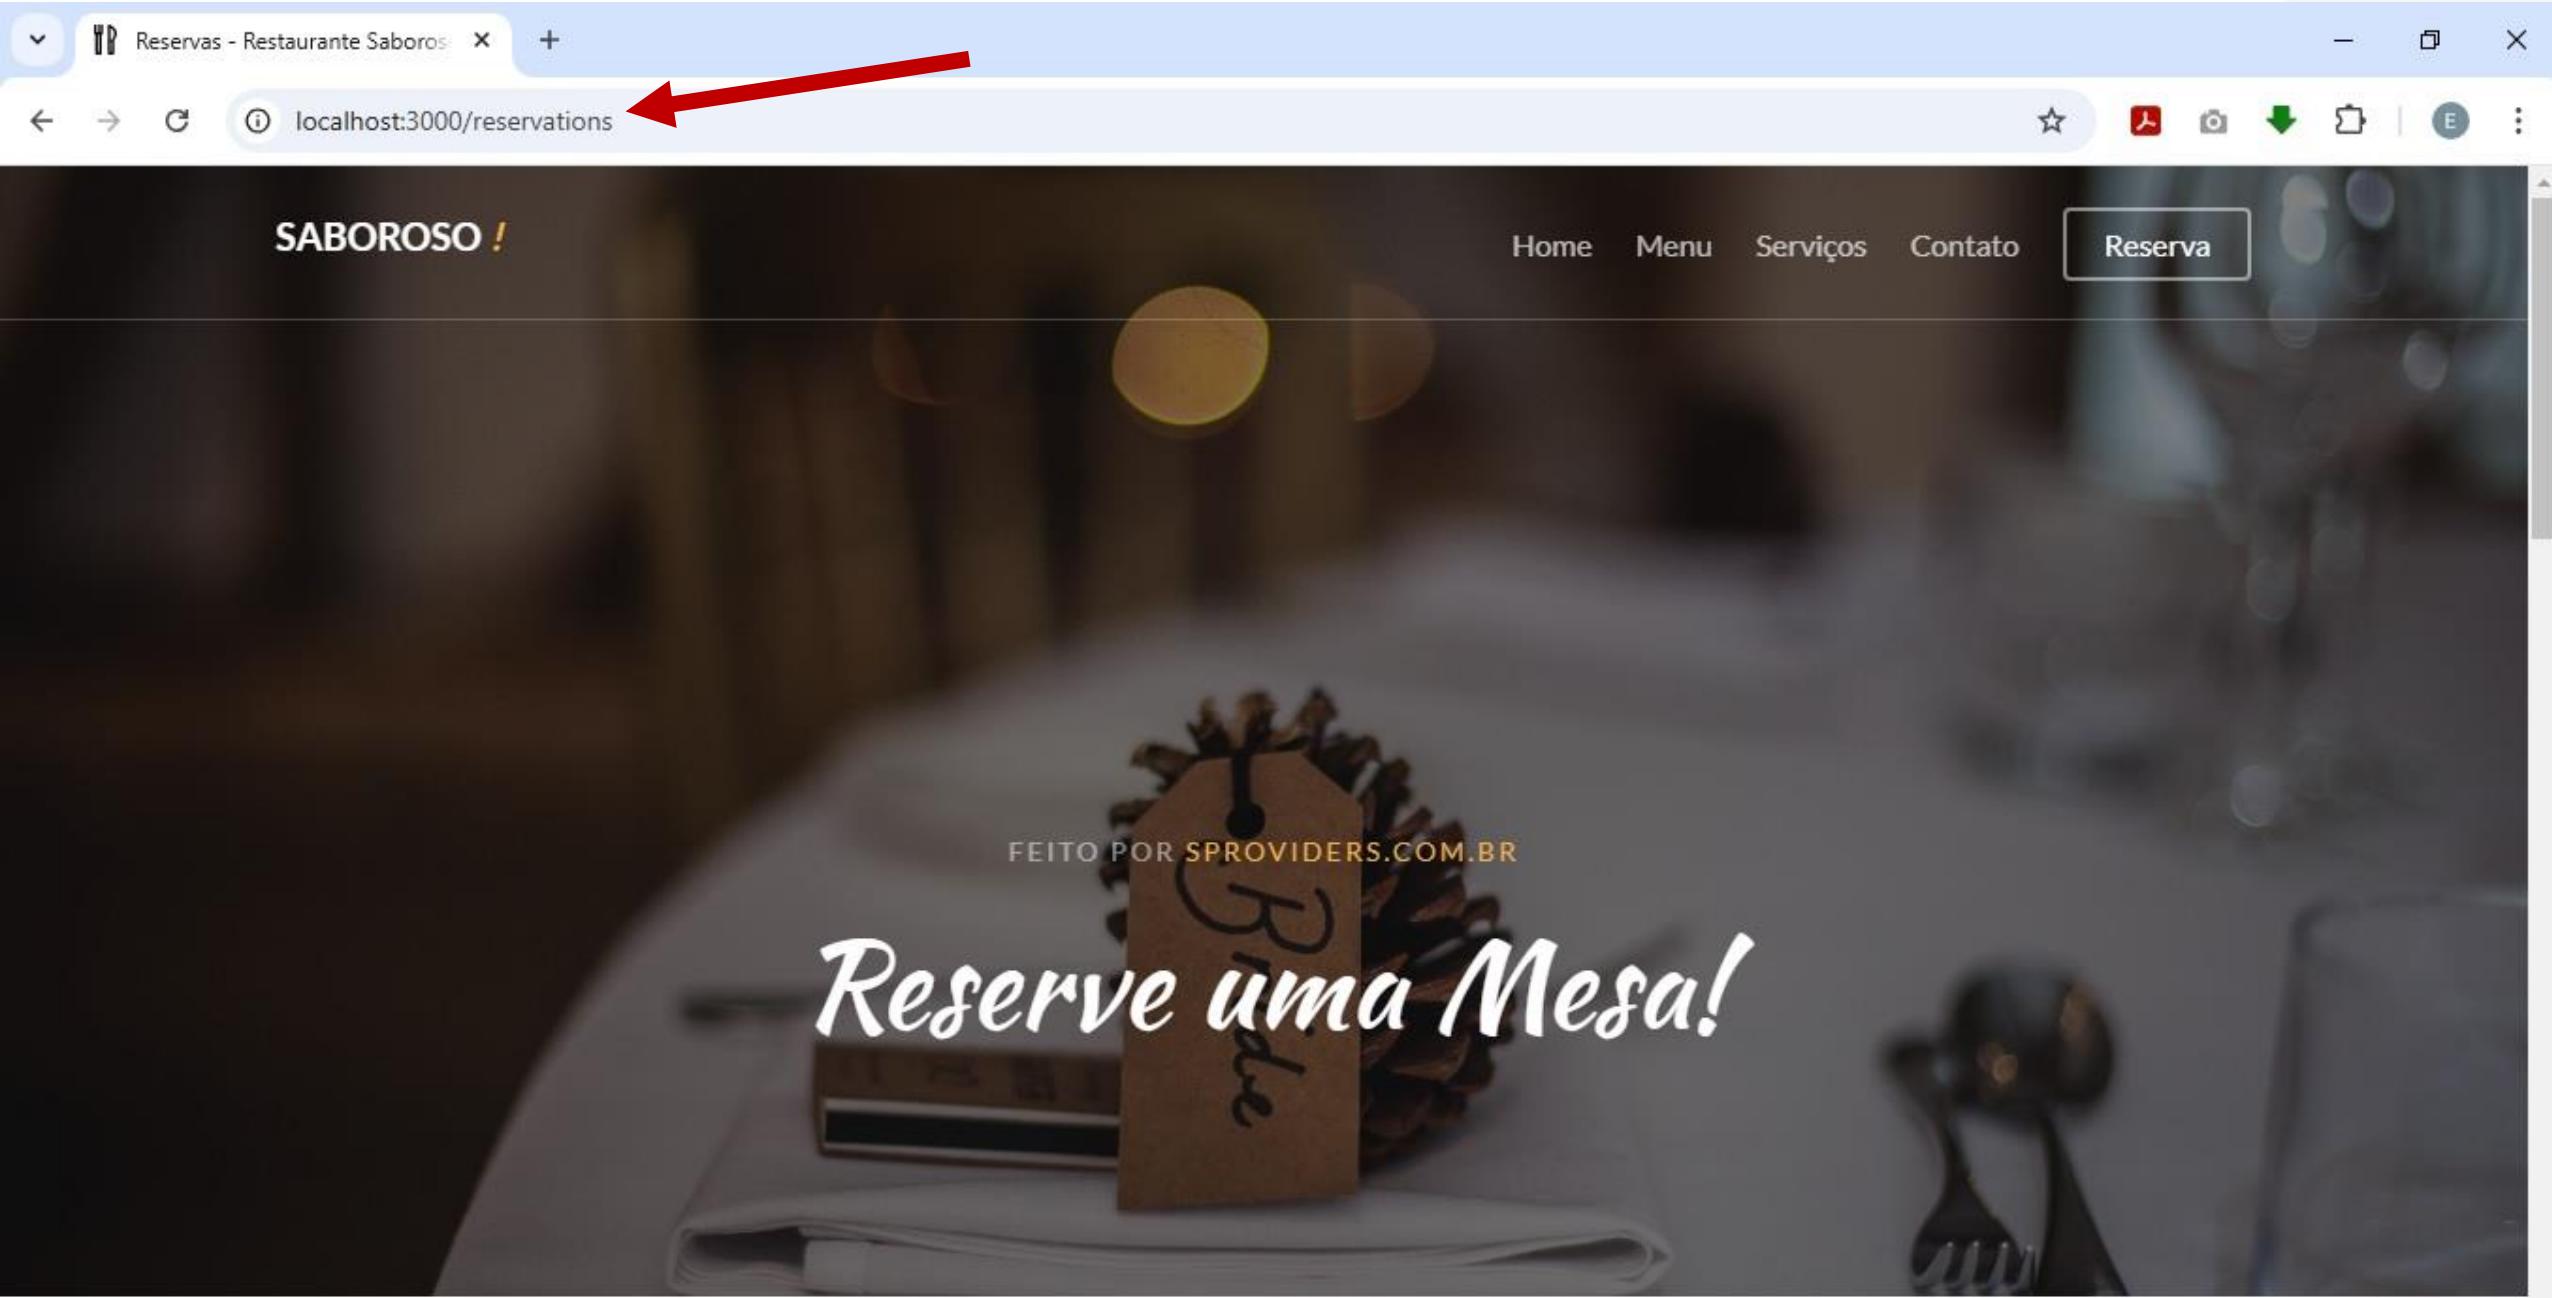

Reserva de mesa

Nome

Fred

E-mail

fred@sp.com.br

Pessoas

2

Data

20/12/2024

Hora

20:30

Reservar Agora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br




sproviders.com.br





Estilos de formatação □

```
{"name": "Fred", "email": "fred@sp.com.br", "people": "2", "date": "20/12/2024", "time": "20:30"}
```

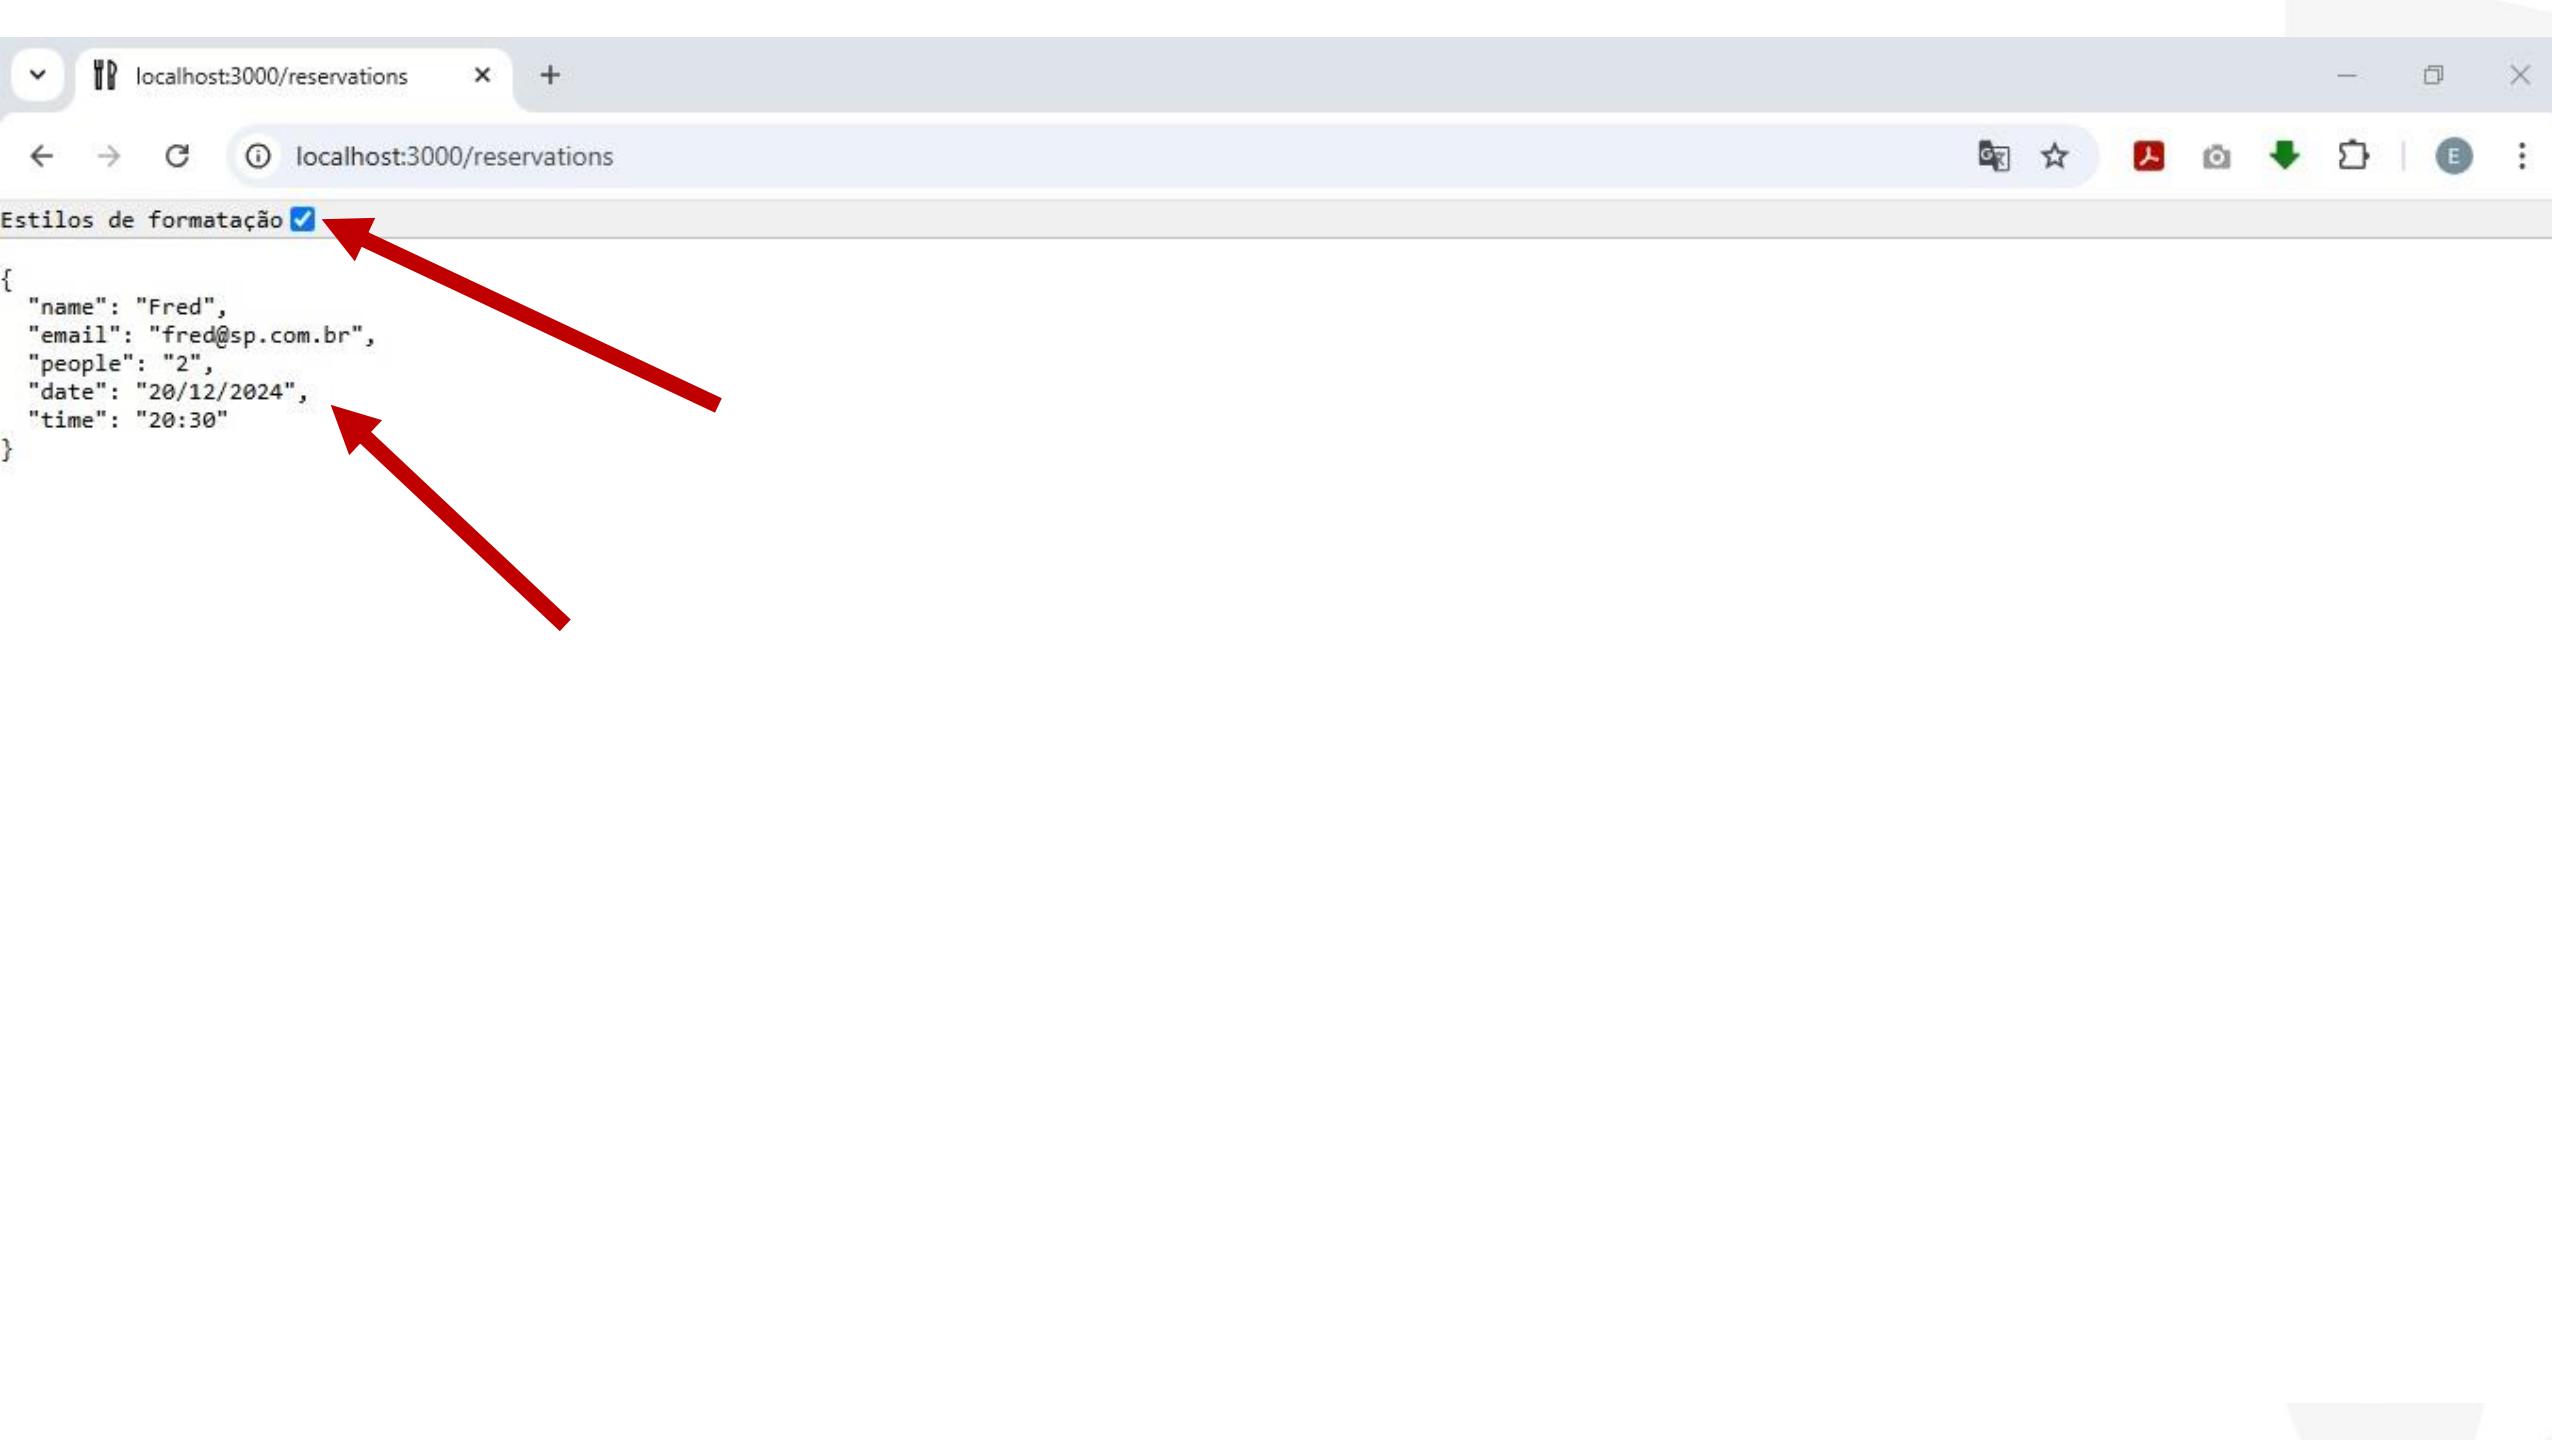

A screenshot of the Visual Studio Code (VS Code) interface. The top bar includes standard menu items: File, Edit, Selection, View, Go, and others. A search bar is located at the top center. The left sidebar features icons for Explorer, Search, Open, and others. The main area shows the file structure under 'SABOROSO' and the content of 'index.js'. A red arrow points to 'index.js' in the Explorer. The status bar at the bottom displays file statistics: Ln 58, Col 1, Spaces: 2, UTF-8, LF, and toolbars for JavaScript, Go Live, and Prettier.

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡ ⚡ ⚡ ⚡ ⚡ ⚡ ⚡ ⚡ ⚡

EXPLORER ... JS index.js X header-index.ejs reservations.ejs ⚡ ⚡ ⚡ ⚡ ⚡ ⚡ ⚡ ⚡

SABOROSO routes JS index.js X JS users.js views inc content contacts.ejs facts.ejs menus.ejs reservations.ejs services.ejs subscribe.ejs text.ejs footer-gototop.ejs footer-scripts.ejs footer.ejs head.ejs header-index.ejs header-menu.ejs header.ejs > OUTLINE > TIMELINE 🔍 0 △ 0 ⚡ 0 ⚡

routes > JS index.js > router.get('/reservations') callback

```
45 router.get('/reservations', function(req, res, next) {  
46  
47     res.render('reservations', {  
48         title: 'Reservas - Restaurante Saboroso!',  
49         background: "images/img_bg_2.jpg",  
50         h1: "Reserve uma Mesa!"  
51     });  
52 };  
53  
54 router.post('/reservations', function(req, res, next) {  
55     res.send(req.body);  
56 });  
57  
58 router.get('/services', function(req, res, next) {  
59     res.render('services', {  
60         title: 'Serviços - Restaurante Saboroso!',  
61         background: "images/img_bg_1.jpg",  
62         h1: "É um prazer poder servir!"  
63     });  
64 });  
65  
66 }));  
67  
68 }));  
69 }));  
70 };
```

Ln 58, Col 1 Spaces: 2 UTF-8 LF ⚡ JavaScript ⚡ Go Live ⚡ Prettier ⚡

A screenshot of a code editor interface, likely Visual Studio Code, showing a file named `index.js`. The code is part of a Node.js application for a restaurant reservation system. The editor has a dark theme with syntax highlighting for JavaScript and EJS files.

The code in `index.js` handles a POST request for reservations. It checks if required fields are present in the request body: name, email, people, date, and time. If any field is missing, it sends an error message in Portuguese. If all fields are present, it sends the entire request body back to the client.

```
routes > JS index.js > router.post('/reservations') callback
      50   h1: "Reserve uma Mesa!";
      51   });
      52   });
      53   });

router.post('/reservations', function(req, res, next) {
  56   if (!req.body.name) {
  57     res.send("Digite o nome");
  58   } else if (!req.body.email) {
  59     res.send("Digite o e-mail");
  60   } else if (!req.body.people) {
  61     res.send("Selecione o número de pessoas");
  62   } else if (!req.body.date) {
  63     res.send("Selecione a data");
  64   } else if (!req.body.time) {
  65     res.send("Selecione a hora");
  66   } else {
  67     res.send(req.body);
  68   }
  69 });
  70 });
  71 });
  72 });
  73 });
  74 });

router.get('/services', function(req, res, next) {
```

The status bar at the bottom of the editor shows the following information:

- Ln 57, Col 1 (379 selected)
- Spaces: 2
- UTF-8
- LF
- JavaScript
- Go Live
- Prettier

A red arrow points from the status bar to the code at line 57, specifically pointing to the condition `if (!req.body.name)`.

Reserva de mesa

Nome

E-mail

Pessoas

Data

Hora

Reservar Agora

Informações de Contato



R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br



Reserva de mesa

Nome

E-mail

Pessoas

Data

Hora


Reservar Agora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimais - RG

[+1 234 567 890](tel:+1234567890)contato@sproviders.com.brsproviders.com.br

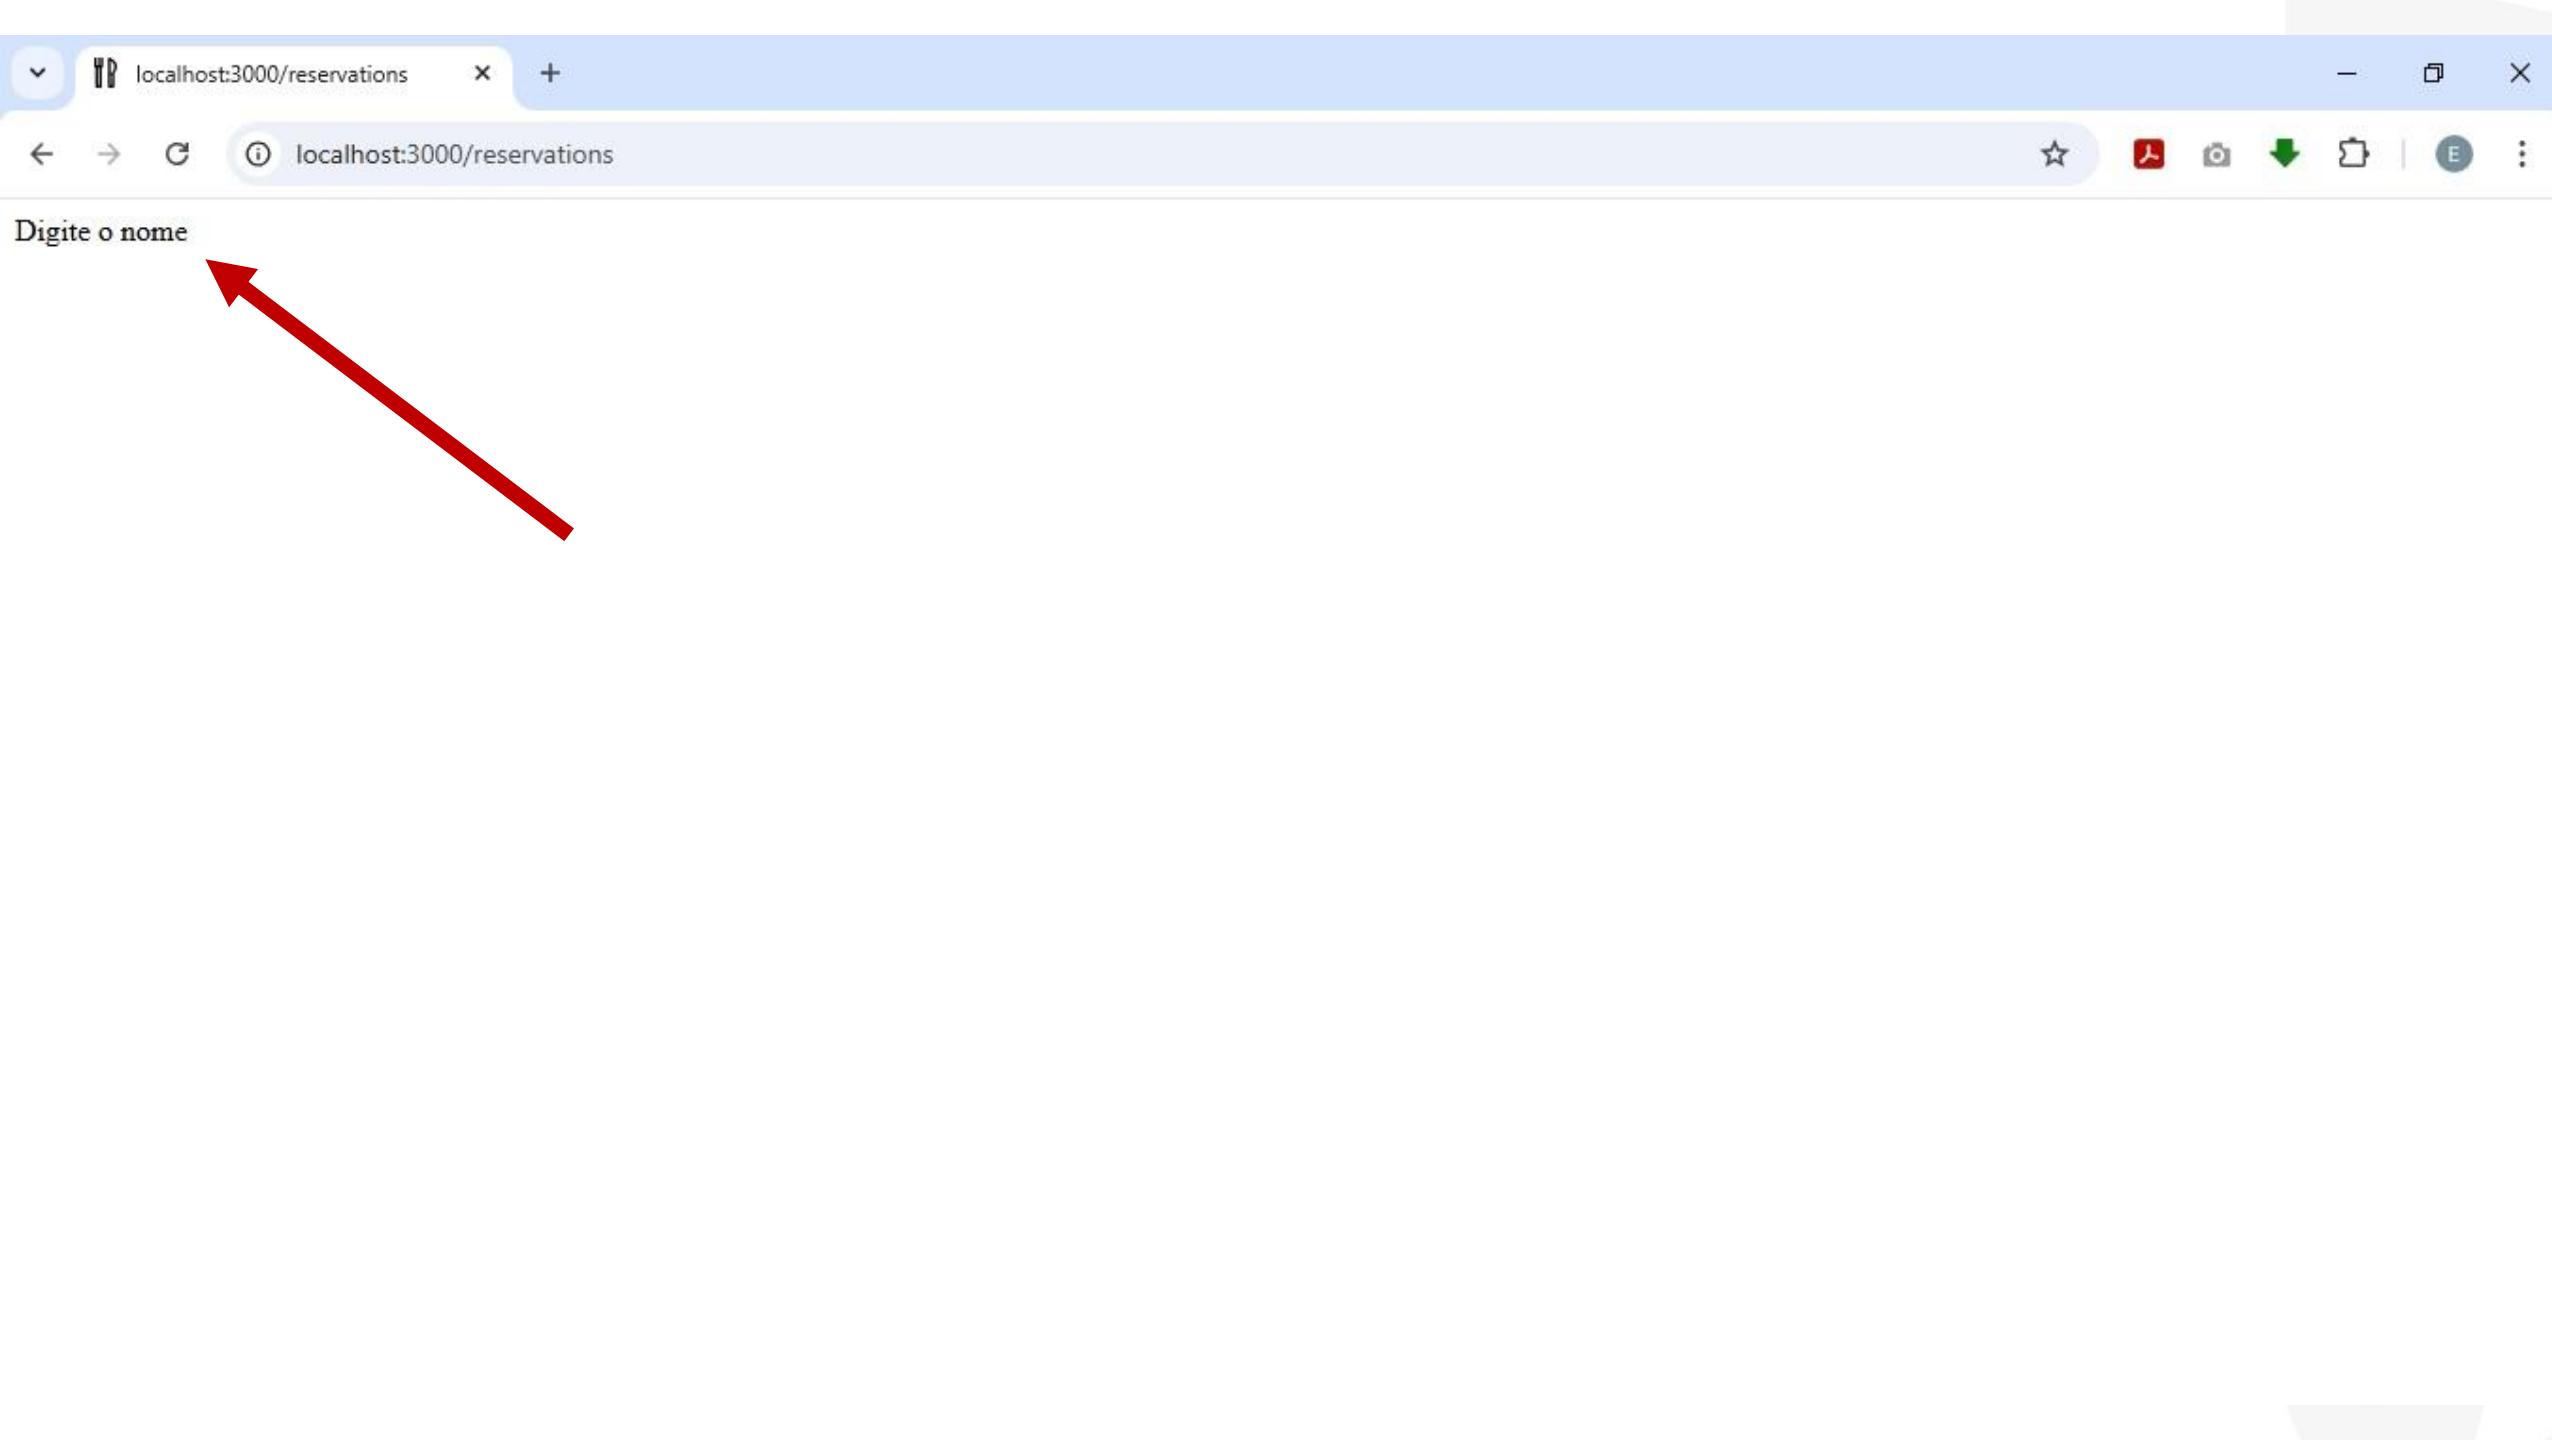

Digite o nome

Reserva de mesa

Nome

Fred

E-mail

fred@sp.com.br

Pessoas

2

Data

20/12/2024

Hora

Reservar Agora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br




sproviders.com.br





Seleccione a hora



Reservas - Restaurante Saboros +

localhost:3000/reservations

Reserva de mesa

Nome
Fred

E-mail
fred@sp.com.br

Pessoas
2

Data
20/12/2024

Hora
20:40

Reservar Agora

Informações de Contato

R. 1234, 56 - 1^a andar
Centro, Odimais - RG

+1 234 567 890

contato@sproviders.com.br

sproviders.com.br

↑



Estilos de formatação

```
{"name": "Fred", "email": "fred@sp.com.br", "people": "2", "date": "20/12/2024", "time": "20:40"}
```

A screenshot of a web browser window displaying a JSON object. The URL bar shows 'localhost:3000/reservations'. The JSON object is:

```
{  
  "name": "Fred",  
  "email": "fred@sp.com.br",  
  "people": "2",  
  "date": "20/12/2024",  
  "time": "20:40"  
}
```

Two red arrows point from the bottom left towards the top left of the JSON object. One arrow points to the word 'Estilos' in the status bar, which is followed by a checked checkbox icon. Another arrow points to the opening brace '{' at the start of the JSON object.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer Sidebar:** Shows a tree view of the project structure under the folder "SABOROSO". The file "index.js" is selected and highlighted with a red arrow.
- Code Editor:** Displays the content of "index.js". The code defines a route for "/reservations" using Express.js's router.get method. The rendered template ("res.render") includes a title, background image, and a main heading.

```
routes > JS index.js > router.get('/reservations') callback
41   });
42   });
43   });
44
45   router.get('/reservations', function(req, res, next) {
46     res.render('reservations', {
47       title: 'Reservas - Restaurante Saboroso!',
48       background: "images/img_bg_2.jpg",
49       h1: "Reserve uma Mesa!"
50     });
51
52   });
53
54
55   router.post('/reservations', function(req, res, next) {
56
57     if (!req.body.name) {
58       res.send("Digite o nome");
59     } else if (!req.body.email) {
60       res.send("Digite o e-mail");
61     } else if (!req.body.people) {
62       res.send("Selecione o número de pessoas");
63     } else if (!req.body.date) {
64       res.send("Selecione a data");
65     } else if (!req.body.time) {
66       res.send("Selecione a hora");
67     }
68   });
69 }
```
- Status Bar:** Shows the current line (Ln 47, Col 1), character count (150 selected), and encoding (UTF-8 LF). It also indicates the file type (JavaScript) and provides links for "Go Live" and "Prettier".

A screenshot of the Visual Studio Code (VS Code) interface. The window title is "saboroso [Administrator]".

The Explorer sidebar on the left shows the project structure:

- SABOROSO
 - bin
 - inc
 - db.js
 - menus.js
 - routes
 - index.js
 - users.js
 - views
 - inc
 - content
 - contacts.ejs
 - facts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
- node_modules
- public

A red arrow points to the "reservations.js" file in the routes section of the Explorer.

The Editor tab bar at the top has four tabs: index.js, reservations.js (which is active), header-index.ejs, and reservations.ejs.

The Editor pane shows the contents of the "reservations.js" file:

```
1
```

The Status Bar at the bottom displays:

- Ln 1, Col 1
- Spaces: 4
- UTF-8
- CRLF
- JavaScript
- Go Live
- Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar contains icons for File, Edit, Selection, View, Go, and other settings. The Explorer sidebar shows a file tree with a node "reservations.js" selected. The main editor area has four tabs: "index.js", "reservations.js" (which is active), "header-index.ejs", and "reservations.ejs". The code in "reservations.js" is as follows:

```
1 module.exports = {
2 ...
3     render() {
4
5     }
6 };
7
8 };
```

A red arrow points to the closing brace of the render function at line 6. The status bar at the bottom indicates the cursor is at "Ln 5, Col 9" with "Spaces: 4" and "UTF-8" encoding. Other status indicators include "CRLF", "JavaScript", "Go Live", "Prettier", and a lock icon.

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER

SABOROSO

- > bin
- ✓ inc
- JS db.js
- JS menus.js
- JS reservations.js
- > node_modules
- > public
- ✓ routes
 - JS index.js
 - JS users.js
- ✓ views
 - ✓ inc
 - ✓ content
 - ↳ contacts.ejs
 - ↳ facts.ejs
 - ↳ menus.ejs
 - ↳ reservations.ejs
 - ↳ services.ejs
 - ↳ subscribe.ejs
 - ↳ text.ejs

OUTLINE

TIMELINE

index.js X reservations.js ↳ header-index.ejs ↳ reservations.ejs

routes > JS index.js > router.get('/reservations') callback

```
41   });
42
43   });
44
45   router.get('/reservations', function(req, res, next) {
46     res.render('reservations', {
47       title: 'Reservas - Restaurante Saboroso!',
48       background: "images/img_bg_2.jpg",
49       h1: "Reserve uma Mesa!"
50     });
51
52
53   });
54
55   router.post('/reservations', function(req, res, next) {
56
57     if (!req.body.name) {
58       res.send("Digite o nome");
59     } else if (!req.body.email) {
60       res.send("Digite o e-mail");
61     } else if (!req.body.people) {
62       res.send("Selecione o número de pessoas");
63     } else if (!req.body.date) {
64       res.send("Selecione a data");
65     } else if (!req.body.time) {
66       res.send("Selecione a hora");
67     }
68   });
69 }
```

Ln 47, Col 1 (150 selected) Spaces: 2 UTF-8 LF { JavaScript Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS index.js JS reservations.js ✎ header-index.ejs ↗ reservations.ejs ⌂ ...

✓ SABOROSO

- > bin
- ✓ inc
 - JS db.js
 - JS menus.js
 - JS reservations.js**
- > node_modules
- > public
- ✓ routes
 - JS index.js
 - JS users.js
- ✓ views
 - ✓ inc
 - ✓ content
 - ↳ contacts.ejs
 - ↳ facts.ejs
 - ↳ menus.ejs
 - ↳ reservations.ejs
 - ↳ services.ejs
 - ↳ subscribe.ejs
 - ↳ text.ejs
- > OUTLINE
- > TIMELINE

inc > JS reservations.js > [e] <unknown> > 📁 render

```
1 module.exports = {  
2   ...  
3   render(res) {  
4     res.render('reservations', {  
5       title: 'Reservas - Restaurante Saboroso!',  
6       background: "images/img_bg_2.jpg",  
7       h1: "Reserve uma Mesa!"  
8     });  
9   }  
10 }  
11  
12 };
```

Ln 3, Col 11 (203 selected) Spaces: 4 UTF-8 CRLF { JavaScript Go Live Prettier

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer Sidebar:** Shows the project structure under the 'SABOROSO' root:
 - bin
 - inc
 - db.js
 - menus.js
 - reservations.js
 - node_modules
 - public
 - routes
 - index.js (selected)
 - users.js
 - views
 - inc
 - content
 - contacts.ejs
 - facts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
- Code Editor:** The 'index.js' file is open, showing the following code:

```
routes > JS index.js > router.get('/reservations') callback
41   });
42
43   });
44   router.get('/reservations', function(req, res, next) {
45     res.render('reservations', {
46       title: 'Reservas - Restaurante Saboroso!',
47       background: "images/img_bg_2.jpg",
48       h1: "Reserve uma Mesa!"
49     });
50
51   });
52
53 });
54
55 router.post('/reservations', function(req, res, next) {
56
57   if (!req.body.name) {
58     res.send("Digite o nome");
59   } else if (!req.body.email) {
60     res.send("Digite o e-mail");
61   } else if (!req.body.people) {
62     res.send("Selecione o número de pessoas");
63   } else if (!req.body.date) {
64     res.send("Selecione a data");
65   } else if (!req.body.time) {
66     res.send("Selecione a hora");
67   }
68 });
69
70 module.exports = router;
```
- Status Bar:** Ln 45, Col 38 (3 selected) Spaces: 2 UTF-8 LF JavaScript Go Live Prettier

The screenshot shows a dark-themed instance of Visual Studio Code (VS Code) with the following interface elements:

- Top Bar:** Contains icons for File, Edit, Selection, View, Go, and a search bar labeled "saboroso [Administrator]".
- Left Sidebar (Explorer):** Shows a tree view of the project structure under the "SABOROSO" root. The "reservations.js" file is selected in the routes folder, highlighted with a blue background.
- Top Activity Bar:** Shows tabs for "index.js", "reservations.js" (which is active), "header-index.ejs", and "reservations.ejs".
- Editor Area:** Displays the contents of the "reservations.js" file. The code defines a module export named "render" which takes "res" and "req" parameters and uses "res.render" to render a template.
- Bottom Status Bar:** Shows file statistics: "Ln 3, Col 20 (3 selected)", "Spaces: 4", "UTF-8", "CRLF", "JavaScript", "Go Live", "Prettier", and a bell icon.

```
inc > JS reservations.js > [e] <unknown> > render
1 module.exports = {
2 ...
3   render(res, req) {
4
5     res.render('reservations', {
6       title: 'Reservas - Restaurante Saboroso!',
7       background: "images/img_bg_2.jpg",
8       h1: "Reserve uma Mesa!"
9     });
10
11   };
12 };
```

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS index.js JS reservations.js ✎ header-index.ejs ↗ reservations.ejs ⌂ ...

SABOROSO

- > bin
- < inc
- JS db.js
- JS menus.js
- JS reservations.js
- > node_modules
- > public
- < routes
- JS index.js
- JS users.js
- < views
- < inc
- < content
- ↳ contacts.ejs
- ↳ facts.ejs
- ↳ menus.ejs
- ↳ reservations.ejs
- ↳ services.ejs
- ↳ subscribe.ejs
- ↳ text.ejs

OUTLINE

TIMELINE

```
inc > JS reservations.js > [?] <unknown> > 📁 render > ⚡ h1
1 module.exports = {
2 ...
3     render(res, req) {
4
5         res.render('reservations', {
6             title: 'Reservas - Restaurante Saboroso!',
7             background: "images/img_bg_2.jpg",
8             h1: "Reserve uma Mesa!",
9             body: req.body
10        });
11    }
12};
13};
```

Ln 8, Col 36 (29 selected) Spaces: 4 UTF-8 CRLF { JavaScript Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The top bar includes standard menu items: File, Edit, Selection, View, Go, and others. A search bar is centered above the main area. The left sidebar contains icons for Explorer, Search, Open, Find, and others. The Explorer view shows a file tree for a project named "SABOROSO". The "routes" folder is expanded, showing "index.js" and "users.js". A red arrow points from the "index.js" entry in the tree to its corresponding code editor tab. The code editor displays the content of "index.js", which is a Node.js file using Express.js to handle requests for the home page and contacts. The status bar at the bottom shows file statistics (Ln 21, Col 51), encoding (UTF-8 LF), language (JavaScript), and other settings.

```
routes > JS index.js > router.get('/contacts') callback
1 var conn = ...
2 var express = require('express');
3 var menus = require('../inc/menus');
4 var router = express.Router();
5
6 /* GET home page. */
7 router.get('/', function(req, res, next) {
8
9     menus.getMenus().then(results => {
10
11         res.render('index', {
12             title: 'Restaurante Saboroso!',
13             menus: results,
14             isHome: true
15         });
16     );
17 });
18 );
19 );
20
21 router.get('/contacts', function(req, res, next) {
22
23     res.render('contacts', {
24         title: 'Contato - Restaurante Saboroso!',
25         background: "images/img_bg_3.jpg",
26         h1: "Diga um oi!"
```

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer:** Shows the project structure under SABOROSO:
 - bin
 - inc
 - db.js
 - menus.js
 - reservations.js
 - node_modules
 - public
 - routes
 - index.js (selected)
 - users.js
 - views
 - inc
 - content
 - contacts.ejs
 - facts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
- Code Editor:** JS index.js (active tab)

```
routes > JS index.js > ...
1 var conn = require('../inc/db')
2 var express = require('express');
3 var menus = require('../inc/menus');
4 var reservations = require('../inc/reservations'); // Line 4 highlighted by a red arrow
5 var router = express.Router();
6
7 /* GET home page. */
8 router.get('/', function(req, res, next) {
9
10     menus.getMenus().then(results => {
11
12         res.render('index', {
13             title: 'Restaurante Saboroso!',
14             menus: results,
15             isHome: true
16         });
17
18     });
19
20 });
21
22 router.get('/contacts', function(req, res, next) {
23
24     res.render('contacts', {
25         title: 'Contato - Restaurante Saboroso!',
26         background: "images/img_bg_3.jpg",

```
- Bottom Status Bar:** Ln 4, Col 1 (52 selected) Spaces: 2 UTF-8 LF { JavaScript Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The top bar includes standard menu items: File, Edit, Selection, View, Go, and others. A search bar is located at the top center. The left sidebar contains icons for Explorer, Search, Open, Find, and Settings. The Explorer view shows a file tree for a project named 'SABOROSO'. The 'routes' folder is expanded, showing 'index.js' and 'users.js'. A red arrow points from the 'index.js' entry in the tree to the code editor. The code editor displays the content of 'index.js'. The status bar at the bottom shows file statistics: Ln 53, Col 1, Spaces: 2, UTF-8, LF, and a JavaScript icon.

```
File Edit Selection View Go ...
routes > JS index.js > router.get('/reservations') callback
41
42     });
43
44 });
45
46 router.get('/reservations', function(req, res, next) {
47
48     res.render('reservations', {
49         title: 'Reservas - Restaurante Saboroso!',
50         background: "images/img_bg_2.jpg",
51         h1: "Reserve uma Mesa!"
52     });
53
54 });
55
56 router.post('/reservations', function(req, res, next) {
57
58     if (!req.body.name) {
59         res.send("Digite o nome");
60     } else if (!req.body.email) {
61         res.send("Digite o e-mail");
62     } else if (!req.body.people) {
63         res.send("Selecione o número de pessoas");
64     } else if (!req.body.date) {
65         res.send("Selecione a data");
66     } else if (!req.body.time) {
```

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the file path "saboroso [Administrator]". The left sidebar (Explorer) lists the project structure under the folder "SABOROSO". The current file is "index.js" located in the "routes" directory. The code editor displays the following JavaScript code:

```
routes > JS index.js > router.get('/reservations') callback
41
42     });
43
44 });
45
46 router.get('/reservations', function(req, res, next) {
47
48     reservations.render(req, res); // Red arrow points here
49
50     res.render('reservations', {
51         title: 'Reservas - Restaurante Saboroso!',
52         background: "images/img_bg_2.jpg",
53         h1: "Reserve uma Mesa!"
54     });
55
56 });
57
58 router.post('/reservations', function(req, res, next) {
59
60     if (!req.body.name) {
61         res.send("Digite o nome");
62     } else if (!req.body.email) {
63         res.send("Digite o e-mail");
64     } else if (!req.body.people) {
65         res.send("Selecione o número de pessoas");
66     } else if (!req.body.date) {
```

The status bar at the bottom indicates "Ln 48, Col 1 (32 selected)" and "Spaces: 2". Other icons in the status bar include a magnifying glass, a search icon, and "JavaScript" and "Go Live" buttons.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the folder "SABOROSO". A red arrow points from the "reservations.js" file listed in the Explorer to its corresponding tab in the main editor area. The editor tab shows the following code:

```
1 module.exports = {
2 ...
3     render(res, req) {
4
5         res.render('reservations', {
6             title: 'Reservas - Restaurante Saboroso!',
7             background: "images/img_bg_2.jpg",
8             h1: "Reserve uma Mesa!",
9             body: req.body
10        });
11    }
12};
13};
```

The status bar at the bottom indicates the current position is "Ln 13, Col 3" with "Spaces: 4" and "UTF-8" encoding. Other status icons include "CRLF", "JavaScript", "Go Live", and "Prettier".

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the folder "SABOROSO". The main editor area shows the file "reservations.js" with the following code:

```
inc > JS reservations.js > [?] <unknown> > ⚡ render
1 module.exports = {
2 ...
3     render(req, res) {
4
5         res.render('reservations', {
6             title: 'Reservas - Restaurante Saboroso!',
7             background: "images/img_bg_2.jpg",
8             h1: "Reserve uma Mesa!",
9             body: req.body
10        });
11    }
12 };
13 };
```

A red arrow points to the first line of the "render" function, specifically to the parameter "req". The status bar at the bottom indicates "Ln 3, Col 12 (8 selected)".

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the file path "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the folder "SABOROSO", including files like "bin", "inc", "db.js", "menus.js", "reservations.js", "node_modules", "public", and "routes". The "routes" folder contains "index.js" (selected), "users.js", and "views" (expanded), which further contains "inc" (expanded), "content", "contacts.ejs", "facts.ejs", "menus.ejs", "reservations.ejs", "services.ejs", "subscribe.ejs", and "text.ejs". Below these are sections for ".NET Core", ".NET", "Angular", "React", "Node.js", "MongoDB", "Docker", "Cloud", "File", and "Outline". The main editor area shows the content of "index.js". A red arrow points from the status bar at the bottom right to a tooltip for the line "background: "images/img_bg_2.jpg";". The tooltip displays the line of code with the "background" property highlighted in blue. The status bar also shows "Ln 49, Col 1 (152 selected)", "Spaces: 2", "UTF-8", "LF", "JavaScript", "Go Live", and "Prettier".

```
routes > JS index.js > router.get('/reservations') callback
41
42     });
43
44 );
45
46 router.get('/reservations', function(req, res, next) {
47
48     reservations.render(req, res);
49
50     res.render('reservations', {
51         title: 'Reservas - Restaurante Saboroso!',
52         background: "images/img_bg_2.jpg",
53         h1: "Reserve uma Mesa!"
54     });
55
56 );
57
58 router.post('/reservations', function(req, res, next) {
59
60     if (!req.body.name) {
61         res.send("Digite o nome");
62     } else if (!req.body.email) {
63         res.send("Digite o e-mail");
64     } else if (!req.body.people) {
65         res.send("Selecione o número de pessoas");
66     } else if (!req.body.date) {
```

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the file path "saboroso [Administrator]". The left sidebar contains icons for Explorer, Search, Open, and Outline. The Explorer view shows a project structure under "SABOROSO" with files like bin, inc, db.js, menus.js, reservations.js, node_modules, public, routes, index.js (selected), users.js, views, inc, content, contacts.ejs, facts.ejs, menus.ejs, reservations.ejs, services.ejs, subscribe.ejs, text.ejs, and a .gitignore file. The main editor area displays "index.js" with the following code:

```
routes > JS index.js > router.get('/reservations') callback
41
42     });
43
44 });
45
46 router.get('/reservations', function(req, res, next) {
47
48     reservations.render(req, res);
49 });
50
51
52 router.post('/reservations', function(req, res, next) {
53
54     if (!req.body.name) {
55         res.send("Digite o nome");
56     } else if (!req.body.email) {
57         res.send("Digite o e-mail");
58     } else if (!req.body.people) {
59         res.send("Selecione o número de pessoas");
60     } else if (!req.body.date) {
61         res.send("Selecione a data");
62     } else if (!req.body.time) {
63         res.send("Selecione a hora");
64     } else {
65
66         res.send(req.body);
67     }
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
```

A red arrow points from the bottom of the code editor towards the closing brace of the first function block at line 49. The status bar at the bottom indicates the cursor is at line 49, column 1, with settings for spaces: 2, UTF-8, LF, and JavaScript.



Estilos de formatação

```
{  
  "name": "Fred",  
  "email": "fred@sp.com.br",  
  "people": "2",  
  "date": "20/12/2024",  
  "time": "20:40"  
}
```

Reserva de mesa

Nome

Fred

E-mail

fred@sp.com.br

Pessoas

2

Data

20/12/2024

Hora

20:40

Reservar Agora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br



Reserva de mesa

Nome

E-mail

Pessoas

Data

Hora

Reservar Agora

Informações de Contato

R. 1234, 56 - 1^a andar
Centro, Odimais - RG

+1 234 567 890



contato@sproviders.com.br



sproviders.com.br



The screenshot shows a dark-themed interface of the Visual Studio Code code editor. In the top left, the menu bar includes File, Edit, Selection, View, Go, and others. The top center features a search bar with the text "saboroso [Administrator]". The top right contains window control icons. On the far left is the Explorer sidebar, which displays a tree view of a project structure under the folder "SABOROSO". The "views" section is expanded, showing "content", "inc", and "reservations.ejs". A red arrow points from the "reservations.ejs" entry in the Explorer to the same file in the main editor area. The editor tab bar at the top has four tabs: "index.js", "reservations.js", "header-index.ejs", and "reservations.ejs" (which is currently active). The main editor area shows the HTML code for a reservation form. The code includes a header section with a title "Reserva de mesa", followed by three form groups for name, email, and people count. The file content starts at line 1 and ends at line 25.

```
> content > <div class="gtco-section" style="padding-bottom: 14em;">
  <div class="gtco-container">
    <div class="row">
      <div class="col-md-12">
        <div class="col-md-6 animate-box">
          <h3>Reserva de mesa</h3>
          <form action="/reservations" method="post">
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputName">Nome</label>
                <input type="text" id="inputName" name="name" class="form-control">
              </div>
            </div>
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputEmail">E-mail</label>
                <input type="email" id="inputEmail" name="email" class="form-control">
              </div>
            </div>
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputPeople">Pessoas</label>
                <select id="inputPeople" name="people" class="form-control">
                  <option value=""> -- selecione -- </option>
                  <option value="1">1</option>
                </select>
              </div>
            </div>
          </form>
        </div>
      </div>
    </div>
  </div>
</div>
```

A screenshot of the Visual Studio Code (VS Code) interface. The top navigation bar includes File, Edit, Selection, View, Go, and other standard options. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the "SABOROSO" root, with files like index.js, reservations.js, header-index.ejs, and reservations.ejs selected. The main editor area shows the contents of the "reservations.ejs" file, which is an EJS template. The code includes HTML structure with Bootstrap classes and some JavaScript-like logic with `<% %>` tags. A red arrow originates from the "reservations.ejs" entry in the Explorer sidebar and points towards the file tab in the top right of the editor area. The status bar at the bottom provides information about the current line (Ln 6, Col 1), character count (205 selected), and encoding (UTF-8). Other status icons include CRLF, HTML, Go Live, and Prettier.

```
> content > <> reservations.ejs > div.gtco-section > div.gtco-container > div.row > div.col-md-12 > div.col-md-6.animate-box
1   <div class="gtco-section" style="padding-bottom: 14em;">
2     <div class="gtco-container">
3       <div class="row">
4         <div class="col-md-12">
5           <div class="col-md-6 animate-box">
6             <% if (typeof error === "string") {%
7               <div class="alert alert-error">
8                 <%= error %>
9               </div>
10             <% } %>
11             <h3>Reserva de mesa</h3>
12             <form action="/reservations" method="post">
13               <div class="row form-group">
14                 <div class="col-md-12">
15                   <label for="inputName">Nome</label>
16                   <input type="text" id="inputName" name="name" class="form-control">
17                 </div>
18               </div>
19               <div class="row form-group">
20                 <div class="col-md-12">
21                   <label for="inputEmail">E-mail</label>
22                   <input type="email" id="inputEmail" name="email" class="form-control">
23                 </div>
24               </div>
25               <div class="row form-group">
```

A screenshot of the Visual Studio Code (VS Code) interface. The Explorer sidebar on the left shows a file tree for a project named "SABOROSO". The "routes" folder contains "index.js" and "users.js", which is highlighted with a red arrow. Other files like "bin", "inc", "db.js", "menus.js", and "reservations.js" are also listed. The Editor tab bar at the top has tabs for "index.js", "reservations.js", "header-index.ejs", and "reservations.ejs". The main editor area displays code for "index.js", specifically a section for handling the "/reservations" route. A red arrow points from the "users.js" entry in the Explorer to the "reservations.render(req, res);" line in the code editor. The status bar at the bottom shows file statistics (Ln 48, Col 33 (30 selected)), encoding (UTF-8), line endings (LF), and icons for JavaScript, Go Live, and Prettier.

```
routes > JS index.js > router.get('/reservations') callback
41
42     });
43
44 );
45
46 router.get('/reservations', function(req, res, next) {
47
48     reservations.render(req, res); ← Red arrow here
49
50 );
51
52 router.post('/reservations', function(req, res, next) {
53
54     if (!req.body.name) {
55         res.send("Digite o nome");
56     } else if (!req.body.email) {
57         res.send("Digite o e-mail");
58     } else if (!req.body.people) {
59         res.send("Selecione o número de pessoas");
60     } else if (!req.body.date) {
61         res.send("Selecione a data");
62     } else if (!req.body.time) {
63         res.send("Selecione a hora");
64     } else {
65
66         res.send(req.body);
67     }
68 }
```

A screenshot of a code editor interface, likely Visual Studio Code, showing a file named `index.js`. The code is part of a Node.js application for a reservation system. A red arrow points to a specific line of code where a syntax error has occurred.

```
routes > JS index.js > router.post('/reservations') callback
41
42     });
43
44 });
45
46 router.get('/reservations', function(req, res, next) {
47
48     reservations.render(req, res);
49
50 });
51
52 router.post('/reservations', function(req, res, next) {
53
54     if (!req.body.name) {
55         reservations.render(req, res, "Digite o nome");
56     } else if (!req.body.email) {
57         res.send("Digite o e-mail");
58     } else if (!req.body.people) {
59         res.send("Selecione o número de pessoas");
60     } else if (!req.body.date) {
61         res.send("Selecione a data");
62     } else if (!req.body.time) {
63         res.send("Selecione a hora");
64     } else {
65
66         res.send(req.body);
67     }
68
69     res.end();
70 }
71
72 module.exports = router;
```

The code editor highlights the line `reservations.render(req, res, "Digite o nome");` with a yellow lightbulb icon, indicating a potential issue. The status bar at the bottom shows the current line and column information: `Ln 55, Col 1 (51 selected)`.

A screenshot of the Visual Studio Code (VS Code) interface. The top navigation bar includes File, Edit, Selection, View, Go, and a three-dot menu. The title bar shows the search term "saboroso [Administrator]". The top right features window control buttons. The left sidebar, titled "EXPLORER", displays a file tree for a project named "SABOROSO". The "reservations.js" file is selected in the tree and highlighted in the code editor. A red arrow points from the "reservations.js" entry in the Explorer sidebar to the file tab in the top bar. The code editor shows the following JavaScript code:

```
1 module.exports = {
2 ...
3     render(req, res) {
4
5         res.render('reservations', {
6             title: 'Reservas - Restaurante Saboroso!',
7             background: "images/img_bg_2.jpg",
8             h1: "Reserve uma Mesa!",
9             body: req.body
10        });
11    }
12};
13};
```

The status bar at the bottom indicates the current line (Ln 13, Col 3), spaces (Spaces: 4), encoding (UTF-8 CRLF), language (JavaScript), and other settings like Go Live and Prettier.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the window is titled "saboroso [Administrator]". The left sidebar (Explorer) shows a project structure for a Node.js application named "SABOROSO". The "routes" folder contains "index.js" and "users.js", and the "views" folder contains "inc" (which further contains "content" with files like "contacts.ejs", "facts.ejs", etc.) and "reservations.ejs". The main editor tab is "reservations.js", which contains the following code:

```
1 module.exports = {
2 ...
3   render(req, res, error) {
4
5     res.render('reservations', {
6       title: 'Reservas - Restaurante Saboroso!',
7       background: "images/img_bg_2.jpg",
8       h1: "Reserve uma Mesa!",
9       body: req.body,
10      error
11    });
12  }
13}
14};
```

Two red arrows point to the word "error" in line 10, indicating a potential bug or error in the code. The status bar at the bottom shows "2 selections (6 characters selected)" and other settings like "Spaces: 4", "UTF-8", "CRLF", "JavaScript", "Go Live", and "Prettier".

Reserva de mesa

Nome

E-mail

Pessoas

Data

Hora

Reservar Agora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br



Digite o nome

Reserva de mesa

Nome

E-mail

Pessoas

Data

Hora

Reservar Agora

Informações de Contato



R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br

The screenshot shows a Visual Studio Code (VS Code) interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Search icon, Home icon, Minimize, Maximize, Close.
- Left Sidebar (EXPLORER):** Shows the project structure under the 'SABOROSO' root:
 - bin
 - inc
 - db.js
 - menus.js
 - reservations.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - content
 - contacts.ejs
 - facts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
- Editor Area:** The 'reservations.ejs' file is open in the editor.

```
> content > <> reservations.ejs > <> div.gtco-section > <> div.gtco-container > <> div.row > <> div.col-md-12 > <> div.col-md-6.animate-box
1   <div class="gtco-section" style="padding-bottom: 14em;">
2     <div class="gtco-container">
3       <div class="row">
4         <div class="col-md-12">
5           <div class="col-md-6 animate-box">
6             <% if (typeof error === "string") {%
7               <div class="alert alert-error">
8                 <%= error %>
9               </div>
10             <% } %>
11             <h3>Reserva de mesa</h3>
12             <form action="/reservations" method="post">
13               <div class="row form-group">
14                 <div class="col-md-12">
15                   <label for="inputName">Nome</label>
16                   <input type="text" id="inputName" name="name" class="form-control">
17                 </div>
18               </div>
19               <div class="row form-group">
20                 <div class="col-md-12">
21                   <label for="inputEmail">E-mail</label>
22                   <input type="email" id="inputEmail" name="email" class="form-control">
23                 </div>
24               </div>
25               <div class="row form-group">
```
- Status Bar:** Ln 7, Col 39 (12 selected), Spaces: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the window title "saboroso [Administrator]". The left sidebar (EXPLORER) displays the project structure under the folder "SABOROSO". The "views" folder contains several EJS files: index.ejs, reservations.ejs, header-index.ejs, and others like contacts.ejs, facts.ejs, menus.ejs, services.ejs, subscribe.ejs, and text.ejs. The "reservations.ejs" file is currently selected and open in the main editor area. The code in the editor is:

```
ej> div.gtco-section > div.gtco-container > div.row > div.col-md-12 > div.col-md-6.animate-box > ? > div.alert.alert-dan
1   <div class="gtco-section" style="padding-bottom: 14em;">
2     <div class="gtco-container">
3       <div class="row">
4         <div class="col-md-12">
5           <div class="col-md-6 animate-box">
6             <% if (typeof error === "string") {%
7               <div class="alert alert-danger">
8                 <%= error %
9               </div>
10            <% } %>
11            <h3>Reserva de mesa</h3>
12            <form action="/reservations" method="post">
13              <div class="row form-group">
14                <div class="col-md-12">
15                  <label for="inputName">Nome</label>
16                  <input type="text" id="inputName" name="name" class="form-control">
17                </div>
18              </div>
19              <div class="row form-group">
20                <div class="col-md-12">
21                  <label for="inputEmail">E-mail</label>
22                  <input type="email" id="inputEmail" name="email" class="form-control">
23                </div>
24              </div>
25              <div class="row form-group">
```

The line containing the error message, "`<div class="alert alert-danger">`", is highlighted with a gray background, and a red arrow points to it from the bottom right.

Digite o nome

Reserva de mesa

Nome

E-mail

Pessoas

-- selecione --

Data

Hora

Reservar Agora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br



Digite o nome



Reserva de mesa

Nome

E-mail

Pessoas

Data

Hora

Reservar Agora



Informações de Contato



R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br



A screenshot of the Visual Studio Code (VS Code) interface. The top bar shows the menu: File, Edit, Selection, View, Go, ... and the status bar shows the search term "saboroso [Administrator]". The Explorer sidebar on the left lists the project structure under "SABOROSO", including "bin", "inc", "db.js", "menus.js", "reservations.js", "node_modules", "public", "routes", "index.js", and "users.js". The routes folder is expanded. The Editor tab bar has tabs for "index.js", "reservations.js", "header-index.ejs", and "reservations.ejs", with "index.js" being the active tab. The status bar at the bottom indicates the current position is Line 55, Column 52, with 47 selected characters, using Spaces: 2, LF line endings, and the file is a JavaScript file. The code editor shows the following code:

```
routes > JS index.js > router.post('/reservations') callback
43
44  });
45
46  router.get('/reservations', function(req, res, next) {
47
48    reservations.render(req, res);
49
50  );
51
52  router.post('/reservations', function(req, res, next) {
53
54    if (!req.body.name) {
55      reservations.render(req, res, "Digite o nome");
56    } else if (!req.body.email) {
57      res.send("Digite o e-mail");
58    } else if (!req.body.people) {
59      res.send("Selecione o número de pessoas");
60    } else if (!req.body.date) {
61      res.send("Selecione a data");
62    } else if (!req.body.time) {
63      res.send("Selecione a hora");
64    } else {
65
66      res.send(req.body);
67    }
68 }
```

Two red arrows point to the code: one from the "index.js" entry in the Explorer to the first line of the "post" handler, and another from the "users.js" entry in the Explorer to the "reservations.render" call on line 55.

A screenshot of a code editor interface, likely Visual Studio Code, showing a file named `index.js`. The code is part of a Node.js application for managing reservations.

The code handles two routes:

- `router.get('/reservations', function(req, res, next) {`
- `reservations.render(req, res);`
- `});`
- `router.post('/reservations', function(req, res, next) {`
- `if (!req.body.name) {`
- `reservations.render(req, res, "Digite o nome");`
- `} else if (!req.body.email) {`
- `reservations.render(req, res, "Digite o e-mail");`
- `} else if (!req.body.people) {`
- `reservations.render(req, res, "Selecione o número de pessoas");`
- `} else if (!req.body.date) {`
- `reservations.render(req, res, "Selecione a data");`
- `} else if (!req.body.time) {`
- `reservations.render(req, res, "Selecione a hora");`
- `} else {`
- `res.send(req.body);`
- `}`

A red arrow points to the line `reservations.render(req, res, "Selecione o número de pessoas");` at line 63.

The status bar at the bottom shows the following information:

- 4 selections (228 characters selected)
- Spaces: 2
- UTF-8 LF
- JavaScript
- Go Live
- Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the file path "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the folder "SABOROSO", including files like "bin", "inc", "db.js", "menus.js", "reservations.js", "node_modules", "public", "routes", "index.js", "users.js", "views", "inc", "content", "contacts.ejs", "facts.ejs", "menus.ejs", "reservations.ejs", "services.ejs", "subscribe.ejs", and "text.ejs". The "reservations.js" file is open in the main editor area. The code is a Node.js module for handling reservations:

```
var conn = require('../db');
module.exports = {
  render(req, res, error) {
    res.render('reservations', {
      title: 'Reservas - Restaurante Saboroso!',
      background: "images/img_bg_2.jpg",
      h1: "Reserve uma Mesa!",
      body: req.body,
      error
    });
  },
  save(fields) {
    conn.query(`INSERT INTO tb_reservations
`);
```

A red arrow points from the bottom right towards the highlighted SQL query line "conn.query(`INSERT INTO tb_reservations`);". The status bar at the bottom indicates "2 selections (131 characters selected)".

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQL Editor

Navigation

SCHEMAS

Filter objects

saboroso

- Tables
 - tb_contacts
 - tb_emails
 - tb_menus
 - tb_reservations
- Indexes
- Foreign Keys
- Triggers
- tb_users

Administration Schemas

Information Output

Action Output

Table: tb_reservations

Columns:

| | Type | Properties |
|-----------|--------------|------------|
| id | int | AI PK |
| name | varchar(256) | |
| email | varchar(256) | |
| people | int | |
| date | date | |
| time | time | |
| register | timestamp | |

Object Info Session

The screenshot shows the MySQL Workbench interface. The left sidebar is the 'Navigation' panel, which includes a 'SCHEMAS' section with a search bar and a tree view of database objects. Under the 'saboroso' schema, the 'Tables' node is expanded, showing 'tb_contacts', 'tb_emails', 'tb_menus', and 'tb_reservations'. A red arrow points from the top-left towards the 'tb_reservations' node. Another red arrow points directly at the 'tb_reservations' node in the list. The bottom-left panel displays detailed information about the 'tb_reservations' table, including its columns and their data types and properties. The bottom tabs show 'Object Info' and 'Session'.

MySQL Workbench

Local instance MySQL80 X

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

saboroso

- Tables
 - tb_contacts
 - tb_emails
 - tb_menus
 - tb_reservations
- Indexes
- Foreign Keys
- Triggers
- tb_users

Administration Schemas

Information

Table: tb_reservations

Columns:

| ID | Type | Null | Key | Default | Extra |
|----------|--------------|------|-----|-------------------|-------------------|
| id | int | NO | PRI | NULL | auto_increment |
| name | varchar(256) | NO | | NULL | |
| email | varchar(256) | NO | | NULL | |
| people | int | NO | | NULL | |
| date | date | NO | | NULL | |
| time | time | NO | | NULL | |
| register | timestamp | NO | | CURRENT_TIMESTAMP | DEFAULT_GENERATED |

SQL File 4* X

1 • DESC tb_reservations;

Result Grid

| Field | Type | Null | Key | Default | Extra |
|----------|--------------|------|-----|-------------------|-------------------|
| id | int | NO | PRI | NULL | auto_increment |
| name | varchar(256) | NO | | NULL | |
| email | varchar(256) | NO | | NULL | |
| people | int | NO | | NULL | |
| date | date | NO | | NULL | |
| time | time | NO | | NULL | |
| register | timestamp | NO | | CURRENT_TIMESTAMP | DEFAULT_GENERATED |

Result 1 X

Action Output

| # | Time | Action |
|---|----------|----------------------|
| 1 | 19:43:40 | DESC tb_reservations |

Message

7 row(s) returned

Duration / Fetch

0.015 sec / 0.000 sec

Object Info Session

The image shows the MySQL Workbench interface with three red arrows highlighting specific areas. One arrow points from the SQL query 'DESC tb_reservations;' in the top panel to the 'Result Grid' below. Another arrow points from the 'Result Grid' to the 'Action Output' table. A third arrow points from the 'Action Output' table back up to the SQL query.

A screenshot of the Visual Studio Code (VS Code) interface. The Explorer sidebar on the left shows a file tree for a project named 'SABOROSO'. The 'reservations.js' file is selected. The Editor tab bar at the top has four tabs: 'index.js', 'reservations.js' (which is active), 'header-index.ejs', and 'reservations.ejs'. The main editor area displays the 'reservations.js' code. A red arrow points from the 'node_modules' entry in the Explorer to the 'require('db')' line in the code. Another red arrow points from the 'tb_reservations' table name in the SQL query to the 'tb_reservations' entry in the status bar.

```
inc > JS reservations.js > [e] <unknown> > ⚡ save
1 var conn = require('../db')
2
3 module.exports = {
4
5     render(req, res, error) {
6
7         res.render('reservations', {
8             title: 'Reservas - Restaurante Saboroso!',
9             background: "images/img_bg_2.jpg",
10            h1: "Reserve uma Mesa!",
11            body: req.body,
12            error
13        });
14    },
15
16    save(fields) {
17
18        conn.query(`INSERT INTO tb_reservations
19                    `);
20    }
21
22}
23
24};
```

File Edit Selection View Go ... ← → 🔍 saboroso [Administrator]

EXPLORER ... JS index.js JS reservations.js X ↗ header-index.ejs ↗ reservations.ejs ⌂ ...

SABOROSO

- > bin
- ✓ inc
 - JS db.js
 - JS menus.js
 - JS reservations.js
- > node_modules
- > public
- ✓ routes
 - JS index.js
 - JS users.js
- ✓ views
 - ✓ inc
 - ✓ content
 - ↳ contacts.ejs
 - ↳ facts.ejs
 - ↳ menus.ejs
 - ↳ reservations.ejs
 - ↳ services.ejs
 - ↳ subscribe.ejs
 - ↳ text.ejs
- > OUTLINE
- > TIMELINE

inc > JS reservations.js > [e] <unknown> > ⚡ save

1 var conn = require('../db')

2

3 module.exports = {

4

5 render(req, res, error) {

6

7 res.render('reservations', {

8 title: 'Reservas - Restaurante Saboroso!',

9 background: "images/img_bg_2.jpg",

10 h1: "Reserve uma Mesa!",

11 body: req.body,

12 error

13 });

14 },

15

16 save(fields) {

17

18 conn.query(`

19 INSERT INTO tb_reservations

20 `);

21 }

22}

23

24};

Ln 19, Col 40 Spaces: 4 UTF-8 CRLF { JavaScript Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar contains icons for File, Edit, Selection, View, Go, and other settings. The Explorer sidebar shows a file tree for a project named "SABOROSO" with subfolders like bin, inc, db.js, menus.js, reservations.js, node_modules, public, routes, index.js, users.js, views, inc, content, contacts.ejs, facts.ejs, menus.ejs, reservations.ejs, services.ejs, subscribe.ejs, text.ejs, and a collapsed section for .htaccess, .gitignore, and package.json. The main editor area displays a JavaScript file named "reservations.js". The code is as follows:

```
16  save(fields) {  
17    return new Promise((resolve, reject) => {  
18      conn.query(`  
19        INSERT INTO tb_reservations (name, email, people, date, time)  
20        VALUES(?, ?, ?, ?, ?)`  
21      , [  
22        fields.name,  
23        fields.email,  
24        fields.people,  
25        fields.date,  
26        fields.time  
27      ], (err, results) => {  
28        if (err) {  
29          reject(err);  
30        } else {  
31          resolve(results);  
32        }  
33      }  
34    );  
35  };  
36};  
37});  
38};  
39};
```

A red arrow points from the bottom right towards the cursor at line 16, column 1. The status bar at the bottom indicates the current position is "Ln 16, Col 1 (553 selected)". Other status bar items include "Spaces: 4", "CRLF", "JavaScript", "Go Live", "Prettier", and a lock icon.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar (EXPLORER) displays the project structure under "SABOROSO", including files like "bin", "inc", "db.js", "menus.js", "reservations.js", "node_modules", "public", "routes/index.js", "routes/users.js", "views/inc/content/contacts.ejs", "views/inc/content/facts.ejs", "views/inc/content/menus.ejs", "views/inc/content/reservations.ejs", "views/inc/content/services.ejs", "views/inc/content/subscribe.ejs", "views/inc/content/text.ejs", and "views/header-index.ejs". The main editor area shows a JavaScript file "reservations.js" with the following code:

```
16     save(fields) {
17
18         return new Promise((resolve, reject) => {
19
20             conn.query(`
21                 INSERT INTO tb_reservations (name, email, people, date, time)
22                 VALUES(?, ?, ?, ?, ?)
23             `, [
24                 fields.name,
25                 fields.email,
26                 fields.people,
27                 fields.date, ←
28                 fields.time
29             ], (err, results) => {
30
31                 if (err) {
32                     reject(err);
33                 } else {
34                     resolve(results);
35                 }
36             });
37         });
38     };
39 }
```

The line "fields.date," is highlighted with a red arrow pointing to the comma. The status bar at the bottom indicates "Ln 27, Col 24 (11 selected)".

Reserva de mesa

Nome

E-mail

Pessoas

Data

Hora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br




sproviders.com.br




Estilos de formatação □


```
{"name": "Fred", "email": "fred@sp.com.br", "people": "2", "date": "21/11/2024", "time": "19:53"}
```

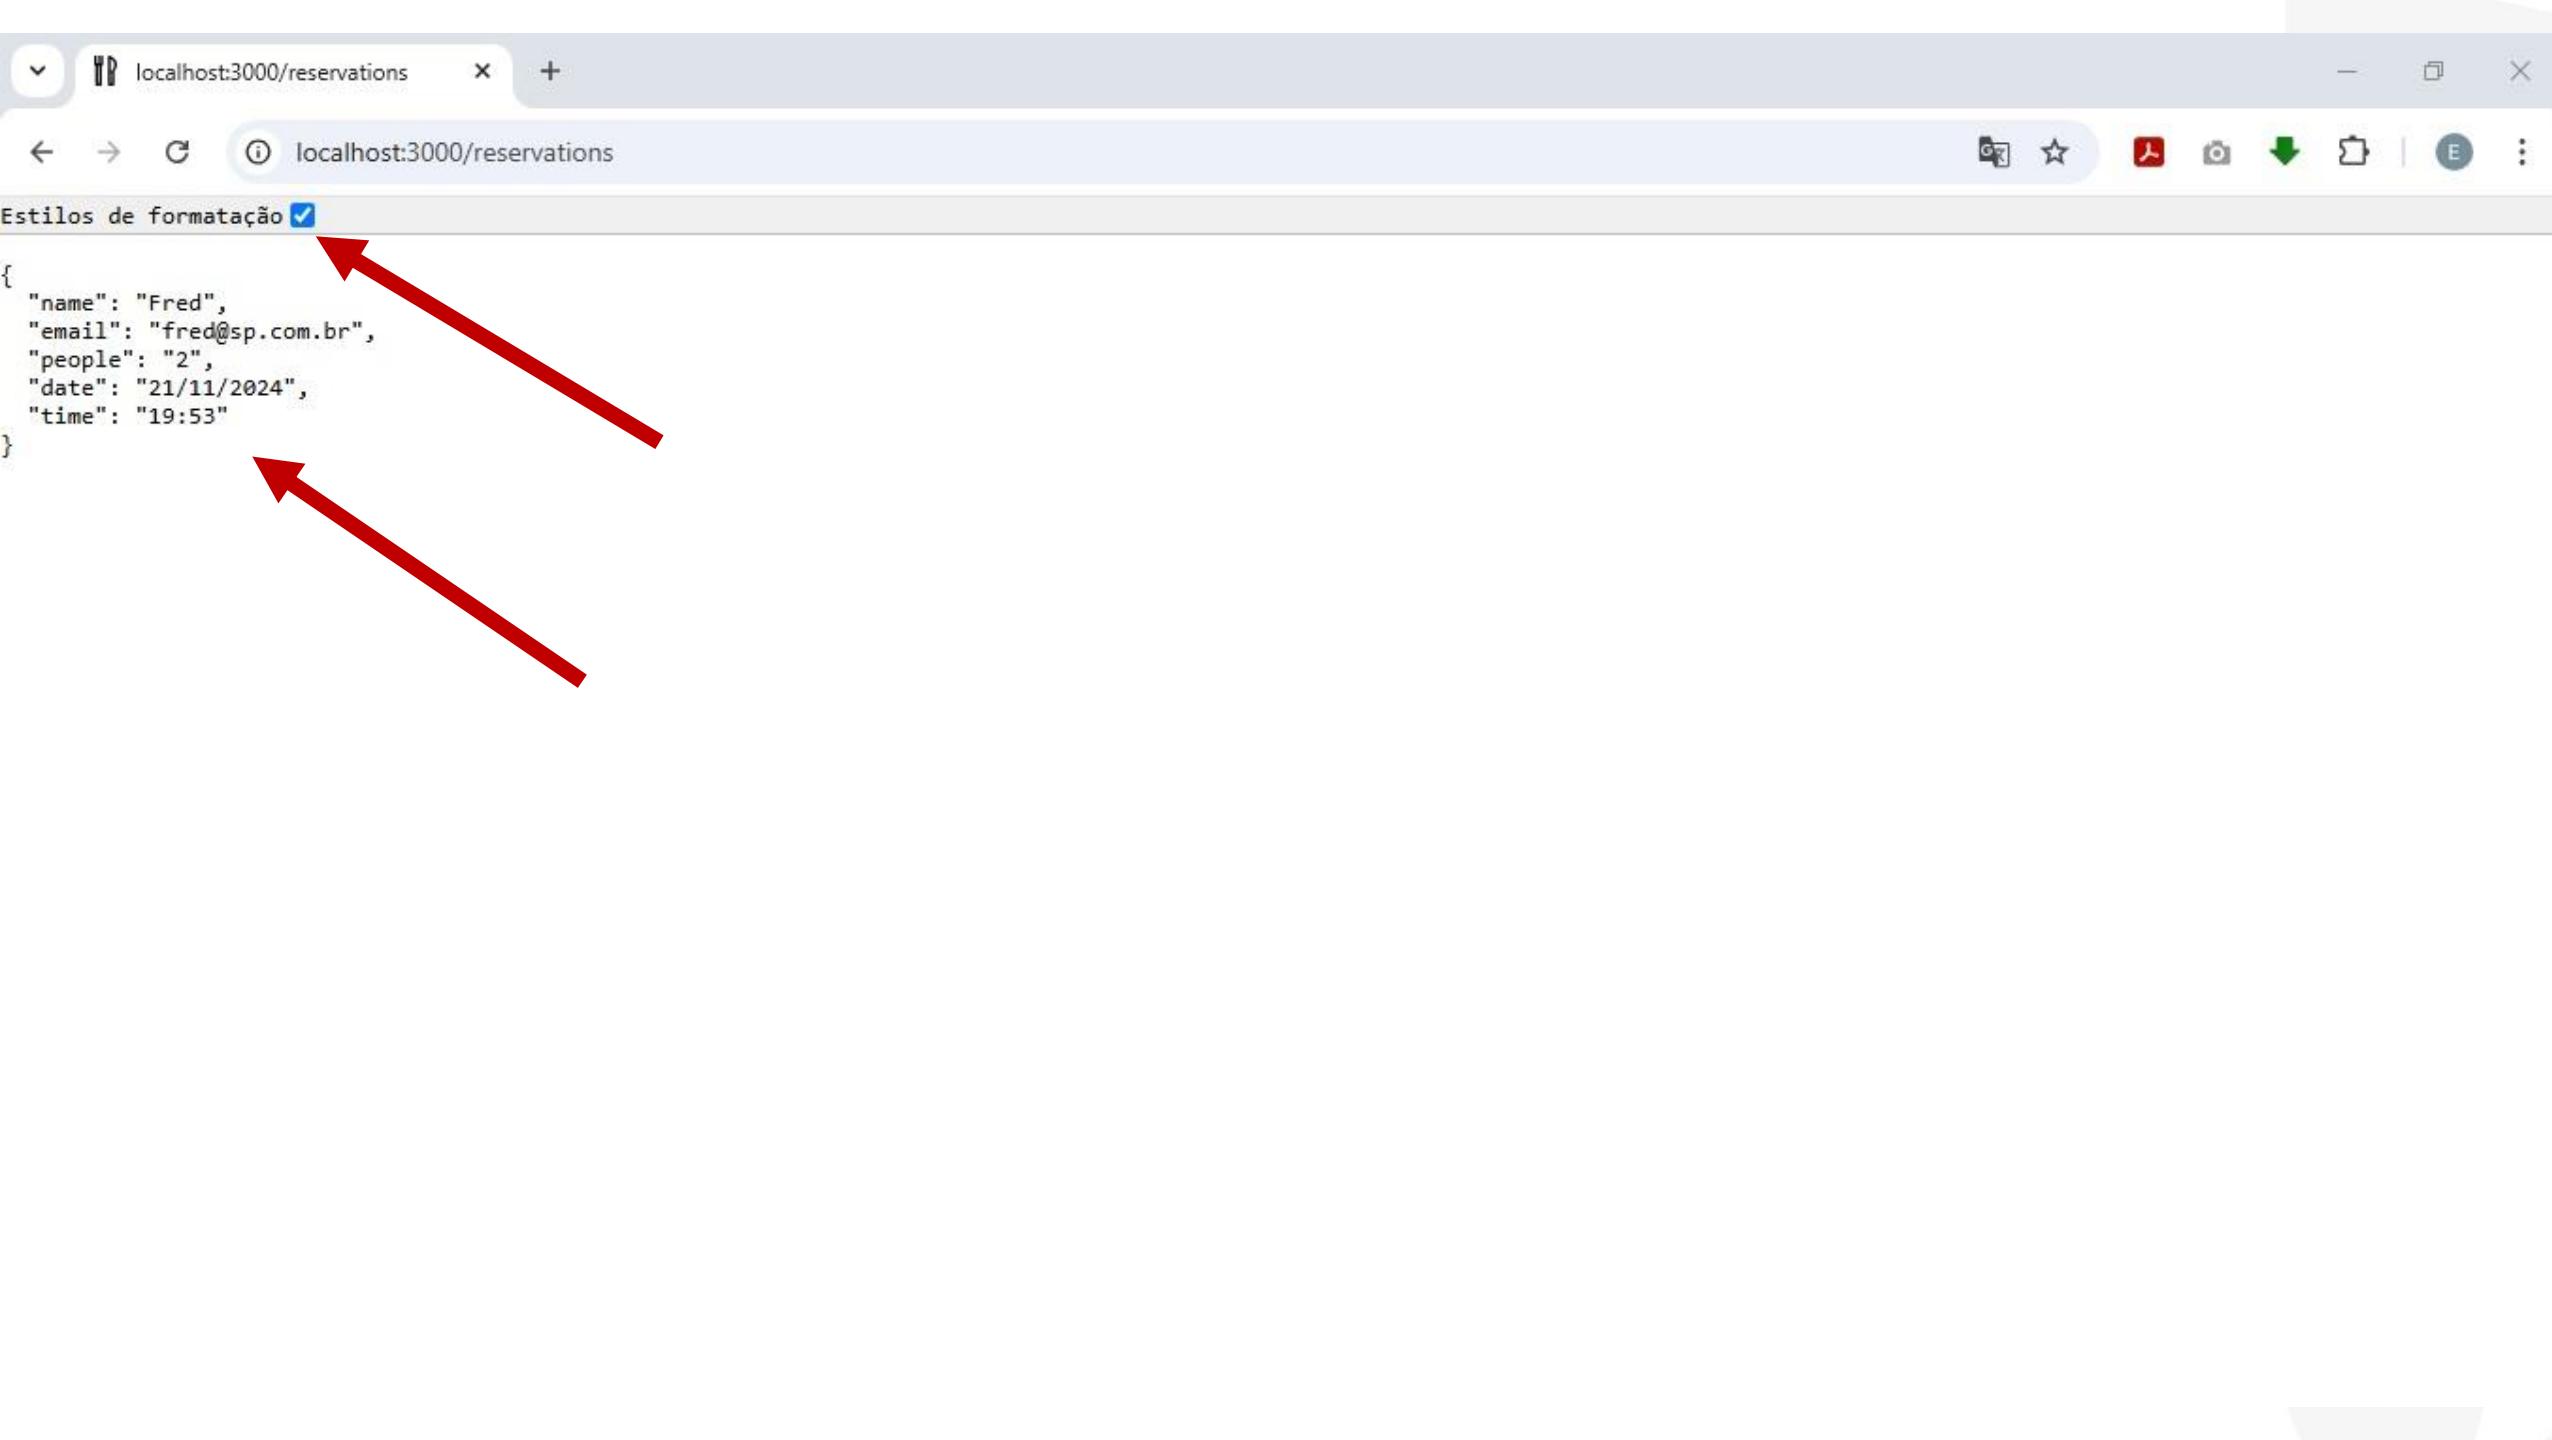

Estilos de formatação

```
{  "name": "Fred",  "email": "fred@sp.com.br",  "people": "2",  "date": "21/11/2024",  "time": "19:53"}  
}
```

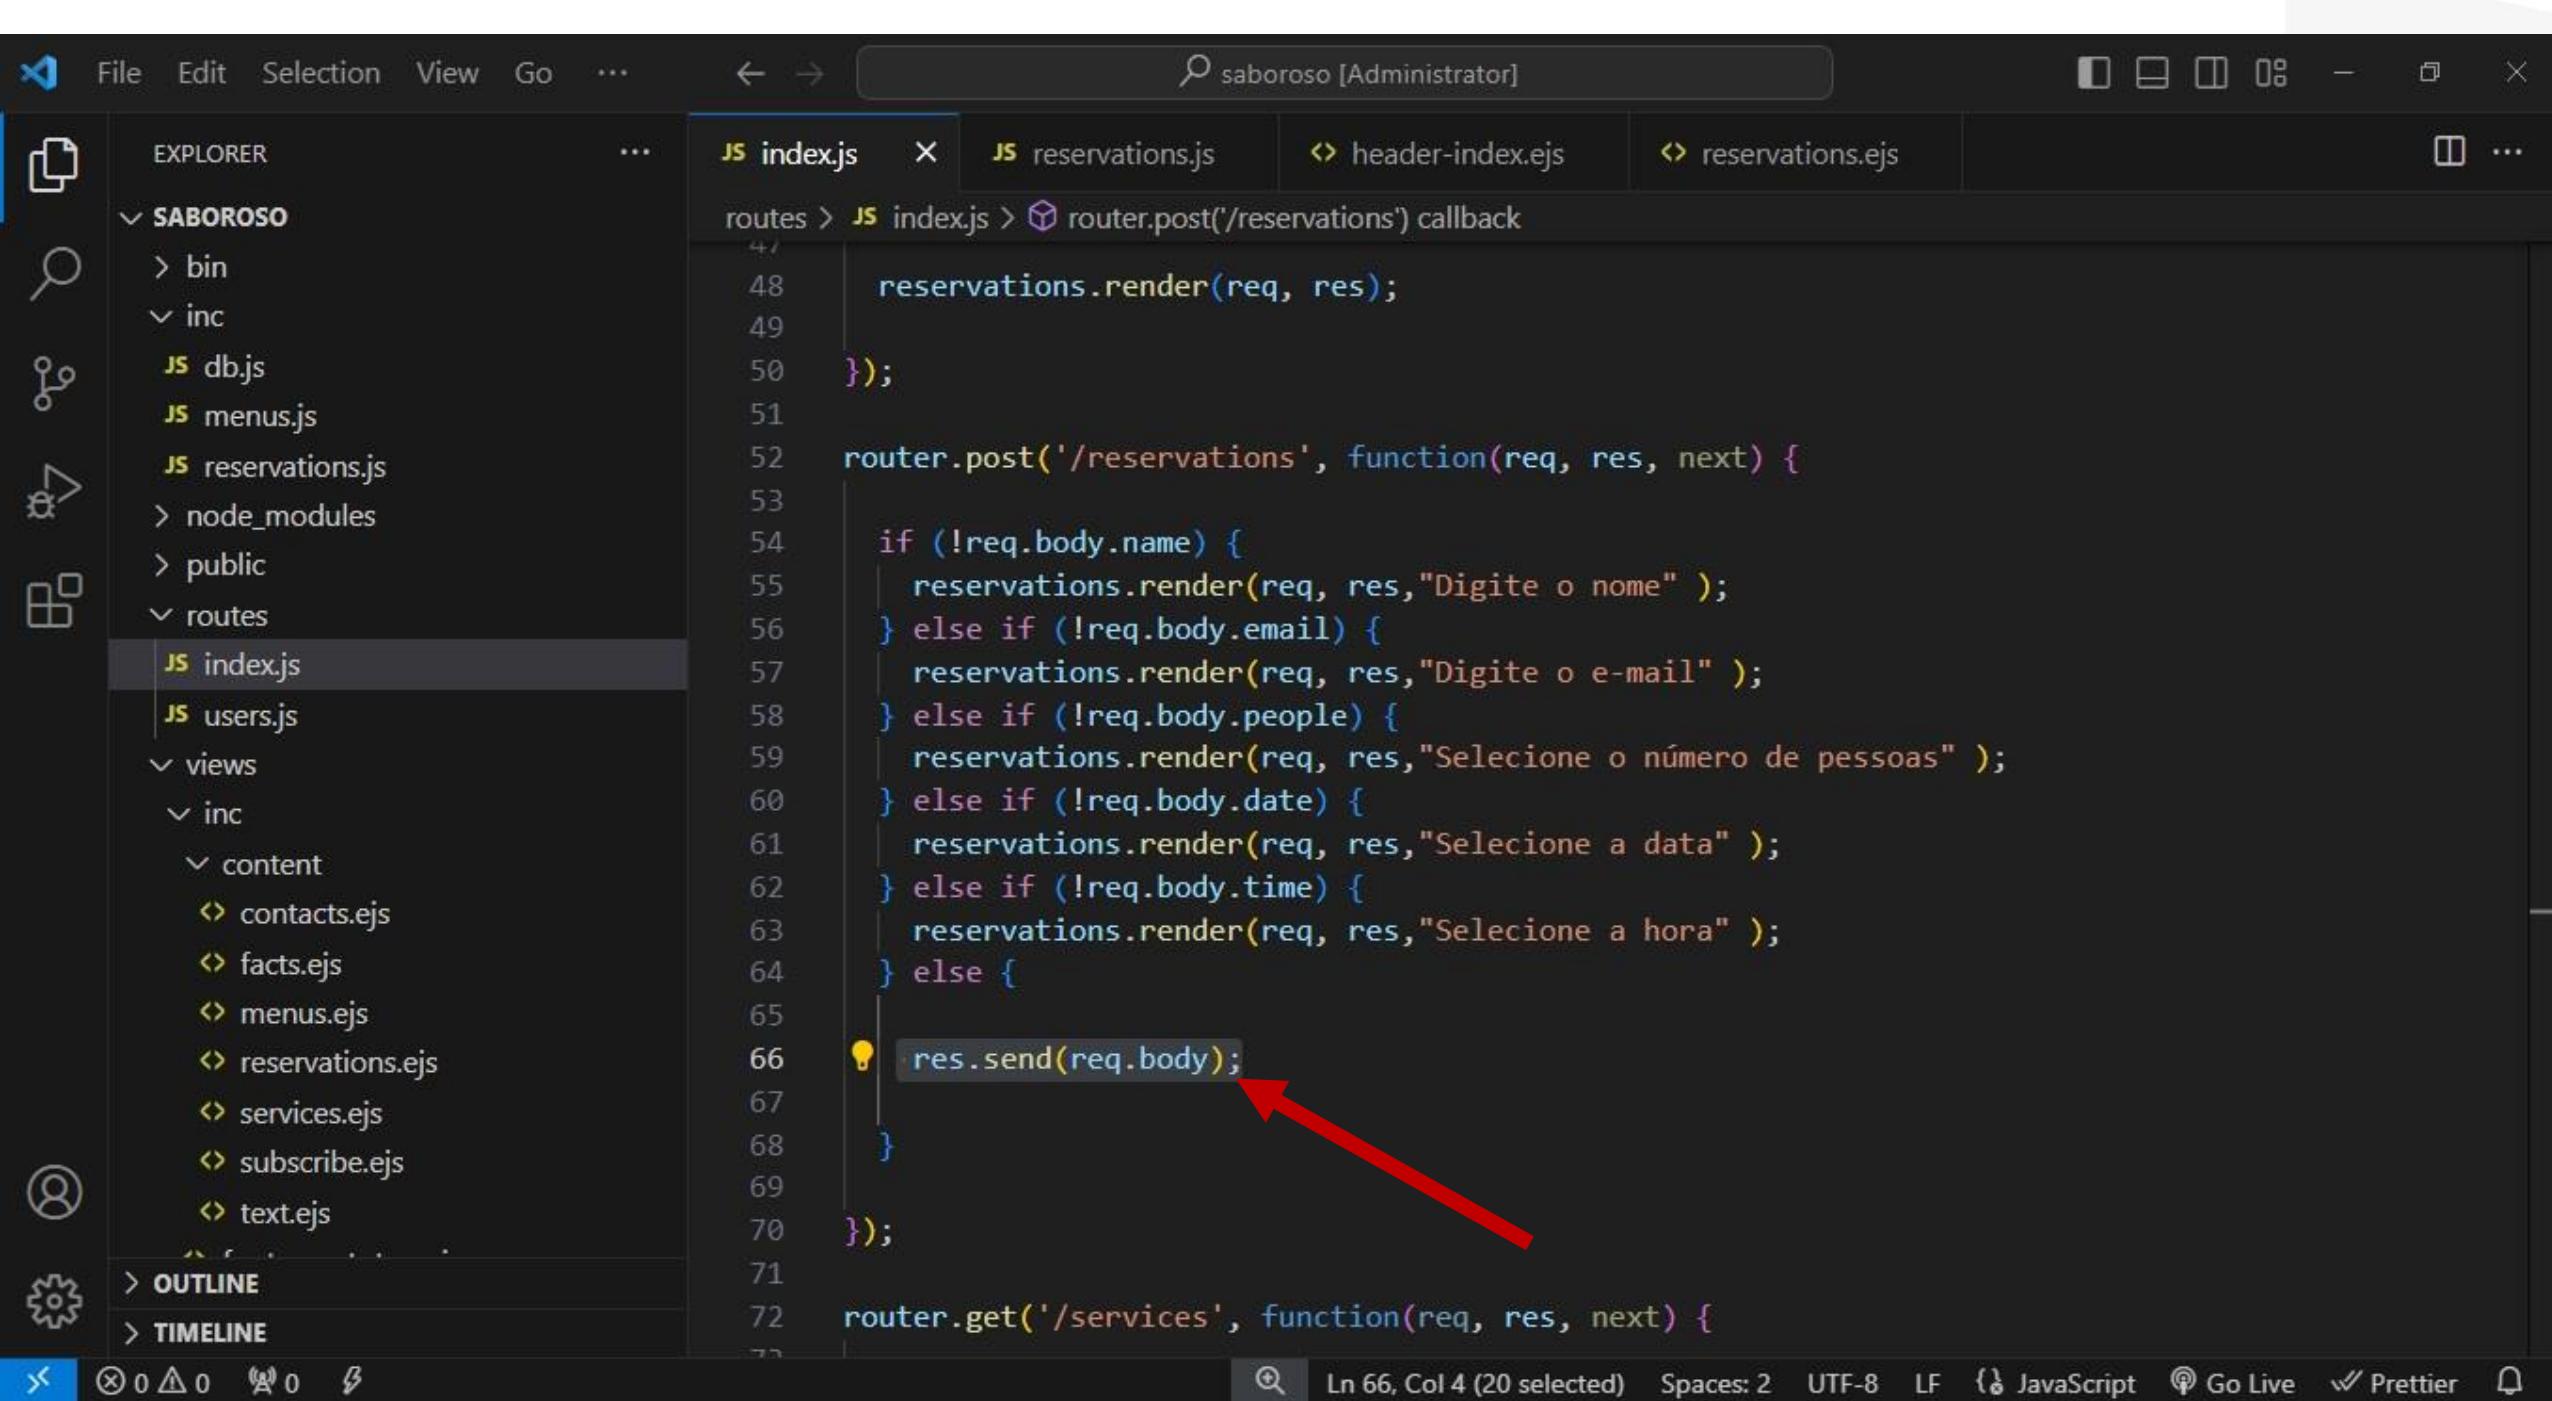

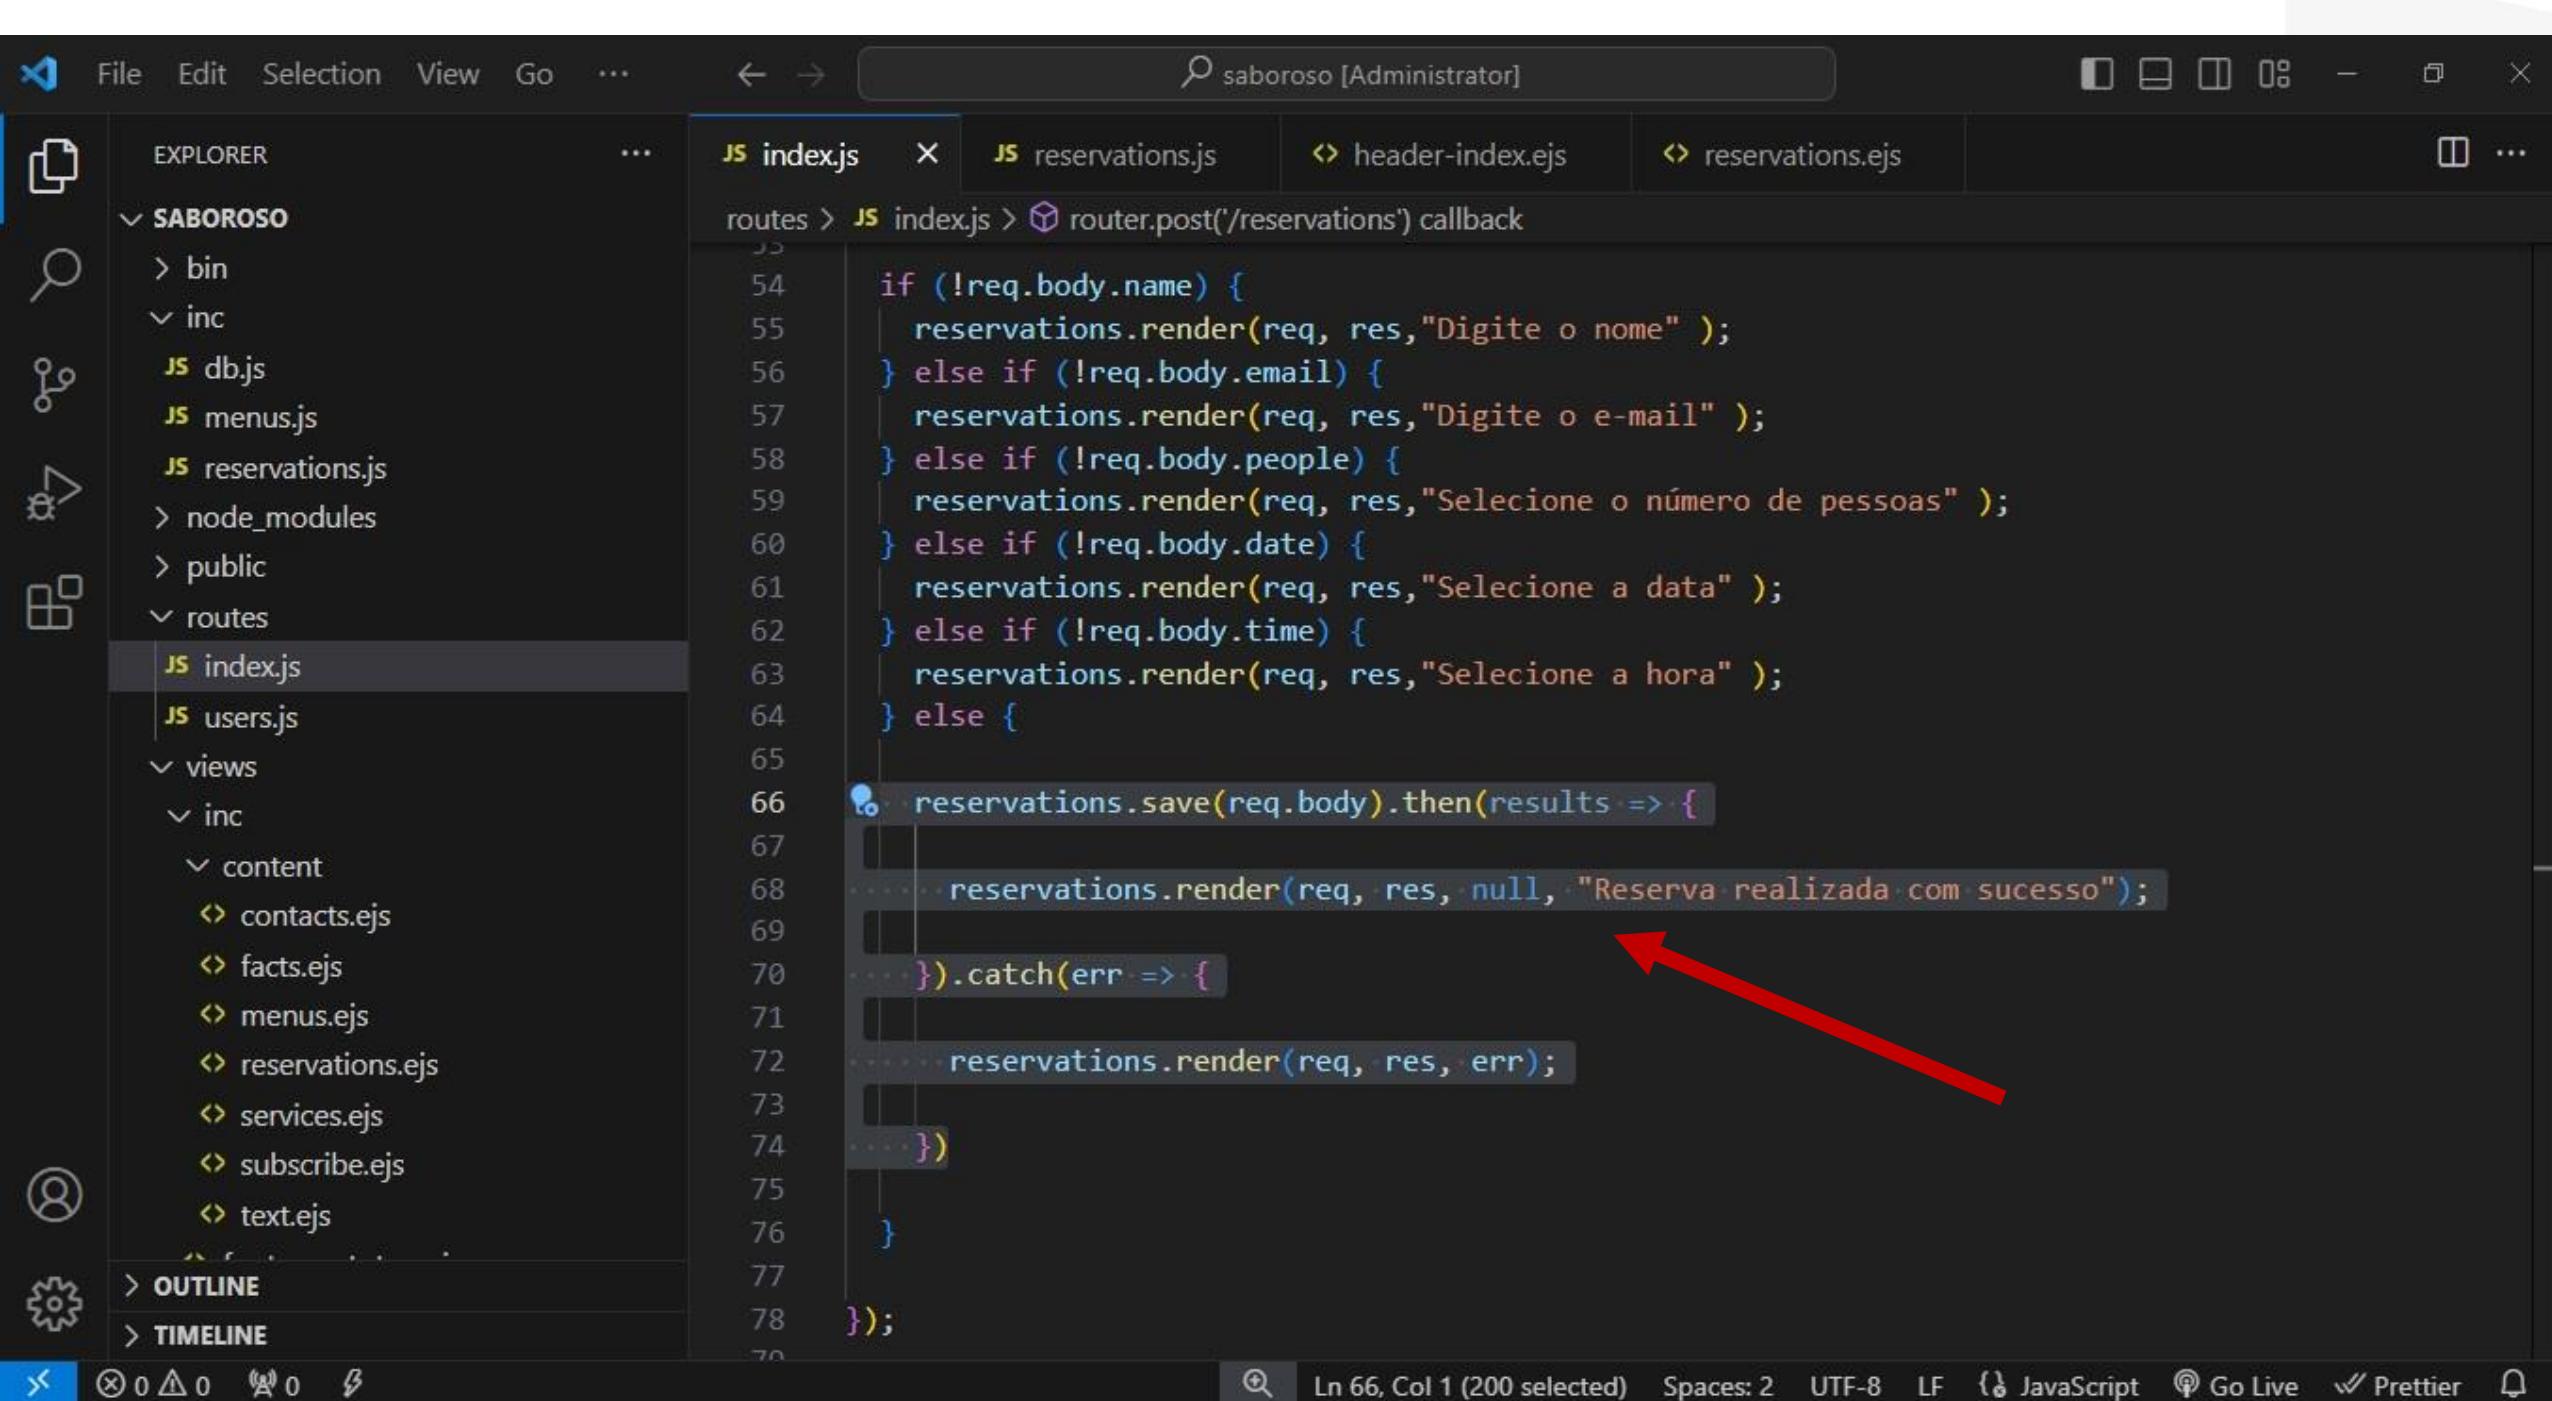

A screenshot of the Visual Studio Code (VS Code) interface. The top bar includes standard menu items: File, Edit, Selection, View, Go, and others. A search bar is centered above the tabs. The right side of the top bar features window control buttons (minimize, maximize, close) and a tab switcher.

The left sidebar contains the Explorer view, which shows a file tree for a project named "SABOROSO". The tree includes "bin", "inc" (with "db.js", "menus.js", and "reservations.js"), "node_modules", "public", "routes" (with "index.js" and "users.js"), and "views" (with "inc" containing "content" files like "contacts.ejs", "facts.ejs", "menus.ejs", "reservations.ejs", "services.ejs", "subscribe.ejs", and "text.ejs"). Other collapsed sections include ".env", ".git", ".vscode", and ".wasm". A red arrow points from the "reservations.js" entry in the tree to the editor tab.

The main editor area displays the contents of the "reservations.js" file. The code uses ES6 syntax and includes imports from "db.js" and "ejs". It defines a module export function that handles rendering a template ("reservations.ejs") with specific data and saving fields to a database using a promise-based query.

The bottom status bar shows file navigation icons, line and column numbers (Ln 28, Col 24), character count (Spaces: 4), encoding (UTF-8 CRLF), language (JavaScript), and live preview (Go Live). A Prettier icon indicates the code has been formatted.

```
JS index.js JS reservations.js X < header-index.ejs < reservations.ejs
```

```
inc > JS reservations.js > [ ] < unknown > > [ ] save > [ ] <function>
1 var conn = ...
2
3 module.exports = {
4
5   render(req, res, error) {
6
7     res.render('reservations', {
8       title: 'Reservas - Restaurante Saboroso!',
9       background: "images/img_bg_2.jpg",
10      h1: "Reserve uma Mesa!",
11      body: req.body,
12      error
13    });
14
15
16   save(fields) {
17
18     return new Promise((resolve, reject) => {
19
20       conn.query(`
21         INSERT INTO tb_reservations (name, email, people, date, time)
22         VALUES(?, ?, ?, ?, ?)
23       `, [
24
25         fields.name,
26         fields.email,
27         fields.people,
```

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar contains icons for File, Edit, Selection, View, Go, and other settings. The Explorer sidebar shows a project structure under the folder "SABOROSO", including subfolders "bin", "inc", and "views" with files like "db.js", "menus.js", "index.js", "users.js", and several ".ejs" files. The main editor area has four tabs: "index.js", "reservations.js" (which is active), "header-index.ejs", and "reservations.ejs". The code in "reservations.js" is as follows:

```
inc > JS reservations.js > [e] <unknown> > render
1  var conn = require('../db')
2
3  module.exports = {
4
5    render(req, res, error, success) {
6
7      res.render('reservations', {
8        title: 'Reservas - Restaurante Saboroso!',
9        background: "images/img_bg_2.jpg",
10       h1: "Reserve uma Mesa!",
11       body: req.body,
12       error,
13       success
14     });
15
16
17   save(fields) {
18
19     return new Promise((resolve, reject) => {
20
21       conn.query(
22         'INSERT INTO tb_reservations (name, email, people, date, time)
23         VALUES(?, ?, ?, ?, ?)'
24       , [
25         fields.name,
26         fields.email,
```

Two red arrows point to the parameters of the "render" function: "error" and "success". The "error" parameter is highlighted with a yellow lightbulb icon, indicating a potential issue or warning.


A screenshot of the Visual Studio Code (VS Code) interface. The top bar shows the title "saboroso [Administrator]" and standard window controls. The left sidebar (Explorer) displays a file tree for a project named "SABOROSO". The "views" folder contains subfolders "content", "inc", and "routes", and files "index.js", "users.js", and "reservations.ejs". A red arrow points from the "reservations.ejs" file in the Explorer to the same file in the main editor area. The editor tab bar shows "index.js", "reservations.js", "header-index.ejs", and "reservations.ejs" (which is currently active). The main editor area displays the content of "reservations.ejs", which includes HTML and EJS code for a reservation form. The status bar at the bottom provides information about the current file ("Ln 6, Col 1 (206 selected)"), code style ("Spaces: 4"), encoding ("UTF-8"), and extensions ("HTML", "Prettier").

```
> content > <> reservations.ejs > div.gtco-section > div.gtco-container > div.row > div.col-md-12 > div.col-md-6.animate-box
1   <div class="gtco-section" style="padding-bottom: 14em;">
2     <div class="gtco-container">
3       <div class="row">
4         <div class="col-md-12">
5           <div class="col-md-6 animate-box">
6             <% if (typeof error === "string") {%
7               <div class="alert alert-danger">
8                 <%= error %>
9               </div>
10              <% } %>
11              <h3>Reserva de mesa</h3>
12              <form action="/reservations" method="post">
13                <div class="row form-group">
14                  <div class="col-md-12">
15                    <label for="inputName">Nome</label>
16                    <input type="text" id="inputName" name="name" class="form-control">
17                  </div>
18                </div>
19                <div class="row form-group">
20                  <div class="col-md-12">
21                    <label for="inputEmail">E-mail</label>
22                    <input type="email" id="inputEmail" name="email" class="form-control">
23                  </div>
24                </div>
25                <div class="row form-group">
```

A screenshot of the Visual Studio Code (VS Code) interface. The top bar includes standard menu items: File, Edit, Selection, View, Go, and a separator. To the right are icons for navigating between files, a search bar containing "saboroso [Administrator]", and window control buttons. The left sidebar, titled "EXPLORER", shows a tree view of a project structure under the folder "SABOROSO". The "views" section contains "index.js", "reservations.js", and "users.js". The "routes" section contains "index.js" and "users.js". The "views" section also contains an "inc" folder with "content", "contacts.ejs", "facts.ejs", "menus.ejs", "reservations.ejs" (which is currently selected and highlighted with a red arrow), "services.ejs", "subscribe.ejs", and "text.ejs". Below these are sections for "OUTLINE" and "TIMELINE". The main editor area displays the file "reservations.ejs" with the following code:

```
> reservations.ejs > div.gtco-section > div.gtco-container > div.row > div.col-md-12 > div.col-md-6.animate-box > ? > ?  
1  <div class="gtco-section" style="padding-bottom: 14em;">  
2    <div class="gtco-container">  
3      <div class="row">  
4        <div class="col-md-12">  
5          <div class="col-md-6 animate-box">  
6            <% if (typeof error === "string") { %>  
7              <div class="alert alert-danger">  
8                <%= error %>  
9              </div>  
10             <% } %>  
11  
12            <% if (typeof success === "string") { %>  
13              <div class="alert alert-success">  
14                <%= success %>  
15              </div>  
16            <% } %>  
17  
18            <h3>Reserva de mesa</h3>  
19            <form action="/reservations" method="post">  
20              <div class="row form-group">  
21                <div class="col-md-12">  
22                  <label for="inputName">Nome</label>  
23                  <input type="text" id="inputName" name="name" class="form-control">  
24                </div>  
25              </div>  
26              <div class="row form-group">
```

The status bar at the bottom shows: Ln 12, Col 1 (223 selected) Spaces: 4 CRLF { HTML Go Live Prettier

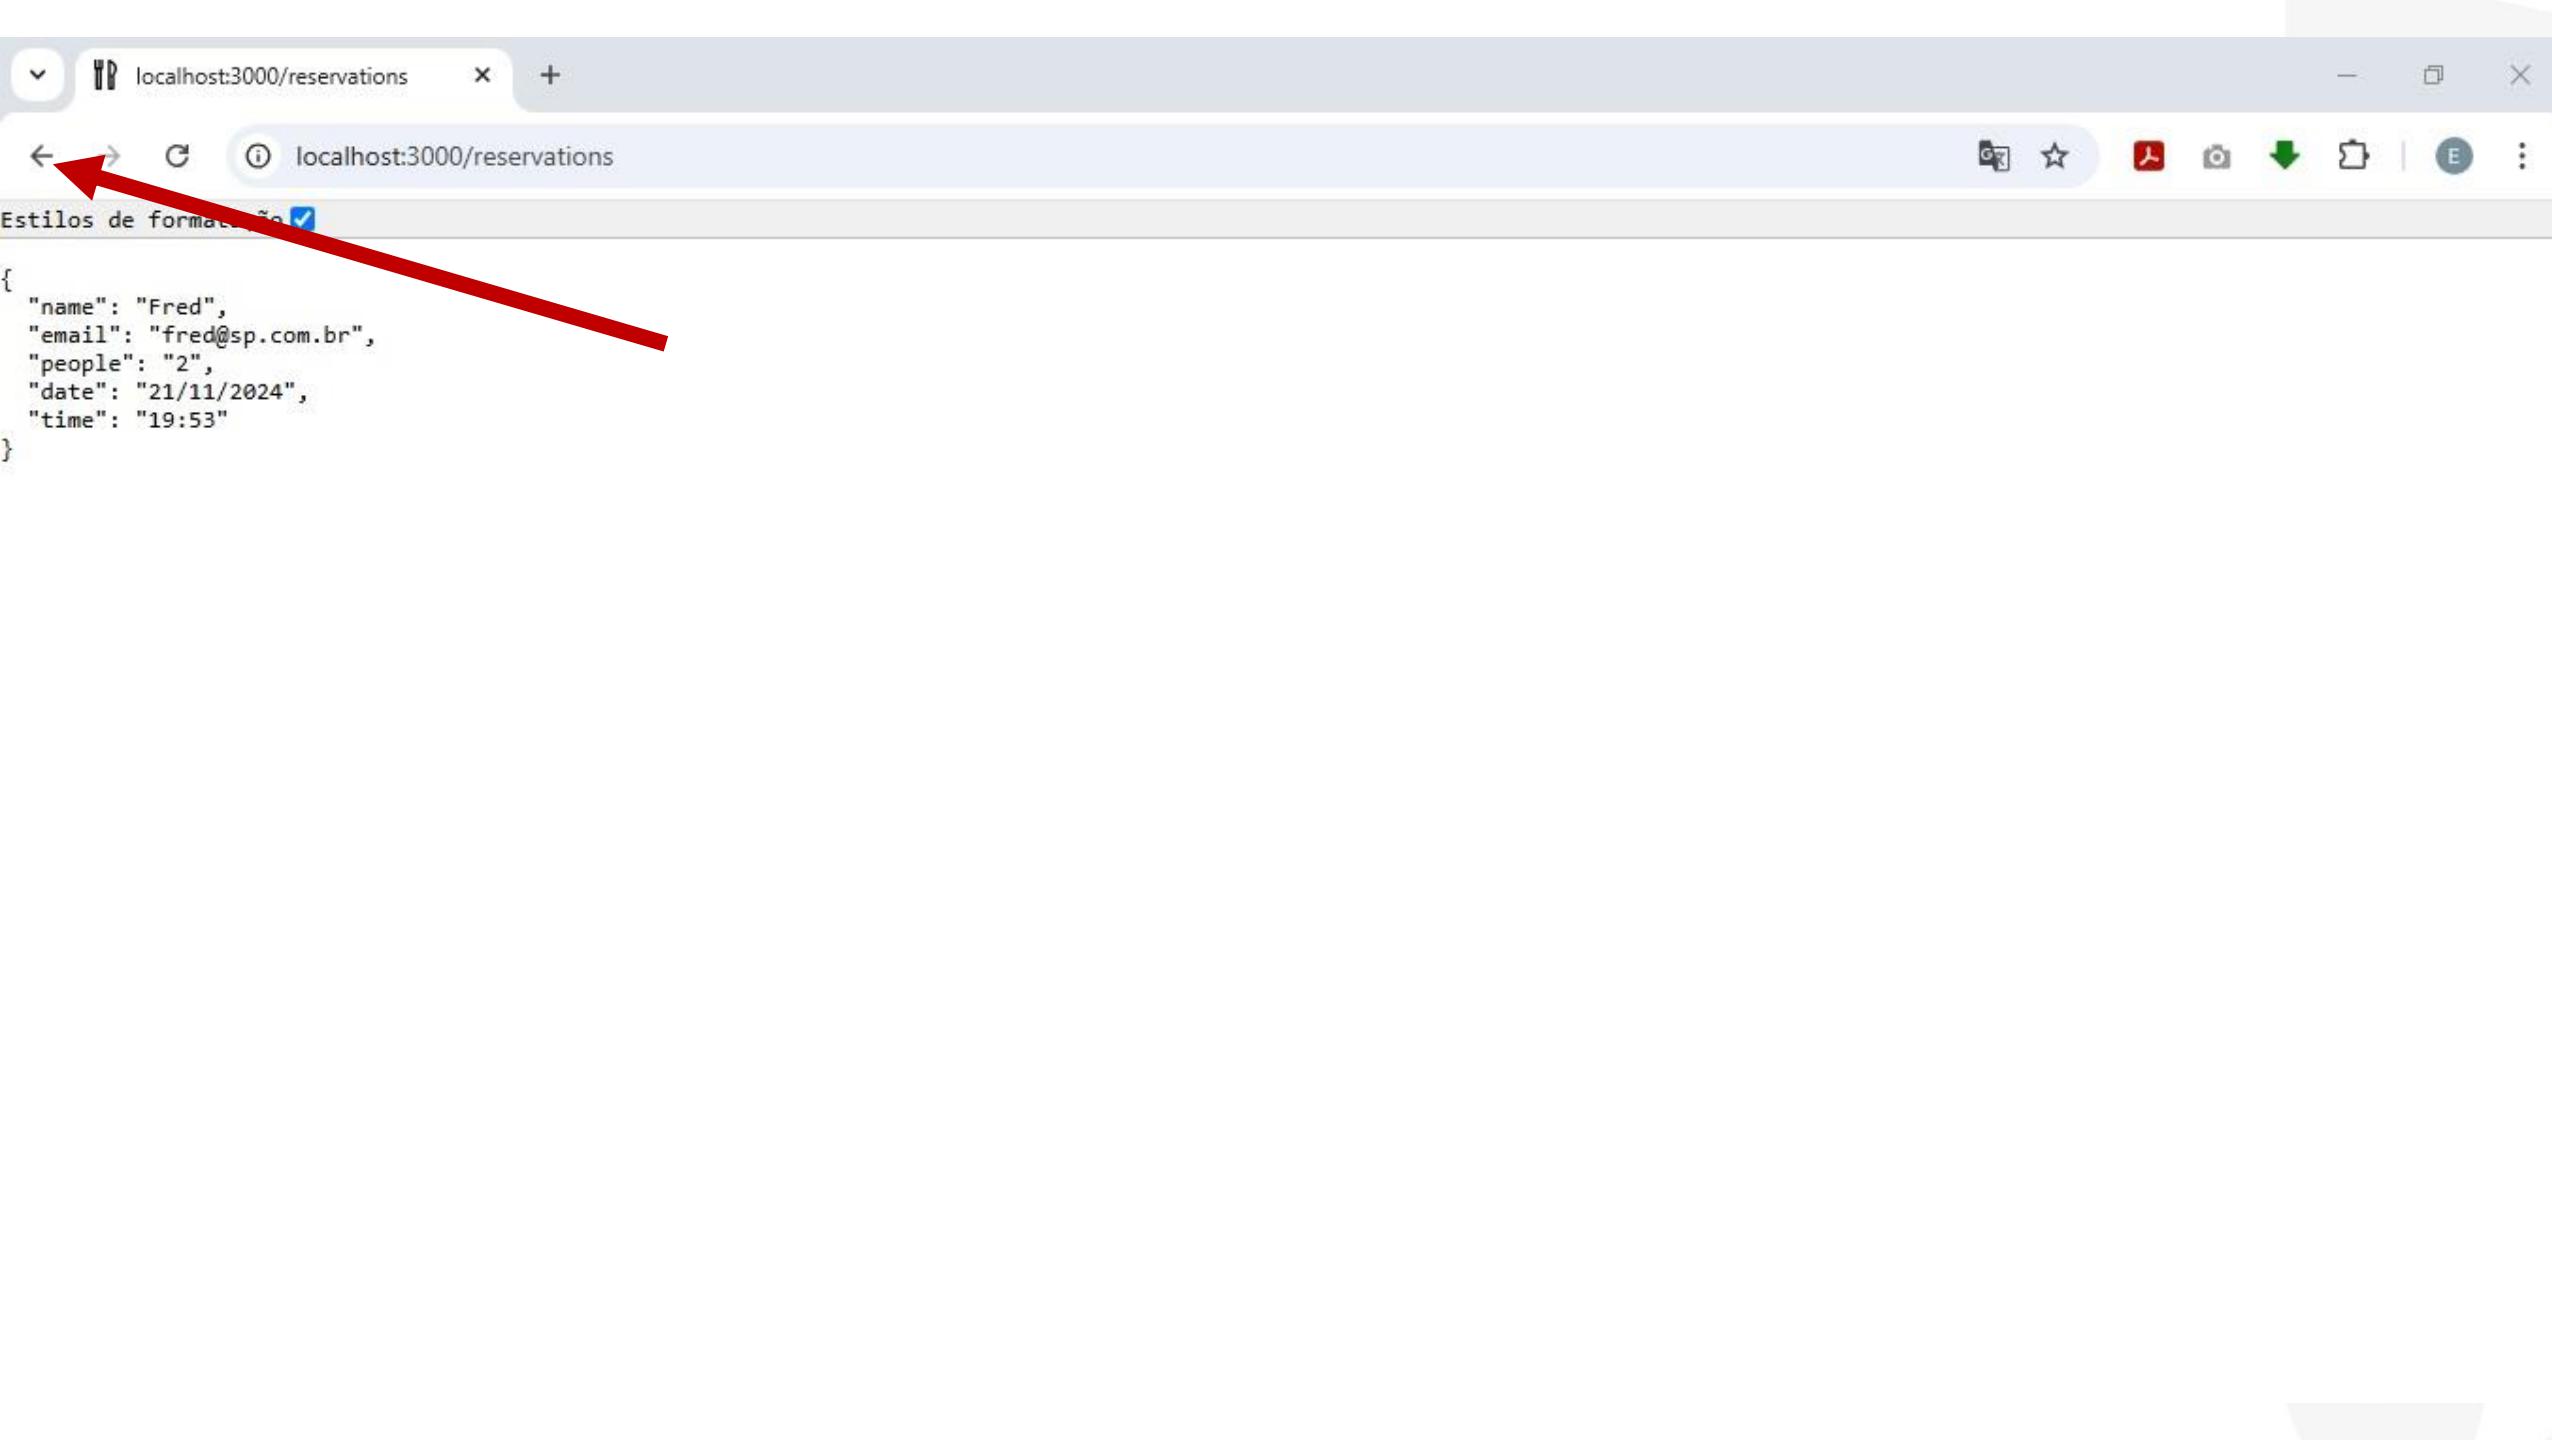

Estilos de formato

```
{  
  "name": "Fred",  
  "email": "fred@sp.com.br",  
  "people": "2",  
  "date": "21/11/2024",  
  "time": "19:53"  
}
```



Digite o nome

Reserva de mesa

Nome

Fred

E-mail

fred@sp.com.br

Pessoas

2

Data

28/11/2024

Hora

20:08

Reservar Agora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odímais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br

Reserva de mesa

Nome

E-mail

Pessoas

-- selecione --

Data

Hora

Informações de Contato



R. 1234, 56 - 1^a andar

Centro, Odimais - RG




+1 234 567 890



contato@sproviders.com.br



sproviders.com.br

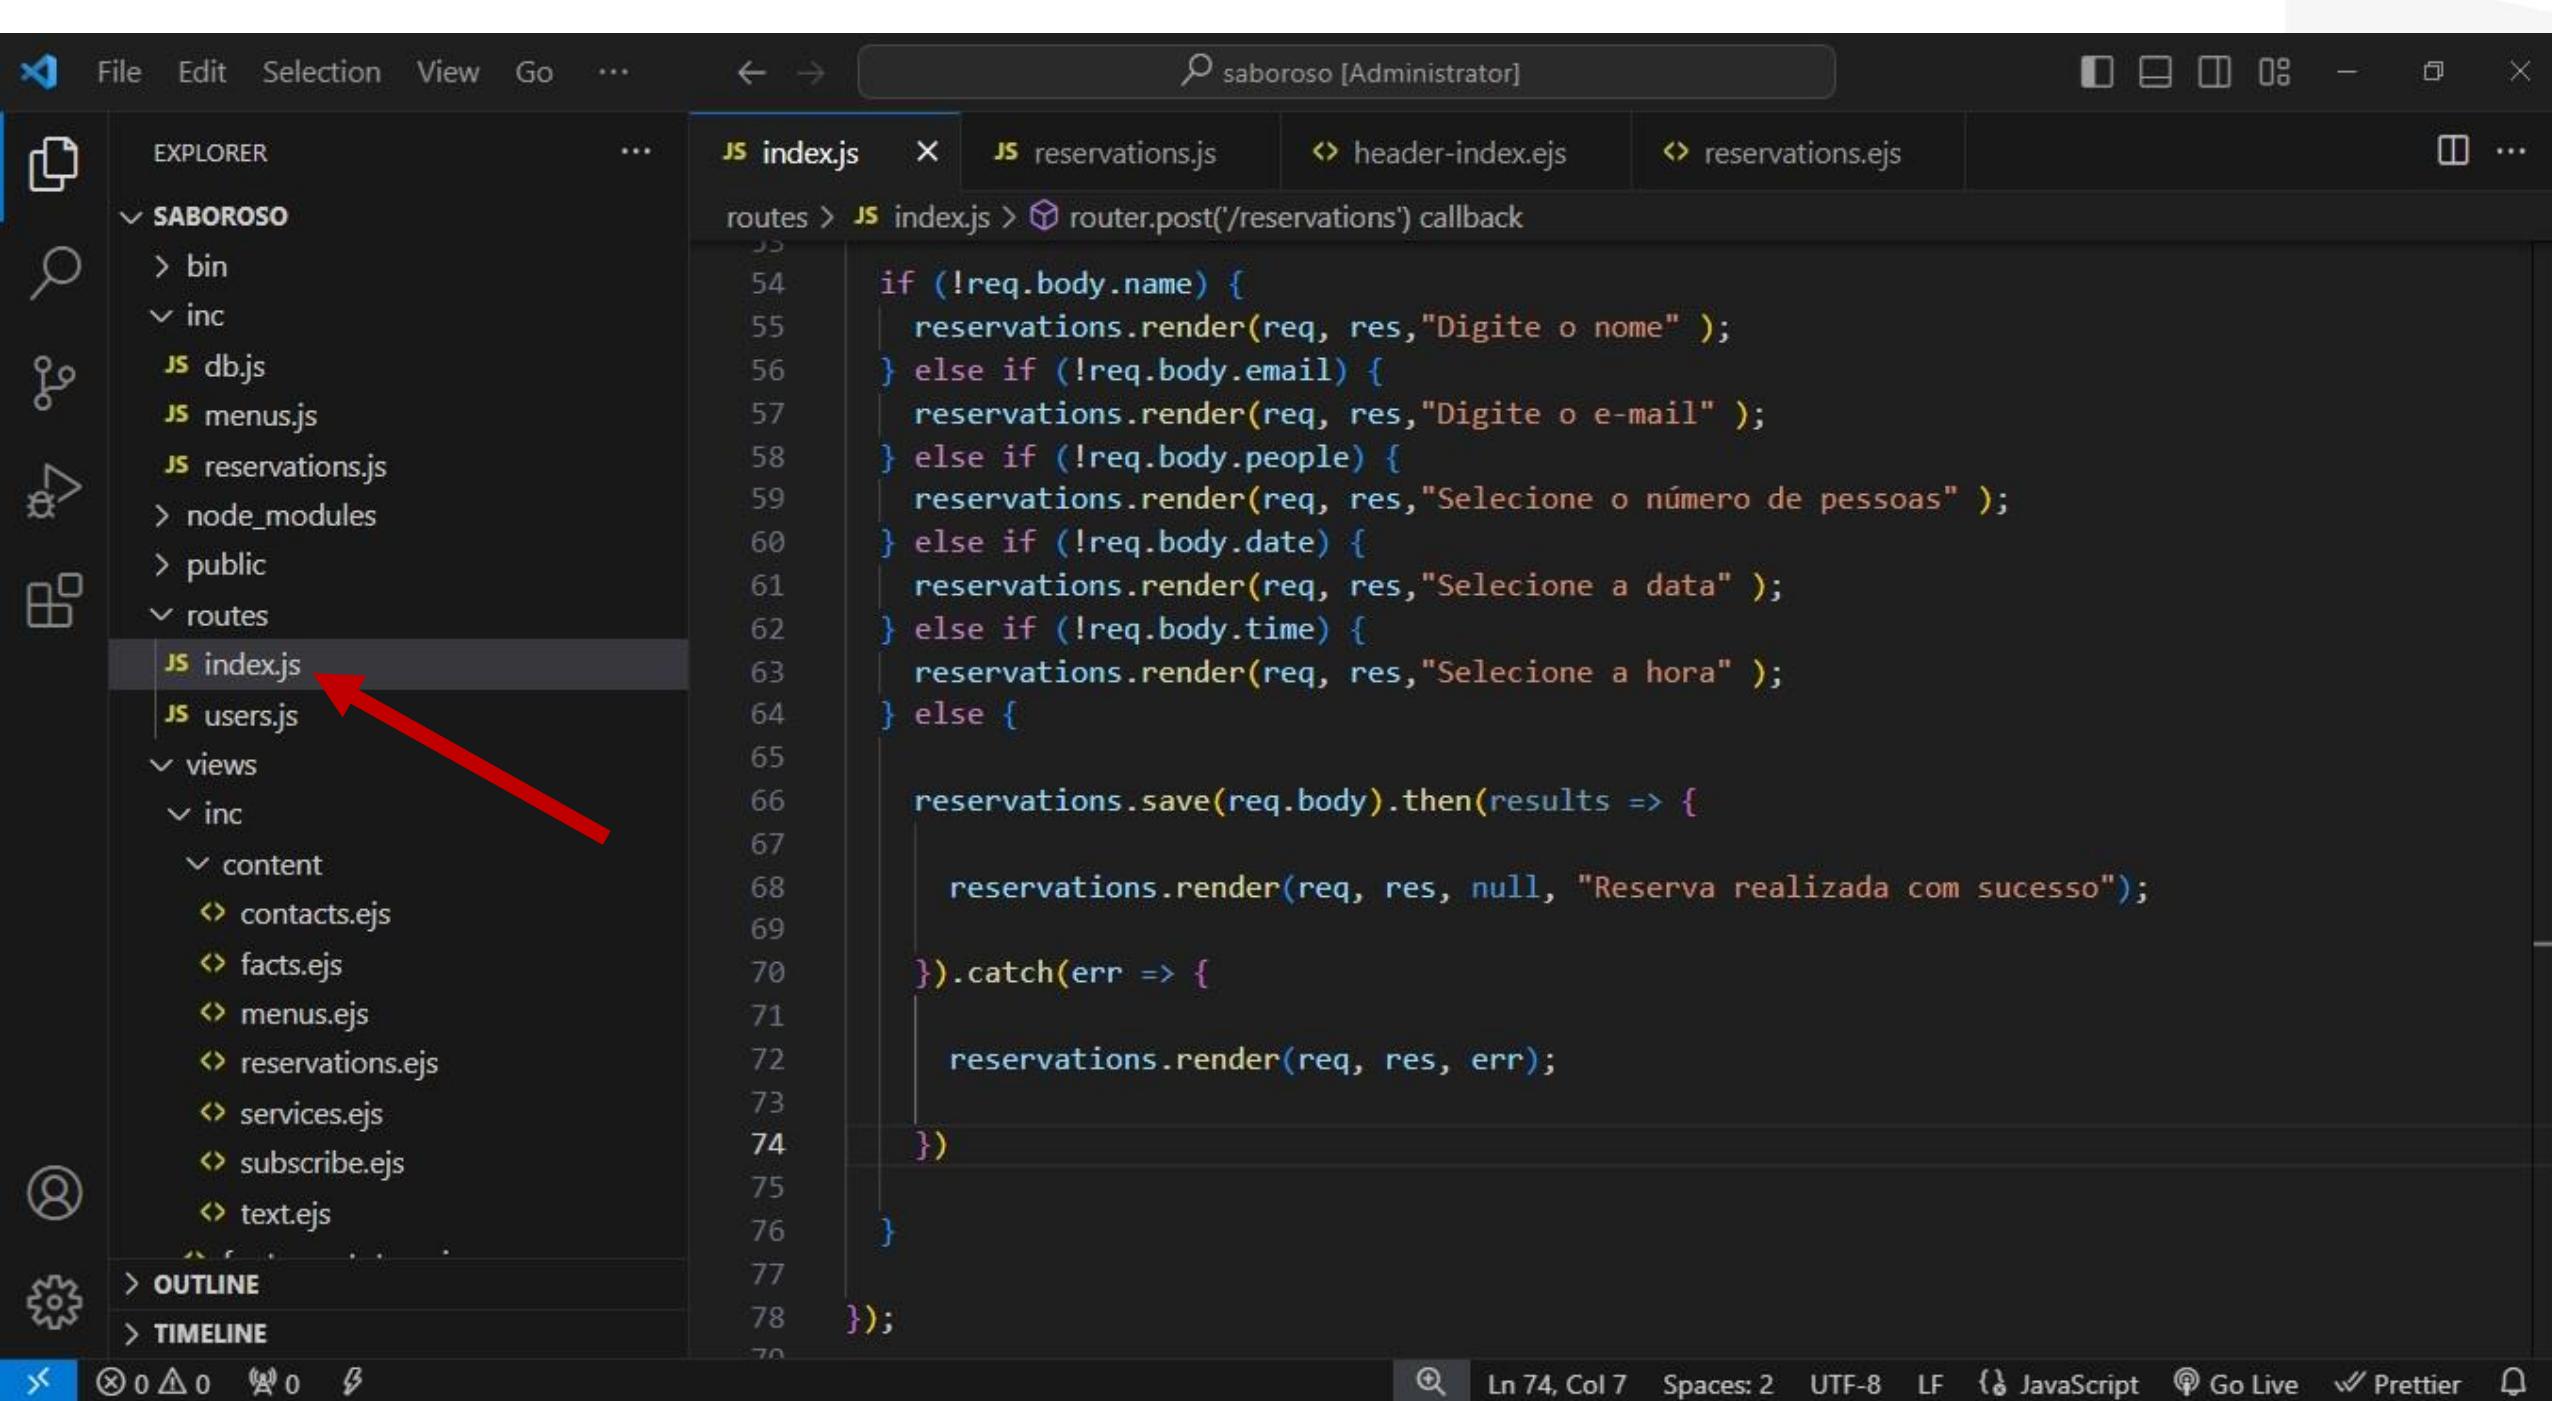

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the file path: routes > JS index.js > router.post('/reservations') callback > catch() callback. The search bar contains the text "saboroso [Administrator]". The left sidebar (Explorer) shows a project structure under the folder "SABOROSO": bin, inc, db.js, menus.js, reservations.js, node_modules, public, routes (with index.js and users.js selected), and views (with inc, content, contacts.ejs, facts.ejs, menus.ejs, reservations.ejs, services.ejs, subscribe.ejs, text.ejs). The main editor area displays the following JavaScript code:

```
54 if (!req.body.name) {  
55   reservations.render(req, res, "Digite o nome" );  
56 } else if (!req.body.email) {  
57   reservations.render(req, res, "Digite o e-mail" );  
58 } else if (!req.body.people) {  
59   reservations.render(req, res, "Selecione o número de pessoas" );  
60 } else if (!req.body.date) {  
61   reservations.render(req, res, "Selecione a data" );  
62 } else if (!req.body.time) {  
63   reservations.render(req, res, "Selecione a hora" );  
64 } else {  
65  
66   reservations.save(req.body).then(results => {  
67  
68     reservations.render(req, res, null, "Reserva realizada com sucesso");  
69   }).catch(err => {  
70     reservations.render(req, res, err.message);  
71   })  
72 }  
73 }  
74 }  
75 }  
76 }  
77 }  
78 };
```

A red arrow points from the bottom right towards the line of code "reservations.render(req, res, err.message);". A yellow lightbulb icon is positioned above the line "reservations.render(req, res, err.message);". The status bar at the bottom indicates: Ln 72, Col 48 (8 selected), Spaces: 2, UTF-8, LF, JavaScript, Go Live, Prettier.

Reserva de mesa

Nome

E-mail

Pessoas

-- selecione --

Data

Hora

Reservar Agora

Informações de Contato



R. 1234, 56 - 1^a andar
Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br

Reserva de mesa

Nome

E-mail

Pessoas

 -- selecione --

Data

Hora

Reservar Agora

Confirmar reenvio do formulário

A página que você está procurando usou as informações inseridas.
Voltar à essa página poderá fazer com que todas as ações realizadas
antes sejam repetidas. Quer continuar?

Continuar

Cancelar

de Contato

- 1^a andar

imais - RG

890



contato@sproviders.com.br



sproviders.com.br



File Edit Selection View Go ... ← → saboroso [Administrator] ⚡

EXPLORER ... JS index.js JS reservations.js ✎ header-index.ejs ↗ reservations.ejs ⌂ ...

SABOROSO

- > bin
- ✓ inc
 - JS db.js
 - JS menus.js
 - JS reservations.js
- > node_modules
- > public
- ✓ routes
 - JS index.js
 - JS users.js
- ✓ views
 - ✓ inc
 - ✓ content
 - ↳ contacts.ejs
 - ↳ facts.ejs
 - ↳ menus.ejs
 - ↳ reservations.ejs
 - ↳ services.ejs
 - ↳ subscribe.ejs
 - ↳ text.ejs

OUTLINE

TIMELINE

File Explorer Search Problems Issues Git File View Insert Run Terminal

12 error,
13 success
14 });
15 },
16
17 save(fields) {
18
19 return new Promise((resolve, reject) => {
20
21 let date = fields.date.split('/');
22
23 fields.date = `\${date[2]}-\${date[1]}-\${date[0]}`;
24
25 conn.query(`
26 INSERT INTO tb_reservations (name, email, people, date, time)
27 VALUES(?, ?, ?, ?, ?)
28 , [
29 fields.name,
30 fields.email,
31 fields.people,
32 fields.date,
33 fields.time
34], (err, results) => {
35
36 if (err) {
37 reject(err);

2 selections (83 characters selected) Spaces: 4 UTF-8 CRLF JavaScript Go Live Prettier

localhost:3000/reservations

Incorrect date value: '28/11/2024' for column 'date' at row 1

Reserva de mesa

Nome

E-mail

Pessoas

-- selecione --

Data

Hora

Reservar Agora

Informações de Contato


R. 1234, 56 - 1^a andar

Centro, Odimais - RG

+1 234 567 890

contato@sproviders.com.br

sproviders.com.br

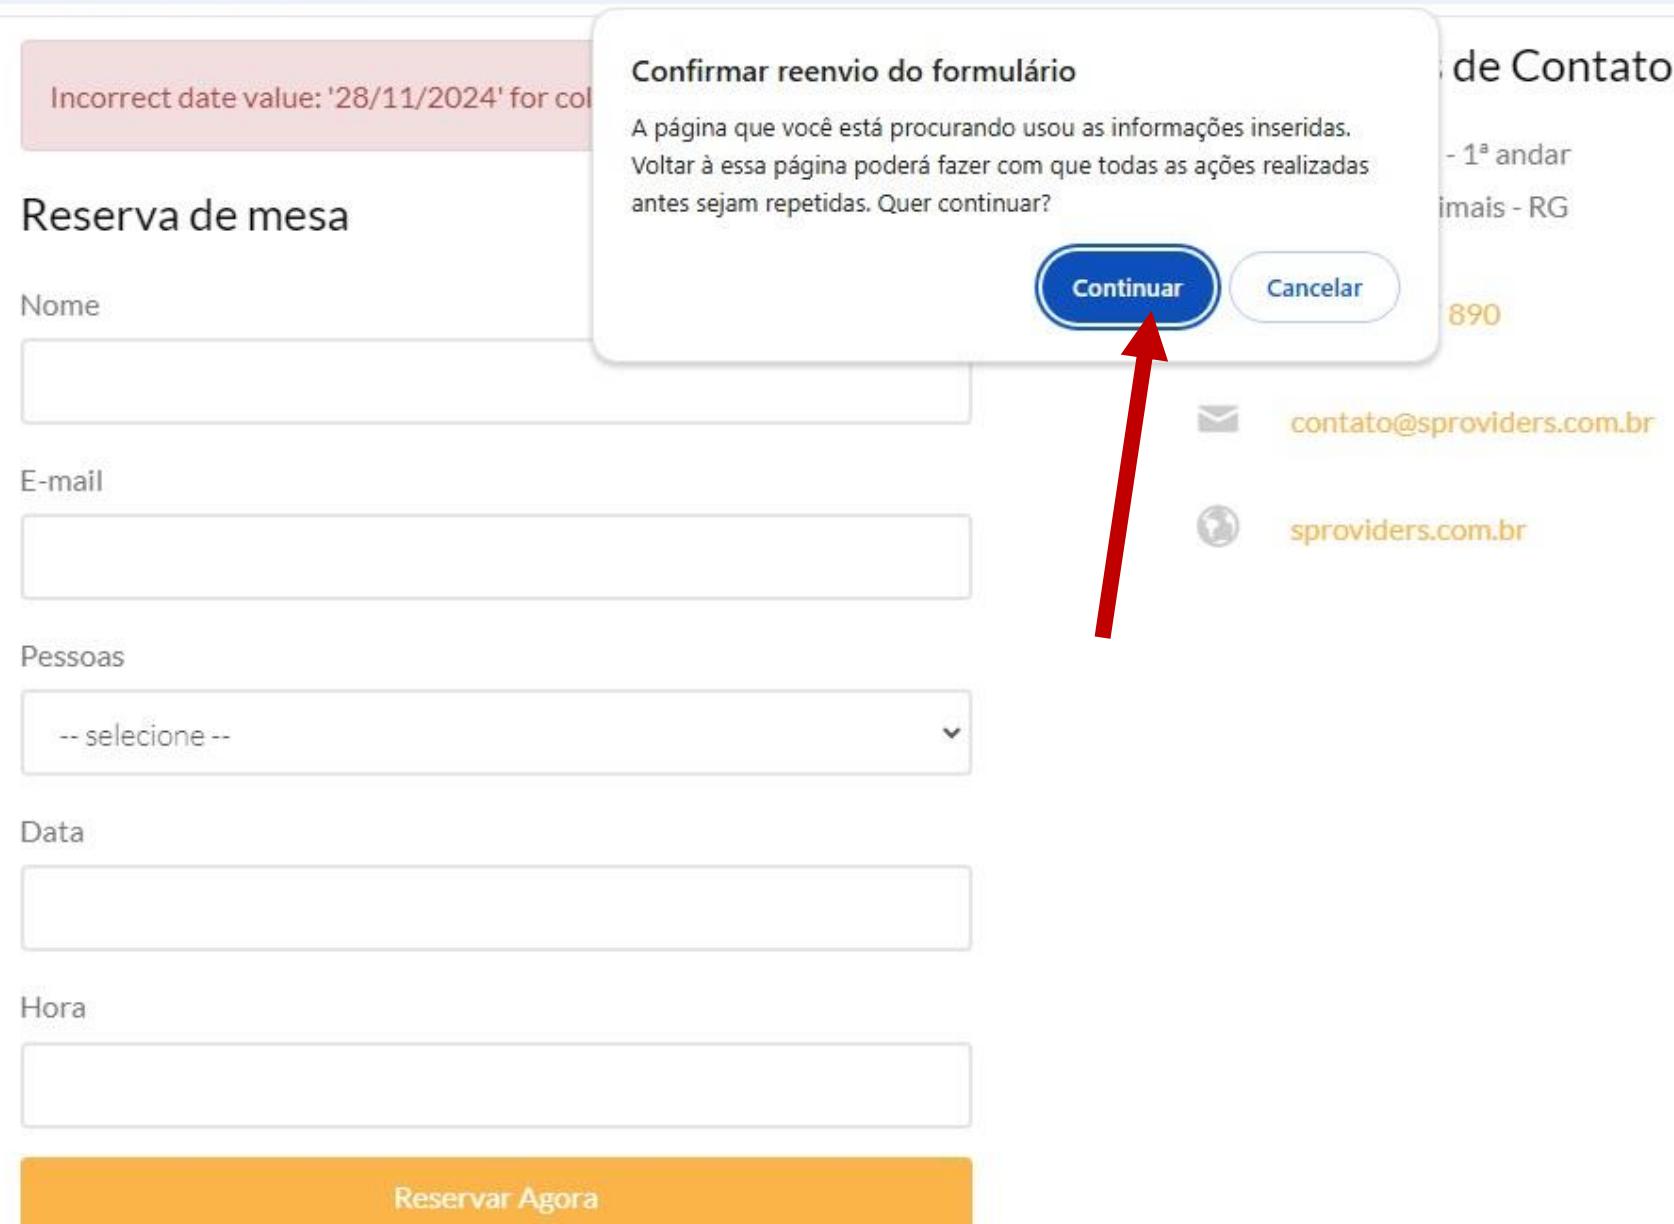

Reserva realizada com sucesso

Reserva de mesa

Nome

E-mail

Pessoas

Data

Hora

Reservar Agora

Informações de Contato



R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br



MySQL Workbench

Local instance MySQL80 X

File Edit View Query Database Server Tools Scripting Help

SQL File 4*

1 • DESC tb_reservations;

Result Grid

| | Field | Type | Null | Key | Default | Extra |
|---|----------|--------------|------|-----|-------------------|-------------------|
| ▶ | id | int | NO | PRI | NULL | auto_increment |
| | name | varchar(256) | NO | | NULL | |
| | email | varchar(256) | NO | | NULL | |
| | people | int | NO | | NULL | |
| | date | date | NO | | NULL | |
| | time | time | NO | | NULL | |
| | register | timestamp | NO | | CURRENT_TIMESTAMP | DEFAULT_GENERATED |

Result 1 X

Output

Action Output

| # | Time | Action |
|---|----------|----------------------|
| 1 | 19:43:40 | DESC tb_reservations |

Message

7 row(s) returned

Duration / Fetch

0.015 sec / 0.000 sec

Table: tb_reservations

Columns:

| id | int AI PK |
|----------|--------------|
| name | varchar(256) |
| email | varchar(256) |
| people | int |
| date | date |
| time | time |
| register | timestamp |

Object Info Session

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQL File 6* ×

Navigator

SCHEMAS

Filter objects

saboroso

- Tables
 - tb_contacts
 - tb_emails
 - tb_menus
 - tb_reservations
- Columns
 - id
 - name
 - email
 - people
 - date
 - time
 - register
- Indexes
- Foreign Keys
- Triggers
- tb_users

Administration Schemas

tb_reservations 3 ×

Information

Output

Action Output

Table: tb_reservations

Columns:

| | Type | Properties |
|-----------|--------------|------------|
| id | int | AI PK |
| name | varchar(256) | |
| email | varchar(256) | |
| people | int | |
| date | date | |
| time | time | |
| register | timestamp | |

SQL File 6* ×

1 SELECT * FROM tb_reservations

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content: |

| | id | name | email | people | date | time | register |
|---|------|------|----------------|--------|------------|----------|---------------------|
| ▶ | 4 | Fred | fred@sp.com.br | 2 | 2024-11-28 | 20:36:00 | 2024-10-28 20:37:41 |
| * | NULL | NULL | NULL | NULL | NULL | NULL | NULL |

Result Grid

Form Editor

Apply Revert

Time Action

1 20:38:04 SELECT * FROM tb_reservations LIMIT 0, 1000

Message

1 row(s) returned

Duration / Fetch

0.000 sec / 0.000 sec

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS index.js JS reservations.js ✎ header-index.ejs ↗ reservations.ejs

SABOROSO

- > bin
- ✓ inc
 - JS db.js
 - JS menus.js
 - JS reservations.js
- > node_modules
- > public
- ✓ routes
 - JS index.js
 - JS users.js
- ✓ views
 - ✓ inc
 - ✓ content
 - ↳ contacts.ejs
 - ↳ facts.ejs
 - ↳ menus.ejs
 - ↳ reservations.ejs
 - ↳ services.ejs
 - ↳ subscribe.ejs
 - ↳ text.ejs
- > OUTLINE
- > TIMELINE

```
inc > JS reservations.js > [e] <unknown> > 📁 render > 💾 body
1   var conn = require('../db')
2
3   module.exports = {
4
5       render(req, res, error, success) {
6
7           res.render('reservations', {
8               title: 'Reservas - Restaurante Saboroso!',
9               background: "images/img_bg_2.jpg",
10              h1: "Reserve uma Mesa!",
11              body: req.body,
12              error,
13              success
14          });
15      },
16
17      save(fields) {
18
19          return new Promise((resolve, reject) => {
20
21              let date = fields.date.split('/');
22
23              fields.date = `${date[2]}-${date[1]}-${date[0]}`;
24
25              conn.query(`
INSERT INTO tb_reservations (name, email, people, date, time)
`)
```

Ln 11, Col 13 (4 selected) Spaces: 4 UTF-8 CRLF { JavaScript Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The top bar includes standard menu items: File, Edit, Selection, View, Go, etc., followed by navigation icons (back, forward, search). The title bar shows the workspace name "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the folder "SABOROSO". The main editor area shows an EJS file named "reservations.ejs". The code is a template for a reservation form, featuring a conditional block and several input fields. A red arrow points from the "reservations.ejs" entry in the Explorer to the corresponding file in the editor. Another red arrow points to the line of code containing the value attribute of an input field.

```
<% if (typeof success === "string") {%
  <div class="alert alert-success">
    <%= success %>
<% } %>


<h3>Reserva de mesa</h3>
<form action="/reservations" method="post">
  <div class="row form-group">
    <div class="col-md-12">
      <label for="inputName">Nome</label>
      <input type="text" id="inputName" name="name" class="form-control"
        value="<%= body.name %>">
    </div>
  </div>
  <div class="row form-group">
    <div class="col-md-12">
      <label for="inputEmail">E-mail</label>
      <input type="email" id="inputEmail" name="email"
        class="form-control">
    </div>
  </div>
  <div class="row form-group">
    <div class="col-md-12">
      <label for="inputPeople">Pessoas</label>
      <select id="inputPeople" name="people" class="form-control">
```

A screenshot of a code editor interface, likely Visual Studio Code, showing an EJS template file named `reservations.ejs`. The file contains HTML-like code with embedded JavaScript logic using the `<% %>` syntax.

```
<ol-md-6.animate-box> <? > <? > <? > <? > <? > form > <? div.row.form-group> <? div.col-md-12> <? input#inputEmail.form-control>
12 <% if (typeof success === "string") {%
13   <div class="alert alert-success">
14     <%= success %>
15   </div>
16 <% } %>
17
18 <h3>Reserva de mesa</h3>
19 <form action="/reservations" method="post">
20   <div class="row form-group">
21     <div class="col-md-12">
22       <label for="inputName">Nome</label>
23       <input type="text" id="inputName" name="name" class="form-control" value="<%= body.name %>">
24     </div>
25   </div>
26   <div class="row form-group">
27     <div class="col-md-12">
28       <label for="inputEmail">E-mail</label>
29       <input type="email" id="inputEmail" name="email" class="form-control" value="<%= body.email %>">
30     </div>
31   </div>
32   <div class="row form-group">
33     <div class="col-md-12">
34       <label for="inputPeople">Pessoas</label>
35       <select id="inputPeople" name="people" class="form-control">
```

The line of code highlighted by a red arrow is:

```
value="<%= body.email %>">
```

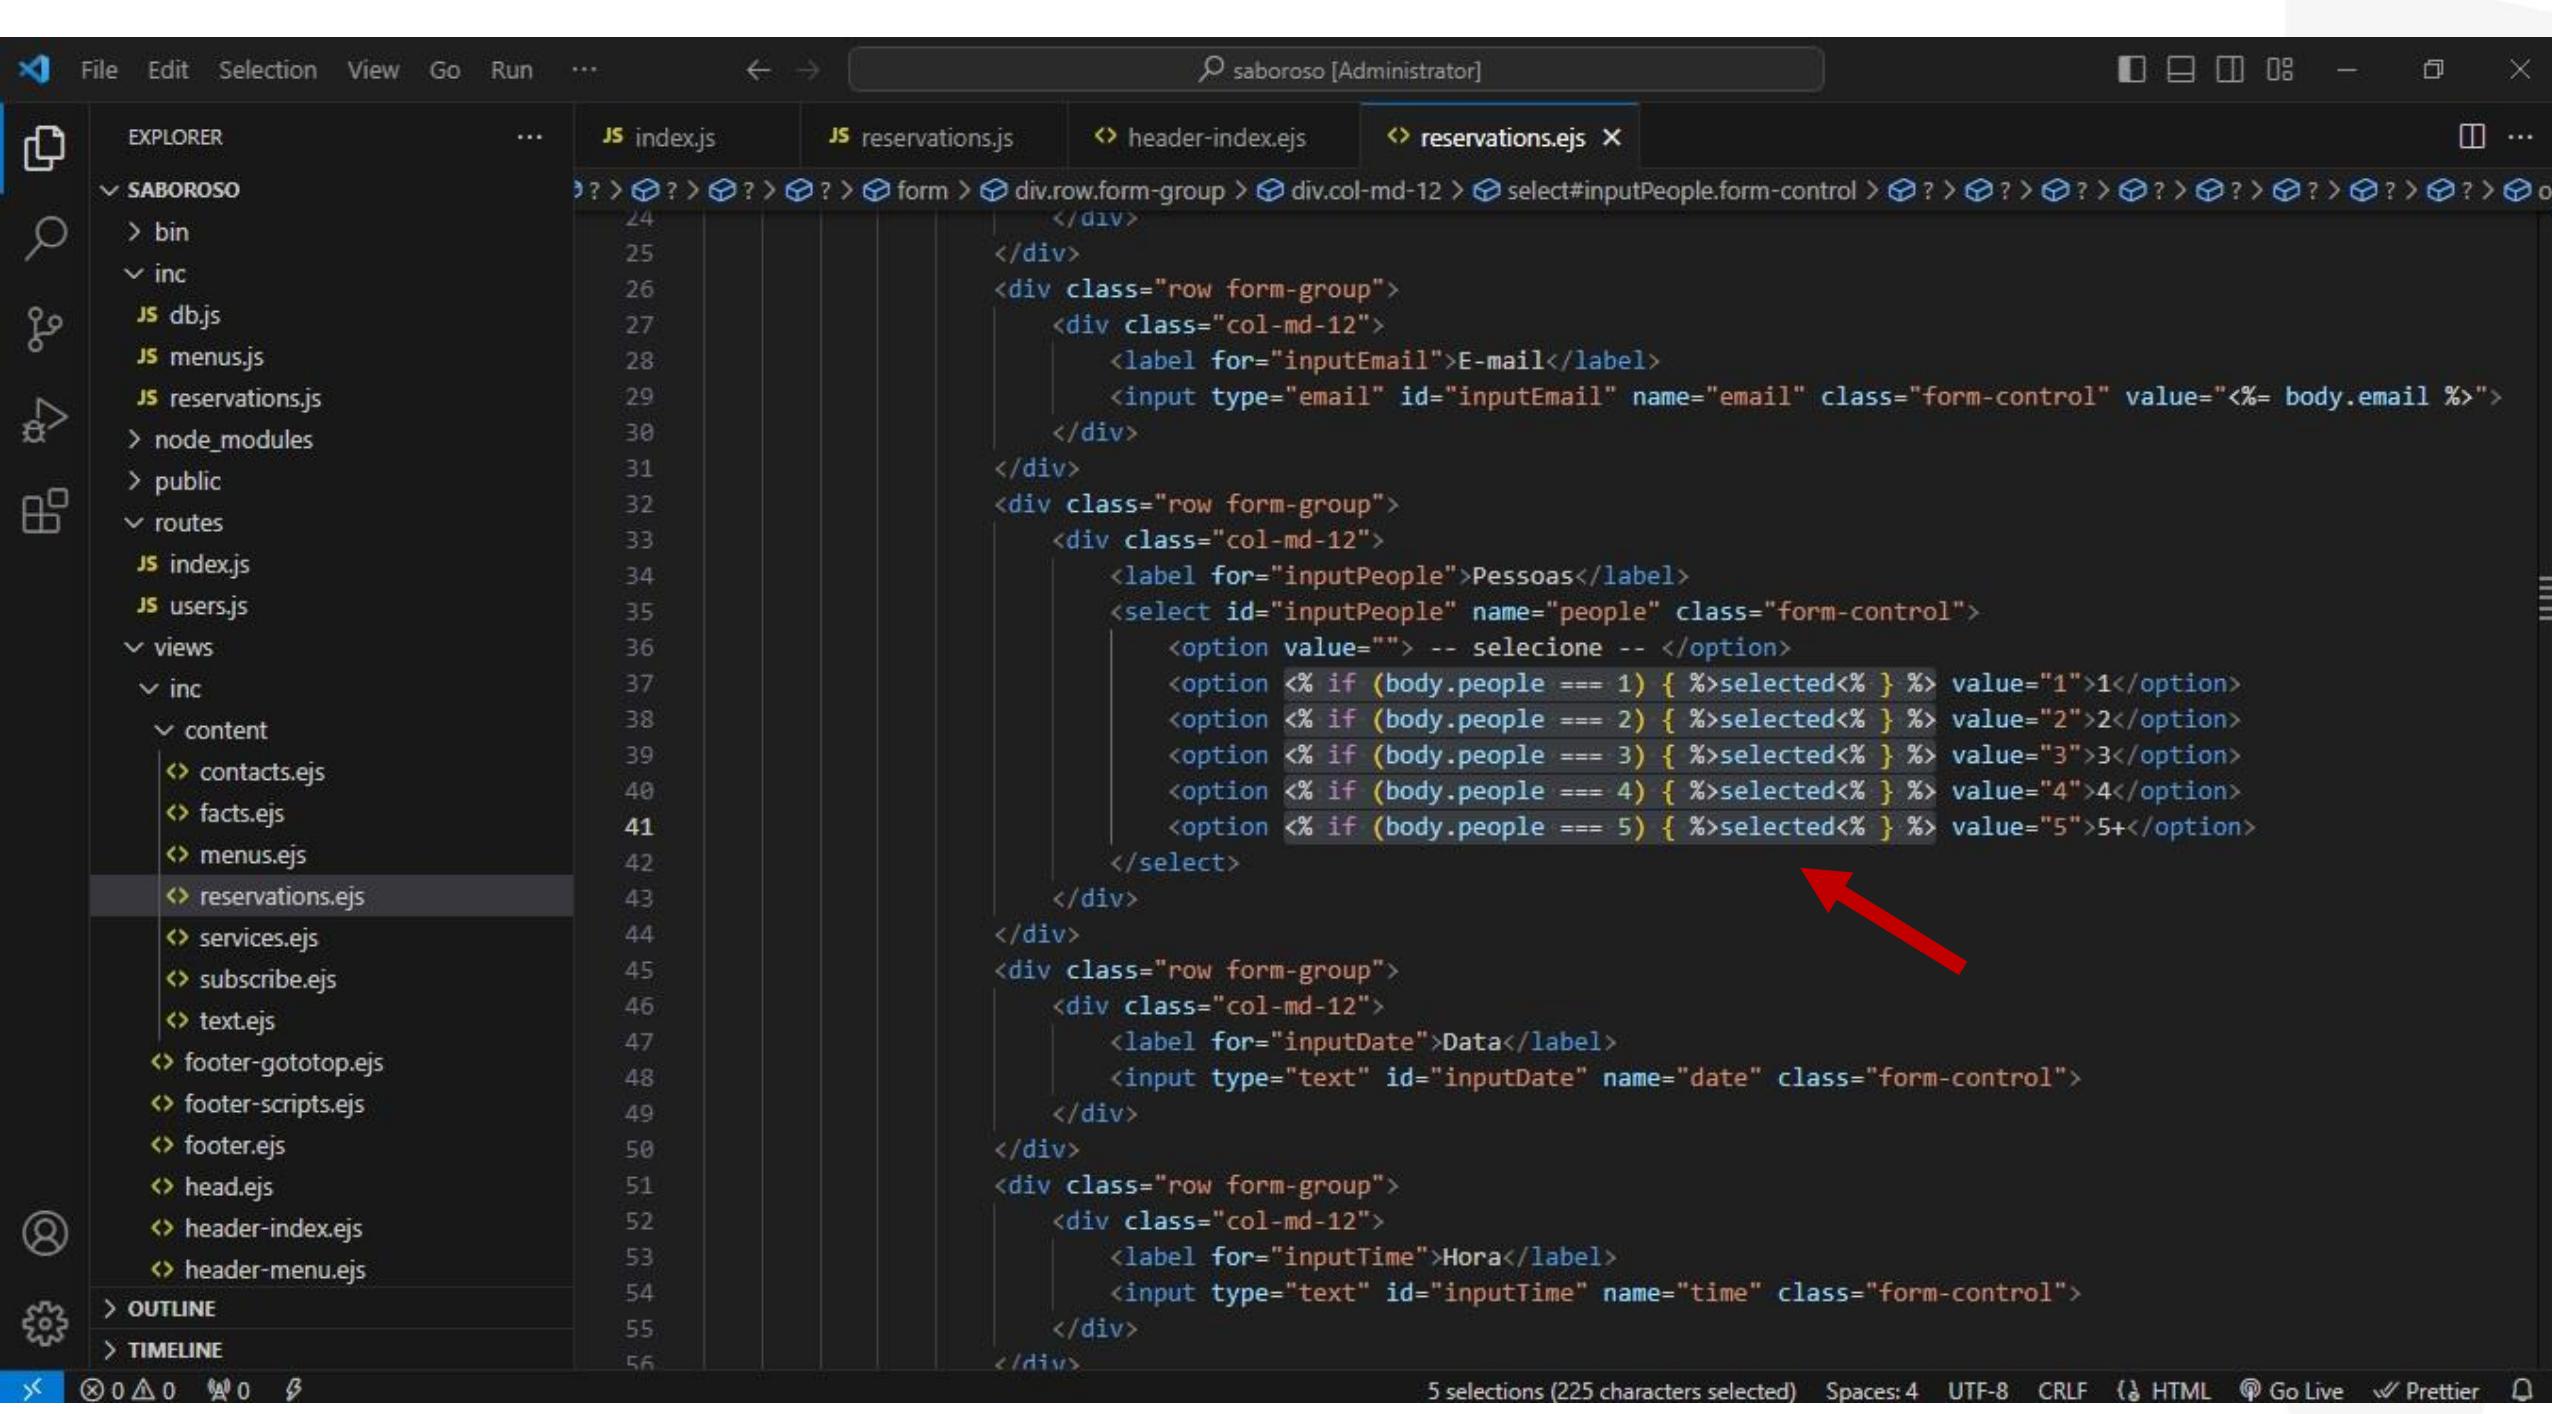

The screenshot shows a code editor interface with a dark theme. The top navigation bar includes File, Edit, Selection, View, Go, Run, and a search bar labeled 'saboroso [Administrator]'. The left sidebar contains icons for Explorer, Search, Find, and Outline/Timeline.

The Explorer sidebar shows a project structure under 'SABOROSO':

- bin
- inc
 - db.js
 - menus.js
 - reservations.js
- node_modules
- public
- routes
 - index.js
 - users.js
- views
 - inc
 - content
 - contacts.ejs
 - facts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs

```
  </div>
  </div>
<div class="row form-group">
  <div class="col-md-12">
    <label for="inputPeople">Pessoas</label>
    <select id="inputPeople" name="people" class="form-control">
      <option value=""> -- selecione -- </option>
      <option <% if (body.people === 1) { %>selected<% } %> value="1">1</option>
      <option <% if (body.people === 2) { %>selected<% } %> value="2">2</option>
      <option <% if (body.people === 3) { %>selected<% } %> value="3">3</option>
      <option <% if (body.people === 4) { %>selected<% } %> value="4">4</option>
      <option <% if (body.people === 5) { %>selected<% } %> value="5">5+</option>
    </select>
  </div>
</div>
<div class="row form-group">
  <div class="col-md-12">
    <label for="inputDate">Data</label>
    <input type="text" id="inputDate" name="date" class="form-control" value="<%= body.date %>">
  </div>
</div>
<div class="row form-group">
  <div class="col-md-12">
    <label for="inputTime">Hora</label>
    <input type="text" id="inputTime" name="time" class="form-control" value="<%= body.time %>">
  </div>
</div>
<div class="row form-group">
  <div class="col-md-12">
    <input type="submit" class="btn btn-primary btn-block" value="Reservar Agora">
  </div>
</div>
```

Reserva de mesa

Nome

E-mail

Pessoas

-- selecione --

Data

Hora

Informações de Contato



R. 1234, 56 - 1^a andar
Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br

Reserva de mesa

Nome

E-mail

Pessoas

Data

Hora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br



Digite o e-mail

Reserva de mesa

Nome

Cecília

E-mail

Pessoas

-- selecione --

Data

Hora

Reservar Agora

Informações de Contato



R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br



Digite o e-mail

Reserva de mesa

Nome

Cecília

E-mail

cecilia@sp.com.br

Pessoas

-- selecione --

Data

Hora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br



Selezione o número de pessoas



Reserva de mesa

Nome

Cecília

E-mail

cecilia@sp.com.br

Pessoas

-- selecione --

Data

Hora

Reservar Agora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br



Selezione o número de pessoas

Reserva de mesa

Nome

Cecília

E-mail

cecilia@sp.com.br

Pessoas

1

Data

Hora

Reservar Agora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br



Selecione a data



Reserva de mesa

Nome

Cecília

E-mail

cecilia@sp.com.br

Pessoas

-- selecione --

Data

Hora

Reservar Agora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimaís - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Toolbars:** Standard icons for back, forward, search, and file operations.
- Left Sidebar (EXPLORER):**
 - SABOROSO folder
 - bin
 - inc
 - db.js
 - menus.js
 - reservations.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - content
 - contacts.ejs
 - facts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-gototop.ejs
 - footer-scripts.ejs
 - footer.ejs
 - head.ejs
 - header-index.ejs
 - header-menu.ejs
 - OUTLINE
 - TIMELINE
- Top Tabs:** index.js, reservations.js, header-index.ejs, reservations.ejs (active tab).
- Editor Area:** Displays the contents of the 'reservations.ejs' file. The code is a template for a form with fields for email, number of people, date, and time. A red arrow points to the closing tag of the people select dropdown. Another red arrow points to the 'reservations.ejs' file name in the sidebar.
- Bottom Status Bar:** Ln 37, Col 60 (3 selected) Spaces: 4 UTF-8 CRLF { HTML Go Live Prettier

A screenshot of a code editor interface, likely Visual Studio Code, showing a file named `reservations.ejs`. The code is a template literal (`<% %>`) used for generating HTML. A red arrow points to a syntax error in the code.

```
<div class="col-md-12">
  <label for="inputEmail">E-mail</label>
  <input type="email" id="inputEmail" name="email" class="form-control" value="<%= body.email %>">
</div>
<div class="row form-group">
  <div class="col-md-12">
    <label for="inputPeople">Pessoas</label>
    <select id="inputPeople" name="people" class="form-control">
      <option value="" -- selecione -- </option>
      <% if (body.people == 1) { %>selected<% } %> value="1">1</option>
      <% if (body.people == 2) { %>selected<% } %> value="2">2</option>
      <% if (body.people == 3) { %>selected<% } %> value="3">3</option>
      <% if (body.people == 4) { %>selected<% } %> value="4">4</option>
      <% if (body.people == 5) { %>selected<% } %> value="5">5+</option>
    </select>
  </div>
<div class="row form-group">
  <div class="col-md-12">
    <label for="inputDate">Data</label>
    <input type="text" id="inputDate" name="date" class="form-control" value="<%= body.date %>">
  </div>
<div class="row form-group">
  <div class="col-md-12">
    <label for="inputTime">Hora</label>
    <input type="text" id="inputTime" name="time" class="form-control" value="<%= body.time %>">
  </div>
<div class="row form-group">
```

The code editor's status bar at the bottom shows:

- 5 selections (10 characters selected)
- Spaces: 4
- UTF-8
- CRLF
- { HTML
- Go Live
- Prettier

Selezione a data

Reserva de mesa

Nome

Cecília

E-mail

cecilia@sp.com.br

Pessoas

1

Data

Hora

Reservar Agora

Confirmar reenvio do formulário

A página que você está procurando usou as informações inseridas.
Voltar à essa página poderá fazer com que todas as ações realizadas
antes sejam repetidas. Quer continuar?

Continuar

Cancelar

de Contato

- 1^a andar

Imais - RG

890



contato@sproviders.com.br



sproviders.com.br



Selecione a data



Reserva de mesa

Nome

Cecília

E-mail

cecilia@sp.com.br

Pessoas

1

Data

Hora

Reservar Agora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimaí - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br



Selecione a data

Reserva de mesa

Nome

Cecília

E-mail

cecilia@sp.com.br

Pessoas

1

Data

28/11/2024

Hora

21:02

Reservar Agora

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimaís - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br



The screenshot shows a Microsoft Visual Studio Code (VS Code) interface. The title bar includes 'File', 'Edit', 'Selection', 'View', 'Go', and a search bar with the text 'saboroso [Administrator]'. The top right corner has window control buttons. The left sidebar, titled 'EXPLORER', displays a file tree for a project named 'SABOROSO'. The 'routes' folder contains several files: 'bin', 'inc', 'db.js', 'menus.js', 'reservations.js', 'node_modules', 'public', and 'views'. Within 'views', there are 'inc' and 'content' folders containing 'contacts.ejs', 'facts.ejs', 'menus.ejs', 'reservations.ejs', 'services.ejs', 'subscribe.ejs', and 'text.ejs'. The 'index.js' file is selected in the Explorer, indicated by a red arrow. The main editor area shows the 'index.js' code:

```
routes > JS index.js > router.post('/reservations') callback > then() callback
54 if (!req.body.name) {
55   reservations.render(req, res, "Digite o nome" );
56 } else if (!req.body.email) {
57   reservations.render(req, res, "Digite o e-mail" );
58 } else if (!req.body.people) {
59   reservations.render(req, res, "Selecione o número de pessoas" );
60 } else if (!req.body.date) {
61   reservations.render(req, res, "Selecione a data" );
62 } else if (!req.body.time) {
63   reservations.render(req, res, "Selecione a hora" );
64 } else {
65
66   reservations.save(req.body).then(results => {
67     req.body = {};
68     reservations.render(req, res, null, "Reserva realizada com sucesso");
69   }).catch(err => {
70     reservations.render(req, res, err.message);
71   })
72 }
73
74
75
76
77
78 }
```

A red arrow points to the line 'req.body = {};' in the code, which is annotated with a yellow lightbulb icon. The status bar at the bottom shows 'Ln 68, Col 7 (14 selected)' and other settings like 'Spaces: 2', 'UTF-8', 'LF', 'JavaScript', 'Go Live', and 'Prettier'.

Selecione a data

Reserva de mesa

Nome

Cecília

E-mail

cecilia@sp.com.br

Pessoas

1

Data

28/11/2024

Hora

21:02

Informações de Contato

R. 1234, 56 - 1^a andar

Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br



sproviders.com.br

Reservar Agora



Reserva realizada com sucesso



Reserva de mesa

Nome

E-mail

Pessoas

Data

Hora

Reservar Agora

Informações de Contato



R. 1234, 56 - 1^a andar
Centro, Odimais - RG



+1 234 567 890



contato@sproviders.com.br




sproviders.com.br

UC: Projetos

Assunto:

Projeto Restaurante – BackEnd

**11 – Enviando Contato com Método POST
para o MySQL**

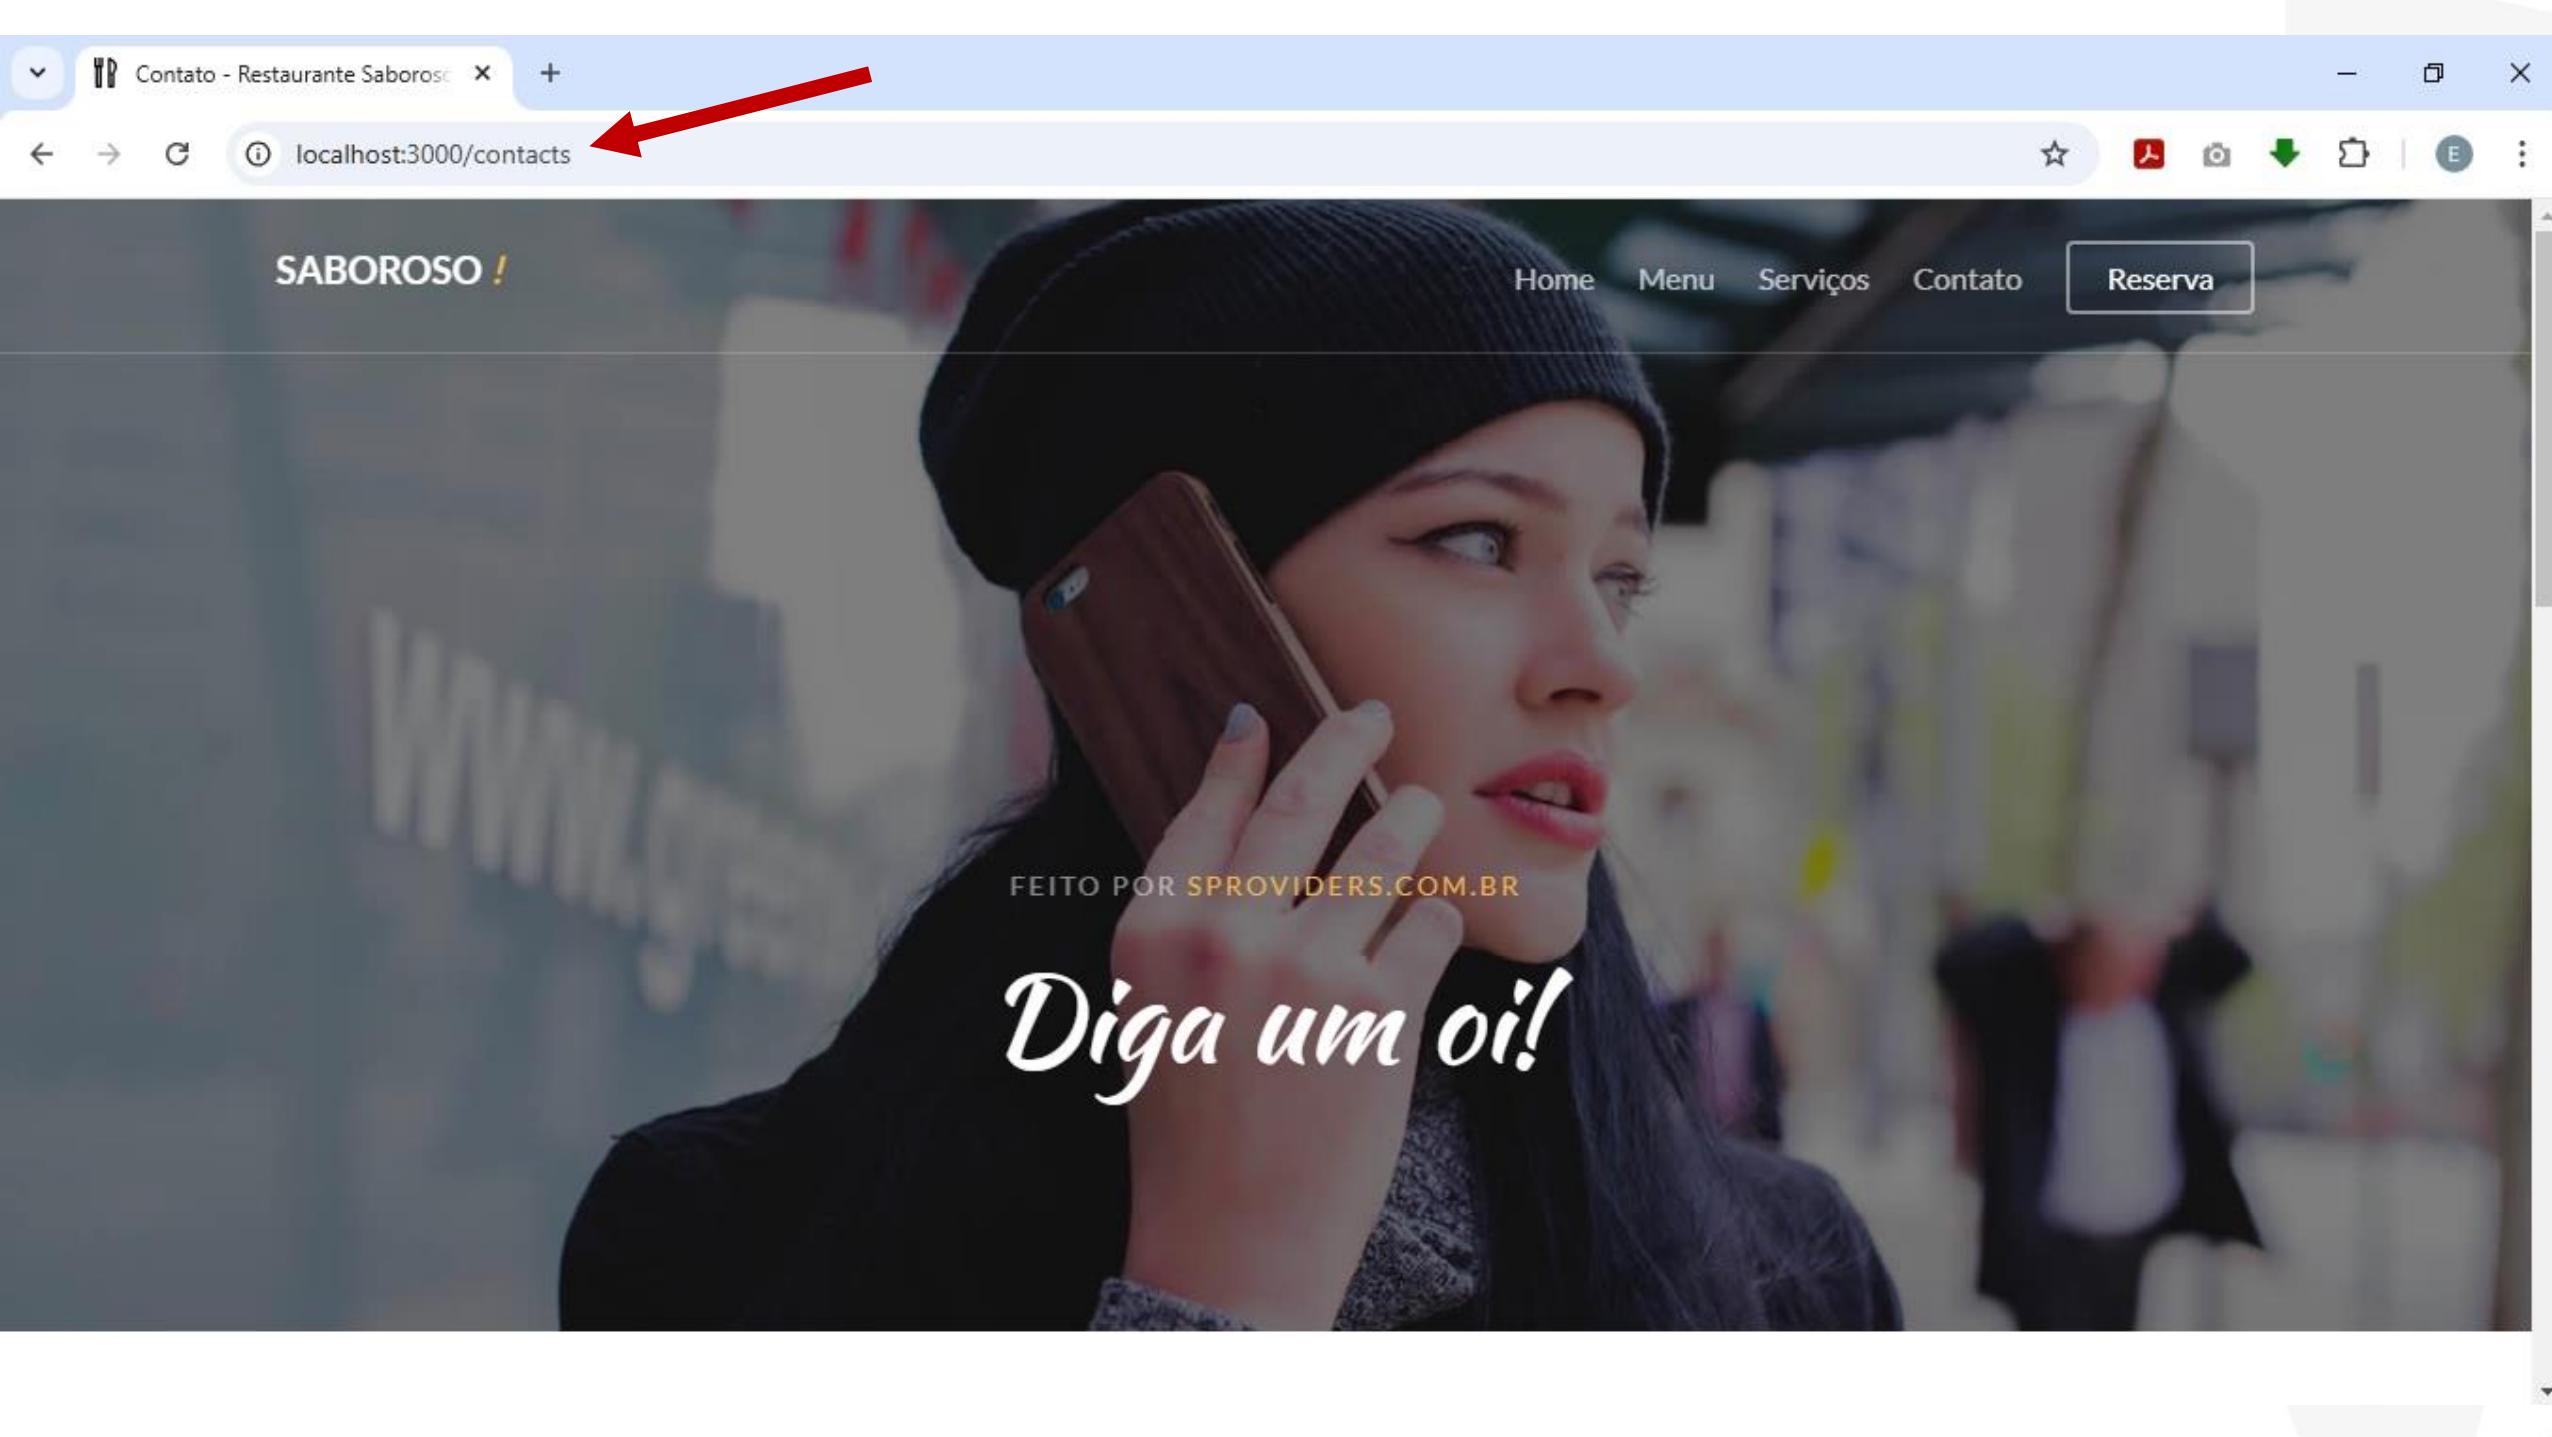

Contato - Restaurante Saboroso

localhost:3000/contacts

SABOROSO!

Home Menu Serviços Contato

Reserva

FEITO POR SPROVIDERS.COM.BR

Diga um oi!

Entre em Contato

Seu nomeSeu endereço de e-mailEscreve alguma coisaEnviar

Informações de Contato



Avenida, R. 1234, 56 - 1^a andar - Centro, Odimais -
RG, 00000-000



(11) 98765-4321




contato@sproviders.com.br



sproviders.com.br



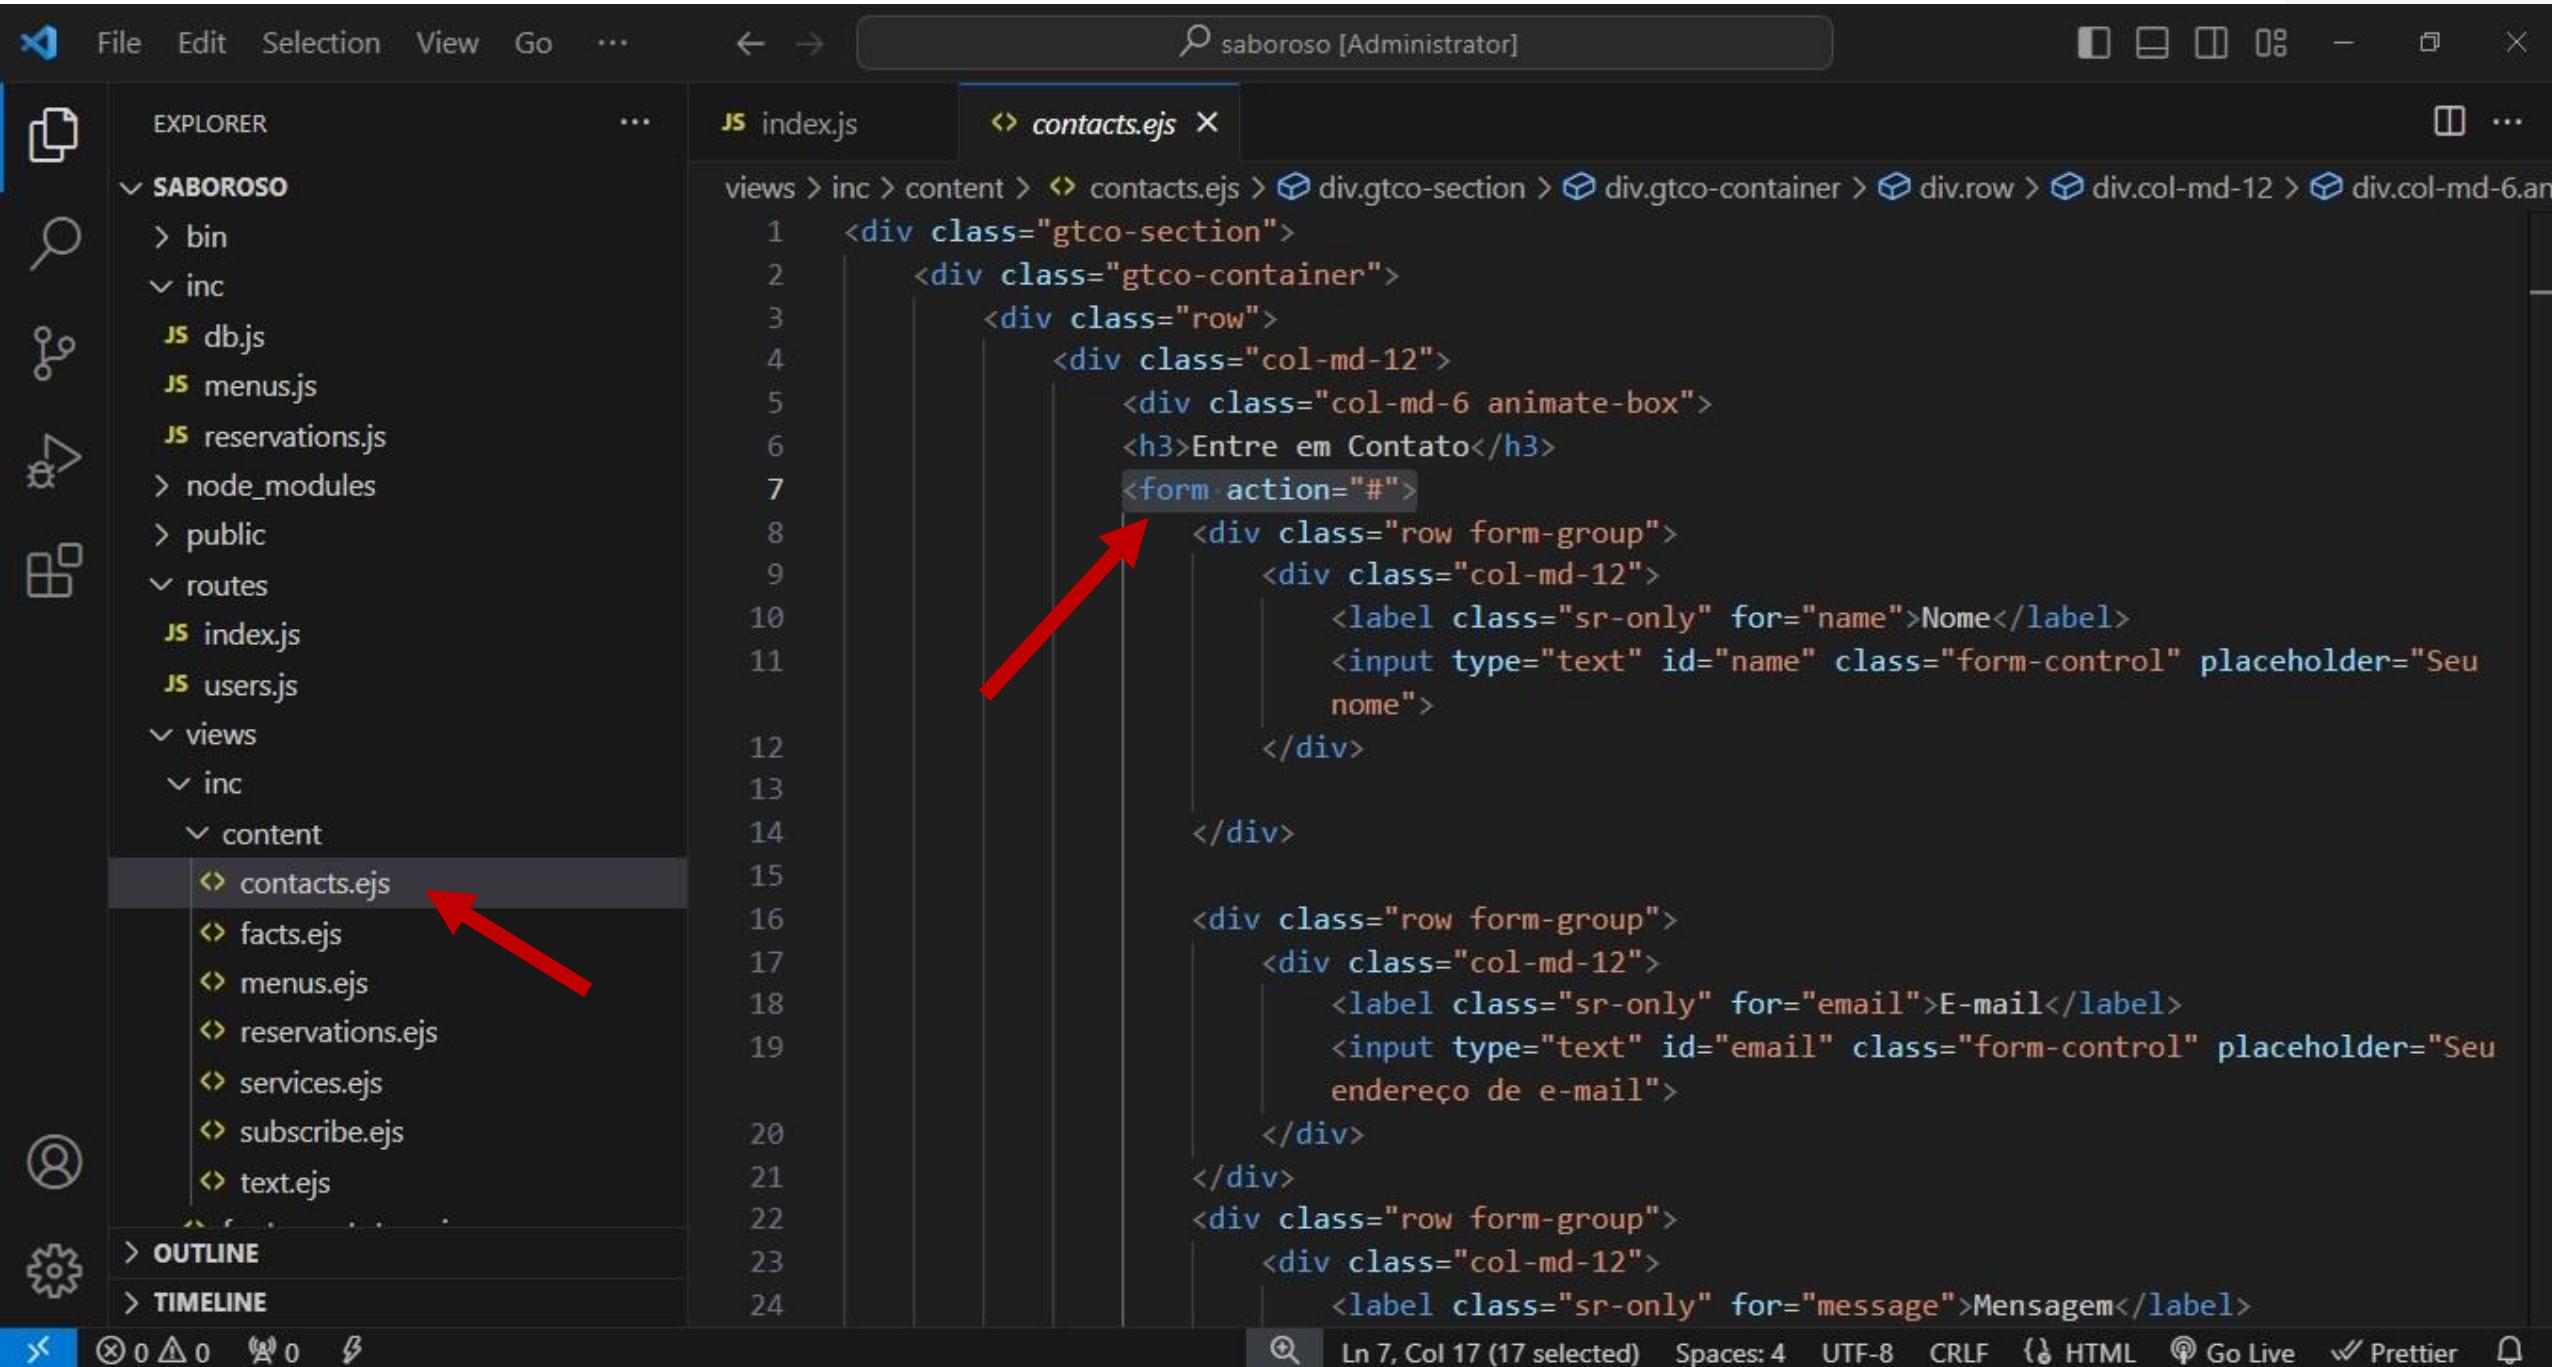

A screenshot of a code editor interface, likely Visual Studio Code, showing an EJS template file named `contacts.ejs`. The file contains HTML-like code with some server-side logic. A red arrow points to the opening tag of a `form` element.

```
inc > content > contacts.ejs > div.gtco-section > div.gtco-container > div.row > div.col-md-12 > div.col-md-6.animate-box
1   <div class="gtco-section">
2     <div class="gtco-container">
3       <div class="row">
4         <div class="col-md-12">
5           <div class="col-md-6 animate-box">
6             <h3>Entre em Contato</h3>
7             <form action="/contacts" method="post">
8               <div class="row form-group">
9                 <div class="col-md-12">
10                <label class="sr-only" for="name">Nome</label>
11                <input type="text" id="name" class="form-control" placeholder="Seu nome">
12              </div>
13            </div>
14
15
16            <div class="row form-group">
17              <div class="col-md-12">
18                <label class="sr-only" for="email">E-mail</label>
19                <input type="text" id="email" class="form-control" placeholder="Endereço de e-mail">
20              </div>
21            </div>
22
23            <div class="row form-group">
24              <div class="col-md-12">
25                <label class="sr-only" for="message">Mensagem</label>
```

The code is part of a contact form. It includes fields for name, email, and message, each with its own label and input field. The form is submitted to the endpoint `/contacts` using the `POST` method.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the window is titled "saboroso [Administrator]". The left sidebar (Explorer) shows a project structure under the folder "SABOROSO". The main editor area displays an EJS template file named "reservations.ejs". The code contains logic to handle errors and success messages. Two specific sections of the code are highlighted with red arrows pointing to them from the right side of the screen:

```
<% if (typeof error === "string") { %>
<div class="alert alert-danger">
<%= error %>
</div>
<% } %>

<% if (typeof success === "string") { %>
<div class="alert alert-success">
<%= success %>
</div>
<% } %>
```

The first highlighted section handles errors by displaying them in a danger-colored alert box. The second highlighted section handles success messages by displaying them in a success-colored alert box.

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS index.js contacts.ejs reservations.ejs alerts.ejs X

SABOROSO views > inc > content > alerts.ejs

inc db.js menus.js reservations.js node_modules public routes index.js users.js views inc content alerts.ejs contacts.ejs facts.ejs menus.ejs reservations.ejs services.ejs subscribe.ejs text.ejs footer-aototon.ejs

OUTLINE

TIMELINE

0 △ 0 ⌂ 0 ⌂ 0 🔍 Ln 1, Col 1 Spaces: 4 CRLF { } HTML Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS index.js contacts.ejs reservations.ejs alerts.ejs

SABOROSO

- inc
 - db.js
 - menus.js
 - reservations.js
- node_modules
- public
- routes
 - index.js
 - users.js
- views
 - inc
 - content
 - alerts.ejs
 - contacts.ejs
 - facts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - footer-aototon.ejs
- OUTLINE
- TIMELINE

views > inc > content > reservations.ejs

```
<div class="gtco-section" style="padding-bottom: 4em; >
  <div class="gtco-container">
    <div class="row">
      <div class="col-md-12">
        <div class="col-md-6 animate-box">
          <% if (typeof error === "string") {%
            <div class="alert alert-danger">
              <%= error %>
            </div>
          <% } %>
          <% if (typeof success === "string") {%
            <div class="alert alert-success">
              <%= success %>
            </div>
          <% } %>
        <h3>Reserva de mesa</h3>
        <form action="/reservations" method="post">
          <div class="row form-group">
            <div class="col-md-12">
              <label for="inputName">Nome</label>
              <input type="text" id="inputName" name="name" class="form-control" value="<%= body.name %>">
            </div>
          </div>
        </form>
      </div>
    </div>
  </div>
</div>
```

Ln 6, Col 1 (433 selected) Spaces: 4 UTF-8 CRLF { HTML Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS index.js contacts.ejs reservations.ejs alerts.ejs

SABOROSO

- inc
 - JS db.js
 - JS menus.js
 - JS reservations.js
- node_modules
- public
- routes
 - JS index.js
 - JS users.js
- views
 - inc
 - content
 - JS alerts.ejs
 - JS contacts.ejs
 - JS facts.ejs
 - JS menus.ejs
 - JS reservations.ejs
 - JS services.ejs
 - JS subscribe.ejs
 - JS text.ejs
 - JS footer-aototon.ejs
 - OUTLINE
 - TIMELINE

> content > reservations.ejs > div.gtco-section > div.gtco-container > div.row > div.col-md-12 > div.col-md-6.animate-box

```
<div class="gtco-section" style="padding-bottom: 4em; >
  <div class="gtco-container">
    <div class="row">
      <div class="col-md-12">
        <div class="col-md-6 animate-box">
          <h3>Reserva de mesa</h3>
          <form action="/reservations" method="post">
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputName">Nome</label>
                <input type="text" id="inputName" name="name" class="form-control" value="<%= body.name %>">
              </div>
            </div>
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputEmail">E-mail</label>
                <input type="email" id="inputEmail" name="email" class="form-control" value="<%= body.email %>">
              </div>
            </div>
            <div class="row form-group">
              <div class="col-md-12">
                <label for="inputPeople">Pessoas</label>
```

Ln 6, Col 1 Spaces: 4 UTF-8 CRLF { HTML ⚡ Go Live ✓ Prettier

A screenshot of the Visual Studio Code interface. The Explorer sidebar on the left shows a file tree for a project named 'SABOROSO'. The 'views' folder contains 'inc', 'content', and 'routes' subfolders, along with 'index.js', 'users.js', and 'alerts.ejs'. The 'content' folder has subfolders 'facts' and 'menu'. The 'inc' folder contains 'db.js', 'menus.js', and 'reservations.js'. The 'routes' folder contains 'index.js' and 'users.js'. The 'views' folder also contains 'index.js', 'contacts.ejs', 'reservations.ejs', and 'alerts.ejs'. The 'alerts.ejs' file is currently open in the main editor area. The status bar at the bottom shows the file path 'views > inc > content > alerts.ejs', line 11, column 12, and other details like 'Spaces: 4', 'UTF-8', and 'Prettier' status.

File Edit Selection View Go ... ← → 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS index.js contacts.ejs reservations.ejs alerts.ejs X ⌂ ...

SABOROSO

inc

JS db.js

JS menus.js

JS reservations.js

> node_modules

> public

routes

JS index.js

JS users.js

views

inc

content

JS alerts.ejs

JS contacts.ejs

JS facts.ejs

JS menus.ejs

JS reservations.ejs

JS services.ejs

JS subscribe.ejs

JS text.ejs

JS footer-autotop.ejs


> OUTLINE

> TIMELINE

views > inc > content > alerts.ejs

```
1  <% if (typeof error === "string") {%
2      <div class="alert alert-danger">
3          <%= error %>
4      </div>
5  <% } %>
6
7  <% if (typeof success === "string") {%
8      <div class="alert alert-success">
9          <%= success %>
10     </div>
11 <% } %>
```


Ln 11, Col 12 Spaces: 4 UTF-8 CRLF { HTML Go Live Prettier

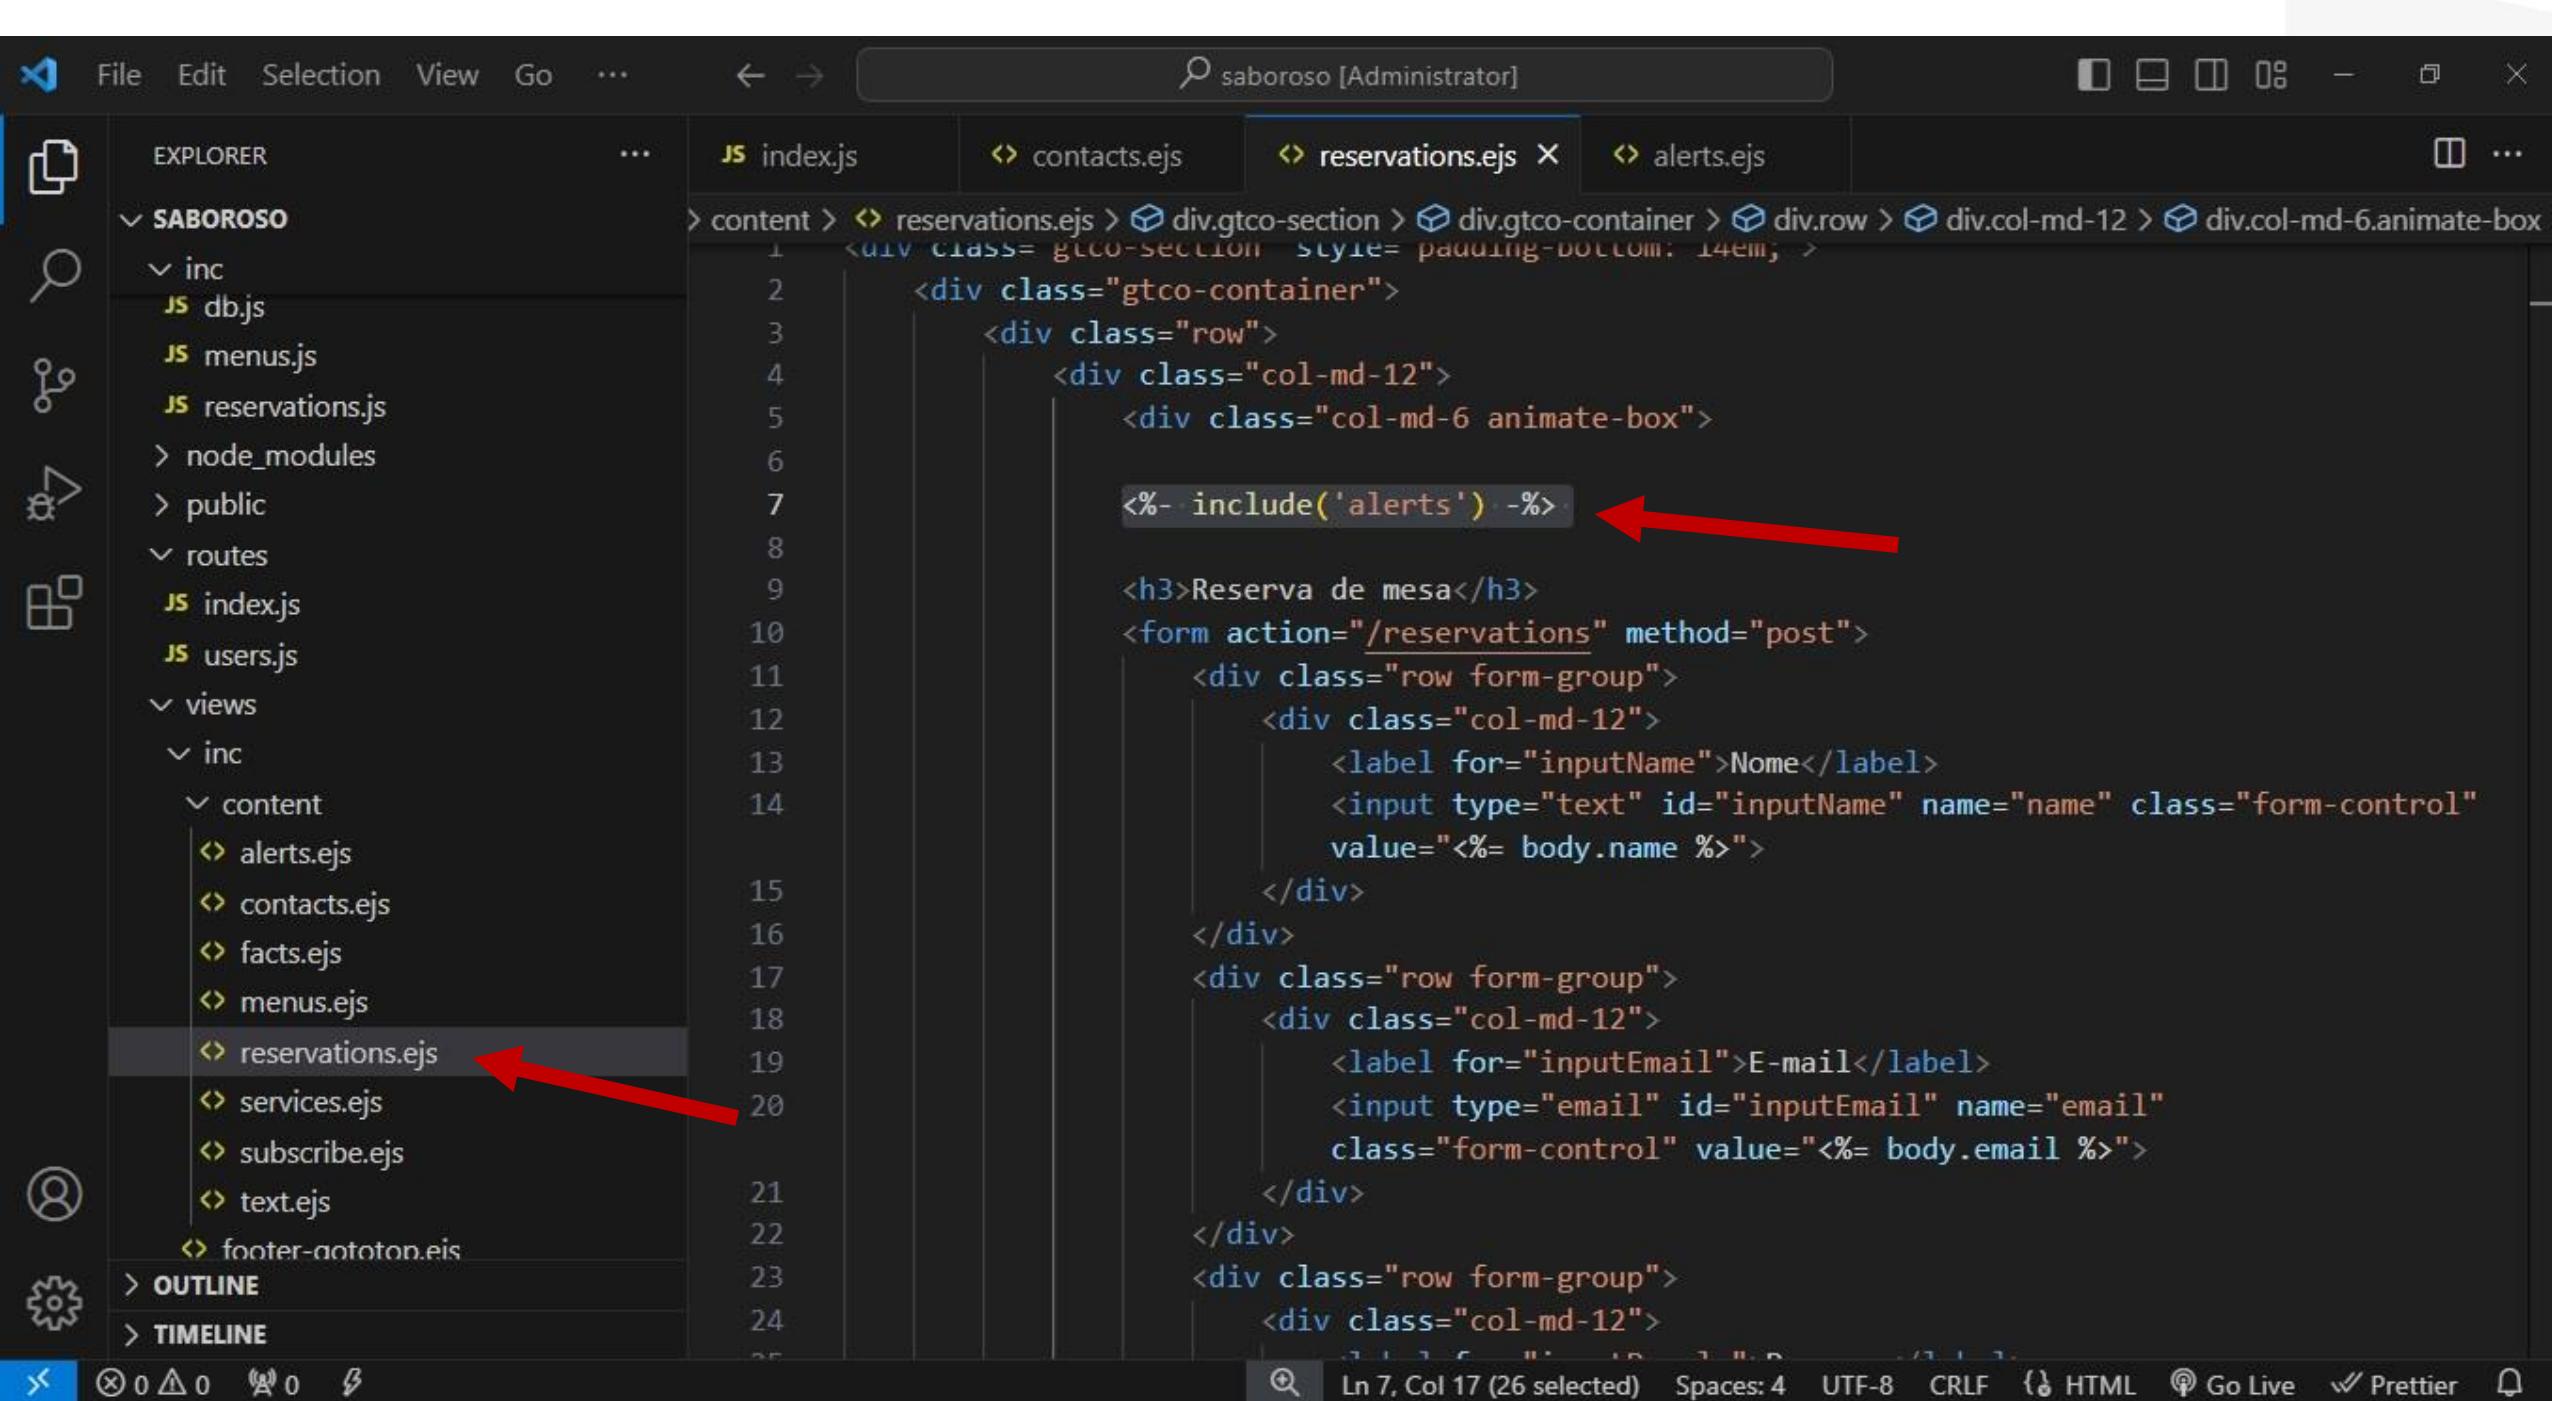

A screenshot of the Visual Studio Code (VS Code) interface. The top bar includes icons for File, Edit, Selection, View, Go, and a search bar containing 'saboroso [Administrator]'. The left sidebar has icons for Explorer, Search, Open, and others. The Explorer pane shows a project structure under 'SABOROSO': inc, db.js, menus.js, reservations.js, node_modules, public, routes, index.js, users.js, views, inc, content, alerts.ejs, contacts.ejs (which is highlighted with a red arrow), facts.ejs, menus.ejs, reservations.ejs, services.ejs, subscribe.ejs, text.ejs, footer-autotop.ejs, OUTLINE, and TIMELINE. The main editor area displays the 'contacts.ejs' file content:

```
inc > content > contacts.ejs > div.gtco-section > div.gtco-container > div.row > div.col-md-12 > div.col-md-6.animate-box
1   <div class="gtco-section">
2     <div class="gtco-container">
3       <div class="row">
4         <div class="col-md-12">
5           <div class="col-md-6 animate-box">
6             <h3>Entre em Contato</h3>
7             <form action="/contacts" method="post">
8               <div class="row form-group">
9                 <div class="col-md-12">
10                <label class="sr-only" for="name">Nome</label>
11                <input type="text" id="name" class="form-control" placeholder="Seu nome">
12              </div>
13            </div>
14
15
16            <div class="row form-group">
17              <div class="col-md-12">
18                <label class="sr-only" for="email">E-mail</label>
19                <input type="text" id="email" class="form-control" placeholder="Endereço de e-mail">
20              </div>
21            </div>
22
23            <div class="row form-group">
24              <div class="col-md-12">
25                <label class="sr-only" for="message">Mensagem</label>
```

The status bar at the bottom shows: Line 5, Column 51, Spaces: 4, UTF-8, CRLF, HTML, Go Live, Prettier.

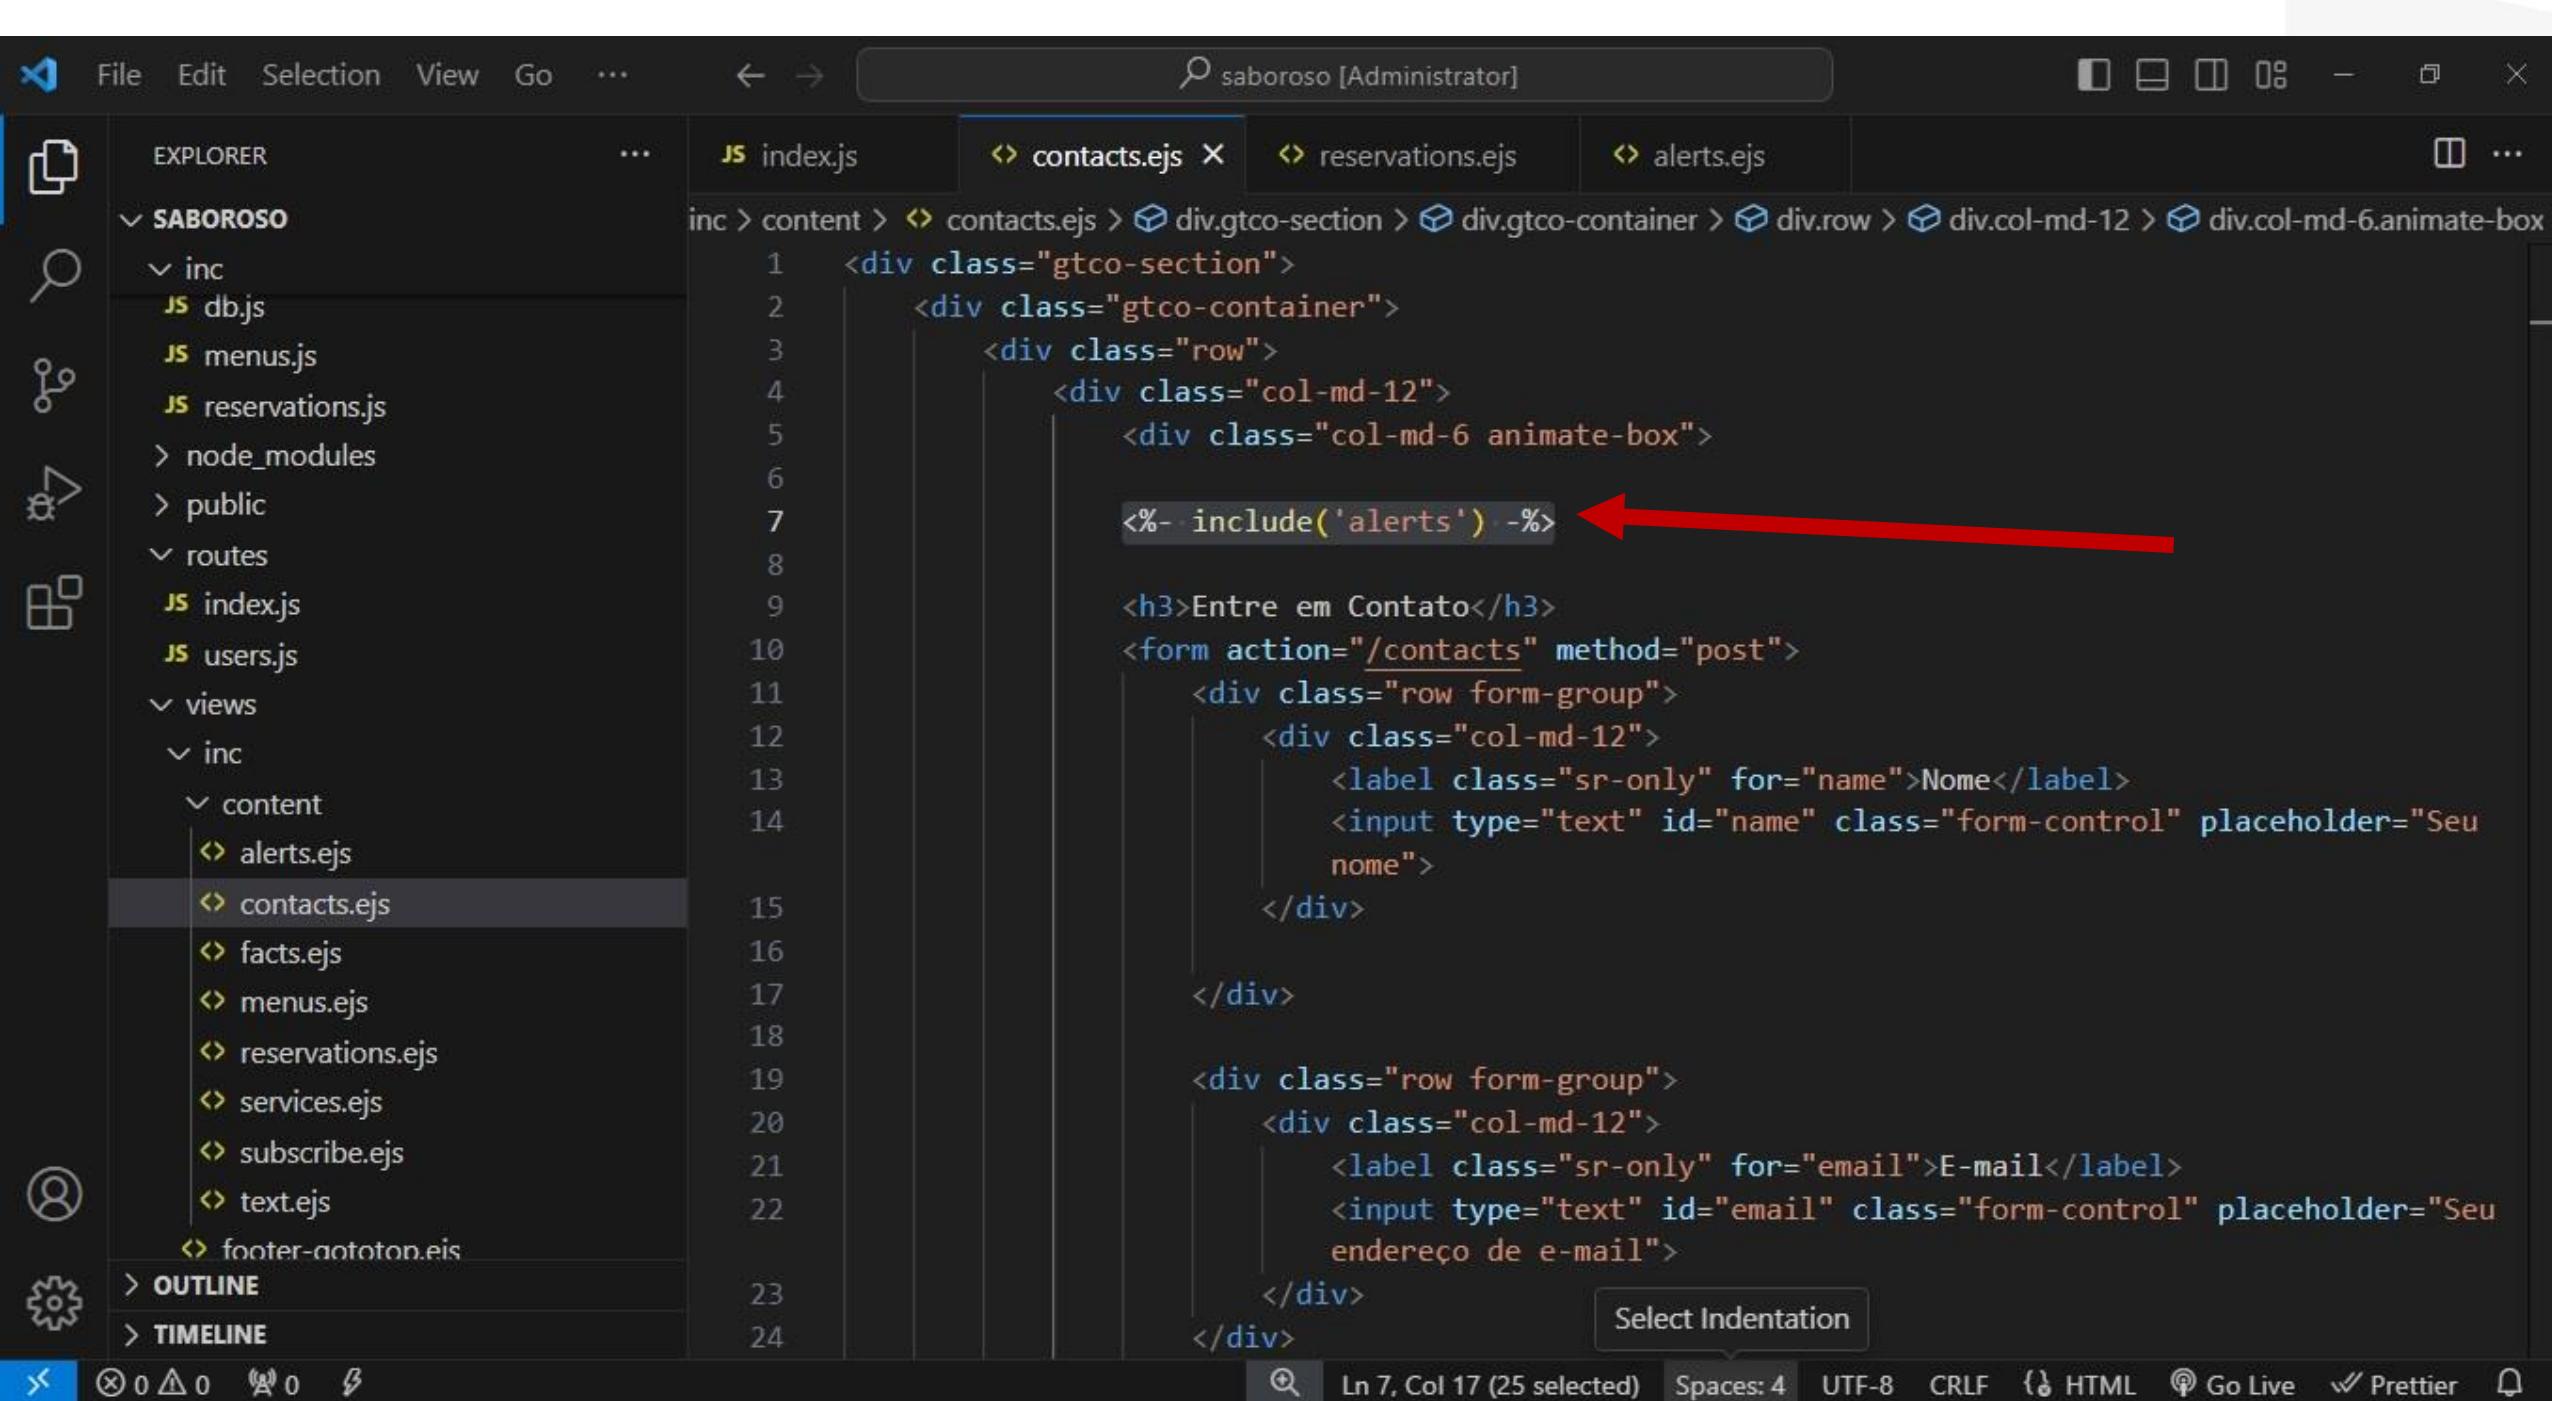

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Run, ...
- Search Bar:** saboroso [Administrator]
- Explorer:** Shows a file tree for a project named "SABOROSO".
 - inc: db.js, menus.js, reservations.js
 - node_modules
 - public
 - routes: index.js, users.js
 - views: inc (content, alerts.ejs, contacts.ejs, facts.ejs, menus.ejs, reservations.ejs, services.ejs, subscribe.ejs, text.ejs), footer-gototop.ejs, footer-scripts.ejs, footer.ejs, head.ejs, header-index.ejs, header-menu.ejs
- Code Editor:** The "contacts.ejs" file is open. The code is an EJS template for a contact form.

```
<div>Entre em Contato</div>
<form action="/contacts" method="post">
  <div class="row form-group">
    <div class="col-md-12">
      <label class="sr-only" for="name">Nome</label>
      <input type="text" id="name" class="form-control" placeholder="Seu nome" value="<%= body.name %>">
    </div>
  </div>

  <div class="row form-group">
    <div class="col-md-12">
      <label class="sr-only" for="email">E-mail</label>
      <input type="text" id="email" class="form-control" placeholder="Seu endereço de e-mail" value="<%= body.email %>">
    </div>
  </div>

  <div class="row form-group">
    <div class="col-md-12">
      <label class="sr-only" for="message">Mensagem</label>
      <textarea name="message" id="message" cols="30" rows="10" class="form-control" placeholder="Escreve alguma coisa"><%= body.message %></textarea>
    </div>
  </div>

  <div class="form-group">
    <input type="submit" value="Enviar" class="btn btn-primary">
  </div>
</form>
<div class="col-md-5 col-md-push-1 animate-box">
```
- Status Bar:** 2 selections (49 characters selected) Spaces: 4 UTF-8 CRLF { HTML Go Live Prettier

A screenshot of a code editor interface, likely Visual Studio Code, showing a file named `index.js`. The editor has a dark theme. On the left is the Explorer sidebar with project files like `SABOROSO`, `node_modules`, `public`, `routes`, `index.js`, `users.js`, `views`, `inc`, `content`, and various EJS files. The main area shows the following code:

```
<div>.gtco-container > <div>.row > <div>.col-md-12 > <div>.col-md-6.animate-box > ? > <form> <div>.row.form-group > <div>.col-md-12 > <input>#name.form-control  
8  
9 <h3>Entre em Contato</h3>  
10 <form action="/contacts" method="post">  
11 <div class="row form-group">  
12 <div class="col-md-12">  
13 <label class="sr-only" for="name">Nome</label>  
14 <input type="text" id="name" class="form-control" placeholder="Seu nome" value="<% body.name %>">  
15 </div>  
16 </div>  
17 <div class="row form-group">  
18 <div class="col-md-12">  
19 <label class="sr-only" for="email">E-mail</label>  
20 <input type="text" id="email" class="form-control" placeholder="Seu endereço de e-mail" value="<% body.email %>">  
21 </div>  
22 </div>  
23 <div class="row form-group">  
24 <div class="col-md-12">  
25 <label class="sr-only" for="message">Mensagem</label>  
26 <textarea name="message" id="message" cols="30" rows="10" class="form-control" placeholder="Escreve alguma coisa"><%= body.message %></textarea>  
27 </div>  
28 </div>  
29 <div class="form-group">  
30 <input type="submit" value="Enviar" class="btn btn-primary">  
31 </div>  
32 </div>  
33 </div>  
34 </div>  
35 </div>  
36 </div>  
37 <div class="col-md-5 col-md-push-1 animate-box">  
38
```

A red arrow points to the `placeholder="Escreve alguma coisa"><%= body.message %>` line in the code, indicating a selected or highlighted section.

The screenshot shows a code editor interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Minimize, Maximize, Close, Minimize, Maximize, Close, Minimize, Maximize, Close.
- Explorer Sidebar:** Shows the project structure under 'SABOROSO'. The 'index.js' file is selected (highlighted with a red arrow).
- Code Editor:** The 'index.js' file content is displayed:

```
routes > JS index.js > ...
14     menus: results,
15     isHome: true
16   });
17 });
18 });
19 });
20 });
21 );
22 router.get('/contacts', function(req, res, next) {
23   res.render('contacts', {
24     title: 'Contato - Restaurante Saboroso!',
25     background: "images/img_bg_3.jpg",
26     h1: "Diga um oi!"
27   });
28 });
29 });
30 );
31 router.get('/menus', function(req, res, next) {
32   menus.getMenus().then(results => {
33     res.render('menus', {
34       title: 'Menus - Restaurante Saboroso!',
35       background: "images/img_bg_1.jpg",
36       h1: "Saboreie nosso menu!",
37       menus: results
38     });
39   });
30 );
```
- Status Bar:** Ln 22, Col 1 (195 selected), Spaces: 2, UTF-8, LF, JavaScript, Go Live, Prettier.

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the file path "routes > JS index.js > ...". The left sidebar (Explorer) displays the project structure under the folder "SABOROSO". A red arrow points from the "index.js" entry in the Explorer to the same line in the code editor. Another red arrow points to the "post" method call in the code.

```
File Edit Selection View Go ...
routes > JS index.js > ...
16     );
17
18     });
19
20 });
21
22 router.get('/contacts', function(req, res, next) {
23
24     res.render('contacts', {
25         title: 'Contato - Restaurante Saboroso!',
26         background: "images/img_bg_3.jpg",
27         h1: "Diga um oi!"
28     });
29 });
30
31 router.post('/contacts', function(req, res, next) {
32
33     res.render('contacts', {
34         title: 'Contato - Restaurante Saboroso!',
35         background: "images/img_bg_3.jpg",
36         h1: "Diga um oi!"
37     });
38 });
39
40 router.get('/menus', function(req, res, next) {
41
```

Ln 31, Col 8 (4 selected) Spaces: 2 UTF-8 LF { JavaScript Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The window title is "saboroso [Administrator]".

Explorer View: Shows the project structure under the "SABOROSO" folder. The "views" folder is expanded, showing its subfolders "inc" and "content", which contain files like "alerts.ejs", "contacts.ejs", "facts.ejs", "menus.ejs", "reservations.ejs", and "services.ejs". A red arrow points to the "contacts.ejs" file in the "content" folder.

Editor View: The active editor tab is "contacts.js". The code editor shows the following content:

```
1
```

Status Bar: Displays file statistics (0△0), encoding (UTF-8), and code analysis results (JavaScript: 0 errors, Go Live, Prettier).


A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows "saboroso [Administrator]". The left sidebar (Explorer) displays a file tree for a project named "SABOROSO". The "inc" folder contains several files: contacts.js (selected), db.js, menus.js, reservations.js, node_modules, public, routes, index.js, and users.js. The "views" folder contains "inc" which further contains "content" (alerts.ejs, contacts.ejs, facts.ejs, menus.ejs, reservations.ejs, services.ejs, subscribe.ejs, text.ejs, footer-gototop.ejs, footer-scripts.ejs, footer.ejs, head.ejs). The "OUTLINE" and "TIMELINE" sections are also visible in the sidebar.

The main editor area shows the "contacts.js" file:

```
index.js contacts.js contacts.ejs reservations.ejs alerts.ejs
```

```
1 var conn = require("./db");
2
3 module.exports = {
4
5   render(req, res, error, success) {
6
7     },
8
9   save(fields) {
10
11     return new Promise((resolve, reject) => {
12
13       conn.query(
14         `INSERT INTO tb_contacts (name, email, message)
15          VALUES(?, ?, ?)`
16       , [
17         fields.name,
18         fields.email,
19         fields.message
20       ], (err, results) => {
21         if (err) {
22           reject(err);
23         } else {
24           resolve(results);
25         }
26       });
27
28     });
29
30   }
31
32 };
```

A red arrow points from the bottom right towards the closing brace of the "save(fields)" function. A tooltip "Select Indentation" is visible at the bottom right of the editor area. The status bar at the bottom shows "Ln 7, Col 5" and other file-related information.

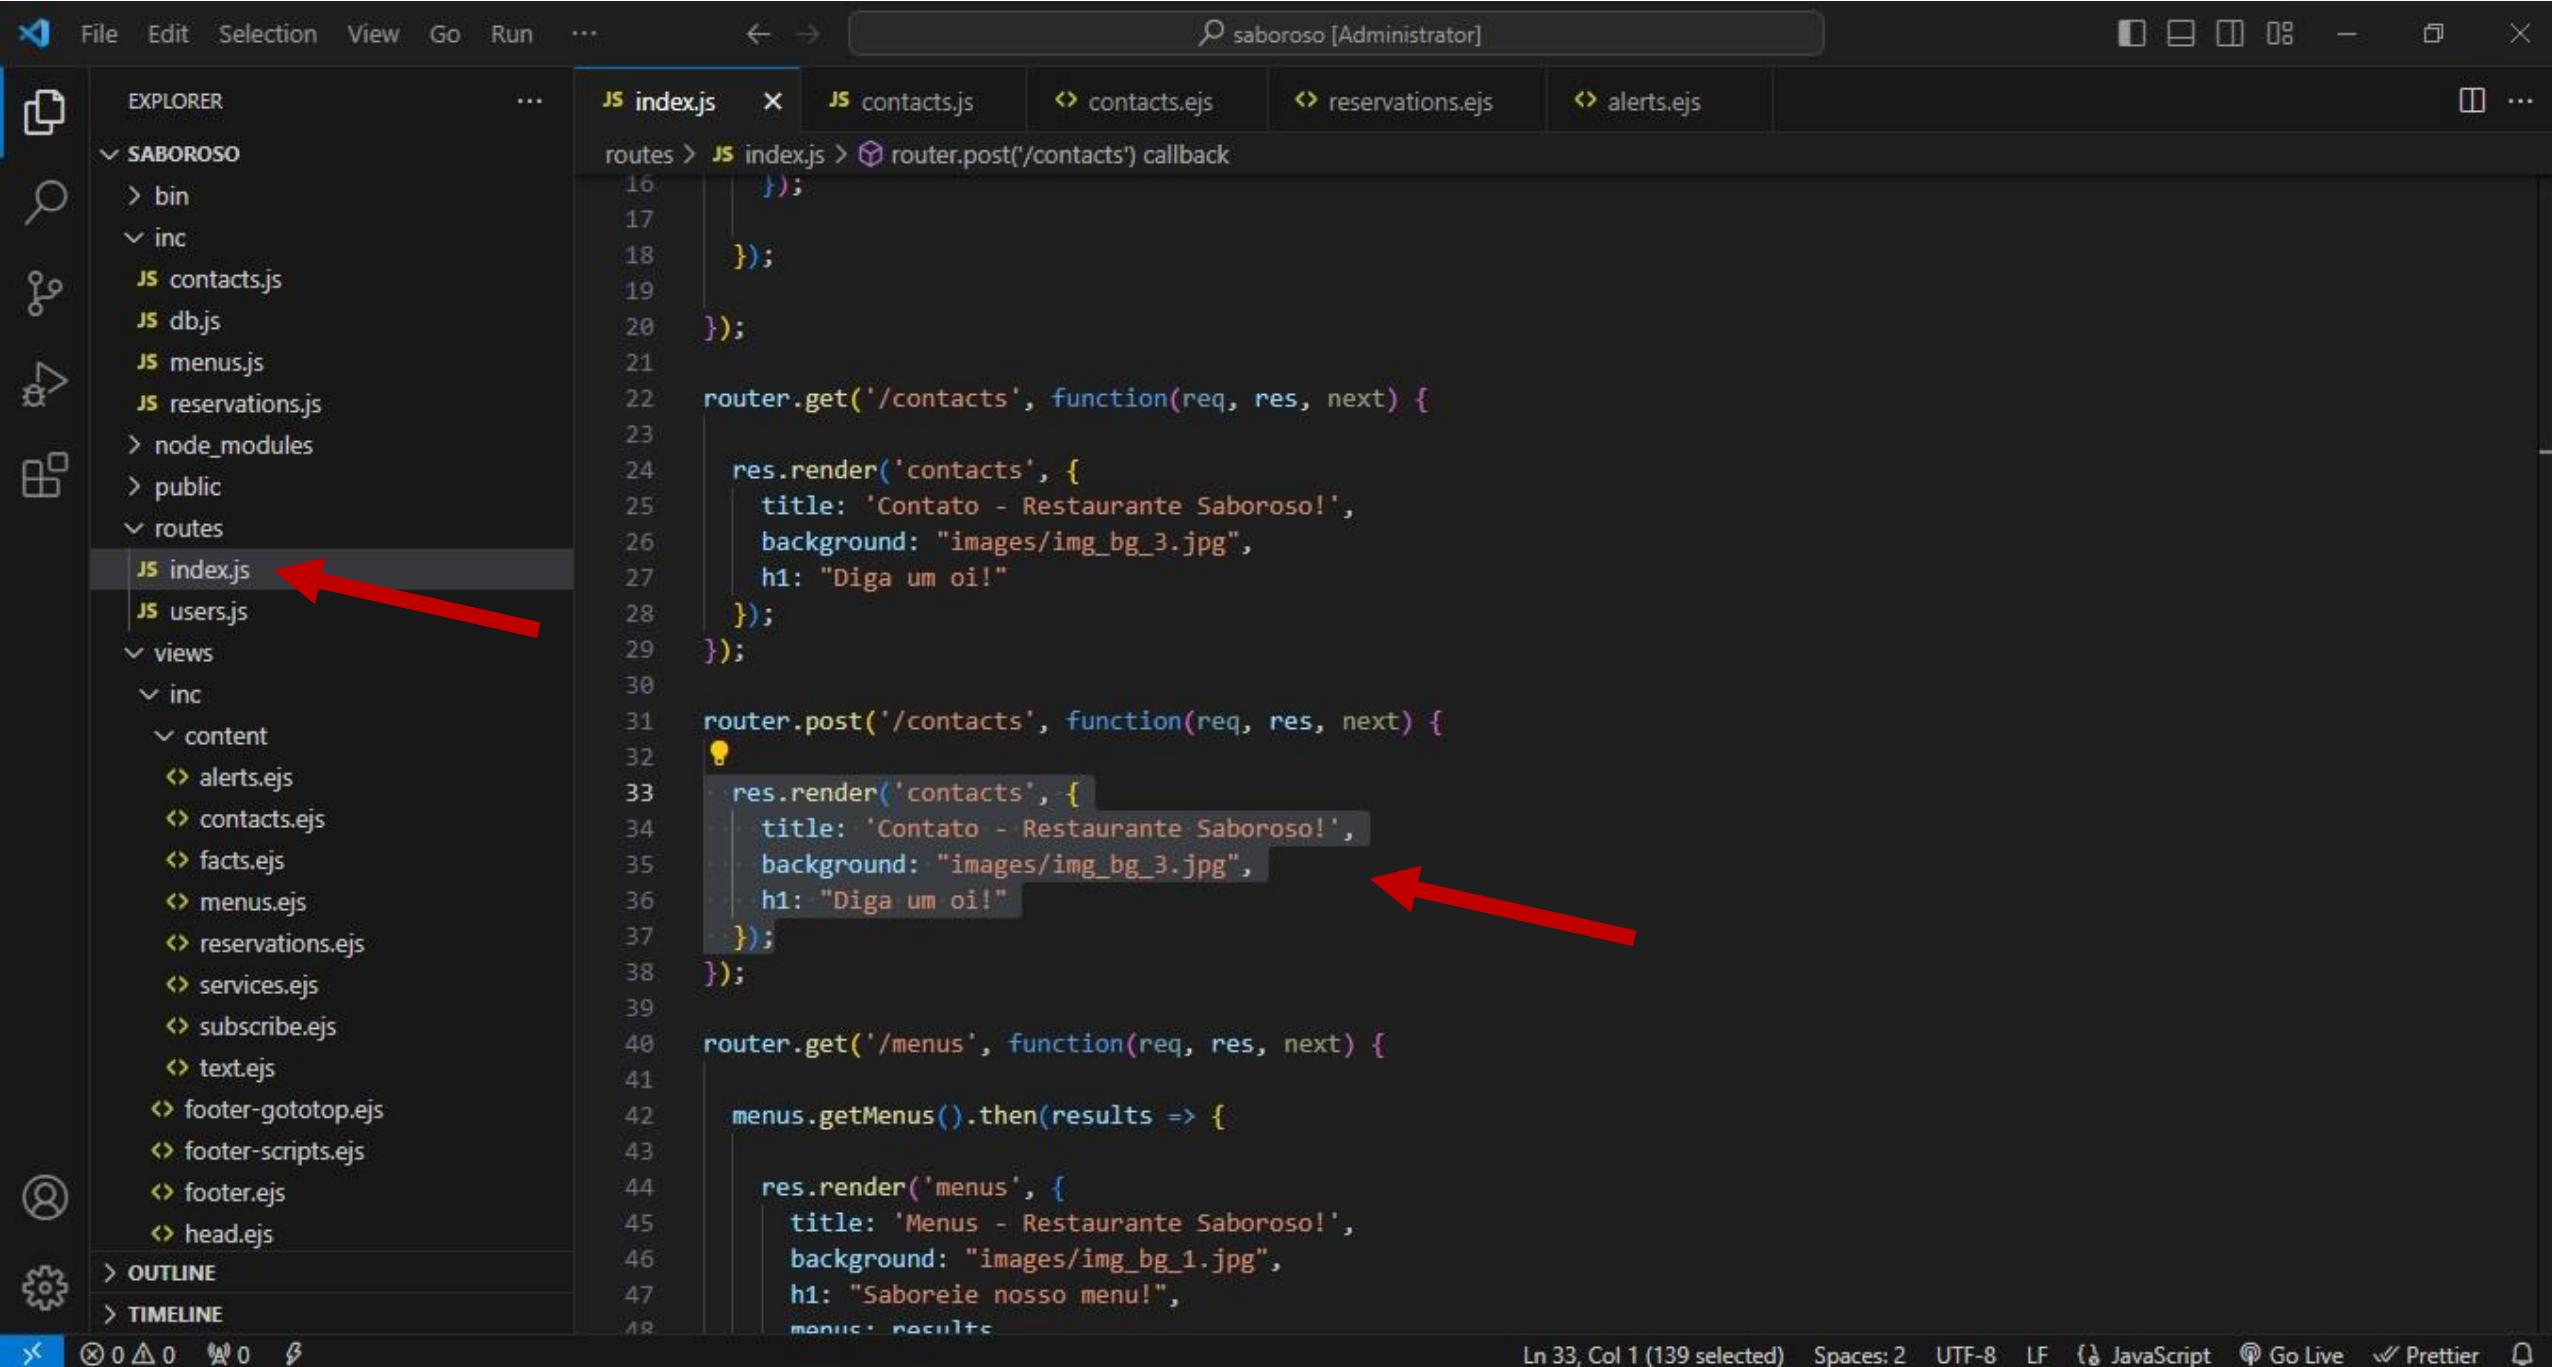

A screenshot of a code editor interface, likely Visual Studio Code, showing a file named `index.js`. The code is part of a Node.js application for a restaurant named "Saboroso". The editor has a dark theme with syntax highlighting for JavaScript. The sidebar on the left shows the project structure under the folder `SABOROSO`, including files like `bin`, `inc`, `db.js`, `menus.js`, `reservations.js`, `node_modules`, `public`, `routes`, `index.js` (which is currently selected), and `users.js`. The main pane displays the following code:

```
routes > JS index.js > router.post('/contacts') callback
16    });
17
18    });
19
20  });
21
22  router.get('/contacts', function(req, res, next) {
23
24    res.render('contacts', {
25      title: 'Contato - Restaurante Saboroso!',
26      background: "images/img_bg_3.jpg",
27      h1: "Diga um oi!"
28    });
29  });
30
31  router.post('/contacts', function(req, res, next) {
32
33  });
34
35  router.get('/menus', function(req, res, next) {
36
37    menus.getMenus().then(results => {
38
39      res.render('menus', {
40        title: 'Menus - Restaurante Saboroso!',
41        background: "images/img_bg_1.jpg",
42        h1: "Saboreie nosso menu!",
43        menus: results
44      });
45
46  });
47
```

A large red arrow points from the bottom right towards the closing brace of the `router.get('/contacts')` block at line 29. The status bar at the bottom indicates the code is in `JavaScript` mode, with `Ln 33, Col 1`, `Spaces: 2`, `UTF-8`, `LF`, and `Go Live` buttons.

File Edit Selection View Go Run ... ← → 🔍 saboroso [Administrator] ⌂ ⌂ ⌂ ⌂ ⌂ ⌂ ⌂ ⌂ ⌂

EXPLORER

SABOROSO

bin

inc

contacts.js (selected)

db.js

menus.js

reservations.js

node_modules

public

routes

index.js

users.js

views

inc

content

alerts.ejs

contacts.ejs

facts.ejs

menus.ejs

reservations.ejs

services.ejs

subscribe.ejs

text.ejs

footer-gototop.ejs

footer-scripts.ejs

footer.ejs

head.ejs

OUTLINE

TIMELINE

index.js contacts.js ✘ contacts.ejs reservations.ejs alerts.ejs

```
inc > JS contacts.js > [✖] <unknown> > render
  1 var conn = require("./db");
  2
  3 module.exports = {
  4
  5   render(req, res, error, success) {
  6
  7     res.render('contacts', {
  8       title: 'Contato - Restaurante Saboroso!',
  9       background: "images/img_bg_3.jpg",
 10       h1: "Diga um oi!"
 11     });
 12   },
 13
 14   save(fields) {
 15
 16     return new Promise((resolve, reject) => {
 17
 18       conn.query(
 19         "INSERT INTO tb_contacts (name, email, message)
 20         VALUES(?, ?, ?)"
 21       , [
 22         fields.name,
 23         fields.email,
 24         fields.message
 25       ], (err, results) => {
 26         if (err) {
 27           reject(err);
 28         } else {
 29           resolve(results);
 30         }
 31       });
 32     });
 33   }
 34 }
```

Ln 7, Col 1 (181 selected) Spaces: 4 UTF-8 CRLF ⓘ JavaScript ⌂ Go Live ⓘ Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar contains icons for Explorer, Search, Open, and Outline/Timeline. The Explorer view shows a file tree for a project named "SABOROSO" with subfolders like "bin", "inc", "public", "routes", and "views". Inside "views", there are "index.js", "users.js", and "contacts.js" files, with "contacts.js" currently selected. The main editor area displays the "contacts.js" file:

```
inc > JS contacts.js > [?] <unknown> > 📁 render > ✎ success
1 var conn = require("./db");
2
3 module.exports = {
4
5   render(req, res, error, success) {
6
7     res.render('contacts', {
8       title: 'Contato - Restaurante Saboroso!',
9       background: "images/img_bg_3.jpg",
10      h1: "Diga um oi!",
11      body: req.body,
12      error,
13      success
14    });
15
16  },
17
18  save(fields) {
19
20    return new Promise((resolve, reject) => {
21
22      conn.query(`
23        INSERT INTO tb_contacts (name, email, message)
24        VALUES(?, ?, ?)
25      `, [
26        fields.name,
27        fields.email,
28        fields.message
29      ], (err, results) => {
30        if (err) {
31          reject(err);
32        } else {
```

A red arrow points from the bottom right towards the word "success" in line 13, indicating a potential error or warning. The status bar at the bottom shows "Ln 13, Col 20 (71 selected)" and other settings like "Spaces: 4", "UTF-8", "CRLF", "JavaScript", "Go Live", and "Prettier".

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Explorer View:** Shows the project structure under the SABOROSO folder:
 - bin
 - inc
 - contacts.js
 - db.js
 - menus.js
 - reservations.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - content
 - alerts.ejs
 - contacts.ejs
 - facts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
- Code Editor:** The routes/index.js file is open, showing the following code:

```
1 var conn = require('../inc/db')
2 var express = require('express');
3 var menus = require('../inc/menus');
4 var reservations = require('../inc/reservations');
5 var contacts = require('../inc/contacts');
6 var router = express.Router();

7 /* GET home page. */
8 router.get('/', function(req, res, next) {
9
10    menus.getMenus().then(results => {
11
12        res.render('index', {
13            title: 'Restaurante Saboroso!',
14            menus: results,
15            isHome: true
16        });
17
18    });
19
20 });
21
22
23 router.get('/contacts', function(req, res, next) {
24
25     res.render('contacts', {
26         title: 'Contato - Restaurante Saboroso!',
```
- Annotations:** Two red arrows highlight the file in the Explorer view and the require statement for 'contacts' in the code editor.
- Status Bar:** Ln 5, Col 1 (44 selected) Spaces: 2 UTF-8 LF JavaScript Go Live Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The top bar includes standard menu items: File, Edit, Selection, View, Go, and others. A search bar is centered above the editor area. The left sidebar contains icons for Explorer, Search, Open, Find, and others. The Explorer view shows a file tree for a project named "SABOROSO". The "routes" folder is expanded, showing files like index.js, contacts.js, db.js, menus.js, reservations.js, node_modules, public, and routes. The "index.js" file under routes is selected and highlighted with a red arrow pointing to it. The main editor area displays the contents of index.js, which includes Express.js route definitions for '/contacts' and '/menus'. The status bar at the bottom shows the current file is index.js, line 18, column 1, with 2 spaces, encoding UTF-8, line feed LF, and tabs set to JavaScript. It also includes Go Live and Prettier buttons.

```
routes > JS index.js > router.get('/') callback > then() callback
17     });
18     });
19   });
20 });
21 });
22
23 router.get('/contacts', function(req, res, next) {
24
25   res.render('contacts', {
26     title: 'Contato - Restaurante Saboroso!',
27     background: "images/img_bg_3.jpg",
28     h1: "Diga um oi!"
29   });
30 });
31
32 router.post('/contacts', function(req, res, next) {
33
34 });
35
36 router.get('/menus', function(req, res, next) {
37
38   menus.getMenus().then(results => {
39
40     res.render('menus', {
41       title: 'Menus - Restaurante Saboroso!',
```

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS index.js X JS contacts.js ⚡ contacts.ejs ⚡ reservations.ejs ⚡ alerts.ejs ⚡ ...

SABOROSO

- > bin
- < inc
- JS contacts.js
- JS db.js
- JS menus.js
- JS reservations.js
- > node_modules
- > public
- < routes
- JS index.js
- JS users.js

views

- < inc
- < content
- ⌚ alerts.ejs
- ⌚ contacts.ejs
- ⌚ facts.ejs
- ⌚ menus.ejs
- ⌚ reservations.ejs
- ⌚ services.ejs

> OUTLINE

> TIMELINE

routes > JS index.js > router.get('/contacts') callback

```
17     });
18
19     });
20
21 });
22
23 router.get('/contacts', function(req, res, next) {
24
25     contacts.render(req, res); ←
26
27     res.render('contacts', {
28         title: 'Contato - Restaurante Saboroso!',
29         background: "images/img_bg_3.jpg",
30         h1: "Diga um oi!"
31     });
32 }
33
34 router.post('/contacts', function(req, res, next) {
35
36 });
37
38 router.get('/menus', function(req, res, next) {
39
40     menus.getMenus().then(results => {
41
```

Ln 25, Col 1 (28 selected) Spaces: 2 UTF-8 LF { JavaScript Go Live Prettier

File Edit Selection View Go ... 🔍 saboroso [Administrator] ⚡

EXPLORER ... JS index.js X JS contacts.js ⚡ contacts.ejs ⚡ reservations.ejs ⚡ alerts.ejs ⚡ ...

SABOROSO

- > bin
- < inc
- JS contacts.js
- JS db.js
- JS menus.js
- JS reservations.js
- > node_modules
- > public
- < routes
- JS index.js
- JS users.js

views

- < inc
- < content
- ⌚ alerts.ejs
- ⌚ contacts.ejs
- ⌚ facts.ejs
- ⌚ menus.ejs
- ⌚ reservations.ejs
- ⌚ services.ejs

> OUTLINE

> TIMELINE

routes > JS index.js > router.get('/contacts') callback

```
17     });
18     });
19     });
20     });
21   });
22
23   router.get('/contacts', function(req, res, next) {
24
25     contacts.render(req, res);
26
27     res.render('contacts', {
28       title: 'Contato - Restaurante Saboroso!',
29       background: "images/img_bg_3.jpg",
30       h1: "Diga um oi!"
31     });
32   });
33
34   router.post('/contacts', function(req, res, next) {
35
36   });
37
38   router.get('/menus', function(req, res, next) {
39
40     menus.getMenus().then(results => {
41
```

Ln 26, Col 1 (140 selected) Spaces: 2 UTF-8 LF ⓘ JavaScript ⌐ Go Live ⌐ Prettier

A screenshot of the Visual Studio Code (VS Code) interface. The Explorer sidebar on the left shows a file tree for a project named "SABOROSO". The "routes" folder contains "index.js" and "users.js", which are highlighted with a red arrow pointing to them. The main editor area displays the "index.js" file, which contains Node.js code for setting up routes and rendering EJS templates. The status bar at the bottom provides information about the current file: "index.js" (JavaScript), line 26, column 1, with 2 spaces per tab, using LF line endings. It also shows icons for Go Live, Prettier, and other extensions.

```
routes > JS index.js > router.get('/contacts') callback
17     });
18     });
19     });
20     });
21     });
22
23     router.get('/contacts', function(req, res, next) {
24
25       contacts.render(req, res);
26     });
27
28
29     router.post('/contacts', function(req, res, next) {
30
31     });
32
33     router.get('/menus', function(req, res, next) {
34
35       menus.getMenus().then(results => {
36
37         res.render('menus', {
38           title: 'Menus - Restaurante Saboroso!',
39           background: "images/img_bg_1.jpg",
40           h1: "Saboreie nosso menu!",
41           menus: results
42       });
43     });
44   });
45 }
```

A screenshot of a code editor interface, likely Visual Studio Code, showing a file navigation feature. The top bar includes standard menu items: File, Edit, Selection, View, Go, etc. A search bar is present above the tabs. The tabs at the top show five files: index.js (selected), contacts.js, contacts.ejs, reservations.ejs, and alerts.ejs.

The left sidebar, titled "EXPLORER", displays a file tree for a project named "SABOROSO". The tree includes "inc", "routes", and "views" folders. Under "routes", "index.js" is selected and highlighted with a red arrow pointing to it. Under "views", there is a "content" folder containing "alerts.ejs", "contacts.ejs", "facts.ejs", "menus.ejs", "reservations.ejs", "services.ejs", "subscribe.ejs", and "text.ejs".

The main editor area shows the content of "index.js". It contains a function for handling a POST request to '/contacts'. The code checks if required fields (name, email, message) are provided. If any field is missing, it renders an error message. If all fields are present, it saves the contact to the database and renders a success message. Error handling is also included.

```
routes > JS index.js > router.post('/contacts') callback
27  );
28
29  router.post('/contacts', function(req, res, next) {
30    if (!req.body.name) {
31      contacts.render(req, res, 'Digite o nome');
32    } else if (!req.body.email) {
33      contacts.render(req, res, 'Digite o e-mail');
34    } else if (!req.body.message) {
35      contacts.render(req, res, 'Digite a mensagem');
36    } else {
37      contacts.save(req.body).then(results => {
38        contacts.render(req, res, null, "Contato enviado com sucesso!");
39      }).catch(err=> {
40        contacts.render(req, res, err.message);
41      });
42    }
43  });
44
45
46
47  );
48
49  );
50
51  );
52
```

The status bar at the bottom shows the current line (Ln 31, Col 1), the number of selected characters (451 selected), and the file encoding (UTF-8 LF). It also includes icons for Go Live, Prettier, and other settings.

The screenshot shows a code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbars:** Minimize, Maximize, Close, Fullscreen, Zoom, Refresh, Save, Undo, Redo.
- Left Sidebar (EXPLORER):**
 - SABOROSO
 - inc
 - db.js
 - menus.js
 - reservations.js
 - node_modules
 - public
 - routes
 - index.js
 - users.js
 - views
 - inc
 - content
 - alerts.ejs
 - contacts.ejs** (highlighted with a red arrow)
 - facts.ejs
 - menus.ejs
 - reservations.ejs
 - services.ejs
 - subscribe.ejs
 - text.ejs
 - OUTLINE
 - TIMELINE
- Code Editor Tabs:** index.js, contacts.js, contacts.ejs (active), reservations.ejs, alerts.ejs
- Code Editor Status Bar:** Ln 37, Col 61, Spaces: 4, UTF-8, CRLF, HTML, Go Live, Prettier

```
<%- include('alerts') -%>

<h3>Entre em Contato</h3>
<form action="/contacts" method="post">
  <div class="row form-group">
    <div class="col-md-12">
      <label class="sr-only" for="name">Nome</label>
      <input type="text" id="name" class="form-control" placeholder="Seu nome" value="<%= body.name %>">
    </div>
  </div>

  <div class="row form-group">
    <div class="col-md-12">
      <label class="sr-only" for="email">E-mail</label>
      <input type="text" id="email" class="form-control" placeholder="Seu endereço de e-mail" value="<%= body.email %>">
    </div>
  </div>

  <div class="row form-group">
    <div class="col-md-12">
      <label class="sr-only" for="message">Mensagem</label>
      <textarea name="message" id="message" cols="30" rows="10" class="form-control" placeholder="Escreve alguma coisa"><%= body.message %></textarea>
    </div>
  </div>
```

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, ...
- Search Bar:** saboroso [Administrator]
- Toolbar:** Back, Forward, Home, Find, Replace, Save, Close, Minimize, Maximize, Fullscreen.
- Explorer:** Shows the project structure under the folder "SABOROSO".
 - inc: db.js, menus.js, reservations.js
 - node_modules
 - public
 - routes: index.js, users.js
 - views: inc (content: alerts.ejs, contacts.ejs, facts.ejs, menus.ejs, reservations.ejs, services.ejs, subscribe.ejs, text.ejs), OUTLINE, TIMELINE
- Code Editor:** The "contacts.ejs" file is open. The code is a JADE template for a contact form.

```
<%- include('alerts') -%>

<h3>Entre em Contato</h3>
<form action="/contacts" method="post">
  <div class="row form-group">
    <div class="col-md-12">
      <label class="sr-only" for="name">Nome</label>
      <input type="text" id="name" name="name" class="form-control" placeholder="Seu nome" value="<%= body.name %>">
    </div>
  </div>

  <div class="row form-group">
    <div class="col-md-12">
      <label class="sr-only" for="email">E-mail</label>
      <input type="text" id="email" name="email" class="form-control" placeholder="Seu endereço de e-mail" value="<%= body.email %>">
    </div>
  </div>


  <div class="row form-group">
    <div class="col-md-12">
      <label class="sr-only" for="message">Mensagem</label>
      <textarea name="message" id="message" cols="30" rows="10" class="form-control" placeholder="Escreve alguma coisa"><%= body.message %></textarea>
    </div>
  </div>
```
- Status Bar:** 2 selections (23 characters selected) Spaces: 4 UTF-8 CRLF { HTML Go Live Prettier



Entre em Contato

Informações de Contato

-  Avenida, R. 1234, 56 - 1^º andar - Centro, Odimais - RG, 00000-000
 -  (11) 98765-4321
 -  contato@sproviders.com.br
 -  sproviders.com.br

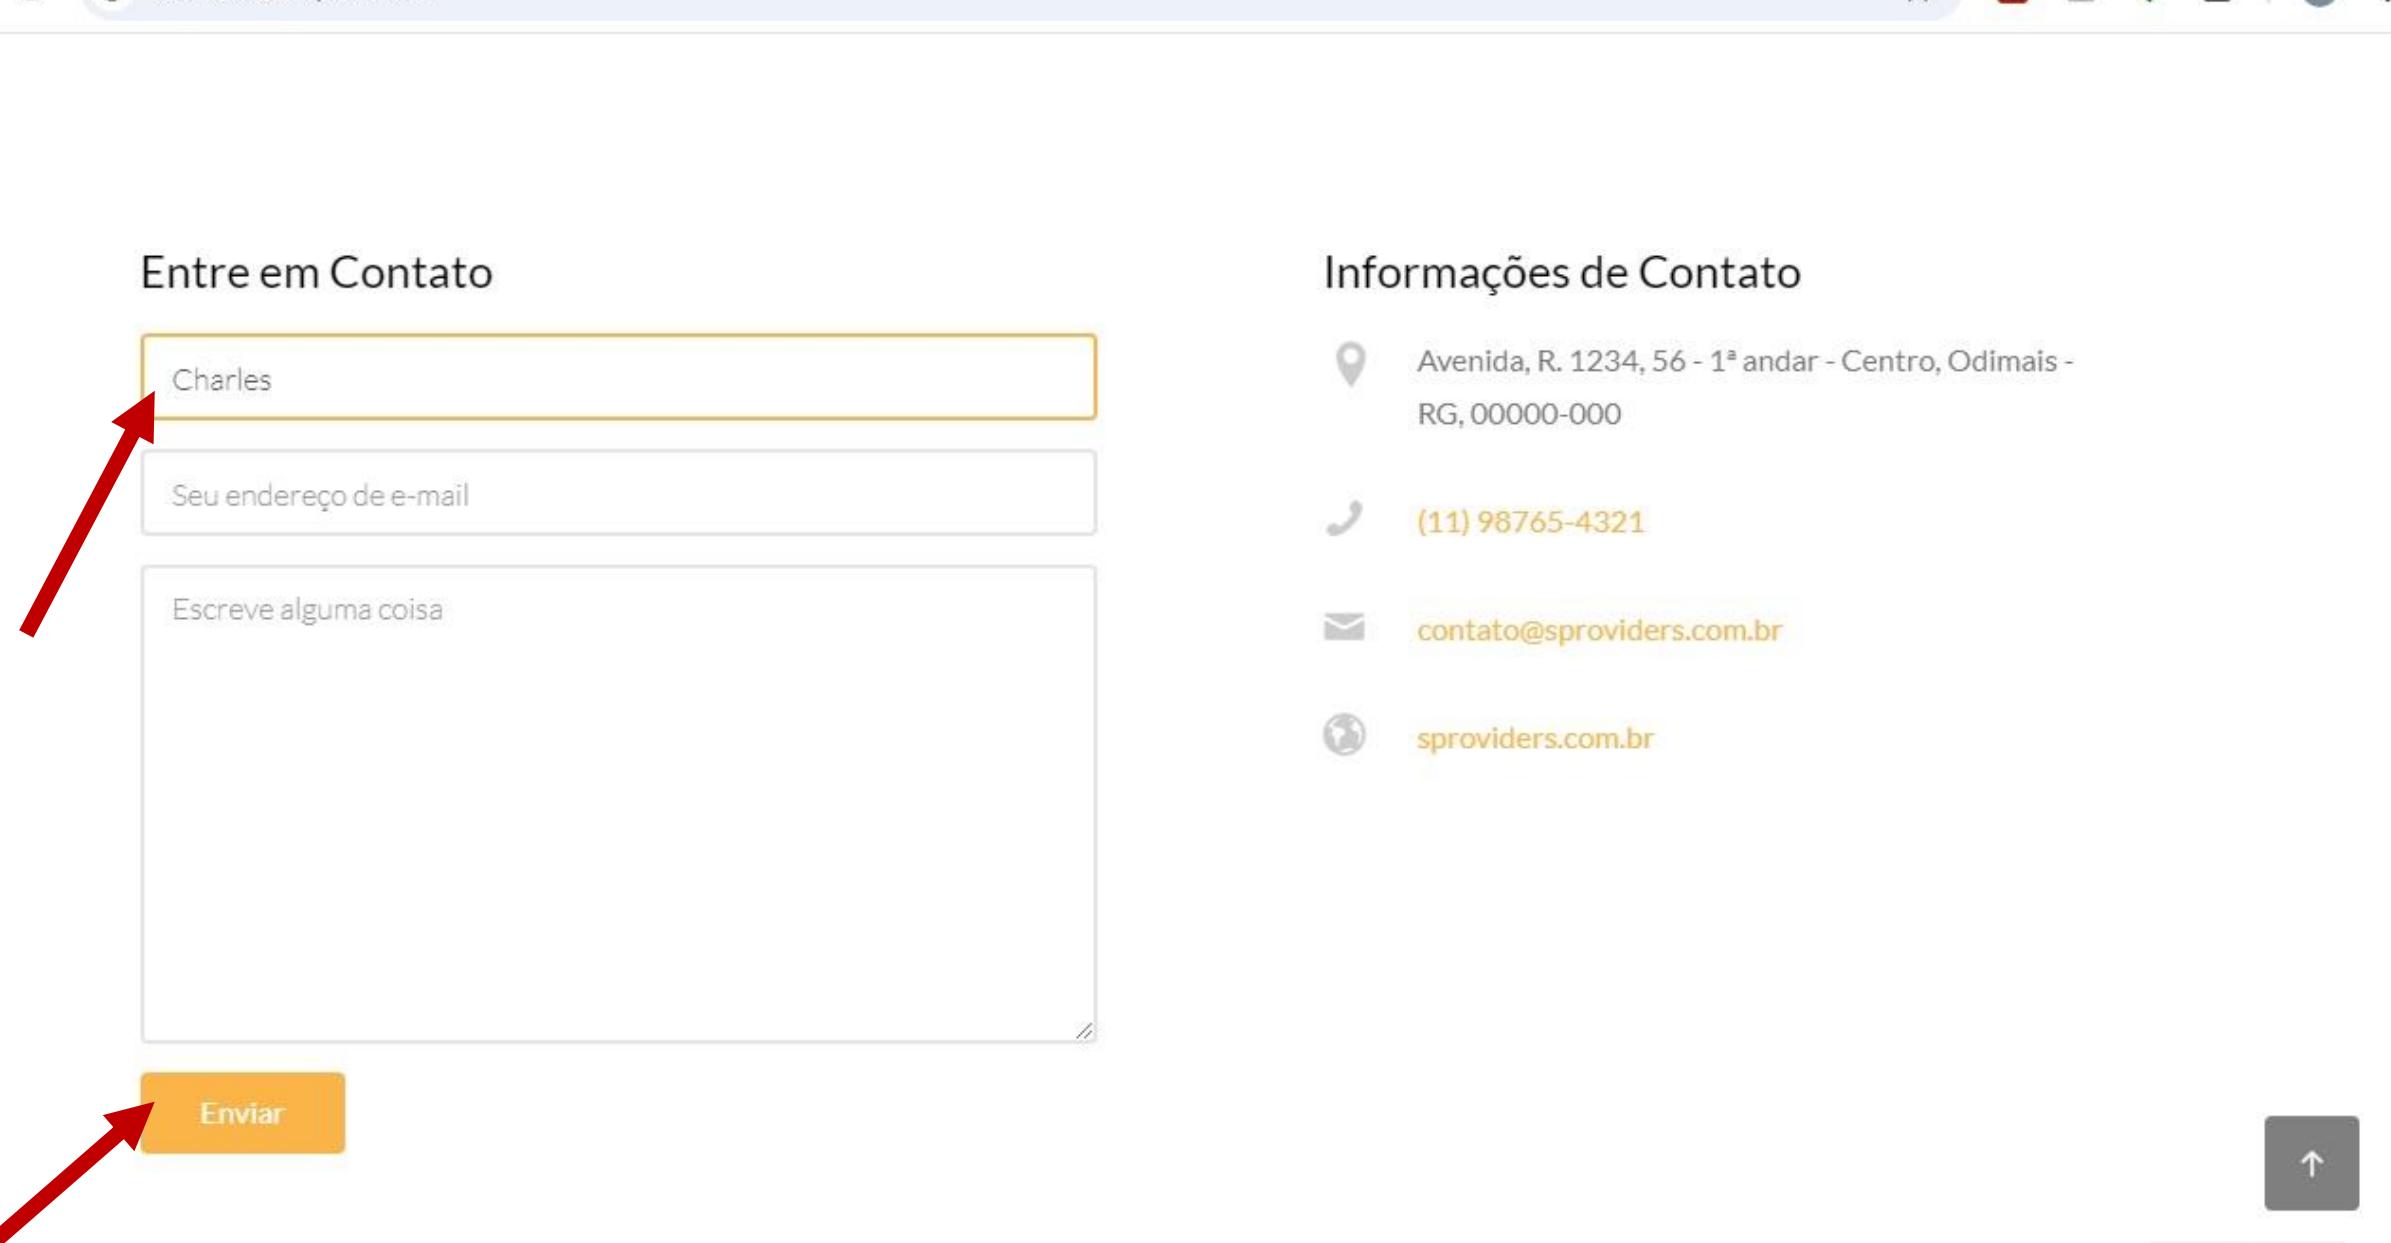

Digite o e-mail

Entre em Contato

Charles

Seu endereço de e-mail

Escreve alguma coisa

Enviar

Informações de Contato

Avenida, R. 1234, 56 - 1^a andar - Centro, Odimais - RG, 00000-000

(11) 98765-4321

contato@sproviders.com.br

sproviders.com.br

Digite o e-mail

Entre em Contato

Charles

charles@sp.com.br

Escreve alguma coisa

Enviar

Informações de Contato



Avenida, R. 1234, 56 - 1^a andar - Centro, Odimais -
RG, 00000-000



(11) 98765-4321



contato@sproviders.com.br



sproviders.com.br



Digite a mensagem

Entre em Contato

Charles

charles@sp.com.br

Escreve alguma coisa

Enviar

Informações de Contato

Avenida, R. 1234, 56 - 1^a andar - Centro, Odimais - RG, 00000-000

(11) 98765-4321

contato@sproviders.com.br

sproviders.com.br



Digite a mensagem

Entre em Contato

Charles

charles@sp.com.br

Olá

Enviar

Informações de Contato



Avenida, R. 1234, 56 - 1^a andar - Centro, Odimais -
RG, 00000-000



(11) 98765-4321



contato@sproviders.com.br



sproviders.com.br

Contato enviado com sucesso!

Entre em Contato

Enviar

Informações de Contato



Avenida, R. 1234, 56 - 1^a andar - Centro, Odimais -
RG, 00000-000



(11) 98765-4321



contato@sproviders.com.br



sproviders.com.br



A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The Explorer sidebar on the left lists the project structure under the folder "SABOROSO". A red arrow points from the "index.js" file in the Explorer to the same file in the main editor area. The main editor area displays the "routes/index.js" file, which contains code for a POST route to handle contact submissions. The status bar at the bottom shows the file path "Ln 48, Col 1", "Spaces: 2", "UTF-8", "LF", and icons for JavaScript, Go Live, and Prettier.

```
routes > JS index.js > router.post('/contacts') callback
27  });
28
29  router.post('/contacts', function(req, res, next) {
30
31    if (!req.body.name) {
32      contacts.render(req, res, 'Digite o nome');
33    } else if (!req.body.email) {
34      contacts.render(req, res, 'Digite o e-mail');
35    } else if (!req.body.message) {
36      contacts.render(req, res, 'Digite a mensagem');
37    } else {
38
39      contacts.save(req.body).then(results => {
40
41        contacts.render(req, res, null, "Contato enviado com sucesso!");
42
43      }).catch(err=> {
44
45        contacts.render(req, res, err.message);
46
47      });
48
49    }
50
51  });
52
```

A screenshot of the Visual Studio Code (VS Code) interface. The title bar shows the workspace name "saboroso [Administrator]". The left sidebar (Explorer) displays the project structure under the folder "SABOROSO". A red arrow points from the "index.js" file in the Explorer to the same file in the main code editor area. The code editor shows a block of JavaScript code. A yellow lightbulb icon with a question mark is positioned over the line "req.body = {};" in the editor, indicating a potential issue or suggestion. The status bar at the bottom provides information about the current line (Ln 41, Col 7), character count (14 selected), and file encoding (UTF-8). Other status icons include "Spaces: 2", "LF", "JavaScript", "Go Live", and "Prettier".

```
routes > JS index.js > router.post('/contacts') callback > then() callback
27  );
28
29  router.post('/contacts', function(req, res, next) {
30
31    if (!req.body.name) {
32      contacts.render(req, res, 'Digite o nome');
33    } else if (!req.body.email) {
34      contacts.render(req, res, 'Digite o e-mail');
35    } else if (!req.body.message) {
36      contacts.render(req, res, 'Digite a mensagem');
37    } else {
38
39      contacts.save(req.body).then(results => {
40
41        req.body = {};
42
43        contacts.render(req, res, null, "Contato enviado com sucesso!");
44
45      }).catch(err=> {
46
47        contacts.render(req, res, err.message);
48
49      });
50
51  }
52 }
```

Contato enviado com sucesso!

Entre em Contato

Enviar

Informações de Contato



Avenida, R. 1234, 56 - 1^a andar - Centro, Odimais -
RG, 00000-000



(11) 98765-4321



contato@sproviders.com.br



sproviders.com.br



Contato enviado com sucesso!

Entre em Contato

Seu endereço de e-mail

Informações de Contato



Avenida, R. 1234, 56 - 1^a andar - Centro, Odimais -
RG. 00000-000



(11) 98765-4321



contato@sproviders.com.br



sproviders.com.br

MySQL Workbench

Local instance MySQL80 X

File Edit View Query Database Server Tools Scripting Help

SQL File 6*

Navigator

SCHEMAS

Filter objects

saboroso

tb_contacts (highlighted with a red arrow)

tb_emails

tb_menus

tb_reservations

Columns

- id
- name
- email
- people
- date
- time
- register

Indexes

Foreign Keys

Triggers

tb_users

Views

Administration Schemas

tb_reservations 3 X

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content: |

| | id | name | email | people | date | time | register |
|---|------|------|----------------|--------|------------|----------|---------------------|
| ▶ | 4 | Fred | fred@sp.com.br | 2 | 2024-11-28 | 20:36:00 | 2024-10-28 20:37:41 |
| * | NULL | NULL | NULL | NULL | NULL | NULL | NULL |

Form Editor

Result Grid

Information

Action Output

Table: tb_reservations

Columns:

| | Type | Properties |
|----------|--------------|------------|
| id | int | AI PK |
| name | varchar(256) | |
| email | varchar(256) | |
| people | int | |
| date | date | |
| time | time | |
| register | timestamp | |

Time Action

1 20:38:04 SELECT * FROM tb_reservations LIMIT 0, 1000

Message: 1 row(s) returned

Duration / Fetch: 0.000 sec / 0.000 sec

Object Info Session

MySQL Workbench

Local instance MySQL80 X

File Edit View Query Database Server Tools Scripting Help

SQL File 6*

SELECT * FROM tb_reservations

Navigator

SCHEMAS

Filter objects

saboroso

Tables

- tb_contact
- tb_emails
- tb_menus
- tb_reserva
- tb_users

Views

Stored Procedures

Functions

sakila

sys

world

Administration Schema

Information

Result Grid

Form Editor

Table: tb_contacts

Columns:

| id | name | email | message | register |
|-----------|--------------|--------------|---------|-----------|
| int AI PK | varchar(256) | varchar(256) | text | timestamp |

Time Action

1 20:38:04 SELECT * FROM tb_reservations LIMIT 0, 1000

Message

1 row(s) returned

Duration / Fetch

0.000 sec / 0.000 sec

Object Info Session

Red arrows point from the 'tb_contact' entry in the 'Tables' list to the 'Select Rows - Limit 1000' option in the context menu.

The context menu for 'tb_contact' includes the following options:

- Select Rows - Limit 1000
- Table Inspector
- Copy to Clipboard
- Table Data Export Wizard
- Table Data Import Wizard
- Send to SQL Editor
- Create Table...
- Create Table Like...
- Alter Table...
- Table Maintenance...
- Drop Table...
- Truncate Table...
- Search Table Data...
- Refresh All

MySQL Workbench

Local instance MySQL80 ×

File Edit View Query Database Server Tools Scripting Help

SQL File 6* tb_contacts ×

Navigator

SCHEMAS

Filter objects

saboroso

Tables

- tb_contacts
- tb_emails
- tb_menus
- tb_reservations
- tb_users

Views

Stored Procedures

Functions

sakila

sys

world

SQL File 6*

1 • SELECT * FROM saboroso.tb_contacts;

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content: |

| | id | name | email | message | register |
|---|------|---------|-------------------|---------|---------------------|
| ▶ | 1 | Charles | charles@sp.com.br | Olá | 2024-10-28 22:09:47 |
| ▶ | 2 | Charles | charles@sp.com.br | Olá | 2024-10-28 22:12:11 |
| * | HULL | HULL | HULL | HULL | HULL |

Result Grid | Form Editor

Administration Schemas

tb_contacts 1 ×

Information

Action Output

| # | Time | Action | Message | Duration / Fetch |
|---|----------|--|-------------------|-----------------------|
| 1 | 20:38:04 | SELECT * FROM tb_reservations LIMIT 0, 1000 | 1 row(s) returned | 0.000 sec / 0.000 sec |
| 2 | 22:14:01 | SELECT * FROM saboroso.tb_contacts LIMIT 0, 1000 | 2 row(s) returned | 0.000 sec / 0.000 sec |

Object Info Session

The screenshot shows the MySQL Workbench interface with the 'tb_contacts' table selected. In the center, a 'Result Grid' displays two rows of data from the 'tb_contacts' table. Below the grid, the 'Action Output' section shows a history of database actions. Two red arrows point from the bottom of the question to the 'Action' column of the history table, specifically highlighting the second entry which corresponds to the current query being run.

| # | Time | Action | Message | Duration / Fetch |
|---|----------|--|-------------------|-----------------------|
| 1 | 20:38:04 | SELECT * FROM tb_reservations LIMIT 0, 1000 | 1 row(s) returned | 0.000 sec / 0.000 sec |
| 2 | 22:14:01 | SELECT * FROM saboroso.tb_contacts LIMIT 0, 1000 | 2 row(s) returned | 0.000 sec / 0.000 sec |