

 **Lab meeting** · Oct 6, 10:00

 **Project review** · Oct 8, 14:00

 **Reading group** · Oct 13, 11:00

Same procedure,
different inputs

Schematic examples



Agent execution: model calls per task



Program execution: compile, then reuse



Compile


→ **</>**

</>



Extract inputs on each use

Compilation attempt

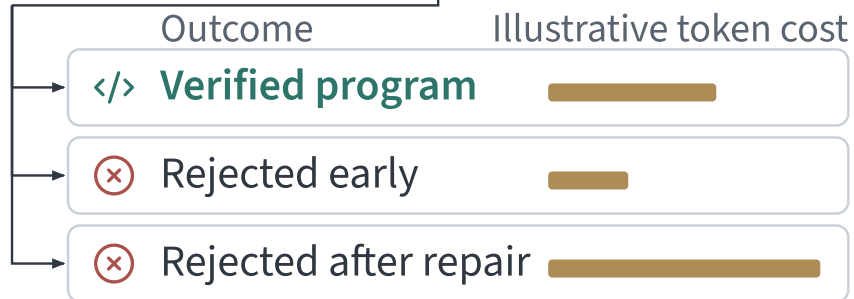

Every attempt has a cost.

(a) Uncertain compilation price

Schematic futures

Decision now

Observed



</> If compilation succeeds

Many later tasks

Few later tasks

GUI changes



GUI drift ⊗



Will later uses recover the compilation cost?

(b) Unknown future use