

UNIVERSITY OF CALIFORNIA
SANTA CRUZ

**VOICE QUALITY AND TONE AT THE PHONETICS-PHONOLOGY
INTERFACE**

A dissertation submitted in partial satisfaction of the
requirements for the degree of

DOCTOR OF PHILOSOPHY

in

LINGUISTICS

by

Mykel Loren Brinkerhoff

June 2025

The Dissertation of Mykel Loren Brinkerhoff
is approved:

Professor Grant McGuire, Chair

Professor Jaye Padgett

Professor Ryan Bennett

Professor Marc Garellek

Peter Biehl
Vice Provost and Dean of Graduate Studies

Copyright © by
Mykel Loren Brinkerhoff
2025

Contents

List of Figures	v
List of Tables	vii
Abstract	viii
Dedication	ix
Acknowledgments	x
1 Introduction	1
2 Vowels and suprasegmentals in Santiago Laxopa Zapotec	2
2.1 Introduction	2
2.2 Vowels in Santiago Laxopa Zapotec	3
2.3 Voice Quality contrasts in Santiago Laxopa Zapotec	6
2.4 Tonal contrasts in Santiago Laxopa Zapotec	8
2.5 Interactions between tone and voice quality	8
3 On using Residual H1* for voice quality research	9
3.1 Introduction	9
3.2 Santiago Laxopa Zapotec	12
3.3 Methods	14
3.3.1 Elicitation	14
3.3.2 Data Processing	14
3.3.3 Statistical modeling	16
3.4 Results	18
3.4.1 H1*-H2*	18
3.4.2 Residual H1*	19

3.4.3	Model Comparison	20
3.5	Conclusion	21
4	The acoustic space of voice quality in Santiago Laxopa Zapotec	22
4.1	Introduction	22
4.2	Methods	23
4.2.1	Participants	23
4.2.2	Recordings	23
4.2.3	Acoustic measuring	24
4.2.4	Data processing	25
4.2.5	Statistical analysis	27
4.3	Results	29
4.3.1	Acoustic space of voice quality	29
4.3.2	Acoustic correlates of voice quality	31
4.4	Discussion	33
4.5	Conclusion	36
5	Trees reveal the importance of measures in SLZ	37
5.1	Introduction	37
5.2	What are Decision Trees	38
5.3	Decision trees in linguistics	39
6	Testing the laryngeal complexity hypothesis	41
6.1	Laryngeal Complexity	41
6.2	41
7	Modeling laryngeal complexity	43
8	Conclusion	45
	Bibliography	46
A	Some Ancillary Stuff	60

List of Figures

2.1	Santiago Laxopa taken by Beto Diaz, a resident of Santiago Laxopa. . .	3
2.2	Vowel space of Santiago Laxopa Zapotec. The ellipses around each vowel mean represents 1 standard. The scale of the axes are in barks with their corresponding Hz values.	5
3.1	H1*-H2* across the duration of the vowel. Points represent the mean of each measure across the ten intervals. The error bars around each point represent ± 1.96 Std. Error. A line was plotted over each to show how the acoustic measure functions across the ten intervals.	18
3.2	Residual H1* across the duration of the vowel. Points represent the mean of each measure across the ten intervals. The error bars around each point represent ± 1.96 Std. Error. A line was plotted over each to show how the acoustic measure functions across the ten intervals. . .	19
4.1	Scree plot for the MDS analysis.	29
4.2	Two-dimensional MDS solution showing the first and second dimensions.	30
4.3	Two-dimensional MDS solution showing the first and third dimensions.	31
4.4	Two-dimensional MDS solution showing the second and third dimensions.	32
4.5	A diagram showing the relationship between breathy, modal, and creaky phonation types. Based on Gordon & Ladefoged (2001).	34

5.1	Classification tree of phonation categories derived from the full set of acoustic measures for all individual tokens in the data set labeled as modal, breathy, or creaky. Abbreviations used in this figure are: HNR05_means002: harmonics-to-noise ratio over the frequency range from 0 Hz to 500 Hz for the middle third of each vowel; SHR_means002: subharmonic-to-harmonic ratio for the middle third of each vowel; H1H2c_means002: $H1^* - H2^*$ for the middle third of each vowel; B: breathy, M: modal, and C: creaky phonation categories.	40
6.1	A first figure.	41
6.2	A second figure.	42
7.1	The Laryngeal Articulator Model from Esling et al. (2019). This model shows the interactions between the laryngeal articulators (labeled circles). Syngeristic interactions are shown with solid lines, while anti-syngeristic interactions are shown with dotted lines.	44

List of Tables

2.1	Vowel qualities in Santiago Laxopa Zapotec.	4
2.2	Pillai scores and Bhattacharyya's Affinity for /o/ and /u/ in Santiago Laxopa Zapotec.	6
2.3	SLZ tone and voice quality combinations.	8
3.1	Model comparison between H1*-H2* and Residual H1* in distinguishing Santiago Laxopa Zapotec voice quality.	20
3.2	AIC for the H1*-H2* and residual H1* models.	21
4.1	Weight of each acoustic measure along each of the three dimensions indicated by the MDS solution (D1, D2, D3). Parameters that have weights higher than other parameters are in bold (weights > 4.0 for D1 and D2, and weights > 3.0 for D3).	33

Abstract

Voice Quality and Tone at the phonetics-phonology interface

by

Mykel Loren Brinkerhoff

Theses have elements. Isn't that nice?

To myself,

Mykel Loren Brinkerhoff,

the only person worthy of my company.

Acknowledgments

I want to “thank” my committee, without whose ridiculous demands, I would have graduated so, so, very much faster.

Chapter 1

Introduction

Voice quality describes the state of the larynx during phonation, when the vocal folds are set in motion. Languages make use of voice quality for paralinguistic purposes, such as conveying indexation of “biological, psychological, and social characteristics of the speaker” (Laver 1968) and racial identity (Podesva 2016).

Voice quality is also used linguistically. In English, it is often the case that we use creaky voice to indicate that we are at the end of an utterance (e.g., Garellek 2013). In many other languages, voice quality is used as part of the phonological system. Most famously, Gujarati has a phonemic contrast between breathy and modal voice in vowels (e.g., Fischer-Jørgensen 1968, Esposito & Khan 2012, Khan 2012, Esposito et al. 2019).

Esposito & Khan (2020)

Chapter 2

Vowels and suprasegmentals in Santiago Laxopa Zapotec

2.1 Introduction

Santiago Laxopa Zapotec (SLZ; *Dilla'xhunuh Laxup* [diz̥a'z̥un l:aʃup^h]) is a Northern Zapotec language spoken by approximately 1000 people in the municipality of Santiago Laxopa, Ixtlán, Oaxaca, Mexico and in diaspora communities throughout Mexico and the United States (Adler & Morimoto 2016, Adler et al. 2018, Foley, Kalivoda & Toosarvandani 2018, Foley & Toosarvandani 2020). According to Smith-Stark (2007), SLZ is part of the Cajonos Zapotec macro variety, which also includes Zoogocho Zapotec, Yatzachi Zapotec, Yalálag Zapotec, Tabaá Zapotec, Lachirioag Zapotec and sev-

eral other varieties spoken in the Sierra Norte of Oaxaca, Mexico.



Figure 2.1: Santiago Laxopa taken by Beto Diaz, a resident of Santiago Laxopa.

2.2 Vowels in Santiago Laxopa Zapotec

SLZ exhibits a four-vowel inventory; see Table 2.2. This type of vowel inventory is very common among Sierra Norte Zapotecs. Most varieties have the vowels /i/, /e/, /a/, and /o/ (Nellis & Hollenbach 1980, Jaeger & Van Valin 1982, Butler H. 1997, Avelino 2004, Long & Cruz 2005, Sonnenschein 2005).

In SLZ the vowel /o/ is marginal in SLZ's lexicon, only appearing in a few lexical

Table 2.1: Vowel qualities in Santiago Laxopa Zapotec.

	front	central	back
high	i		u~o
mid	e		
low		a	

items such as the diminutive classifier *do'*. This vowel is instead replaced by /u/ in most cases. This difference, however, is not universal among all speakers in the community. For the most part older speakers exhibit the vowel /o/ in their speech, while younger speakers tend to replace it with /u/. Most speakers, when asked, classify the two back rounded vowels as the same phoneme and view them as a dialectal feature between the different pueblos. For example, in neighboring San Bartolomé Zoogocho the /u/ vowel is very marginal and has led Sonnenschein (2005) to describe the language as having only four vowels. It is interesting to note that everywhere that SLZ has the vowels /u/ or /o/, Zoogocho only has /o/. Further evidence for this comes from plotting the vowels along the first two formants. As shown in Figure 2.2, the vowels /o/ and /u/ occupy nearly identical vowel spaces.

Additional evidence for the overlap of /o/ and /u/ can be measured with a combination of Pillai scores (Pillai 1955, Hay, Warren & Drager 2006, Nycz & Hall-Lew 2014) and Bhattacharyya's Affinity (Bhattacharyya 1943, Johnson 2015, Warren 2018, Strelluf 2018). Both of these measures show to what degree of overlap exists between two different items in some space. Their use in linguistics has primarily been used

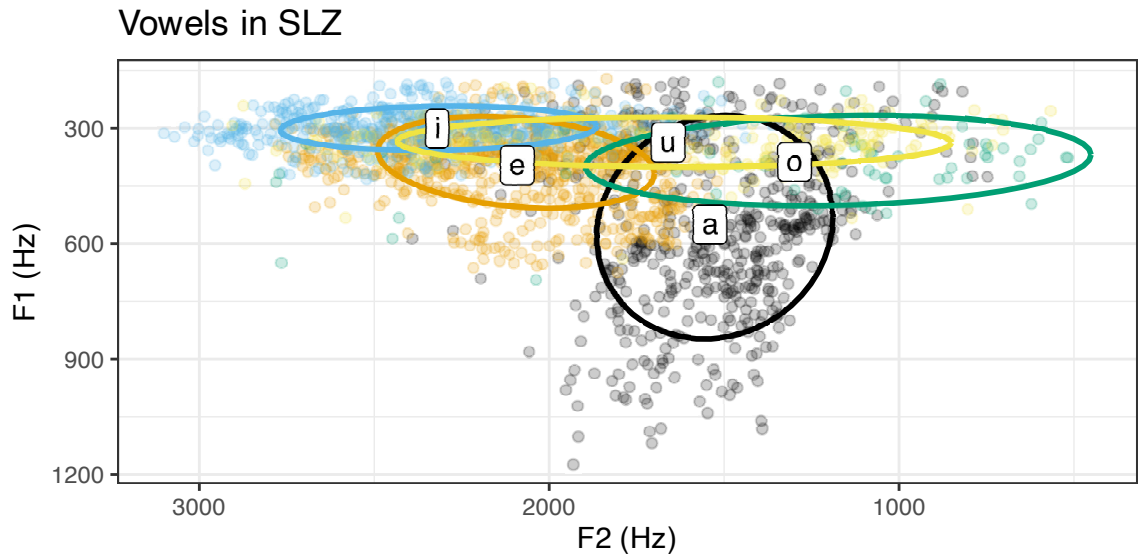


Figure 2.2: Vowel space of Santiago Laxopa Zapotec. The ellipses around each vowel mean represents 1 standard. The scale of the axes are in barks with their corresponding Hz values.

to show the process of a complete and partial mergers between vowels, such as the NEAR-SQUARE vowel merger in New Zealand English (Hay, Warren & Drager 2006). In the case of SLZ, these measures are used to show that these two vowels are starting to undergo a split. The Pillai scores and Bhattacharyya's Affinity show that the vowels /o/ and /u/ are nearly identical in their vowel space; see Table 2.2. In interpreting these results, Pillai scores range from 0 to 1, with 0 indicating overlap and 1 indicating complete no overlap. Bhattacharyya's Affinity ranges from 0 to 1, with 0 indicating no overlap and 1 indicating complete overlap. The results show that the overlap between /o/ and /u/ is not complete, but it is not negligible either.

Table 2.2: Pillai scores and Bhattacharyya’s Affinity for /o/ and /u/ in Santiago Laxopa Zapotec.

	Pillai score	Bhattacharyya’s Affinity
All speakers	0.157	0.892
Females	0.138	0.890
Males	0.224	0.858

2.3 Voice Quality contrasts in Santiago Laxopa Zapotec

Most Zapotec languages also make use of contrastive voice qualities (see Ariza-García 2018 for an overview and typology of the voice quality contrasts in the Zapotec language family), with SLZ being no exception. SLZ has a four-way voice quality contrast: modal, breathy, checked, and rearticulated. These contrasts are exemplified in the minimal quadruple in (1).

(1) Four-way near minimal phonation contrast

- a. *yag* /çag^L/ ‘tree; wood; almúd (unit of measurement approximately 4kg)’
- b. *yah* /ça^L/ ‘metal; rifle; bell’
- c. *yu*’ /çu^{ʔL}/ ‘cooking pot’
- d. *ya’a* /ça^ʔa^L/ ‘market’

SLZ shares with most Zapotec varieties, two types of creaky voice: checked and rearticulated. Checked vowels are characterized by an abrupt glottal closure which cuts the

vowel short. This phonation is sometimes realized as a period of creakiness at the end of the vowel.

Among speakers of SLZ, there is a large amount of inter- and intra-speaker variability in how the rearticulated vowels are produced. Some speakers produce these vowels with a full glottal stop in the middle of the vowel, others produce a vowel with apparent modal voice but with a drop in amplitude (similar to what Gerfen & Baker 2005 found for some Mixtec varieties), while others produce creaky voice throughout the entire vowel. Some speakers produce a combination of these unique productions. Overall, these rearticulated vowels are produced with some form of manipulation of glottal closure or amplitude drop in the middle of the vowel.

[INSERT SPECTROGRAMS OF CHECKED AND REARTICULATED VOWELS]

SLZ is unique because it is a Northern Core Zapotec that has developed breathy voice, which has not been described in any of the neighboring varieties that make up the Sierra Norte varieties (Nellis & Hollenbach 1980, Jaeger & Van Valin 1982, Butler H. 1997, Avelino 2004, Sonnenschein 2005, Long & Cruz 2005).¹ Breathy voice is characterized by a raspiness throughout the whole vowel or a portion of the vowel depending on the speaker.

[INSERT SPECTROGRAM OF BREATHY VOWEL]

¹Breathy voice in Zapotec languages, however, is common in Central Valley Zapotecs (Munro & Lopez 1999, Esposito 2004, 2010, Uchihara 2016, Ariza-García 2018).

2.4 Tonal contrasts in Santiago Laxopa Zapotec

One of the most well known features of all Oto-Manguean languages is the fact that they are tonal languages and exhibit a large range of tonal systems (Pike 1948, Rensch 1976, Josserand 1983, Silverman 1997a, Beam de Azcona 2007, DiCanio 2010, 2012, Elliott, Edmondson & Cruz 2016, Campbell 2017a,b, Lillehaugen 2019, Eischens 2022). SLZ has a five-way tonal contrast which consists of three level tones (high, mid, low) and two contour tones (rising and falling).

Brinkerhoff, Duff & Wax Cavallaro (2022)

2.5 Interactions between tone and voice quality

Based on elicitation data collected from 2020-2022, SLZ has a more expansive distribution of tone and phonation when compared to SLQZ but seems to be very similar to other Northern Zapotec varieties (e.g., Avelino 2004). The distribution of SLZ tonal and phonation combinations are given in Table 2.3.

Table 2.3: SLZ tone and voice quality combinations.

	Modal	Breathy	Checked	Rearticulated
High	✓	–	✓	✓
Mid	✓	✓	✓	✓
Low	✓	✓	✓	✓
High-Low	✓	✓	✓	✓
Mid-High	✓	✓	–	✓

Chapter 3

On using Residual H1* for voice quality research

3.1 Introduction

It is well understood that the term voice quality refers to and describes the manner in which the vocal folds vibrate during speech production. Many languages make use of voice quality to convey paralinguistic information by “indexing the biological, psychological, and social characteristics of the speaker” (Laver 1968, Podesva 2016). In addition to using voice quality to convey paralinguistic information, many languages use voice quality to convey phonemic distinctions (Garellek 2019).

It has long been established that voice quality contrasts have correlates in the

acoustic signal (Fischer-Jørgensen 1968, Buder 1999, Kent & Ball 1999). For example, Fischer-Jørgensen (1968) found that a strengthened fundamental correlated with breathy voice in Gujarati. In order to normalize the amplitude of the fundamental and counter-act some of the effects of high-pass filtering and differences in sound pressure in the signal, she proposed that you could subtract the amplitude of a higher harmonic, in this case, the second harmonic (H2), from the amplitude of the fundamental (H1). This measure, H1-H2, has since been used in many studies to measure not only breathy voice but other voice quality contrasts as well (Garellek 2019, Chai & Garellek 2022).

Despite the large amount of evidence in support of H1-H2, it is not without its problems (Chai & Garellek 2022). One of the main problems is that using H2 and other normalizations (e.g., H1-A3) are really just attempts at trying to understand the relative strength of the fundamental to higher harmonic energy. Furthermore, Sundberg (2022) found that H1 and H2 are affected differently by subglottal pressure, compromising some of the original reasoning behind the use of H1-H2 from Fischer-Jørgensen (1968). Furthermore, it is not uncommon for researchers to find that H1-H2 is not always the best measure to distinguish voice quality contrasts. For example, Esposito (2010) found that in Santa Ana del Valle Zapotec H1-H2 was only effective in distinguishing the voice quality contrasts in female speakers of the language and male speakers were better distinguished by H1-A3. Furthermore, Garellek & Esposito (2021)

found that the prominence of the cepstral peak, a type of harmonic measurement of noise, was a better measure to distinguish voice quality contrasts in White Hmong than H1-H2 and other measures of the spectral-slope.

Chai & Garellek (2022) found that in addition to the issues mentioned above, errors in measuring H1-H2 is uncomfortably high. This is primarily due to the need to precisely measure two different harmonic amplitudes and when there are errors in calculating H1 this in turn leads to errors in calculating H2 (Arras 1998). An example of this type of error propagation is that when there are errors in measuring the fundamental frequency, which is especially common with non-modal phonation, errors are introduced into measuring harmonics because they are based on the fundamental. Despite algorithms correcting for vowel height, a common error that occurs with calculating and measuring the fundamental frequency is when a high fundamental frequency co-occurs with a low first formant. This situation causes errors in tracking the fundamental frequency and the first formant. A final issue that can occur with measuring the harmonics is in contexts where the vowel is nasalized. Simpson (2012) shows that in these nasalized context, the first nasal pole (P0) can increase the amplitude of H2 and, when the fundamental frequency is high, H1 is instead increased.

This collection of errors leads Chai & Garellek (2022) to propose a new measure, residual H1*. This measure is calculated by first regressing H1 on energy and then subtracting the product of energy and the energy factor from H1. Chai & Garellek ar-

gue that this measure better reflects the initial purpose of using H1-H2. Furthermore, they find that residual H1*: (i) provides better differentiation between phonation types in !Xóõ; (ii) was more robust for measuring creak in Mandarin with respect to different utterance positions; and (iii) has a stronger relationship to the open quotient than H1*H2*.

For our study, we tested residual H1* with data from Santiago Laxopa Zapotec. This language has a complex interaction between tone and phonation types that has led traditional spectral-tilt measures not adequately to capture the differences in phonation in previous studies. We find that residual H1* can adequately capture differences in voice quality and is a more robust measure of voice quality than H1-H2. Adding credence to the use of this measure in voice quality research.

The remainder of this paper is organized as follows. Section 3.2 provides a brief overview of the Santiago Laxopa Zapotec language. Section 3.3 describes the methods used in data collection, data processing, and statistical modeling used in this study. Section 3.4 presents the results of the study. Section 3.5 concludes the paper.

3.2 Santiago Laxopa Zapotec

Santiago Laxopa Zapotec is a Northern Zapotec language of the Oto-manguean language family (Adler & Morimoto 2016, Adler et al. 2018, Foley, Kalivoda & Toosarvandani 2018, Foley & Toosarvandani 2020, Sichel & Toosarvandani 2020a,b, Brinker-

hoff, Duff & Wax Cavallaro 2021, 2022). It is spoken by 981 people in the municipality of Santiago Laxopa, Ixtlán, Oaxaca, Mexico (*Santiago Laxopa* 2022) and a small number of other speakers in diaspora throughout Mexico and the United States. Similar to other Oto-manguean languages, Santiago Laxopa Zapotec is laryngeally complex, which refers to how these languages make use of contrastive tone and contrastive voice quality (Silverman 1997a,b, Blankenship 1997, 2002).

Santiago Laxopa Zapotec exhibits the standard five-vowel inventory, which is further distinguished by the use of a four-way contrast in voice quality. This variety is unique because it is a Northern Core Zapotec that has developed breathy voice in addition to the two types of laryngealization that characterize the rest of the Zapotec languages, namely checked and rearticulated (see Ariza-García (2018) for a typological study of voice quality distinctions in Zapotec languages).

Santiago Laxopa Zapotec is also tonal with three level tones (H, M, and L) and two contours (MH and HL) appearing in nominals (Brinkerhoff, Duff & Wax Cavallaro 2022).¹ The language has a complex interaction between tone and phonation types. Every tone can appear with every phonation type, with two exceptions being that breathy voice cannot appear with the high tone and checked voice cannot appear with the rising contour tone.

These interactions between voice quality and tone present a rich environment for

¹The tonal system of Santiago Laxopa Zapotec for verbs and other lexical categories are still being evaluated.

testing the reliability of voice quality measures in laryngeally complex languages.

3.3 Methods

3.3.1 Elicitation

Ten native speakers of SLZ (five female; five male) participated in a wordlist elicitation. Elicitation was performed in the pueblo of Santiago Laxopa, Ixtlán, Oaxaca, Mexico during the summer of 2022 on a Zoom H4n handheld recorder (16-bit, 44.5 kHz).

The wordlist consisted of 72 items repeated three times each in isolation and the carrier sentence *Shnia' X chonhe lhas* “I say X three times”. Between these 72 words, there were 11 words with breathy voice, 9 with rearticulated voice, 10 with checked voice, and 42 with modal. Thirteen of the 72 words were disyllabic and contained the same voice quality in each syllable. Of those 13, only five contained mixed voicing.

3.3.2 Data Processing

Each vowel of the target words in the carrier sentence condition was labeled following Garellek (2020) for where the vowel began and ended. Each vowel in the word list was annotated for speaker, word, vowel, tone, voice quality, and utterance number. This labeling was conducted for each of the vowels located in the target word from

the elicitation list of the carrier sentences.

These vowels were then extracted and fed into VoiceSauce for acoustic measuring (Shue, Keating & Vicens 2009). The formants were measured using Snack (Sjölander 2004), while the fundamental frequency (f_0) was measured using the STRAIGHT algorithm (Kawahara, Cheveigne & Patterson 1998). Spectral slope measures were corrected for formants and bandwidths (Hanson 1997, Iseli, Shue & Alwan 2007). Each vowel was measured with ten equal time intervals, resulting in 22890 data points in total.

The data was cleaned of outliers following the same steps taken by Chai & Garellek (2022) in their study. The $H1^*$, $H1^*-H2^*$, and f_0 values were z-scored by speaker to reduce the variation between the speakers and provide a way to directly compare the different measures on the same scale. Data points with an absolute z-score value greater than 3 were considered outliers and excluded from the analyzes. Within each vowel category, we calculated the Mahalanobis distance in the F1-F2 panel. Each data point with a Mahalanobis distance greater than 6 was considered an outlier and excluded from the analysis. This is comparable to what was done in Garellek & Esposito (2021), Seyfarth & Garellek (2018), and Chai & Ye (2022).

Time points whose f_0 , F1, or F2 values were outliers were also excluded from $H1^*$ and $H1^* - H2^*$ analyzes because $H1^*$ and $H1^* - H2^*$ are calculated based on f_0 , F1, and F2. Energy was excluded if it had a value of zero and then log-transformed to

normalize its right-skewed distribution. Afterward, the resulted log-transformed data was z-scored and any data point with a z-score larger than 3 was excluded. This outlier removal resulted in 1918 datapoints being removed.

After the outliers were removed, we calculated residual $H1^*$ for the remaining data points following Chai & Garellek (2022). First, a linear mixed effects model was generated with the z-scored $H1^*$ as the response variable and the z-scored energy as fixed effect. The uncorrelated interaction of the z-scored energy by speaker was treated as random. The energy factor resulting from this linear mixed-effects model was extracted. Finally, the z-scored $H1^*$ had the product of the z-scored energy and the energy factor subtracted from it, giving us the residual $H1^*$ measure.

The measures were then assigned according to their position in the vowel (first, middle, and third) for statistical modeling.

3.3.3 Statistical modeling

Three linear mixed-effects regression models were fitted, one each for the z-scored $H1^*$ - $H2^*$ and residual $H1^*$. Each model had tone and interaction between voice quality and position in the vowel as fixed effects, and vowel and interaction between speaker, word, and repetition as random intercepts.

$$Measure \sim Phonation * Position + Tone + (1 | Speaker : Word : Repetition) + (1 | Vowel) \quad (3.1)$$

The tone and the interaction between voice quality and position in the vowel were selected as fixed effects for several reasons. The first is that five unique tones appeared in the data and it is well established that tone interacts with voice quality in different ways (see Esposito & Khan 2020, Garellek 2019 for discussion). By treating tone as a fixed effect in our model, we can account for these interactions. The interaction between voice quality and position in the vowel as a fixed effect was included to account for the temporal differences that between the two different laryngealizations; checked and rearticulated vowels. Checked vowels in Zapotec languages have a glottal occlusion or a short period of creaky voice located at the right edge of the vowel. This is in contrast to rearticulated vowels, where there is a glottal occlusion or creaky voice in the middle of the vowel. Because this difference between checked and rearticulated vowels is temporal in nature, we can account for this difference through the interaction of voice quality and position in the vowel.²

The interaction between speaker, word, and repetition was treated as a random intercept because this allows us to take into account that each speaker said each word on the elicitation list three times. This intercept accounts for not only the intra-speaker

²Tone and voice quality are closely linked . By including only the positional interaction with voice quality we can avoid collinear interactions that appear when we try to include tone in the interaction.

variability, but also the inter-speaker variability during each time the word was uttered. Treating a vowel as a random intercept allows us to capture the fact that each voice quality occurred with different vowels during elicitation.

3.4 Results

3.4.1 $H1^*-H2^*$

Figure 3.1 shows the mean $H1^*-H2^*$ values for each voice quality at each of the ten vowel intervals. We see that the breathy, checked, and rearticulated all have values lower than the modal at each of the first nine intervals. In the final interval, breathy and rearticulated are essentially equal to the modal value. In contrast, checked's value remains lower than the modal's value throughout the entire vowel.

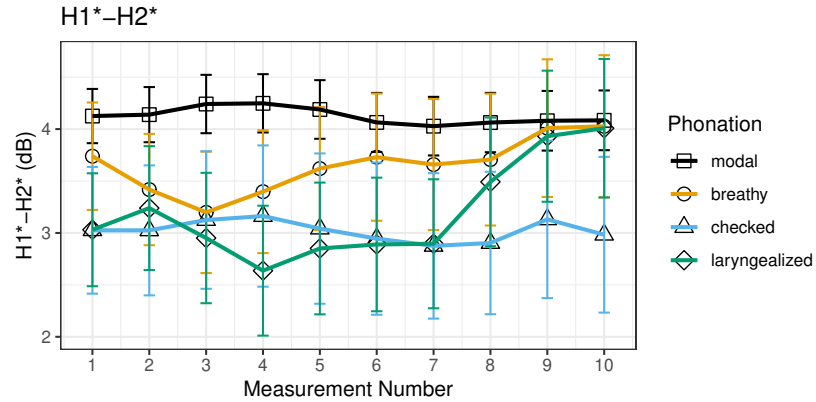


Figure 3.1: $H1^*-H2^*$ across the duration of the vowel. Points represent the mean of each measure across the ten intervals. The error bars around each point represent ± 1.96 Std. Error. A line was plotted over each to show how the acoustic measure functions across the ten intervals.

3.4.2 Residual H1*

Figure 3.2 shows the mean residual H1* values for each voice quality at each of the ten vowel intervals. In contrast to Figure 3.1, we see that breathy has a higher residual H1* measure than modal throughout the duration of the vowel, which is consistent with other observations for breathy voice (Fischer-Jørgensen 1968). Checked and rearticulated both have lower values than the modal at each of the 10 intervals. In addition, it shows that the checked voice has a lower residual H1* value than the rearticulated voice at intervals 8 through 10. The rearticulated voice has a lower residual H1* value than the checked voice at intervals 1 through 7, showing the temporal distinction between these two voice qualities.

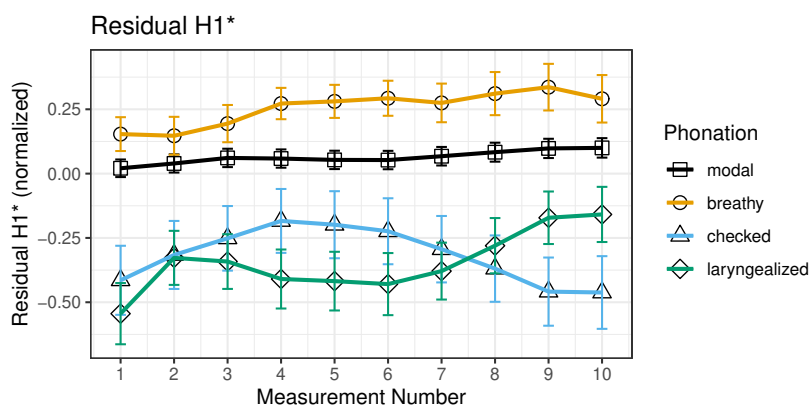


Figure 3.2: Residual H1* across the duration of the vowel. Points represent the mean of each measure across the ten intervals. The error bars around each point represent ± 1.96 Std. Error. A line was plotted over each to show how the acoustic measure functions across the ten intervals.

3.4.3 Model Comparison

In order to assess the robustness of the models we compared the residual H1* linear mixed-effects model to the H1*-H2* linear mixed-effects model. This was carried out using two methods: direct comparison of the outputs of the two models in the same way as Chai & Garellek (2022) and the Akaike Information Criterion (AIC).

Table 3.1 shows the results of the comparison of the linear mixed-effects models for H1*-H2* and residual H1*. In comparing these models, we find that the residual H1* model performed better than the H1*-H2* model in distinguishing voice quality contrasts in Santiago Laxopa Zapotec. This is supported by the larger absolute value of the coefficient estimate, the lower standard error and the higher t-value of the residual H1* to distinguish breathy, checked and rearticulated vowels from modal vowels.

Table 3.1: Model comparison between H1*-H2* and Residual H1* in distinguishing Santiago Laxopa Zapotec voice quality.

Voice Quality Contrast	Model	β	Std. Error	<i>t</i> -value	<i>p</i> -value	
Breathy vs Modal	H1*-H2*	-0.03569	0.04210	-0.84781	0.39656	
	Res. H1*	0.14997	0.03175	4.72315	<0.001	***
Checked vs Modal	H1*-H2*	-0.14120	0.04050	-3.48623	<0.001	***
	Res. H1*	-0.38554	0.03061	-12.59335	<0.001	***
Rearticulated vs Modal	H1*-H2	-0.13719	0.04964	-2.76340	0.00574	**
	Res. H1*	-0.48437	0.03740	-12.95239	<0.001	***

Table 3.2 shows the results of the AIC comparison between the H1*-H2* and residual H1* models. The residual H1* model had a lower AIC than the H1*-H2* model, indicating that the residual H1* model is a better fit for the data than the H1*-H2* model. Even though AIC comparison is usually conducted on nested models, it is still

a useful tool for comparing non-nested models (Burnham & Anderson 2004b, Burnham, Anderson & Huyvaert 2011, Burnham & Anderson 2004a).

Table 3.2: AIC for the H1*-H2* and residual H1* models.

Model	AIC	Δ AIC
H1*-H2* model	43386.99	11214.54
Residual H1* model	32172.45	0

3.5 Conclusion

In conclusion, we find that residual H1* is a more robust measure of voice quality than H1-H2 in Santiago Laxopa Zapotec. This is supported by the results of the linear mixed-effects models, which show that residual H1* is better at distinguishing breathy, checked, and rearticulated vowels from modal vowels. This is further supported by the AIC comparison, which shows that the residual H1* model is a better fit for the data than the H1*-H2* model. These results lend credence to the claims of Chai & Garellek (2022) and support the use of residual H1* in voice quality research, especially in laryngeally complex languages.

Chapter 4

The acoustic space of voice quality in Santiago Laxopa Zapotec

4.1 Introduction

This chapter studies the acoustic dimension of voice quality in Santiago Laxopa Zapotec (SLZ) using a Multidimensional Scaling (MDS) analysis of acoustic data. MDS is a statistical method that reduces the dimensionality of a dataset and visualizes the relationships between data points. This study uses MDS to visualize the acoustic space of voice quality in SLZ. This analysis provides information on the acoustic correlates of voice quality in SLZ and contributes to our understanding of the phonetic properties of this underdocumented language.

This study is based on the work conducted by Keating et al. (2023) on the acoustic space of voice quality in 11 languages. However, this study focuses on a single language, SLZ, and provides a detailed analysis of the acoustic properties of voice quality in this language. The results of this study will contribute to our understanding of the phonetic properties of SLZ and how the acoustic properties of voice quality in this language compare with other languages.

4.2 Methods

4.2.1 Participants

This study uses data collected from 10 native speakers of SLZ during the summer of 2022. Participants were recruited from the community of Santiago Laxopa, Oaxaca, Mexico. All participants were native speakers of SLZ. The participants were between 18 and 60 years old and consisted of five males and five females.

4.2.2 Recordings

The participants were asked to perform a word list elicitation task consisting of 72 words. These words were selected to elicit the entire range of types of voice quality in SLZ, including modal voice, the two kinds of creaky (i.e., checked and rearticulated), and breathy voice. The words were selected based on previous research conducted

as part of the Zapotec Language Project at the University of California, Santa Cruz (*Zapotec Language Project — University of California, Santa Cruz* 2022). Because participants were not literate in SLZ, the word list was prompted for them by asking them “How do you say [word in Spanish]?” by myself and another researcher in Zapotec. Participants were asked to respond with the desired word in the carrier phrase *Shnia*’ [WORD] *chonhe lhas* “I say [WORD] three times.” which was repeated three times. These utterances were recorded in a quiet environment using a Zoom H4n digital recorder. The recordings were saved as 16-bit WAV files with a sampling rate of 44.1 kHz.

4.2.3 Acoustic measuring

These resulting audio files were then processed in Praat to isolate the vowel portion of each word. The onset of the vowel was set to the second glottal pulse after the onset, and the offset of the vowel was set to the last glottal pulse before the decrease in amplitude at the end of the vowel (Garellek 2020). The vowel was then extracted and saved as a separate file for analysis.

These vowels were fed into VoiceSauce (Shue, Keating & Vicenik 2009) to generate the acoustic measures for the studies discussed in this dissertation. Because many acoustic measures are based on the fundamental frequency, this measure was calculated using the STRAIGHT algorithm from (Kawahara, Cheveigne & Patterson 1998).

The STRAIGHT algorithm estimates the fundamental frequency in millisecond (ms) intervals. Once the fundamental frequency is calculated, VoiceSauce then uses an optimization function to locate the harmonics of the spectrum, finding their amplitudes.

VoiceSauce then uses the Snack Sound toolkit (Sjölander 2004) to find the frequencies and bandwidths of the first four formants, also at millisecond intervals. The amplitudes of the harmonics closest to these formant frequencies are located and treated as the amplitudes of the formants. These formant frequencies and bandwidths are used to correct the harmonic amplitudes for the filtering effects of the vocal tract, using Iseli, Shue & Alwan's 2007 extension of the method employed by Hanson (1997). Each vowel was measured across ten equal time intervals, resulting in 22890 data points in total. These measures were then z-scored by speaker to reduce the variation between speakers and provide a way to compare the different measures directly on the same scale.

4.2.4 Data processing

Data points with an absolute z-score value greater than three were considered outliers and excluded from the analyses in the dissertation. The Mahalanobis distance was calculated in the F1-F2 panel within each vowel category. Each data point with a Mahalanobis distance greater than six was considered an outlier and excluded from the analysis.

Energy was excluded if it had a zero value and then log-transformed to normalize its right-skewed distribution. Afterward, the resulting log-transformed data was z-scored, and any data point with a z-score greater than three was excluded. This outlier removal resulted in 1918 data points being removed.

After removing the outliers, I calculated residual $H1^*$ for the remaining data points following Chai & Garellek (2022). First, a linear mixed effects model was generated with the z-scored $H1^*$ as the response variable and the z-scored energy as the fixed effect. The uncorrelated interaction of the z-scored energy by speaker was treated as random. The energy factor resulting from this linear mixed-effects model was extracted. Finally, the z-scored $H1^*$ was the product of the z-scored energy and the energy factor subtracted from it.

Once these steps were completed, the mean of each vowel and speaker of the fifth and sixth intervals was taken. This is similar to what Keating et al. (2023) did by taking the middle of the vowel for their analysis. This choice minimizes the effect of the onset and offset of the vowel on the acoustic measures, which are more likely to be affected by the surrounding consonants and should give us the most accurate representation of the vowel quality. Because z-scores were used, this resulted in negative measures, which presents a problem for MDS analyses. To correct for this, I added the absolute value of the minimum z-score to each measure. This results in a dataset that still preserves the relative differences in the scores while providing a dataset that is all

positive for the MDS analysis.

4.2.5 Statistical analysis

Using a multidimensional scaling (MDS) analysis is a statistical method of reducing the dimensionality of a dataset to visualize the relationships between the data points (Kruskal & Wish 1978). This is especially true when many variables could contribute to the data. In the case of voice quality, this is especially true. As shown in Kreiman et al. (2014, 2021) and Garellek (2020), voice quality is psychoacoustically complex and a single measure is not enough to capture the full range of voice quality. Instead, multiple measures are required that function as cues for the different types of voice quality. For example, a vowel characterized as having a breathy voice has an elevated spectral-slope and a lower harmonics-to-noise ratio than modal voice. A creaky voice has a lowered spectral-slope and a lowered harmonics-to-noise ratio.

Because MDS analyses that contain many variables can result in rather unmeaningful results, I chose to focus on the speaker x voice quality interaction. This allows us to see how speakers differ in their production of the different voice qualities. This choice to focus on speaker x voice quality means that each speaker's production of each of the four phonation contrasts is represented as a single point in the MDS plot (e.g., one point for speaker 1's modal voice, one for speaker one's checked voice, one for speaker one's rearticulated voice, and one for speaker one's breathy voice). This

is similar to what Keating et al. (2023) did in their study of the acoustic space of voice quality in 11 languages, except that they compared the language x voice quality interaction. Both of these interactions show us similar information. One shows us within a language, while the other shows us between languages.

The MDS analysis was conducted in R using the ‘metaMDS’ function in the ‘vegan’ package. The Manhattan distance was used to estimate the physical differences between the speaker x voice quality pairs. Because the distances are non-Euclidean, the MDS analysis was conducted using the non-metric option.

This algorithm resulted in a solution that involves several different dimensions. The number of dimensions retained directly affects how well the original data is captured. Too many dimensions and the data are overfitted; too few, and the data are underfitted. To determine the number of dimensions to retain, I used a scree plot to plot the stress of each dimension. The elbow of the curve was identified as the correct number of dimensions for analysis. Figure 4.1 shows that most data is captured in a two-dimensional space. The third dimension adds more subtle information about the voice quality.

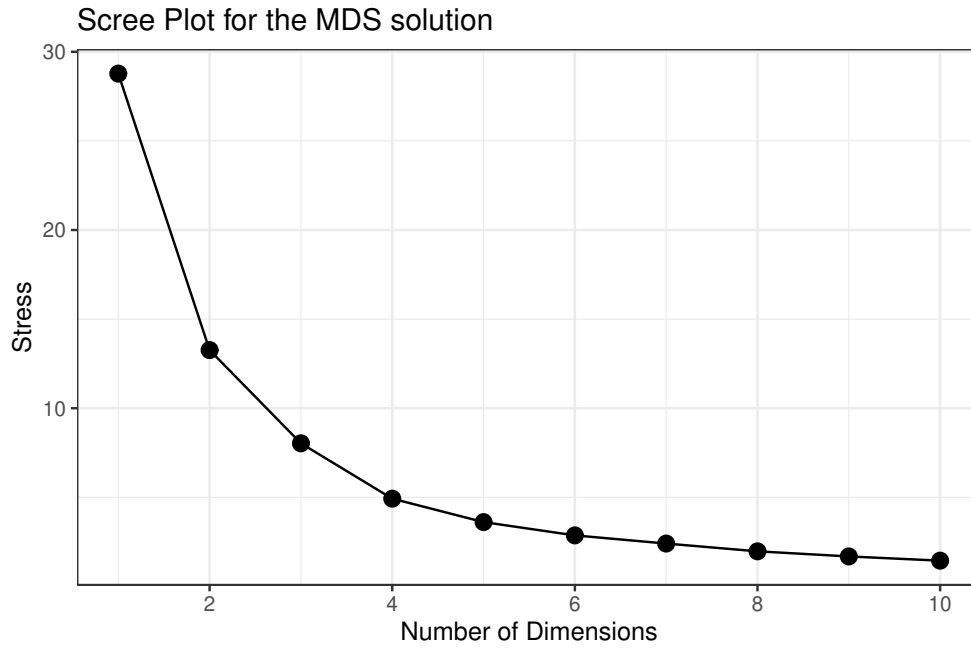


Figure 4.1: Scree plot for the MDS analysis.

4.3 Results

4.3.1 Acoustic space of voice quality

As mentioned above, the results of the MDS analysis can be represented in a two-dimensional space, as shown in Figure 4.2. In this and all subsequent plots, the breathy voice is represented by black, checked voice with orange, rearticulated voice with green, and modal voice with blue. Overall, we see that the breathy voice is located to the left of the plot, checked and rearticulated voices are tending to the right, and the modal voice is located in the center along the first dimension. The second dimension

shows a modal and nonmodal split, with modal voice at the bottom of the plot and nonmodal voice at the top.

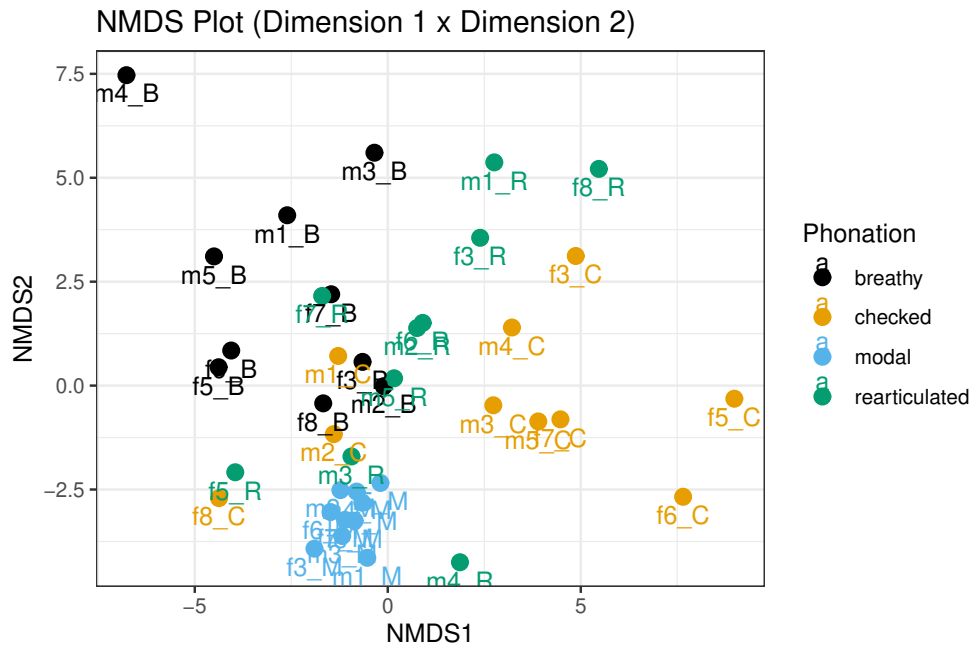


Figure 4.2: Two-dimensional MDS solution showing the first and second dimensions.

As mentioned above, the third dimension adds more information about voice quality. Adding the third dimension helps spread the groups along the first dimension, as shown in Figure 4.3. We see that breathy vowels are located at the top of the plot, and the two types of creaky voices (checked and rearticulated) are at the bottom.

When adding the third dimension to the second, we see that the breathy voices become separated from the other nonmodal voice qualities, as shown in Figure 4.4.

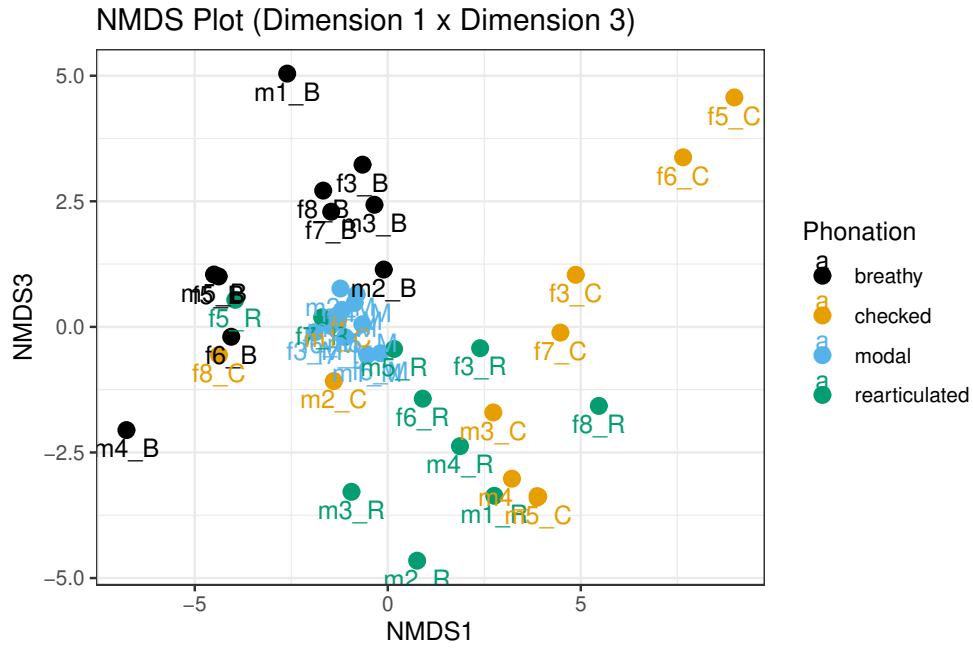


Figure 4.3: Two-dimensional MDS solution showing the first and third dimensions.

4.3.2 Acoustic correlates of voice quality

An additional step to MDS analysis involves testing which acoustic measures contribute the most weight to the different dimensions. Table 4.1 shows the results of this test. In each of the three dimensions of the MDS analysis, the acoustic measures with the highest weight are shown in bold. In the case of the first and second dimensions (D1 and D2), the acoustic measures that have weights higher than those of other parameters are in boldface (weights > 4.0). In the case of the third dimension (D3), the acoustic measures that have weights higher than those of other parameters are in boldface (weights > 3.0).

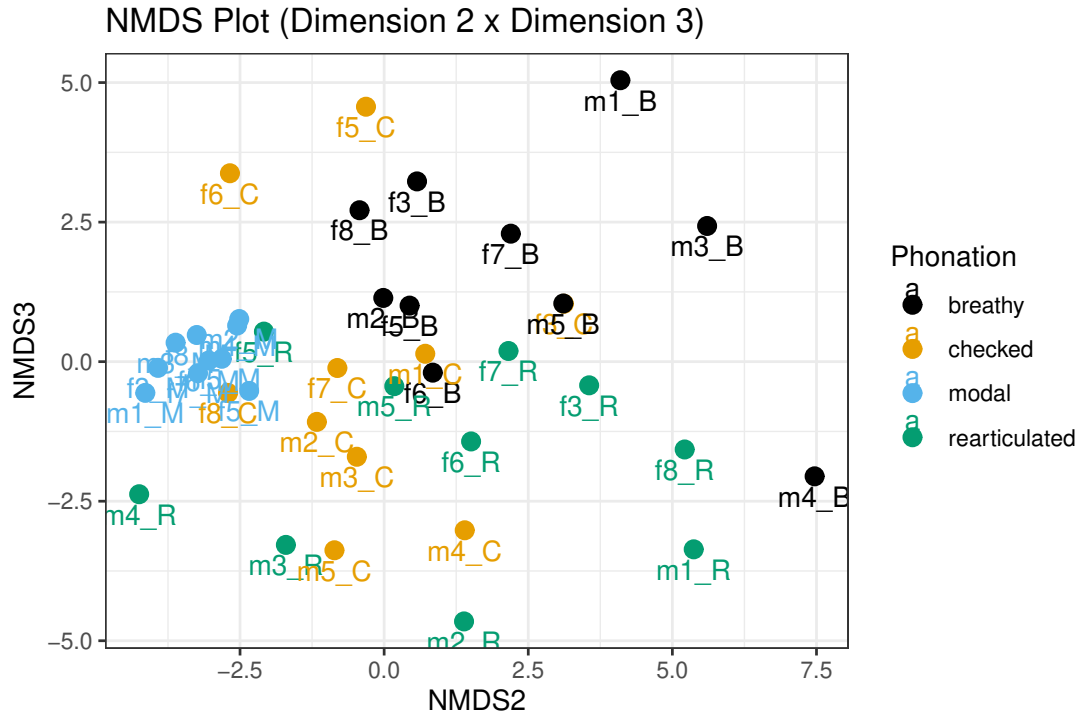


Figure 4.4: Two-dimensional MDS solution showing the second and third dimensions.

We see that for D1, the acoustic measures that have the highest weight on the first dimension are the amplitudes for the first three formants (i.e., $A1^*$, $A2^*$, $A3^*$) and $HNR < 500$ Hz (i.e., a harmonics-to-noise ratio for everything from 0 to 500 Hz). For D2, the acoustic measures with the highest weight are $H1^*-A1^*$, $H1^*-A2^*$ (i.e., spectral-slope measures), and the amplitudes of the first two formants. For D3, we see that $HNR < 1500$ Hz, $HNR < 2500$ Hz, $HNR < 3500$ Hz, and Residual $H1^*$ and $H2^*$ have the highest weights.

Table 4.1: Weight of each acoustic measure along each of the three dimensions indicated by the MDS solution (D1, D2, D3). Parameters that have weights higher than other parameters are in bold (weights > 4.0 for D1 and D2, and weights > 3.0 for D3).

Acoustic Measure	D1	D2	D3
H1*-H2*	1.03	1.01	0.39
H2*-H4	1.15	3.98	2.13
H1*-A1*	2.22	5.15	1.84
H1*-A2*	2.93	4.66	1.00
H1*-A3*	2.37	3.24	0.90
H4*-H2k*	1.47	0.31	1.59
H2k*-H5k*	3.73	0.73	0.84
residual H1*	1.75	0.97	4.24
H2*	1.76	0.94	4.09
H4*	0.79	4.28	0.10
A1*	4.96	5.48	0.17
A2*	5.30	4.90	1.38
A3*	4.54	2.91	1.11
CPP	4.08	0.10	1.68
HNR < 500 Hz	5.66	1.47	1.81
HNR < 1500 Hz	3.95	2.68	3.08
HNR < 2500 Hz	3.15	1.63	3.42
HNR < 3500 Hz	2.86	0.55	3.19
Strength of Excitation	2.09	0.78	0.36
SHR	2.39	0.50	0.47
Energy	2.22	3.91	0.64

4.4 Discussion

The results of the MDS analysis show that the acoustic space in which SLZ’s voice quality occupies is similar to other languages. Similar to what Keating et al. (2023) found in their study, the first dimension appears to roughly be similar to the open quotient of the glottis as proposed by Gordon & Ladefoged (2001). In this model, voice quality is seen as the result of the glottis being more open or closed during phonation. The more open the glottis, the more breathy the phonation will be. The more

closed the glottis, the more creaky the phonation will be. This model from Gordon & Ladefoged (2001) is shown in Figure 4.5.




Figure 4.5: A diagram showing the relationship between breathy, modal, and creaky phonation types. Based on Gordon & Ladefoged (2001).

As mentioned above, the measures that contribute the most to this first dimension are the amplitudes of the first three formants, CPP, and Harmonics-to-Noise Ratio < 500 Hz. Interestingly, even though this dimension is similar to the open-quotient model put forward by Gordon & Ladefoged (2001), we do not observe measures traditionally associated with the open-quotient (i.e., spectral-slope). Instead of seeing traditional spectral-slope measures, we find the three formant amplitudes used to normalize the amplitude of the fundamental like in the measures $H1^*-A1^*$, $H1^*-A2^*$, and $H1^*-A3^*$. This suggests that the first dimension is more about the formants' amplitude than the signal's spectral-slope. This is combined with CPP and $HNR < 500$ Hz, which measures the harmonics-to-noise ratio for the first 500 Hz of the signal. This suggests that the first dimension is also concerned with the amount of noise in the signal.

The second dimension divides the space into modal versus nonmodal voice quality. The acoustic measures that contribute the most weight to this dimension are the spectral-slope measures $H1^*-A1^*$ and $H1^*-A2^*$ and the harmonic amplitudes of $H4^*$, $A1^*$, and $A2^*$. This suggests that the second dimension is more about the spectral-

slope of the signal than about the amount of noise in the signal. This is interesting given that traditional spectral-slope measures are associated with the open-quotient model of voice quality (Holmberg et al. 1995, Kreiman, Gerratt & Antoñanzas-Barroso 2007, Garellek et al. 2016, Garellek 2019, Chai & Garellek 2022).

The third dimension adds more information on nonmodal voice quality. Figure 4.3 and Figure 4.4, this third dimension separates the breathy voice from the other non-modal phonation types. The measures contributing the most to this dimension are the harmonics-to-noise ratio for the first 1500 Hz, 2500 Hz, and 3500 Hz. In addition, the residual $H1^*$ and $H2^*$ have the highest weights, which is interesting given that residual $H1^*$ has been argued to be a more robust measure of the spectral-slope of the signal than traditional spectral-slope measures (Chai & Garellek 2022, Brinkerhoff & McGuire 2024). Furthermore, as discussed in Chapter 3, residual $H1^*$ represents the voice quality in SLZ better than $H1^*-H2^*$ and $H1^*-A3^*$. This dimension is characterized by the harmonics-to-noise ratios for the first 1500 Hz, 2500 Hz, and 3500 Hz. This suggests that the third dimension is more about the signal's spectral quality than about the formants' amplitude. This is combined with residual $H1^*$ and $H2^*$, which are measures of the spectral-slope of the signal.

4.5 Conclusion

Although the discussion has predominately been about the weights of the measures that contribute to the different dimensions, it is important to note that the measures are not independent of each other. Instead, all of the measures contribute to the acoustic space of voice quality in SLZ to some extent or another. Just because a measure has a low weight does not mean that it does not contribute to the acoustic space, but it is still important to understand the acoustic space in SLZ. Rather than thinking of the measures as independent of each other, it is better to think of them as a group of measures that work together to create the acoustic space of voice quality in SLZ. This is especially true given the fact that the MDS analysis is a reduction of the data to a few dimensions. This analysis offers a snapshot of the voice quality acoustic space in SLZ, but is not the full picture.

Additionally, as will be discussed in Chapter 5, another way in which we can determine which measures are the most important is by performing a bootstrap aggregating version of a classification and regression tree analysis (Breiman et al. 1986, Breiman 1996).

Chapter 5

Trees reveal the importance of measures in SLZ

5.1 Introduction

The MDS analysis presented in Chapter 4 helps us to understand the acoustic landscape of SLZ. This helps reveal the multidimensional nature of voice quality and how all the acoustic measures work together to produce that acoustic landscape. The chapter also discussed how certain measures contributed more weight than other acoustic measures to each of the different dimensions. However, it does not tell us what measures are more important in separating the voice qualities from one another. This is where decision trees can be most helpful.

5.2 What are Decision Trees

Decision trees are a statistical tool that helps to reveal which variables divide the space under investigation. Essentially, this is done by stratifying or segmenting the predictor space into some number of simpler regions. The rules that divide the space into these regions are based on some aspect of the variables (see Hastie, Tibshirani & Friedman 2009, James et al. 2021 for explanations on the statistics and how to conduct this in R).

These trees can be used for both regression and classification. In the case of regressions, it splits the predictor space into regions and calculates how the item under discussion behaves in each region. This process of splitting into regions and calculating how something responds in that region continues until some stopping rule is applied, which is usually defined to some number of terminal nodes. This resulting tree is rather large and is then pruned based on the cost-complexity pruning to a subset of itself. This subsetted tree is the tree that has minimized its cost-complexity criterion of all potential subsets. Meaning that it balances the trade-off between the complexity of the tree and its fit to the data.

In the case of classification, the algorithms that result in a tree are very similar to those used for regression trees. The main difference in algorithm comes from what is used to split the nodes and how the tree is pruned. Additionally, instead of predicting a continuous outcome like with regression trees, classification trees predict a categorical

outcome. The predictor space is divided into regions, and within each region, the majority class is assigned as the predicted class for that region. This process continues until a stopping rule is applied, similar to regression trees. The resulting tree can also be pruned to avoid overfitting, using a cost-complexity criterion.

Decision trees are easy to interpret and visualize, making them a popular choice for understanding the structure of the data. However, they are prone to overfitting, especially with small datasets. To remedy this issue techniques such as bagging (Breiman 1996) and random forests (Breiman 2001) were introduced in order to improve the performance and robustness of decision trees.

5.3 Decision trees in linguistics

The use of decision trees in linguistics is not new. One of the first uses was done by Tagliamonte & Baayen (2012), where they were illustrated the use of decision trees in investigating which sociolinguistic factors were the most important in the use of *was* versus *were* in York English. Recently, decision trees were used to show which acoustic measures were the most important in making the split in the acoustic space for voice quality (Keating et al. 2023).

In their study, Keating et al. (2023) performed a simple decision tree analysis to supplement their MDS analysis of 11 languages and their voice quality contrasts.

In the analysis presented in this chapter, I will make use of bagging trees to assess

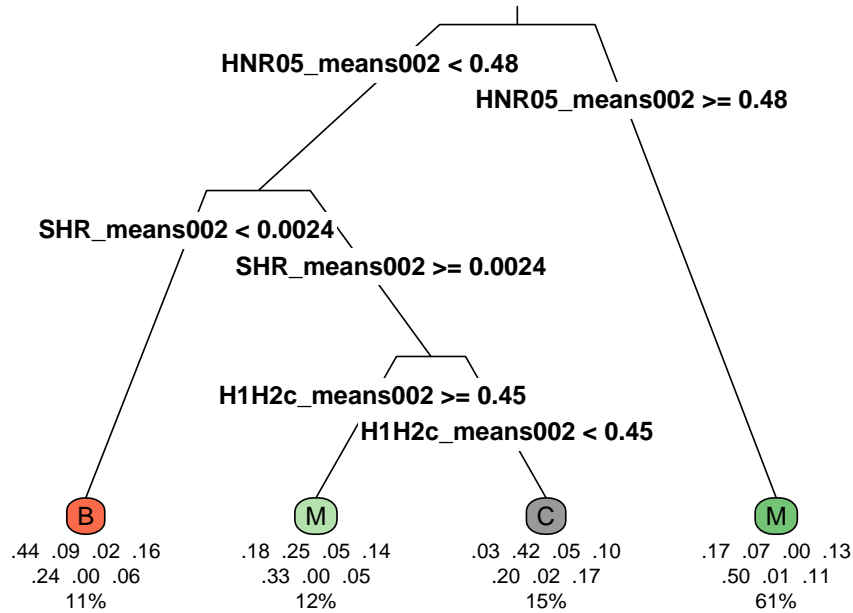


Figure 5.1: Classification tree of phonation categories derived from the full set of acoustic measures for all individual tokens in the data set labeled as modal, breathy, or creaky. Abbreviations used in this figure are: HNR05_means002: harmonics-to-noise ratio over the frequency range from 0 Hz to 500 Hz for the middle third of each vowel; SHR_means002: subharmonic-to-harmonic ratio for the middle third of each vowel; H1H2c_means002: $H1^* - H2^*$ for the middle third of each vowel; B: breathy, M: modal, and C: creaky phonation categories.

the importance of the different

Chapter 6

Testing the laryngeal complexity hypothesis

6.1 Laryngeal Complexity

Some other research was once performed.

6.2

Figure 6.1: A first figure.

Figure 6.2: A second figure.

Chapter 7

Modeling laryngeal complexity

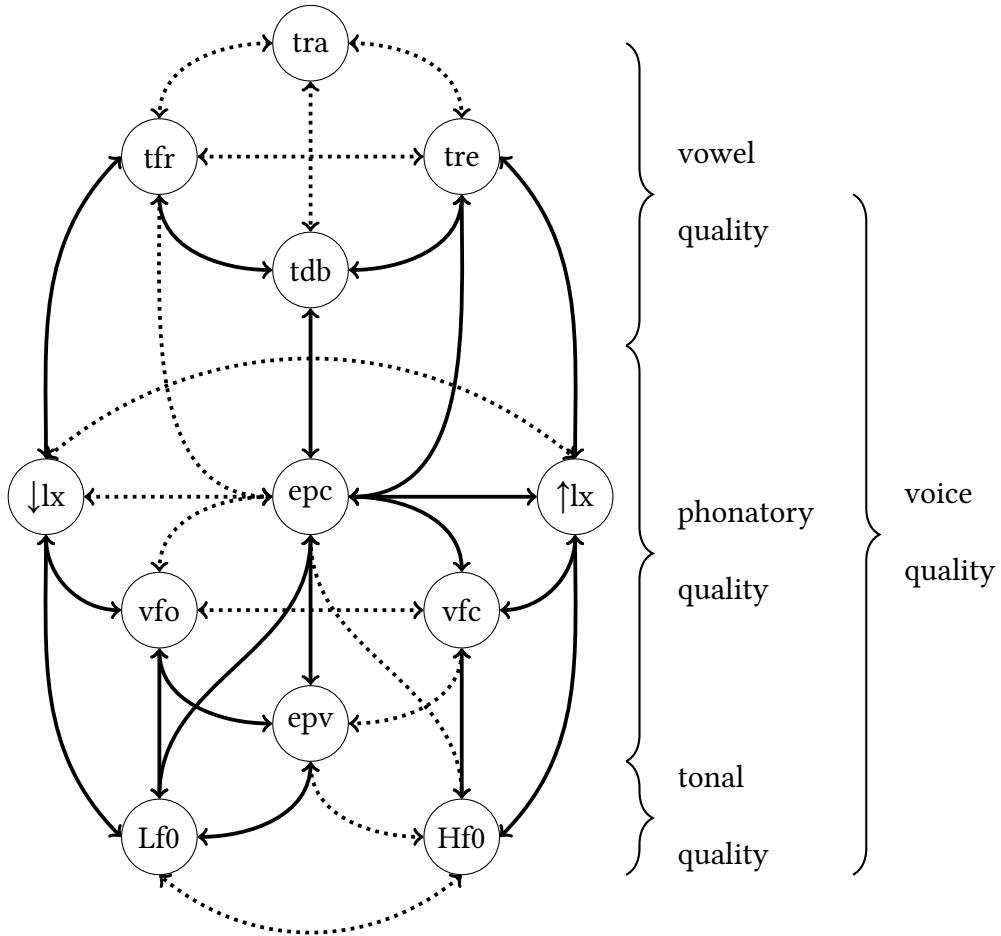


Figure 7.1: The Laryngeal Articulator Model from Esling et al. (2019). This model shows the interactions between the laryngeal articulators (labeled circles). Synergetic interactions are shown with solid lines, while anti-synergetic interactions are shown with dotted lines.

Chapter 8

Conclusion

Bibliography

- Adler, Jeff, Steven Foley, Jed Pizarro-Guevara, Kelsey Sasaki & Maziar Toosarvandani. 2018. The derivation of verb initiality in Santiago Laxopa Zapotec. In Jason Merchant, Line Mikkelsen, Deniz Rudin & Kelsey Sasaki (eds.), *A reasonable way to proceed: Essays in honor of Jim McCloskey*, 31–49. Santa Cruz, Berkeley, Chicago: University of California.
- Adler, Jeff & Maho Morimoto. 2016. Acoustics of phonation types and tones in Santiago Laxopa Zapotec. *The Journal of the Acoustical Society of America* 140(4). 3109–3109. <https://doi.org/10.1121/1.4969713>.
- Ariza-García, Andrea. 2018. Phonation types and tones in Zapotec languages: A synchronic comparison. *Acta Linguistica Petropolitana* XIV(2). 485–516. <https://doi.org/10.30842/alp2306573714220>.
- Arras, Kai O. 1998. *An Introduction to Error Propagation: Derivation, Meaning and Examples of Equation $CY = FX CX FXT$* . EPFL-ASL-TR-98-01 R3. Lausanne, Switzerland: Swiss Federal Institute of Technology Lausanne (EPFL).

- Avelino, Heriberto. 2004. *Topics in Yalálag Zapotec, with particular reference to its phonetic structures*. Los Angeles, CA: University of California, Los Angeles dissertation. 315 pp.
- Beam de Azcona, Rosemary G. 2007. Problems in Zapotec Tone Reconstruction. *Annual Meeting of the Berkeley Linguistics Society* 33(2). 3. <https://doi.org/10.3765/bls.v33i2.3497>.
- Bhattacharyya, A. 1943. On a measure of divergence between two statistical populations defined by their probability distribution. *Bulletin of the Calcutta Mathematical Society* 35. 99–110.
- Blankenship, Barbara. 1997. *The time course of breathiness and laryngealization in vowels*. Los Angeles, CA: University of California, Los Angeles dissertation.
- Blankenship, Barbara. 2002. The timing of nonmodal phonation in vowels. *Journal of Phonetics* 30(2). 163–191. <https://doi.org/10.1006/jpho.2001.0155>.
- Breiman, Leo. 1996. Bagging predictors. *Machine Learning* 24(2). 123–140. <https://doi.org/10.1007/BF00058655>.
- Breiman, Leo. 2001. Random Forests. *Machine Learning* 45(1). 5–32. <https://doi.org/10.1023/A:1010933404324>.
- Breiman, Leo, Jerome H. Friedman, Richard A. Olshen & Charles J. Stone. 1986. *Classification and regression trees*. Boca Raton, Fla.: Taylor and Francis. 358 pp.

- Brinkerhoff, Mykel Loren, John Duff & Maya Wax Cavallaro. 2021. Downstep in Santiago Laxopa Zapotec and the prosodic typology of VSO languages. In *Manchester Phonology Meeting*. Manchester, England.
- Brinkerhoff, Mykel Loren, John Duff & Maya Wax Cavallaro. 2022. Tonal patterns and their restrictions in Santiago Laxopa Zapotec.
- Brinkerhoff, Mykel Loren & Grant McGuire. 2024. On residual H1* as a measure of voice quality. In Taehong Cho, Sahyang Kim, Jeff Holiday & Sang-Im Lee-Kim (eds.), *Proceedings of the 19th Conference on Laboratory Phonology*, 39–40. Seoul, Korea: Hanyang Institute for Phonetics and Cognitive Sciences of Language5.
- Buder, Eugene H. 1999. Acoustic analysis of voice quality: A tabulation of algorithms 1902-1990. In Raymond D. Kent & Martin J. Ball (eds.), *Voice quality measurement*, 119–244. San Diego: Singular Pub. Group.
- Burnham, Kenneth P. & David R. Anderson (eds.). 2004a. *Model Selection and Multimodel Inference*. New York, NY: Springer. <https://doi.org/10.1007/b97636>.
- Burnham, Kenneth P. & David R. Anderson. 2004b. Multimodel Inference: Understanding AIC and BIC in Model Selection. *Sociological Methods & Research* 33(2). 261–304. <https://doi.org/10.1177/0049124104268644>.
- Burnham, Kenneth P., David R. Anderson & Kathryn P. Huyvaert. 2011. AIC model selection and multimodel inference in behavioral ecology: some background, ob-

- servations, and comparisons. *Behavioral Ecology and Sociobiology* 65(1). 23–35.
<https://doi.org/10.1007/s00265-010-1029-6>.
- Butler H., Inez M. 1997. *Diccionario zapoteco de Yatzachi: Yatzachi el Bajo, Yatzachi el Alto, Oaxaca*. 1. ed (Serie de vocabularios y diccionarios indígenas "Mariano Silva y Aceves" no. 37). Tucson, AZ: Instituto Lingüístico de Verano. 528 pp.
- Campbell, Eric W. 2017a. Otomanguean historical linguistics: Exploring the subgroups. *Language and Linguistics Compass* 11(7). e12244. <https://doi.org/10.1111/lnc3.12244>.
- Campbell, Eric W. 2017b. Otomanguean historical linguistics: Past, present, and prospects for the future. *Language and Linguistics Compass* 11(4). e12240. <https://doi.org/10.1111/lnc3.12240>.
- Chai, Yuan & Marc Garellek. 2022. On H1–H2 as an acoustic measure of linguistic phonation type. *The Journal of the Acoustical Society of America* 152(3). 1856–1870.
<https://doi.org/10.1121/10.0014175>.
- Chai, Yuan & Shihong Ye. 2022. Checked Syllables, Checked Tones, and Tone Sandhi in Xiapu Min. *Languages* 7(1). 47. <https://doi.org/10.3390/languages7010047>.
- DiCanio, Christian T. 2010. Itunyoso Trique. *Journal of the International Phonetic Association* 40(2). 227–238. <https://doi.org/10.1017/S0025100310000034>.

- DiCanio, Christian T. 2012. Coarticulation between tone and glottal consonants in Itunyoso Trique. *Journal of Phonetics* 40(1). 162–176. <https://doi.org/10.1016/j.wocn.2011.10.006>.
- Eischens, Benjamin. 2022. *Tone, Phonation, and the Phonology-Phonetics Interface in San Martín Peras Mixtec*. UC Santa Cruz.
- Elliott, A. Raymond, Jerold A. Edmondson & Fausto Sandoval Cruz. 2016. Chicahuaxtla Triqui. *Journal of the International Phonetic Association* 46(3). 351–365. <https://doi.org/10.1017/S0025100315000389>.
- Esling, John H., Scott R. Moisik, Allison Benner & Lise Crevier-Buchman. 2019. *Voice Quality: The Laryngeal Articulator Model*. 1st edn. (Cambridge Studies in Linguistics 162). Cambridge University Press. <https://doi.org/10.1017/9781108696555>.
- Esposito, Christina M. 2004. Santa Ana del Valle Zapotec phonation. *UCLA Working Papers in Phonetics* (103). 71–105.
- Esposito, Christina M. 2010. Variation in contrastive phonation in Santa Ana Del Valle Zapotec. *Journal of the International Phonetic Association* 40(2). 181–198. <https://doi.org/10.1017/S0025100310000046>.
- Esposito, Christina M. & Sameer ud Dowla Khan. 2012. Contrastive breathiness across consonants and vowels: A comparative study of Gujarati and White Hmong. *Jour-*

- nal of the International Phonetic Association* 42(2). 123–143. <https://doi.org/10.1017/S0025100312000047>.
- Esposito, Christina M. & Sameer ud Dowla Khan. 2020. The cross-linguistic patterns of phonation types. *Language and Linguistics Compass* 14(12). <https://doi.org/10.1111/lnc3.12392>.
- Esposito, Christina M., Sameer ud Dowla Khan, Kelly H. Berkson & Max Nelson. 2019. Distinguishing breathy consonants and vowels in Gujarati. *Journal of South Asian Languages and Linguistics* 6(2). 215–243. <https://doi.org/10.1515/jsall-2019-2011>.
- Fischer-Jørgensen, Eli. 1968. Phonetic Analysis of Breathy (Murmured) Vowels in Gujarati. *Annual Report of the Institute of Phonetics University of Copenhagen* 2. 35–85. <https://doi.org/10.7146/aripuc.v2i.130674>.
- Foley, Steven, Nick Kalivoda & Maziar Toosarvandani. 2018. Forbidden clitic clusters in Zapotec. In Daniel Edmiston, Marina Ermolaeva, Emre Hakgüder, Jackie Lai, Kathryn Montemurro, Brandon Rhodes, Amara Sankhagowit & Michael Tabatowski (eds.), *Proceedings of the Fifty-third Annual Meeting of the Chicago Linguistic Society*, 87–102.
- Foley, Steven & Maziar Toosarvandani. 2020. Extending the Person-Case Constraint to Gender: Agreement, Locality, and the Syntax of Pronouns. *Linguistic Inquiry*. 1–40. https://doi.org/10.1162/ling_a_00395.

- Garellek, Marc. 2013. *Production and perception of glottal stops*. Los Angeles, CA: University of California, Los Angeles dissertation.
- Garellek, Marc. 2019. The phonetics of voice. In William F. Katz & Peter F. Assmann (eds.), *The Routledge handbook of phonetics* (Routledge Handbooks in Linguistics), 75–106. Abingdon, Oxon ; New York, NY: Routledge.
- Garellek, Marc. 2020. Acoustic Discriminability of the Complex Phonation System in !Xóõ. *Phonetica* 77(2). 131–160. <https://doi.org/10.1159/000494301>.
- Garellek, Marc & Christina M. Esposito. 2021. Phonetics of White Hmong vowel and tonal contrasts. *Journal of the International Phonetic Association*. 1–20. <https://doi.org/10.1017/S0025100321000104>.
- Garellek, Marc, Robin Samlan, Bruce R. Gerratt & Jody Kreiman. 2016. Modeling the voice source in terms of spectral slopes. *The Journal of the Acoustical Society of America* 139(3). 1404–1410. <https://doi.org/10.1121/1.4944474>.
- Gerfen, Chip & Kirk Baker. 2005. The production and perception of laryngealized vowels in Coatzospan Mixtec. *Journal of Phonetics* 33(3). 311–334. <https://doi.org/10.1016/j.wocn.2004.11.002>.
- Gordon, Matthew & Peter Ladefoged. 2001. Phonation types: a cross-linguistic overview. *Journal of Phonetics* 29(4). 383–406. <https://doi.org/10.1006/jpho.2001.0147>.

- Hanson, Helen M. 1997. Glottal characteristics of female speakers: Acoustic correlates. *The Journal of the Acoustical Society of America* 101(1). 466–481. <https://doi.org/10.1121/1.417991>.
- Hastie, Trevor, Robert Tibshirani & Jerome Friedman. 2009. *The Elements of Statistical Learning* (Springer Series in Statistics). New York, NY: Springer. <https://doi.org/10.1007/978-0-387-84858-7>.
- Hay, Jennifer, Paul Warren & Katie Drager. 2006. Factors influencing speech perception in the context of a merger-in-progress. *Journal of Phonetics*. Modelling Sociophonetic Variation 34(4). 458–484. <https://doi.org/10.1016/j.wocn.2005.10.001>.
- Holmberg, Eva B., Robert E. Hillman, Joseph S. Perkell, Peter C. Guiod & Susan L. Goldman. 1995. Comparisons Among Aerodynamic, Electroglottographic, and Acoustic Spectral Measures of Female Voice. *Journal of Speech, Language, and Hearing Research* 38(6). 1212–1223. <https://doi.org/10.1044/jshr.3806.1212>.
- Iseli, Markus, Yen-Liang Shue & Abeer Alwan. 2007. Age, sex, and vowel dependencies of acoustic measures related to the voice source. *The Journal of the Acoustical Society of America* 121(4). 2283–2295. <https://doi.org/10.1121/1.2697522>.
- Jaeger, Jeri J. & Robert D. Van Valin. 1982. Initial Consonant Clusters in Yateé Zapotec. *International Journal of American Linguistics* 48(2). 125–138. <https://doi.org/10.1086/465724>.

- James, Gareth, Daniela Witten, Trevor Hastie & Robert Tibshirani. 2021. *An introduction to statistical learning: with applications in R*. Second edition (Springer Texts in Statistics). New York: Springer. 1 p. <https://doi.org/10.1007/978-1-0716-1418-1>.
- Johnson, Daniel Ezra. 2015. Quantifying Overlap with Bhattacharyya's affinity and other measures!
- Josserand, Judy Kathryn. 1983. *Mixtec Dialect History*. New Orleans, LA: Tulane University dissertation. 727 pp.
- Kawahara, Hideki, Alain De Cheveigne & Roy D. Patterson. 1998. An instantaneous-frequency-based pitch extraction method for high-quality speech transformation: revised TEMPO in the STRAIGHT-suite. In *5th International Conference on Spoken Language Processing (ICSLP 1998)*, paper 0659-. ISCA. <https://doi.org/10.21437/ICSLP.1998-555>.
- Keating, Patricia, Jianjing Kuang, Marc Garellek, Christina M. Esposito & Sameer ud Dowla Khan. 2023. A cross-language acoustic space for vocalic phonation distinctions. *Language* 99(2). 351–389. <https://doi.org/10.1353/lan.2023.a900090>.
- Kent, Raymond D. & Martin J. Ball (eds.). 1999. *Voice quality measurement*. San Diego: Singular Pub. Group. 492 pp.

- Khan, Sameer ud Dowla. 2012. The phonetics of contrastive phonation in Gujarati. *Journal of Phonetics* 40(6). 780–795. <https://doi.org/10.1016/j.wocn.2012.07.001>.
- Kreiman, Jody, Bruce R. Gerratt & Norma Antoñanzas-Barroso. 2007. Measures of the Glottal Source Spectrum. *Journal of Speech, Language, and Hearing Research* 50(3). 595–610. [https://doi.org/10.1044/1092-4388\(2007/042\)](https://doi.org/10.1044/1092-4388(2007/042)).
- Kreiman, Jody, Bruce R. Gerratt, Marc Garellek, Robin Samlan & Zhaoyan Zhang. 2014. Toward a unified theory of voice production and perception. *Loquens* 1(1). e009. <https://doi.org/10.3989/loquens.2014.009>.
- Kreiman, Jody, Yoonjeong Lee, Marc Garellek, Robin Samlan & Bruce R. Gerratt. 2021. Validating a psychoacoustic model of voice quality. *The Journal of the Acoustical Society of America* 149(1). 457–465. <https://doi.org/10.1121/10.0003331>.
- Kruskal, Joseph & Myron Wish. 1978. *Multidimensional Scaling*. SAGE Publications, Inc. <https://doi.org/10.4135/9781412985130>.
- Laver, John D. M. 1968. Voice Quality and Indexical Information. *British Journal of Disorders of Communication* 3(1). 43–54. <https://doi.org/10.3109/13682826809011440>.
- Lillehaugen, Brook Danielle. 2019. Otomanguean Languages. In *The Routledge Handbook of North American Languages*. Routledge.

- Long, Rebecca & Sofronio Cruz. 2005. *Diccionario zapoteco de San Bartolomé Zoogocho, Oaxaca*. 2nd edition (Serie de vocabularios y diccionarios indígenas "Mariano Silva y Aceves" no. 38). Coyoacán, D.F. [Mexico]: Instituto Lingüístico de Verano. 531 pp.
- Munro, Pamela & Felipe H. Lopez. 1999. *Di'csyonaary x:tèe'n dìi'zh sah Sann Lu'uc* (*San Lucas Quiavini Zapotec dictionary/Diccionario Zapoteco de San Lucas Quiavini*). 2 vols. Los Angeles: (UCLA) Chicano Studies Research Center Publications.
- Nellis, Donald G. & Barbara E. Hollenbach. 1980. Fortis versus Lenis in Cajonos Zapotec Phonology. *International Journal of American Linguistics* 46(2). 92–105. <https://doi.org/10.1086/465639>.
- Nycz, Jennifer & Lauren Hall-Lew. 2014. Best practices in measuring vowel merger. *Proceedings of Meetings on Acoustics* 20(1). 060008. <https://doi.org/10.1121/1.4894063>.
- Pike, Eunice Victoria. 1948. Problems in Zapotec Tone Analysis. *International Journal of American Linguistics* 14(3). 161–170. <https://doi.org/10.1086/463998>.
- Pillai, K. C. S. 1955. Some New Test Criteria in Multivariate Analysis. *The Annals of Mathematical Statistics* 26(1). 117–121. <https://doi.org/10.1214/aoms/1177728599>.
- Podesva, Robert J. 2016. Stance as a Window into the Language-Race Connection: Evidence from African American and White Speakers in Washington, DC. In H. Samy Alim, John R. Rickford & Arnetha F. Ball (eds.), *Raciolinguistics: How Language*

- Shapes Our Ideas About Race*, 203–220. Oxford University Press. <https://doi.org/10.1093/acprof:oso/9780190625696.003.0012>.
- Rensch, Calvin R. 1976. *Comparative Otomanguean phonology* (Language Science Monographs 14). Bloomington: Indiana University Press.
- Santiago Laxopa. 2022. *Santiago Laxopa: Economy, Employment, Equity, Quality of Life, Education, Health and Public Safety*. Data México. <https://datamexico.org/en/profile/geo/santiago-laxopa> (25 April, 2022).
- Seyfarth, Scott & Marc Garellek. 2018. Plosive voicing acoustics and voice quality in Yerevan Armenian. *Journal of Phonetics* 71. 425–450. <https://doi.org/10.1016/j.wocn.2018.09.001>.
- Shue, Yen-Liang, Patricia Keating & Chad Vicens. 2009. VOICESAUCE: A program for voice analysis. *The Journal of the Acoustical Society of America* 126(4). 2221. <https://doi.org/10.1121/1.3248865>.
- Sichel, Ivy & Maziar Toosarvandani. 2020a. Pronouns and Attraction in Sierra Zapotec. In Andrew Hedding & Morwenna Hoeks (eds.), *Syntax and semantics at Santa Cruz, Volume IV* (Syntax & Semantics at Santa Cruz (SASC) 4). Santa Cruz, CA: Linguistics Research Center.
- Sichel, Ivy & Maziar Toosarvandani. 2020b. The featural life of nominals. lingbuzz/005523.
- Silverman, Daniel. 1997a. Laryngeal complexity in Otomanguean vowels. *Phonology* 14(2). 235–261. <https://doi.org/10.1017/S0952675797003412>.

- Silverman, Daniel. 1997b. *Phasing and recoverability* (Outstanding Dissertations in Linguistics). New York: Garland Pub. 242 pp.
- Simpson, Adrian P. 2012. The first and second harmonics should not be used to measure breathiness in male and female voices. *Journal of Phonetics* 40(3). 477–490. <https://doi.org/10.1016/j.wocn.2012.02.001>.
- Sjölander, Kåre. 2004. *Snack Sound Toolkit*. Stockholm, Sweden: KTH.
- Smith-Stark, Thomas. 2007. Algunas isoglosas zapotecas. In *Clasificación de las lenguas indígenas de México: Memorias del III Coloquio Internacional de Lingüística Mauricio Swadesh*, 69–133. Mexico City: UNAM: Instituto de Investigaciones Antropológicas.
- Sonnenschein, Aaron H. 2005. *A descriptive grammar of San Bartolomé Zoogocho Zapotec*. Munich: Lincom Europa.
- Strelluf, Christopher. 2018. Chapter 3: The Low Back Vowel(s). *The Publication of the American Dialect Society* 103(1). 43–64. <https://doi.org/10.1215/00031283-7318737>.
- Sundberg, Johan. 2022. Objective Characterization of Phonation Type Using Amplitude of Flow Glottogram Pulse and of Voice Source Fundamental. *Journal of Voice* 36(1). 4–14. <https://doi.org/10.1016/j.jvoice.2020.03.018>.

- Tagliamonte, Sali A. & R. Harald Baayen. 2012. Models, forests, and trees of York English: *Was/were* variation as a case study for statistical practice. *Language Variation and Change* 24(2). 135–178. <https://doi.org/10.1017/S0954394512000129>.
- Uchihara, Hiroto. 2016. Tone and registrogenesis in Quiaviní Zapotec. *Diachronica* 33(2). 220–254. <https://doi.org/10.1075/dia.33.2.03uch>.
- Warren, Paul. 2018. Quality and quantity in New Zealand English vowel contrasts. *Journal of the International Phonetic Association* 48(3). 305–330. <https://doi.org/10.1017/S0025100317000329>.
- Zapotec Language Project — University of California, Santa Cruz. 2022. <https://zapotec.ucsc.edu/> (6 December, 2022).

Appendix A

Some Ancillary Stuff

Ancillary material should be put in appendices, which appear after the bibliography.