



1.

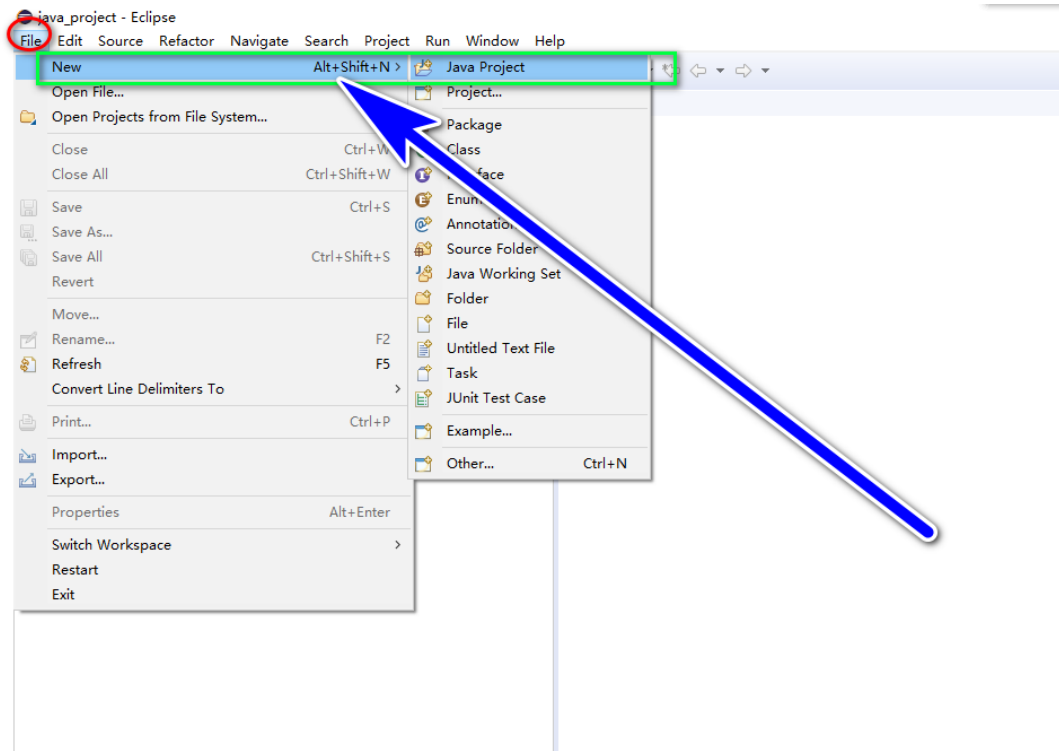


2.


Wanson doc

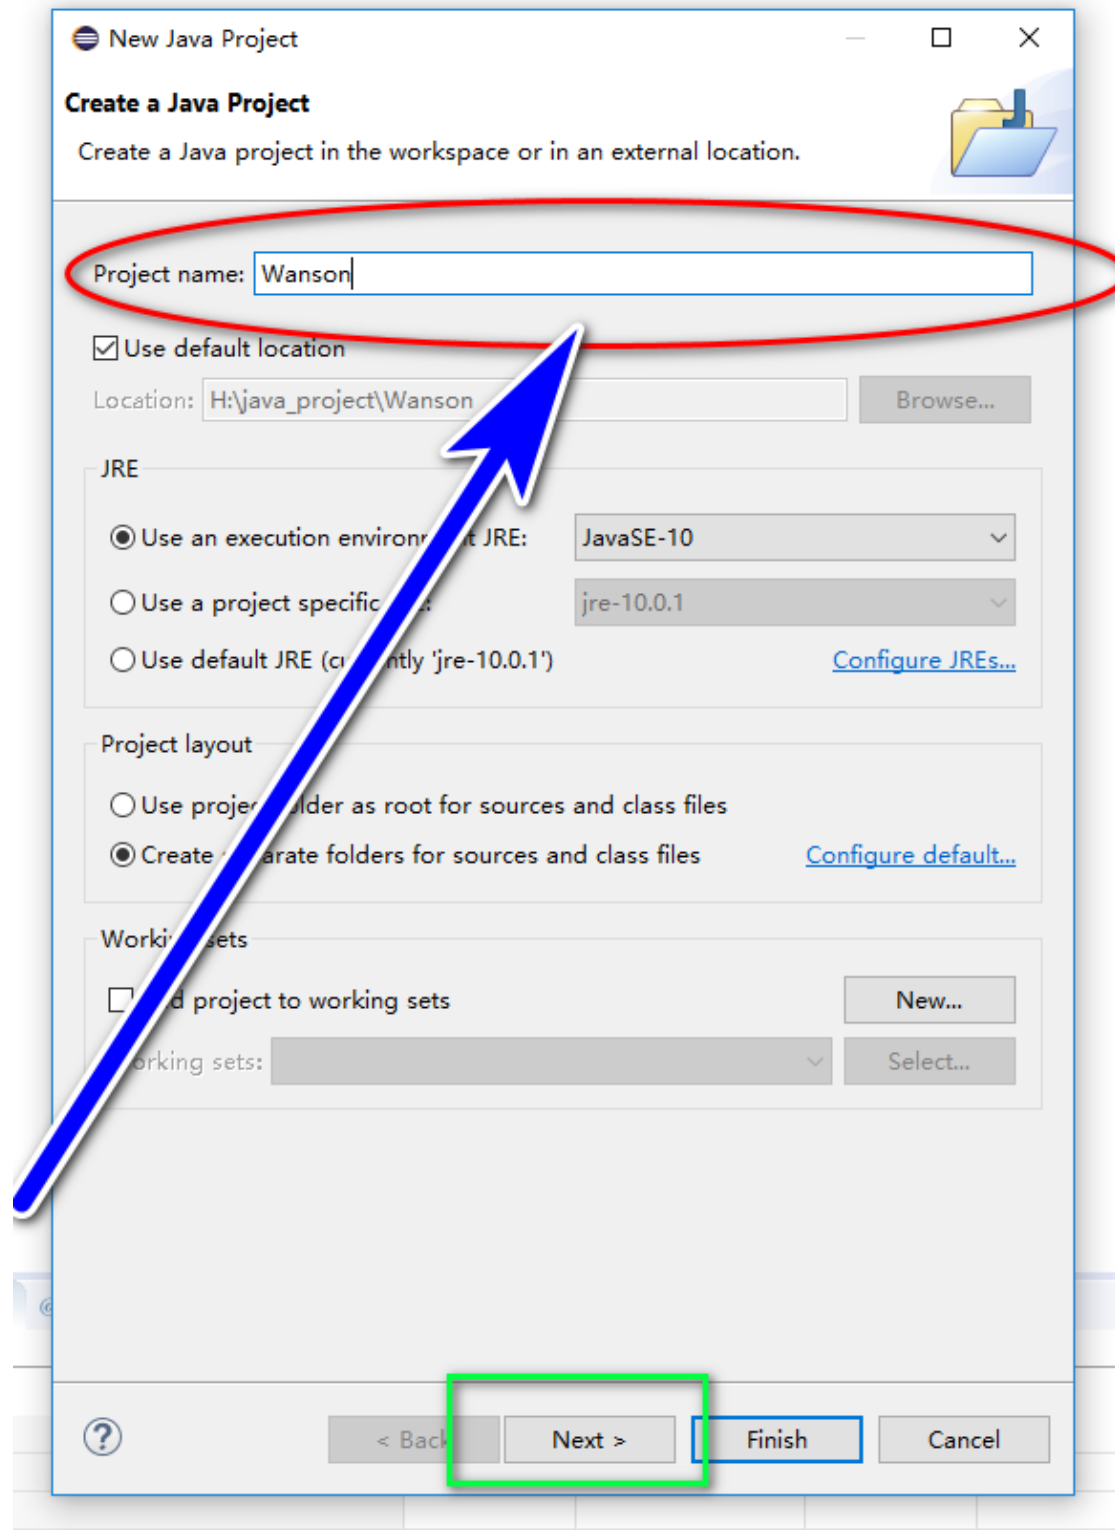

3.

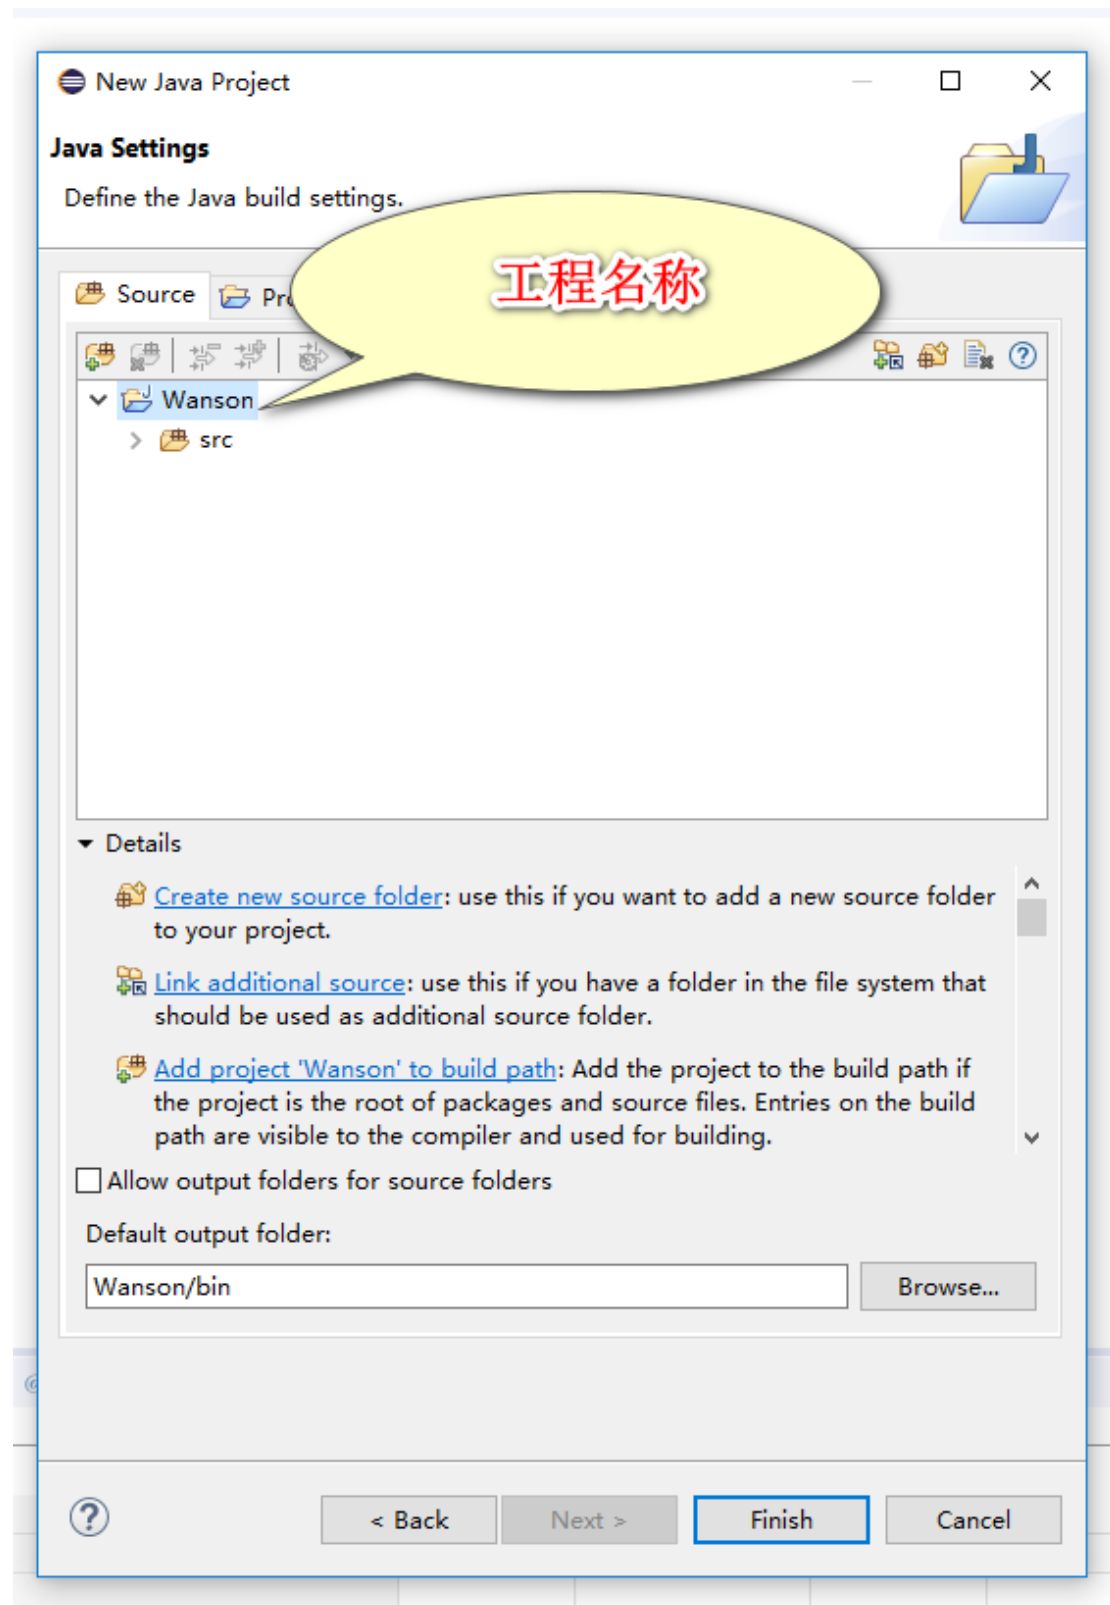


4.

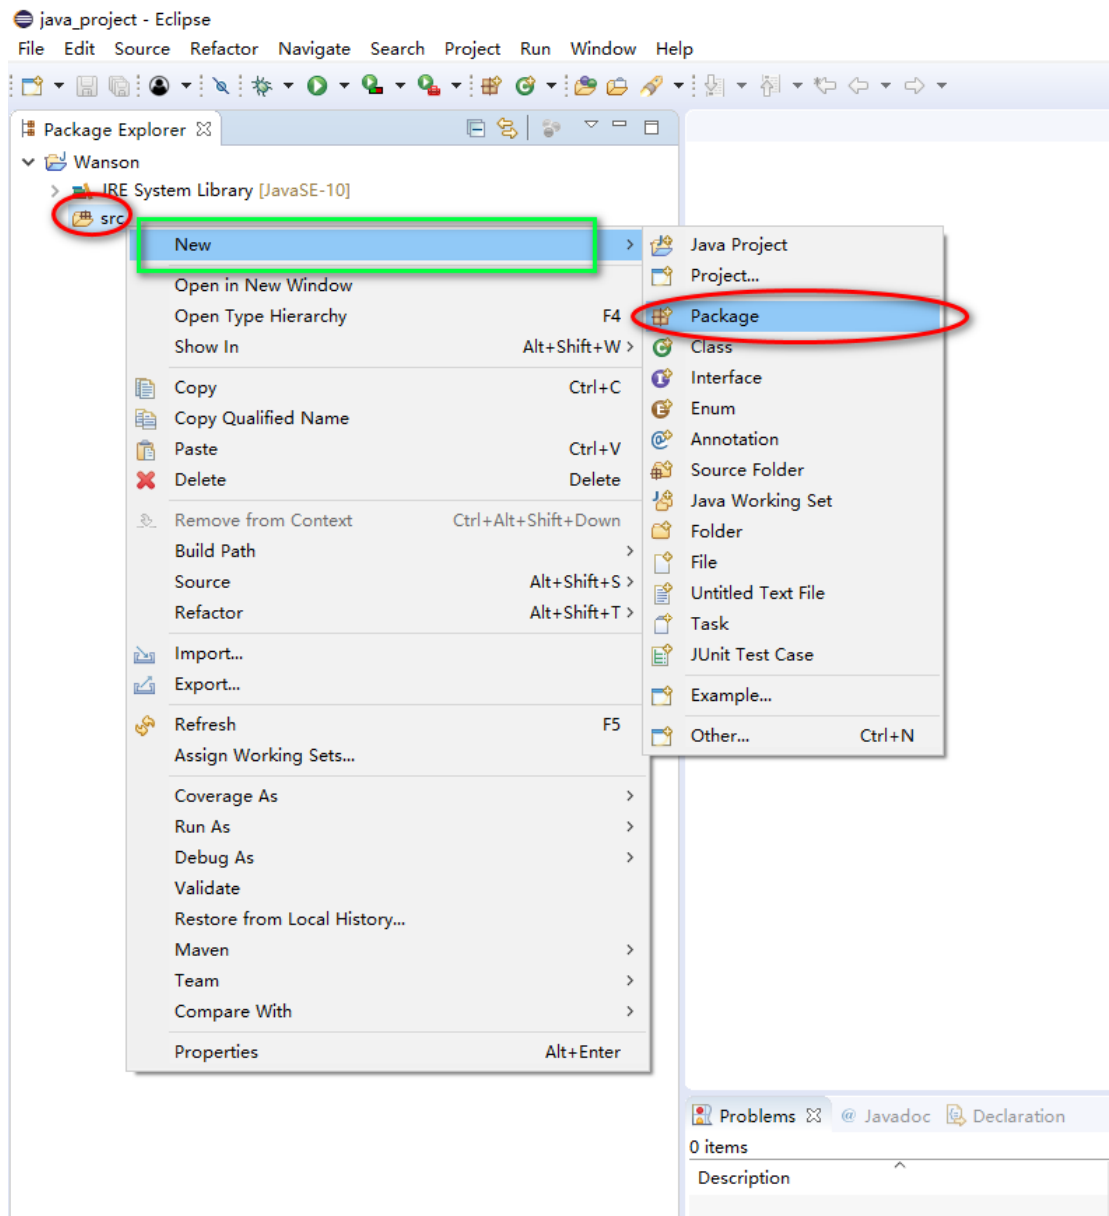


5.

war

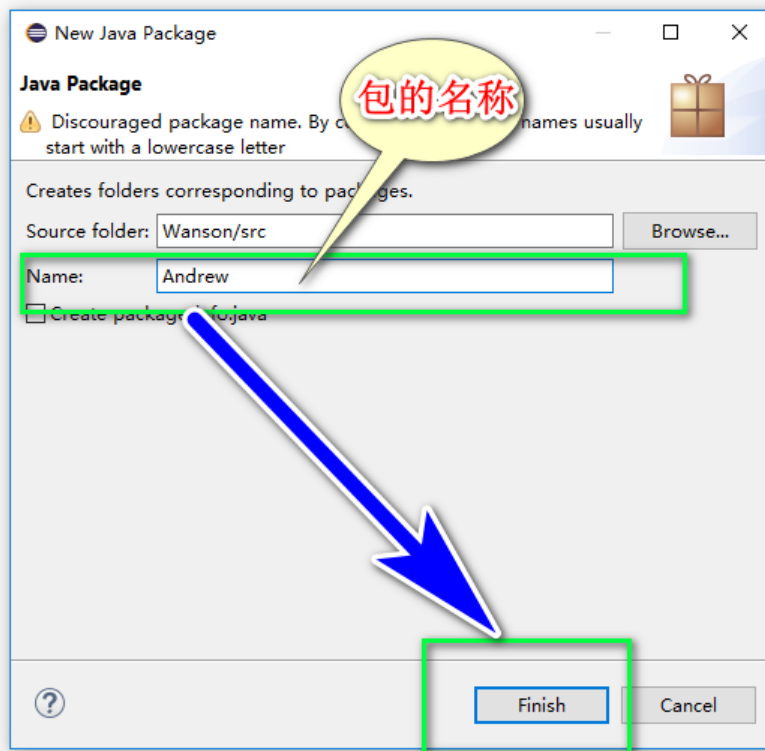

6.

Wanson

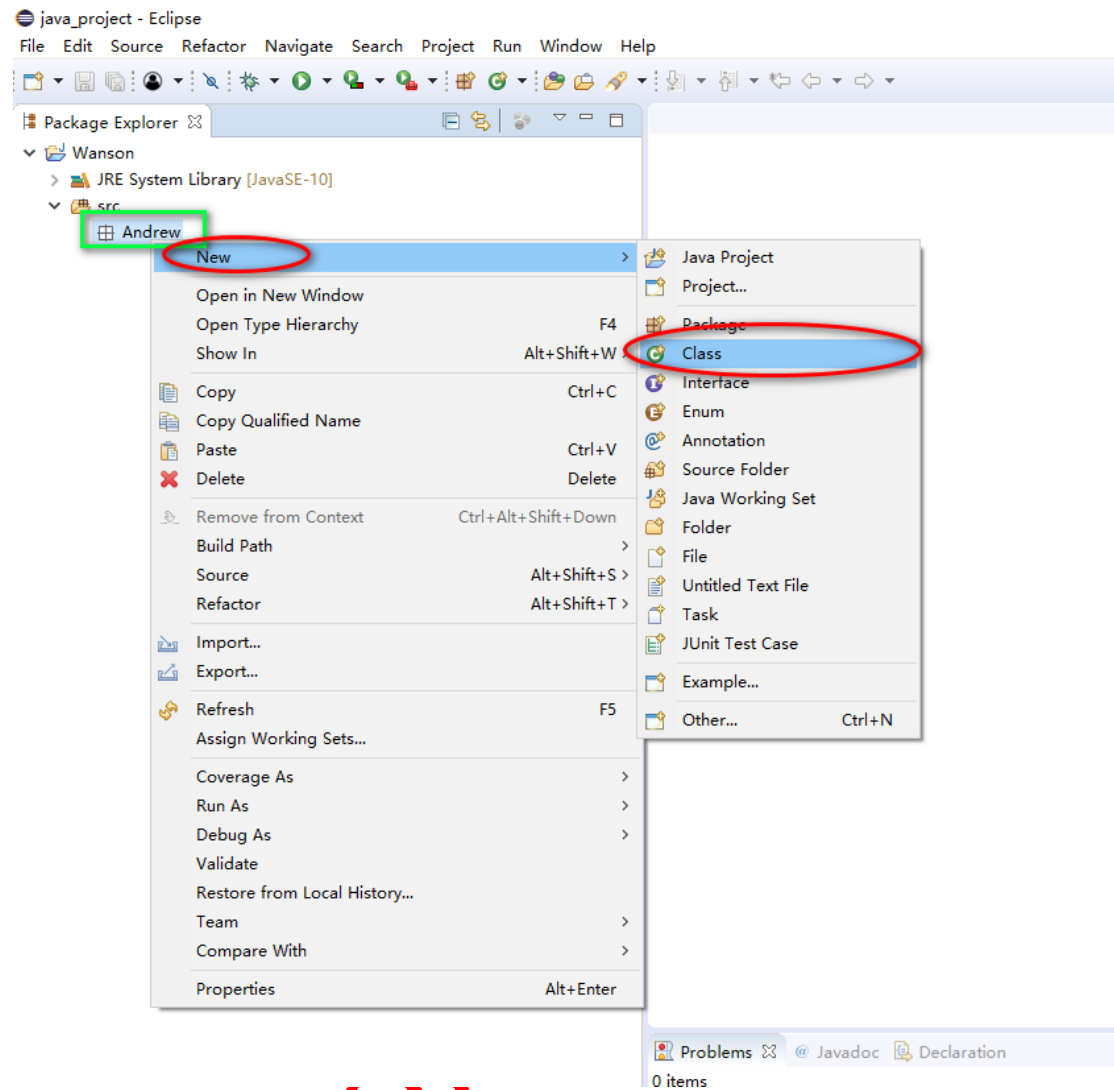

7.

Wanso

elip

The image shows the Eclipse IDE interface. The top part displays the 'New Java Class' dialog box. The 'Name' field is set to 'Driver', and the 'Package' is 'Andrew'. The 'Finish' button is highlighted. A yellow callout bubble points to the 'Name' field with the text '类名' (Class Name).

Below the dialog, the 'Problems' tab is visible, showing 0 items. The 'Package Explorer' on the left shows the project structure: 'Wanson' > 'src' > 'Andrew' > 'Driver.java'. The 'Driver.java' file is selected, and its code is displayed in the editor. The code is as follows:

```
1 package Andrew;
2
3 public class Driver {
4
5     public static void main(String[] args) {
6         System.out.println("fuck java World!!");
7     }
8 }
9
10
11
```

Yellow callout bubbles point to the code elements: '包名' (Package Name) points to 'package Andrew;', '类名' (Class Name) points to 'public class Driver', and '主函数' (Main Function) points to 'public static void main'. A red arrow points from the 'Finish' button in the dialog to the 'Driver.java' file in the Package Explorer.

At the bottom, the 'Console' tab shows the output: 'fuck java World!!'. A yellow callout bubble points to the output with the text '输出结果' (Output Result).

8.

编译 (Compile) 运行 (Run)

wanson document