


2D Ising rare tail $P(|m|)$ ($L=20$, $T=2.6$, $T_c=2.27$); both methods reach the identical deepest bin, $|m|=0.93$

(a) WE and naive resolve the tail to matched depth
(shaded: ± 1 s.d. over 20 replicas)



(b) naive is more precise through most of the tail;
WE only gains an edge at the single deepest bin

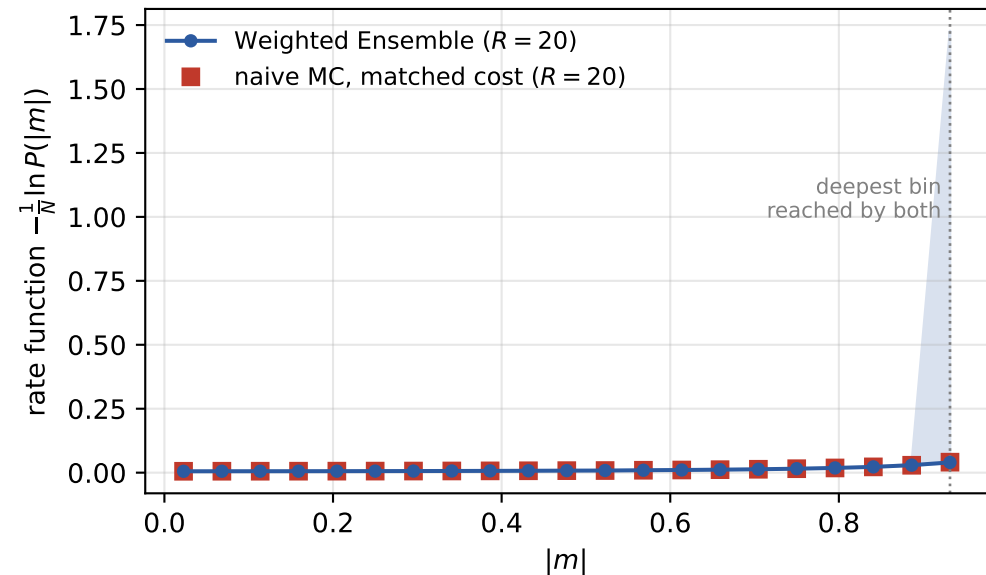