


2D Ising rare tail $P(|m|)$ ($L=20$, $T=2.6$, $T_c=2.27$); naive floor $|m|=0.93$, WE reaches 0.93

(a) WE and naive resolve the tail to matched depth
(shaded: ± 1 s.d. over 20 replicas)



(b) naive: low error then a hard cutoff;
WE: finite, graceful degradation

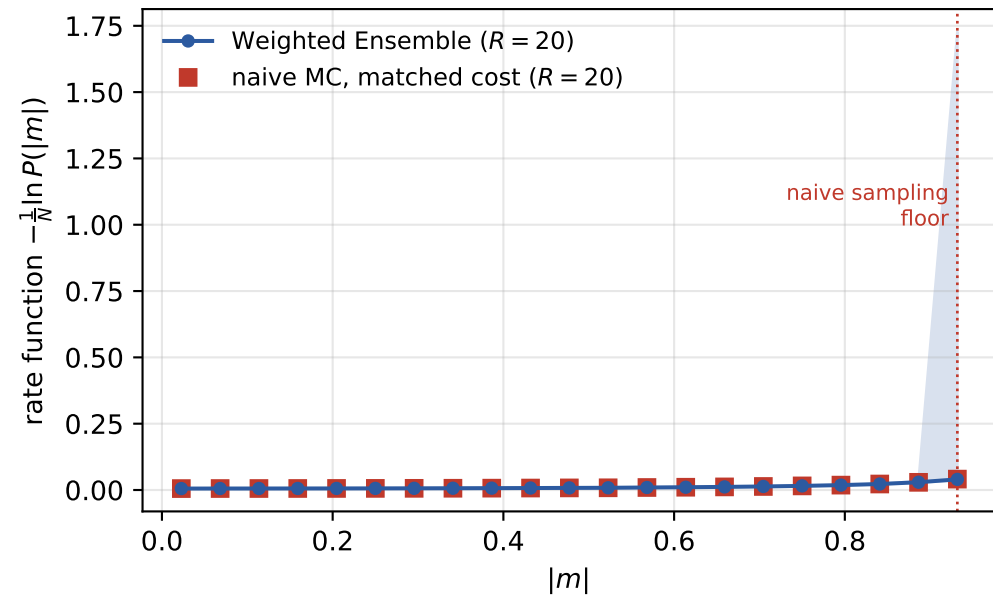