



SmartDrape® & PerfectSheer™ Shades

PROGRAM REFERENCE GUIDE And Price Book



Date	Program	Revision
1/1/2026	SmartDrape™	P24, 25, 28, 36, 37, 39: Added center stack for Norman® Smart Motorized SmartDrape™ . P39: Updated Vane Pack content. P40~41: Added 22 fabric colors.
11/15/2025	PerfectSheer™	- Updated Inside Mount Fabric Width Deductions . - Add Light Gap information.
10/15/2025	PerfectSheer™	- Updated max. common valance quantity and rule. - Updated Valance Joinery and Splicing Rules.
10/1/2025	SmartDrape™	Added ceiling mount and C clip installation. Updated information and drawings for ceiling mount.
9/24/2025	PerfectSheer™	Updated Motorized shade min. width.
9/24/2025	SmartDrape™	- Updated Motorized shade min. width. - Updated Hardware Quantity.
8/15/2025	SmartDrape™	Added motor, battery pack, master/sub gearbox and wand base in Matte Silver, Brass and Bronze.
8/1/2025	PerfectSheer™	Corrected color name. Added PerfectSheer Color Coordination file. Detailed color coordination can be referenced in the appendix.
8/1/2025	SmartDrape™	- Expanded size limitation. - Updated Additional Vanes information.
7/1/2025	SmartDrape™	- Updated Stacking Width description. - Running change: Nickel-plated nuts on SmartJoint Connectors will be color coordinated. - Added SmartDrape Color Coordination file. Detailed color coordination can be referenced in the appendix.
7/1/2025	PerfectSheer™	- Added connector for Curved fascia with fabric. - Discontinued color Pure White in Premium Wood Light Guard.
5/31/2025	SmartDrape™	- Added power source: (Norman Smart AC Adapter Plug in for Motorized SmartDrape. - Added charging extension wand color for Motorized SmartDrape (Norman Smart Rechargeable Battery).
5/30/2025	PerfectSheer™	Added 16" Cord length.
4/9/2025	SmartDrape™	Updated min. Width for Motorized SmartDrape.
3/31/2025	SmartDrape™	Added color coordination for Motorized SmartDrape.
3/31/2025	PerfectSheer™	- Updated max. Width for Motorized PerfectSheer. - Added Valance Deduction. - Updated non-spliced single valance length. Update rule for Keystone quantity. - Updated Valance Joinery rule and keystone location. - Updated Control Wand color to Color Coordination.
3/1/2025	SmartDrape™	Added 6 fabric colors, and Bronze and Brass head rail.



PerfectSheer™ Shades

	Page
General Specifications	<u>4</u>
Lift Systems & Terminology	<u>5 – 6</u>
Valance Options	<u>7 – 11</u>
Mounting Requirements & Fabric Deductions	<u>12 – 15</u>
Additional Options	<u>16 – 17</u>
Fabric List & Color Coordination	<u>18</u>
PerfectSheer Shades Expectations	<u>19 – 22</u>
Product Care	<u>23</u>

SmartDrape™ Shades


General Specifications	<u>24 – 25</u>
Terminology	<u>26</u>
Shade Configurations	<u>27 – 31</u>
Mount Types	<u>32 – 34</u>
Parts and Hardware	<u>35</u>
Additional Options	<u>36 – 39</u>
Fabric List & Color Coordination	<u>40 – 42</u>
Complete Color Coordination Chart	See Appendix
Fabric Disclaimers & Product Care	<u>43</u>



Fully Closed



Partially Open

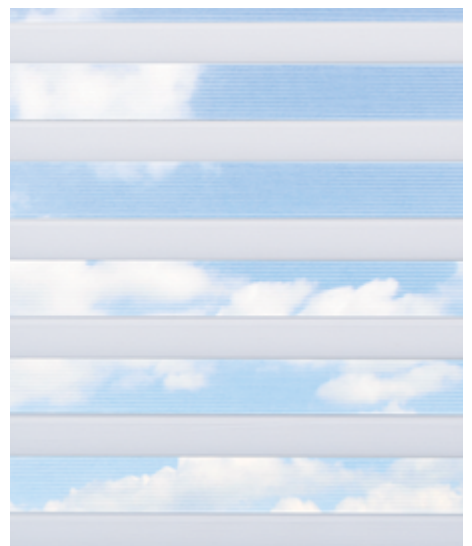

Fully Open



LIGHT FILTERING

		Width														
Height	USA	24	30	36	42	48	54	60	66	72	78	84	90	98	104	110
	36	624	698	774	846	921	1005	1074	1155	1342	1425	1502	1581	1653	1726	1800
	42	651	727	793	873	951	1039	1118	1196	1388	1470	1553	1629	1713	1797	1879
	48	693	762	838	922	1010	1105	1195	1288	1475	1557	1651	1740	1829	1916	2004
	54	715	799	879	983	1074	1171	1275	1372	1557	1657	1746	1852	1950	2050	2149
	60	750	841	927	1029	1128	1243	1348	1461	1644	1751	1862	1974	2081	2187	2294
	66	785	878	976	1083	1195	1313	1433	1555	1732	1856	1976	2094	2211	2329	2448
	72	815	918	1021	1137	1261	1392	1518	1644	1829	1950	2084	2211	2337	2462	2587
	78	837	943	1055	1188	1315	1453	1582	1722	1914	2051	2183	2321	2455	2590	2726
	84	870	988	1102	1247	1383	1525	1672	1810	2011	2157	2303	2445	2584	2724	2863
	90	905	1019	1147	1301	1453	1605	1749	1901	2105	2260	2413	2564	2719	2872	3025
	98	943	1062	1196	1361	1518	1674	1832	1994	2203	2367	2528	2686	2845	3003	3161
	102	983	1103	1249	1421	1579	1741	1915	2083	2302	2475	2645	2808	2972	3136	3299
	108	1020	1146	1298	1479	1644	1807	1998	2175	2398	2581	2758	2928	3099	3267	3437
	120	1058	1188	1348	1539	1706	1874	2081	2265	2496	2687	2873	3050	3225	3399	3574

NO EXTRA CHARGE

- CONTINUOUS CORD LOOP - STANDARD
- CURVED FASCIA WITH FABRIC
- FABRIC COVERED HEM BAR

Fabric Surcharge:

- Room darkening 20%

Miscellaneous:

- Shim \$7 each
- Magnetic hold down \$28 per shade
- Keystone \$73

Valance Surcharges:

	24	30	36	42	48	54	60	66	72	78	84	90	98	104	110
Wood Valance	117	122	133	139	150	161	171	188	204	216	232	249	277	282	304
3 1/2" & 4 1/2" Fabric Valance	133	139	155	161	171	183	199	216	232	249	271	288	315	326	349

For every additional foot, please add \$28 (retail).

Light Control Surcharges:

- Basic Light Guard \$45
- Premium Wood Light Guard \$117

Freight handling fee (net) \$25.00
 Minimum per order (First Shade) &
 \$11.00 each additional Unit no
 Maximum 90" or over; IN WIDTH
 \$80.00 minimum \$50.00 each
 additional

Size Considerations

	Continuous Cord Loop		Motorized	
	Width	Height	Width	Height
Min.	12"	12"	Min. Shade Width differs for each motor. Please ref. Motorization Program Guide for detail information.	
Max.	98"	98"		
Ratio limit**	The width to height ratio is 1:4 for all fabrics.			

*Min. Shade Width differs for each motor. Detail information listed in Motorization Program Guide.
**The height of a continuous cord loop or motorized shade cannot exceed more than 4 times its width.

Side by Side

Side by Side is a great solution for covering wide openings. Side by Side will match tube size and shade bracket size by upgrading to the larger size within the shades selected. This is ideal when a uniform look for shades of different shade widths within a room is requested. Vane Alignment* will be provided when ordered at the same time and the following attributes are the same:

- Room
- Mount type
- Shade height
- Color
- Lift system
 - motor type/power source (if applicable)
- Valance type and size
- Valance return length

* Vane Alignment

When Side by Side is selected in order entry and the shades are ordered with same attributes mentioned, the banded layer alignment will be within a ¼" tolerance.

Size Definition / Standard Deductions


Shade Width

- Shade with Valance: The shade width is measured from the left edge of the bracket to right edge of bracket
- Shade with Fascia: The shade width is measured from left edge of end cap to right edge of end cap


Shade Height

- The shade height is measured from the top of the raceway to the bottom of the hem bar when the shade is completely lowered


Inside Mount: shade width = order width – 1/8"
Outside Mount: shade width = order width

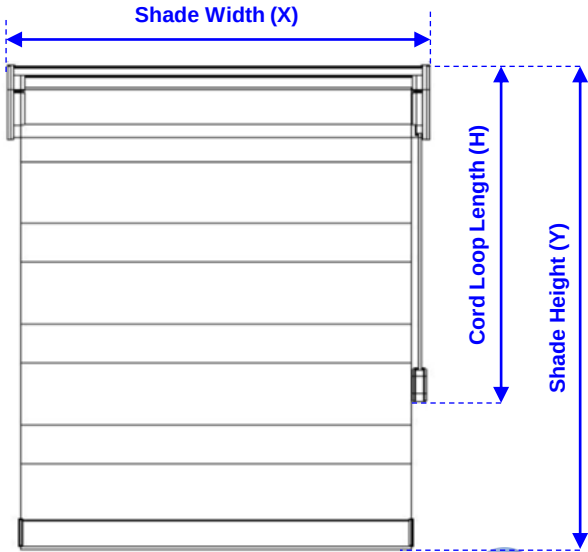

Continuous Cord Loop

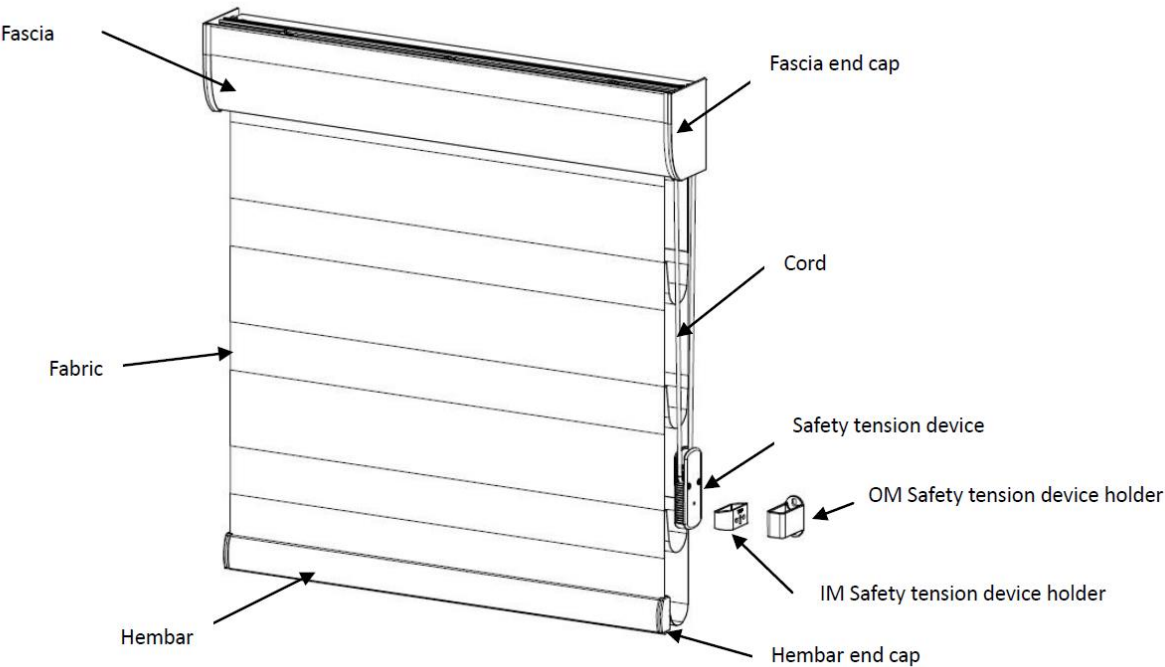

Motorized

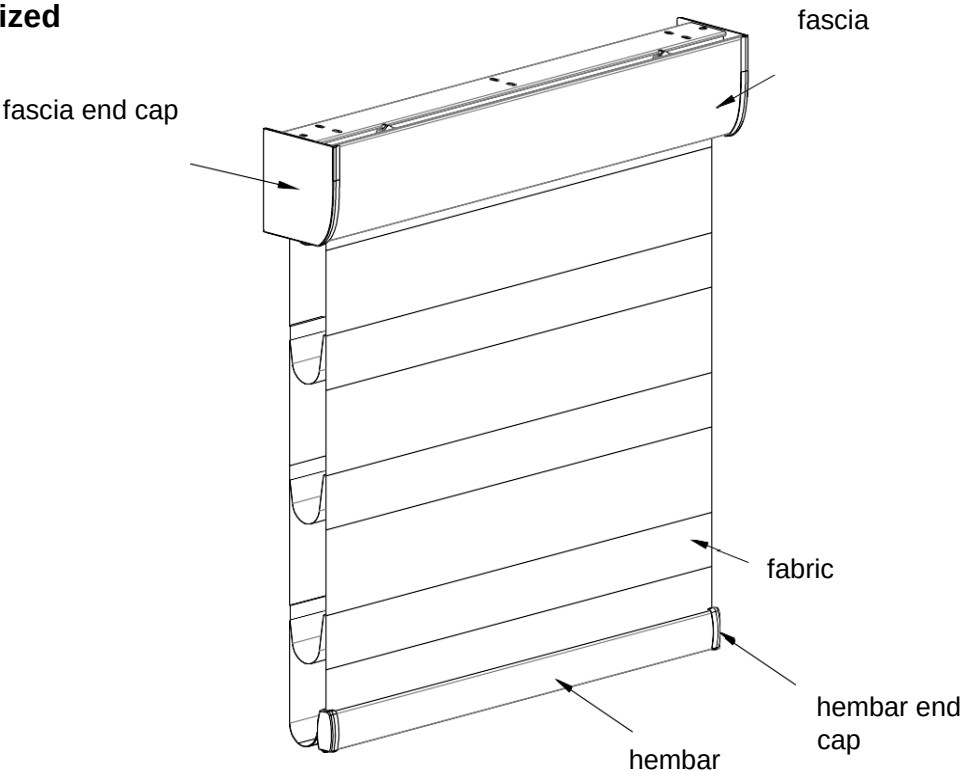

Continuous Cord Loop - Control

Cord Length

Cord Loop Length (Y2)	
Shade Height (Y)	Default Cord Length
$Y \leq 20"$	9"
$20" < Y \leq 30"$	16"
$30" < Y \leq 42"$	24"
$42" < Y \leq 55"$	36"
$55" < Y \leq 69"$	48"
$69" < Y \leq 95"$	60"
$Y > 95"$	84"
Shade Height (Y)	Custom Cord Length
All Shade Heights	Min length: 9" *The max custom cord loop length should be no more than $(\text{order length} - 2")/1.1$

Control Locations

Default	Optional
Right	Left

Valance deduction

Inside Mount		
Valance		Finished Width
Fascia Width	including end caps	Fascia width = shade width*
		Common fascia width** = left/center/right total shade order width+ gaps between shades – 1/8"
	excluding end caps	Fascia width = shade width* – 1/8"
		Common fascia width** = left/center/right total shade order width+ gaps between shades – 1/4"
Wood/ Fabric Valance Width	excluding valance returns	Valance width = shade width*
		Common valance width**= left/center/right total shade order width+ gaps between shades –1/8"

*Shade width = order width – 1/8"
**For common fascia/ valance: 1/8" width deductions will be taken from each shade width measurement entered.

Semi-Inside Mount		
Valance		Finished Width
Fascia Width	including end caps	Fascia width = shade width*
		Common fascia width** = left/center/right total shade order width+ gaps between shades – 1/8"
	excluding end caps	Fascia width = shade width* – 1/8"
		Common fascia width** = left/center/right total shade order width+ gaps between shades – 1/4"
Wood/Fabric Valance Width	including valance returns	Valance inner width = shade width* + 3/16" x return qty
		Common valance inner width**= left/center/right total shade order width+ gaps between shades – 1/8" + 3/16" x return qty
		For Fabric Valance: Valance width = Valance inner width + 5/16" x return qty
		For Wood Modern Valance: Valance width = valance inner width + 7/16" x return qty

*Shade width = order width – 1/8"
**For common fascia/ valance: 1/8" width deductions will be taken from each shade width measurement entered.

Outside Mount		
Valance		Finished Width
Fascia Width	including end caps	Fascia width = shade width*
		Common fascia width = left/center/right total shade order width+ gaps between shades
	excluding end caps	Fascia width = shade width* – 1/8"
		Common fascia width = left/center/right total shade order width+ gaps between shades – 1/8"
Wood/ Fabric Valance Width	including valance returns	Valance inner width = shade width* + 3/16" x return qty
		Common valance inner width= left/center/right total shade order width+ gaps between shades + 3/16" x return qty
		For Fabric Valance: Valance width = (common) valance inner width + 5/16" x return qty
		For Wood Modern Valance: Valance width = (common) valance inner width + 7/16" x return qty
	excluding valance returns	Valance width = shade width* = order width
		Common valance width= left/center/right total shade order width+ gaps between shades

* Shade width = order width

Valance Options	Color	Note	Valance Size
 Curved Fascia with Fabric	Defaulted to selected shade fabric. Optional fabric selection is available.	The max single fascia width is 93". When exceeded, the single fascia will be spliced with keystone or connector as supplied.	3 ½" or 4 ½" * Refer to Fabric Valance / Fascia Size chart.
 Fabric Valance	Defaulted to selected shade fabric. Optional fabric selection is available.	The max single valance width is 93". When exceeded, the valance will be spliced with keystone or connector as supplied. Valance returns available for semi IB & OB	3 ½" or 4 ½" * Refer to Fabric Valance / Fascia Size chart
 Modern Valance	Paint: 001 Pure White 003 Silk White 006 Pearl 012 Crisp Linen 049 Stone Gray 053 Clay Stain: 109 Weathered Teak 110 Limed White 212 Dark Teak 221 Black Walnut 237 Wenge 246 Matte Black <u>See digital swatches here.</u>	The max single valance width is 93". When exceeded, the valance will be spliced with keystone or connector as supplied. Valance returns available for semi IB & OB Material: Wood	4 ½"

**Valances are not recommended for door applications.

Fabric Valance / Fascia Size Chart			
Shade Width (X)	Shade Height (Y)	Fabric Valance / Fascia Size	Valance Bracket Size
All widths	$Y \leq 72"$	Default: 3 ½" Option: 4 ½"	Default: Small Bracket Option: Large Bracket
	$> 72"$	4 ½"	Large Bracket

Notes: The rule applies to single shade or an individual shade with common valance or side by side. To receive the available valance size, each shade per unit must order within the height limits.

Valance Options

Customized Valance Width


- The max custom valance width can be up to 12" wider than the shade width.

Common Valance

- Common valance is available in all Valances
- One common valance can be shared up to 6 independently operated shades.
 - (Exception: Continuous Cord Loop/ AutoWand system only provide 2 shades under common valance.)
 - All shades sharing a common valance must use the same lift system.
 - same motor type/power source (if applicable)
- The gap between each shade is 0" by default; maximum gap is up to 12"
- Common valance will match tube size and shade bracket size by upgrading to the larger size within the shades selected.
- For continuous cord loop system

Default cord loop length: cord length will be supplied according to the shade height of each shade.

Custom cord loop length: cord length will be supplied as per custom cord length for each shade.

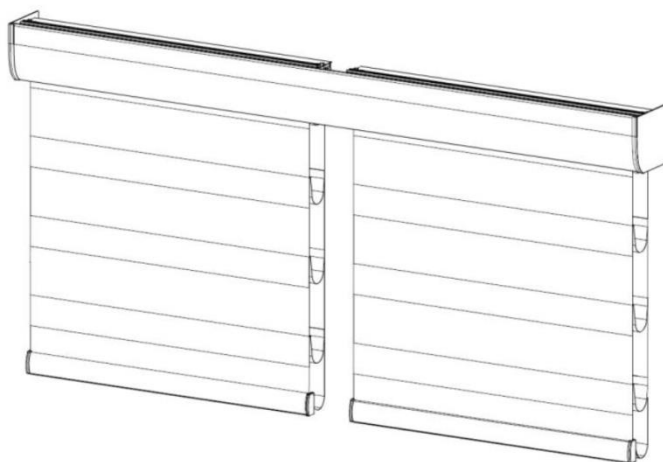

Control Location	
CordLoop/ AutoWand	Left Shade: L Right Shade: R

Valance Return Size Options

Valance Type	Definition	Semi-Inside Mount	Outside Mount	Tolerance
Fabric	From the back of the valance to the end of the return.*	Default: 1" Custom sizes: 1 1/8" ~ 4 1/2"	Default: Standard based on shade configurations	+/- 1/8"
Modern	Inner length.	Default: 1" Custom sizes: 1/2" - 4 1/2"	Custom sizes <u>longer</u> than the standard: 1/8" ~ 1"	

*Thickness of wrapped fabric may cause fabric valance return slightly longer or shorter than order size.

Splicing Valances


Valances wider than its maximum limitations will be spliced. A **valance joinery** method is required to provide support on all spliced valances. This applies to single and common valance.

Valance Joinery and Splicing Rules


Type	Valance	Max Valance Width Without Joint	Max Valance Width With Joint	Valance Joinery		Splice Location				
				Default	Optional	Default	Optional			
Single	Curved Fascia with Fabric	Fascia End Cap to End Cap: 93"	Shade Width (X) + 12"	Connector	Keystone (Up to 5)	Equally Centered	Custom split location (For Keystone only)			
	Fabric Valance (inner width)	93"								
	Modern Valance (inner width)									
Common	Curved Fascia with Fabric	Fascia End Cap to End Cap: 93"	Total Shade Widths + total gap width + 12" ≤ 558" (max. valance width 93"x 6pcs)				Connector	Keystone (Up to 5)	Equally Centered	*Custom split location (For Keystone only)
	Fabric Valance (inner width)	93"								
	Modern Valance (inner width)									

- For Continuous Cord Loop/ AutoWand system under common valance:
 - Total Shade Widths + Gap Sizes +12"≤186"
 - The max valance width with joint will be Total Shade Widths + Gap Sizes +12" ≤ max valance width 93"x2pcs)
 - Up to 3 keystones can be selected per valance

Keystone

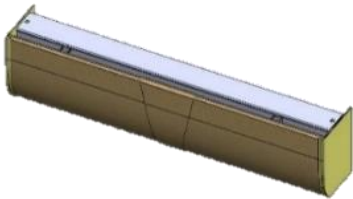

Curved Fascia with fabric Keystone




Fabric Valance Keystone




Modern Valance Keystone


Keystones for fascia with fabric/ fabric valance/ wood valances will also be provided with a set of fascia connector/ valance connectors for additional support.

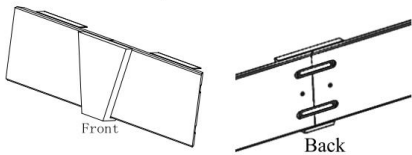

Connector



Curved Fascia Connector



Fabric Valance connector




Wood Modern Valance connector





Keystone Spacing Requirements

Measure from the left of the valance inner width to the center of the keystone. Minimum distance between 2 keystones is 18” and the min. distance between either ends of the valance to the keystone center is 18”.

Keystone Qty		Custom keystone location limitation	
		Min	Max
1 Keystone		18"	total valance width-18"
2 Keystones	1st keystone	18"	total valance width-18"x2
	2nd keystone	1st keystone location+18"	total valance width-18"
3 Keystones	1st keystone	18"	total valance width-18"x3
	2nd keystone	1st keystone location+18"	total valance width-18"x2
	3rd keystone	2nd keystone location +18"	total valance width-18"
4 Keystones	1st keystone	18"	total valance width-18"x4
	2nd keystone	1st keystone location+18"	total valance width-18"x3
	3rd keystone	2nd keystone location +18"	total valance width-18"x2
	4rd keystone	3rd keystone location +18"	total valance width-18"
5 Keystones	1st keystone	18"	total valance width-18"x5
	2nd keystone	1st keystone location+18"	total valance width-18"x4
	3rd keystone	2nd keystone location +18"	total valance width-18"x3
	4rd keystone	3rd keystone location +18"	total valance width-18"x2
	5rd keystone	4rd keystone location +18"	total valance width-18"

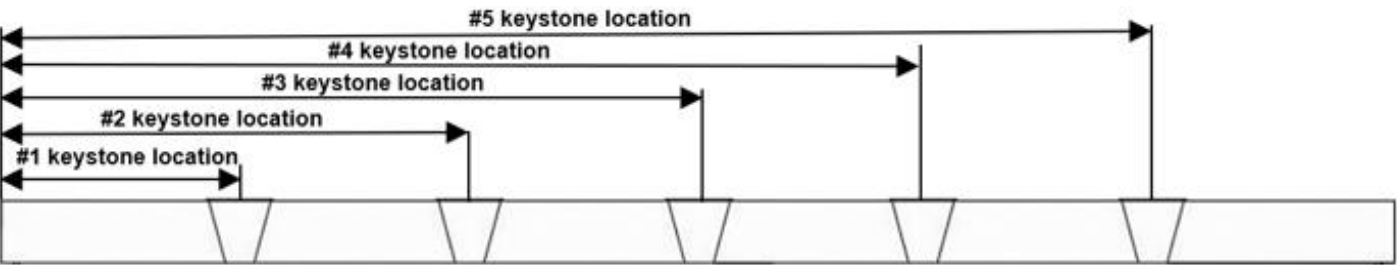

IM Mounting Depth - Continuous cord loop

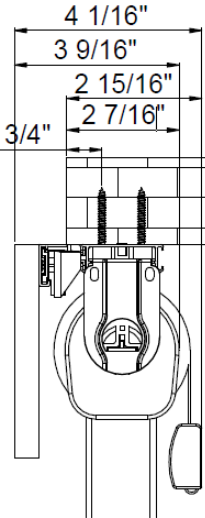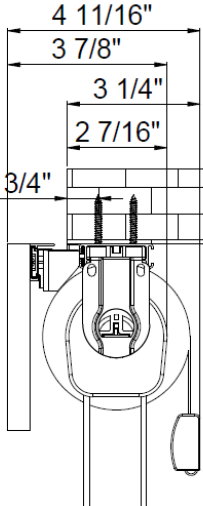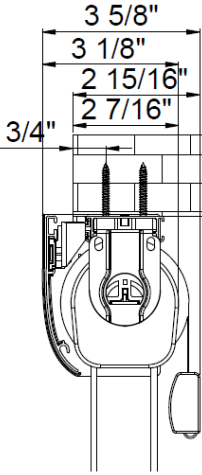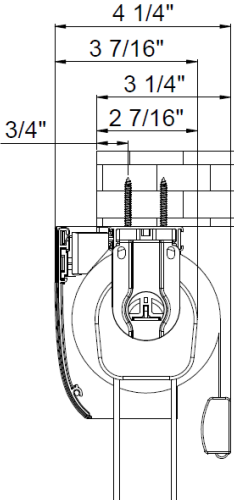Item	Drawing (with max shade length and RD fabric)	
Cord Loop Shade with Valance		
	Small Valance Bracket	Large Valance Bracket
Cord Loop Shade with Fascia		
	Small Valance Bracket	Large Valance Bracket

IM Mounting Depth - Motorized

Item	Drawing (with max shade length and RD fabric)	
Motorized Shade with Valance		
	Small Valance Bracket	Large Valance Bracket
Motorized Shade with Fascia		
	Small Valance Bracket	Large Valance Bracket

When shade is inside mount, customer can also order outside mount bracket if needed for wall/back mount.

When shade is outside mount, customer can also choose inside mount(top mount) option and raceway will be pre-drilled holes for screwing.



Mount Type	Bracket Type	
	Inside(top mount)	Outside(wall/back mount)
Inside (Take Deductions)	With Raceway – Previous Raceway raceway will be pre-drilled holes for screwing	With Raceway – New Raceway with new OM Brackets
Outside (No Deductions)	With Raceway – Previous Raceway raceway will be pre-drilled holes for screwing	With Raceway – New Raceway with new OM Brackets

Inside Mount Fabric Width Deductions

Continuous Cord Loop – Single Inside Mount				
Shade Width	Shade Length	Tube Size	Valance	Finished Fabric Width
12" to 98"	12" to 98"	1 3/4"	CCL with Fascia	Tube Width = Order Width -1 3/8"
				Fabric Width = Order Width – 1 5/8"
			CCL with Valance	Tube Width = Order Width – 1 3/16"
				Fabric Width = Order Width – 1 7/16"

Single Motorized - Inside Mount					
Motor Type	Shade Width	Shade Length	Tube Dimensions	Shade Type	Tube/Fabric Width
Norman Smart Rechargeable Battery with AC Adapter Charger	All widths	All heights	1 3/4" / 2"	Motorized with Fascia	Tube Width = Order Width -1 3/8"
					Fabric Width = Order Width – 1 5/8"
				Motorized with Valance	Tube Width = Order Width – 1 3/16"
					Fabric Width = Order Width – 1 7/16"
All other motorization	All widths	All heights	1 3/4" / 2"	Motorized with Fascia	Tube Width = Order Width – 1 3/8"
					Fabric Width = Order Width – 1 5/8"
				Motorized with Valance	Tube Width = Order Width – 1 3/16"
					Fabric Width = Order Width – 1 3/8"


Single Shade

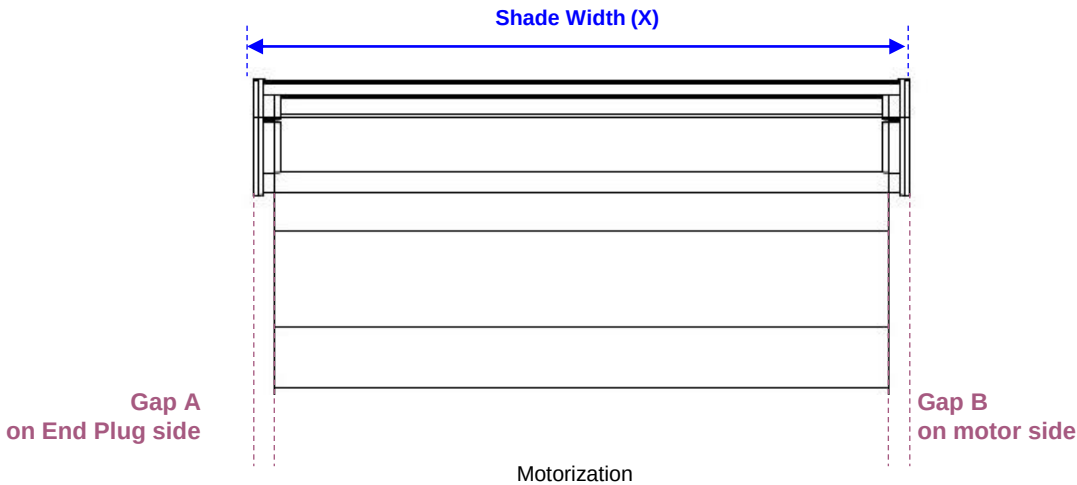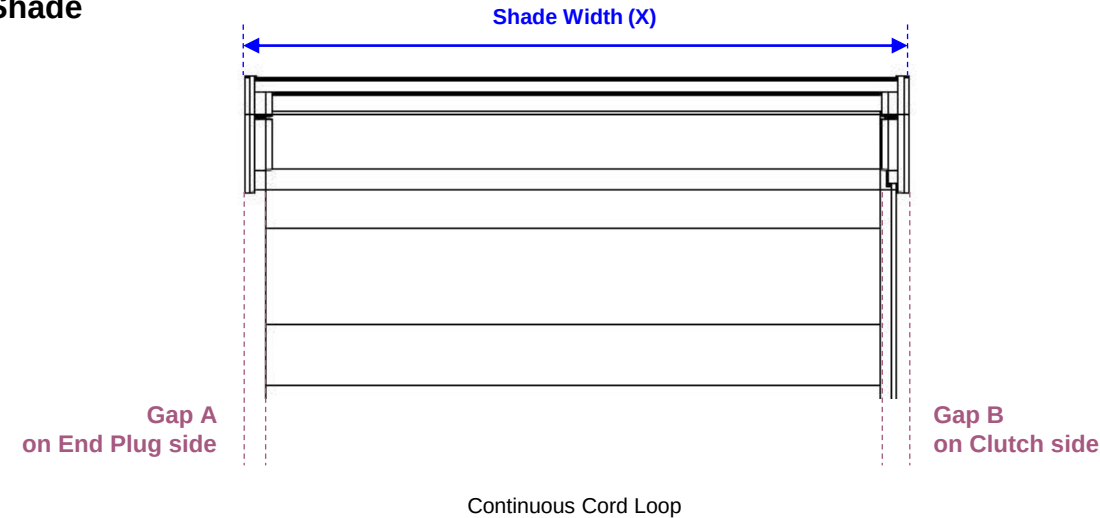

System	Mounting Type	Valance Type	Tube diameter	Gap A	Gap B
Continuous Cord Loop	All	Curved Fascia	1 3/4"	5/8"	7/8"
		Fabric/ wood valance		9/16"	3/4"
All other motorization		Curved Fascia	1 3/4" / 2"	5/8"	13/16"
Norman Smart Rechargeable Battery with AC Adapter Charger					7/8"
All other motorization				9/16"	3/4"
Norman Smart Rechargeable Battery with AC Adapter Charger		Fabric/ wood valance			



OM Mounting Depth

Mounting area required for Outside Mount

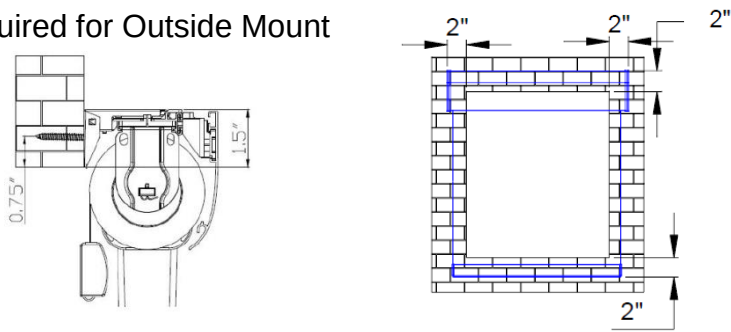


Light Guard

- Light Guard is specifically designed to block incoming light escaping off the top and sides of the window opening.
- Application consists of 2 side blocks (select from premium wood light guard or basic light guard), plus a top block piece

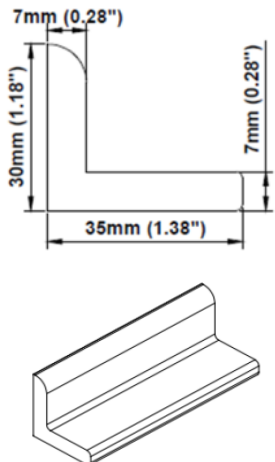	Dimensions	Available colors				
Premium Wood Light Guard (Side Channels)		 049 Stone Gray 053 Clay 110 Limed White 212 Dark Teak 109 Weathered Teak 237 Wenge 221 Black Walnut *The wood light guard will be provided with only 1 size (approx.) 1 3/8".				
Basic Light Guard (Side Channels)	 End Caps *End Caps will come pre-installed on top of the light guard pieces.	 3058 White 3094 Cottage White 3578 Sahara 3463 Chocolate 3129 Silver 3212 Black Ink Light Guard Splicing Rule When the light guard length (L) is over 96", it will be spliced into two pieces. The splicing points are as follows: <table><tr><th>96" < L ≤ 102"</th><th>L > 102"</th></tr><tr><td>From the top down at 6"</td><td>From the bottom up at 96"</td></tr></table>	96" < L ≤ 102"	L > 102"	From the top down at 6"	From the bottom up at 96"
96" < L ≤ 102"	L > 102"					
From the top down at 6"	From the bottom up at 96"					
Top Light Block	4 ½"	Standard color: White				

Shims

- Dimensions: 1 5/8" x 3/8"
- Approx.. 3/8" thick for one and 11/16" thick for two stacked
- Up to 3 shims/spacers can be stacked per bracket


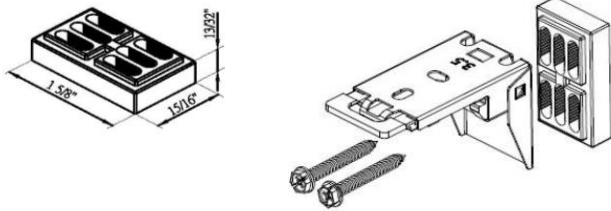


Shade width X	8"≤X≤40"	40"<X≤80"	X>80"
# of mounting brackets	2	3	4
# of shims (1 layer)	2	3	4
# of shims (2 layers)	4	6	8
# of shims (3 layer)	6	9	12


Magnetic Hold-Down

- Two hold down brackets (one for the left and the right side of the shade) will be provided for each shade when requested.
- Defaulted for door applications.
 - Magnetic hold-downs are required for door applications to help keep the shade in place.
 - Not recommended for metal door applications.
- Optional for window applications.
- The magnet will be pre-installed at the factory on the hem bar.
- The magnet catch, which needs to be installed at the job site, can be found in the hardware box.

- Allow extra wall space for installation:
- 9/16" in length from the side edge of the shade
 - 11/16" in height from the bottom edge of the shade

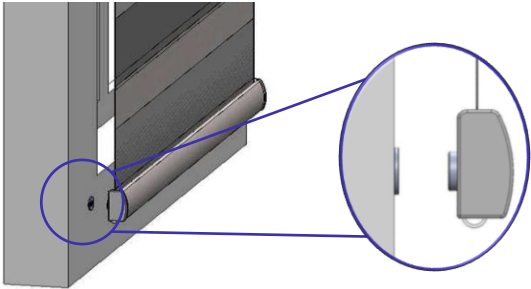



Magnet



Magnet Catch

Available colors for Magnet Catch

- Nickel-Plated (Default)
- (Optional) Pure White, Silk White, Bisque, Pearl, Bright Brass, Antique Brass, Black, Crisp Linen, String, Sea Mist, Stone Gray, Brown Gray, Taupe Gray

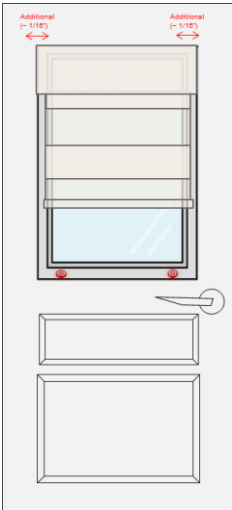

PerfectSheer Shades Installed on a Door

To receive shades suited for door applications, please select the option during order entry. When selected,

- Shades will have an additional fabric deduction of approximately 1/16" (2mm) on each side in order to prevent the fabric from fraying.
(See fabric deductions by lift system for total fabric width deductions.)
- Magnetic hold-downs are defaulted and required when installed on a door.
- Valances are available but not recommended for door applications.

See Color Coordination Chart for detailed color information.

	Fabric List			Color Coordination		
	Opacity	Color Code	Color Name	Cord Color	Raceway, Brackets, Hem bar	Fascia/ Hem bar end caps, Safety tension device, Clutch
1	Light Filtering	F1191	Nightfall	Dark Gray	Black	Black
2		F1192	Granite	Dark Gray	Black	Black
3		F1193	Mineral	Silver	Cottage White	Chocolate
4		F1178	Snowflake	White	White	White
5		F1179	Lily Cream	Alabaster	Cottage White	Cottage White
6		F1180	Dunes	Petal Pink	Cottage White	Terra
7		F1181	Smoke	Smoke	White	Silver
8		F1182	Midnight	Black	Black	Black
9		F1183	Cottonwood	Petal Pink	Cottage White	Nature
10		F1184	Cedar Cream	Alabaster	Cottage White	Sahara
11		F1185	Quarry	Silver	White	Silver
12		F1186	Soft White	White	White	White
13		F1187	Cinnamon	Petal Pink	White	Terra
14		F1188	Platinum	Silver	Cottage White	Cottage White
15		F1189	Magnetic Gray	Smoke	White	Silver
16		F1190	Cast Iron	Dark Gray	Black	Black
17		F1194	Frosty Asphalt	Dark Gray	Black	Black
18		F1195	Frosty Gray	Silver	White	Silver
19		F1196	Frosty White	White	White	White
20		F1197	Light Gray	Smoke	White	Silver
21		F1363	Ivory	Alabaster	Cottage White	Cottage White
22		F1364	Silver	White	White	White
23	Room Darkening	F1200	Moon	White	White	White
24		F1201	Silk	Alabaster	Cottage White	Cottage White
25		F1202	Chai Latte	Petal Pink	Cottage White	Terra
26		F1203	Sky	Smoke	White	Silver
27		F1204	Mars Black	Black	Black	Black
28		F1205	Seaside	Petal Pink	Cottage White	Nature
29		F1206	Palm	Alabaster	Cottage White	Sahara
30		F1207	Stone	Silver	White	Silver
31		F1208	Heather Gray	Smoke	White	Silver
32		F1209	Ash Gray	Dark Gray	Black	Black

Fabric Composition: 100% Polyester

Sheer Shades have been an elegant window treatment solution for decades. Our introduction of PerfectSheer™ comes after years of engineering and design. PerfectSheer™ truly delivers on a number of desired effects of fine window treatments:

- Light transformation
- UV protection
- Softened views while enjoying privacy



We have delivered on these needs while incorporating superior industry enhancements:

- Tightest vane closure in its category for privacy/light control
- 100% Woven seams; not glued, sewn or heat fused
- Hem bar doesn't rise above the window sill in the closed position

But as with all fine window treatments there are certain inherent characteristics of a PerfectSheer™ Shade that can be found in any sheer shade in the market. Since we always strive to provide the highest quality window treatment solutions, we are communicating certain industry-wide operation or fabric characteristics of sheer shades.

Room Darkening versus Blackout Quality

One of the appealing characteristics of a sheer shade is its ability to softly filter light when open and provide varying levels of privacy when closed. While our room darkening fabrics provide more privacy and light control qualities than our light filtering choices, they are not a total blackout solution.

This results from several operating aspects associated with any sheer shade:

Multi Plane Operation

Because of the need to operate on several opposing planes – height, width, depth and in between angles, PerfectSheer™'s vanes are not designed to close completely, most notably at the bottom of the shade. However, vane overlap ensures that privacy is not compromised.



Front View



Side View

Hem Bar Rotation


An inherent characteristic of a sheer shade is that the bottom hem bar rises and lowers off the window sill as the vanes are rotated. Fortunately, unlike some other sheer shades, PerfectSheer™ is designed where the hem bar rests on the window sill when the vanes are closed and rises slightly in the open position, providing maximum light control and privacy.



Open Position



Closed Position

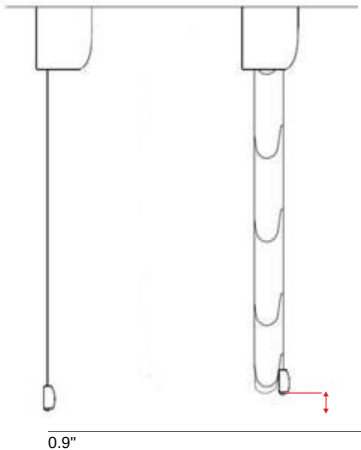


Fabric Characteristics

PerfectSheer™ offers an array of light filtering and room darkening fabrics. As is the nature of all textiles, there are certain characteristics associated with our fabric collection that are considered normal and not flaws.

Wrinkles, Creases and Reverse Light Effect

Slight wrinkles, creases and reverse light effects may appear which are considered normal

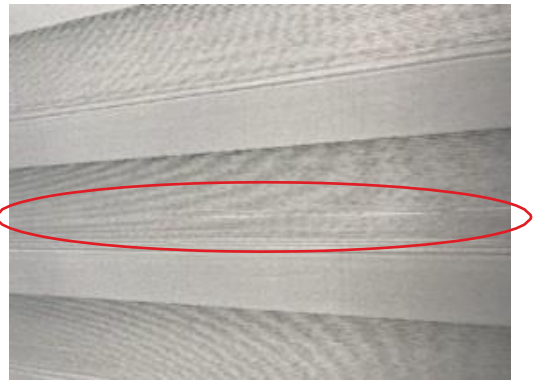


Woven Seam Construction

Because PerfectSheer™'s seams are finely woven not glued, sewn or heat fused, they have a more natural appearance and may not be perfectly straight



Edge Fraying

Small strands of sheer yarn may appear on the shade's vertical edges because of the nature of sheer fabrics. These are considered normal and may be clipped by the consumer. The weaving process may also result in edges that are not perfectly aligned.

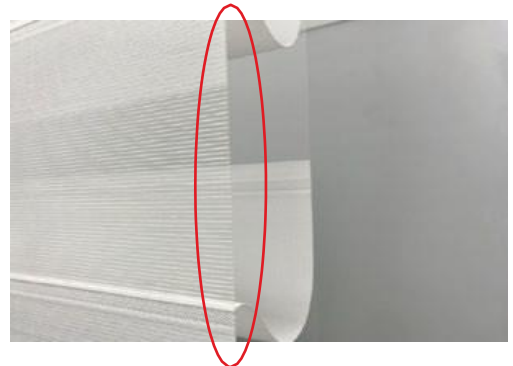

Vane Bowing

The top vane of the shade may bow slightly which is considered normal

**Order Accuracy****Vane Alignment**

When Side by Side is selected in order entry and the shades ordered at the same time, with the same color and height, the banded layer alignment will be within a 1/4" tolerance.

**This includes RGAs. As long as all other criteria is identical, the RGA shades will be subject to the same vane alignment rule with 1/4" tolerance.*

Shade Height

When confirming the accuracy of the ordered height measure with the vanes fully closed.

Our Heritage of Quality

With Norman®, Quality isn't just a catchphrase, it's our Heritage.

Our PerfectSheer™ shade will provide your consumer with years of trouble free operation and enjoyment. It is of course backed by our Lifetime Warranty should anything out of the ordinary occur

Maintaining PerfectSheer™ Shades

Routine cleaning will help maintain the beauty of your shade. Here are the proper methods for cleaning PerfectSheer shades:

Light Dusting

- Use a duster or gentle air blower to remove any dust. Do not vacuum.

Spot Cleaning

- Spot cleaning is not recommended as the fabric material is not water resistant.

Ironing

- One of the benefits of polyester is its non-wrinkling qualities. However, if wrinkles or creases develop, use a steam iron on a medium heat setting (356°F-392°F) to eliminate any unwanted wrinkles.





red dot winner 2020
best of the best



Height	Track Width																	For every additional foot, add
	USA	36	48	54	60	66	72	78	84	90	96	108	120	132	148	160	172	
	48	643	760	809	862	941	997	1051	1111	1191	1262	1364	1549	1744	1961	2195	2411	
	60	716	849	920	984	1081	1140	1204	1276	1367	1451	1567	1760	1968	2191	2453	2675	
	72	809	974	1054	1140	1242	1322	1397	1484	1588	1688	1936	2156	2395	2646	2963	3214	
	84	873	1089	1176	1268	1381	1471	1559	1648	1768	1873	2025	2254	2500	2762	3094	3356	
	100	949	1146	1242	1341	1458	1555	1651	1745	1873	1986	2200	2436	2694	2964	3319	3590	
	120	1074	1236	1353	1462	1587	1697	1806	1909	2050	2176	2491	2743	3014	3306	3703	3995	
	132	1138	1351	1474	1592	1726	1845	1968	2074	2229	2361	2580	2840	3120	3422	3834	4137	
	144	1201	1464	1595	1721	1866	1994	2131	2240	2408	2548	2668	2937	3225	3539	3965	4280	

Fabric Collection: Lakeshore Stripe

Height	Track Width																	For every additional foot, add
	USA	36	48	54	60	66	72	78	84	90	96	108	120	132	148	160	172	
	48	758	892	951	1013	1107	1171	1235	1306	1400	1484	1604	1821	2051	2305	2582	2834	
	60	842	998	1082	1156	1269	1342	1415	1499	1609	1705	1842	2071	2314	2575	2886	3146	
	72	951	1146	1239	1342	1459	1555	1643	1744	1868	1983	2277	2535	2817	3111	3485	3779	
	84	1026	1281	1382	1491	1624	1730	1835	1939	2078	2203	2382	2651	2941	3249	3639	3947	
	100	1115	1347	1459	1576	1714	1830	1942	2052	2203	2337	2587	2865	3169	3486	3904	4223	
	120	1262	1455	1590	1720	1867	1996	2124	2244	2411	2559	2928	3225	3546	3889	4355	4699	
	132	1310	1554	1695	1832	1984	2122	2263	2386	2563	2717	2966	3267	3589	3935	4409	4758	
	144	1382	1685	1835	1979	2146	2292	2450	2575	2769	2929	3069	3377	3711	4070	4560	4922	

Fabric Collections: Light Filtering (Plain, Net, Pacific, Circle, Coronado, Teardrop)

NO EXTRA CHARGE

- BEST FOR KIDS CERTIFIED CORDLESS
- SLEEK, VALANCE-FREE METAL HEADRAIL WITH CONTEMPORARY FINISHES

Surcharges

- | | | | |
|----------------------|-----------|-------------------|----------------|
| • Alternating colors | 10% | • Long L Bracket | \$61 per shade |
| • Room Darkening | 20% | • Keystone | \$73 each |
| • Aluminum Shim | \$28 each | • Additional Wand | \$89 each |

Additional vanes (pack of 6)

Shade Length	48	60	72	84	100	120	132	144
Price \$	230	270	310	350	390	460	500	540

Note: Used when ordered with a shade or on its own. The Room Darkening vane pack carries a 20% surcharge.

Freight handling fee (net) \$25.00 Minimum per order (First Shade) & \$11.00 each additional Unit no Maximum 90" or over; IN WIDTH or length \$80.00 minimum \$50.00 each additional

Program Overview

Application	Operation	Stack Options	Track Sizes
Single Shade	Wand Tilt	Left	Configurations 1
		Right	Configurations 1
		Traveling Center Stack	Configurations 1
	Motorized	Left	Configurations 1
		Right	Configurations 1
		Center Opening	Configurations 3
		Center Stack	Configurations 1
Side by Side Shades	Wand Tilt	Left Shade: L and Right Shade: R	Configurations 2
		Traveling Center Stack	Configurations 2

Size Limitations


The size limitations are a general reference. Order widths are not custom and must be selected from the available sizes. The Shade Width will be determined by the selected Track Width. Choose from the preferred operation type and stack option type to determine the Track Size Configurations available.

Operation & Stack Option	Min Width		Max Width		Min Height	Max Height	Max Area (F) X H
	Track (R)	Shade (F)	Track (R)	Shade (F)			
Wand Tilt Left/Right	17 5/8"	12 1/8"	285 5/8"	280 1/8"	24"	144"	237 SQFT
Wand Tilt Side by Side (each shade)	15 5/8"	12 1/8"	284 3/8"				
Motorized	Please ref. motorized program binder.						

*The shade width and height must be within the max area specified.



Stack Options

Single Shade

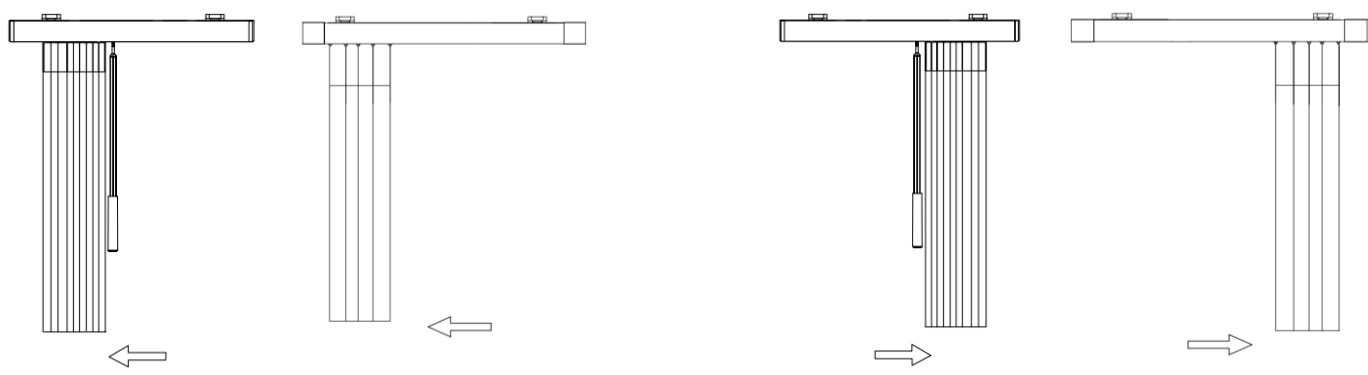



Stack Left

Stack Right

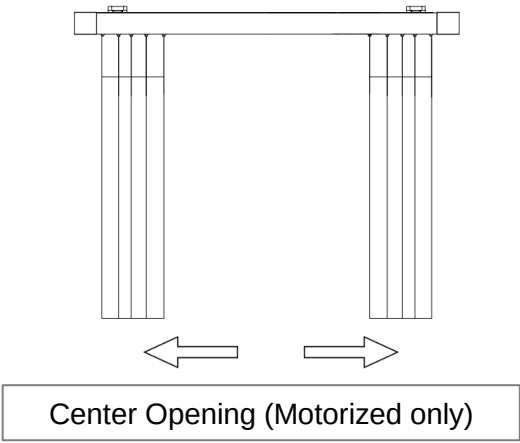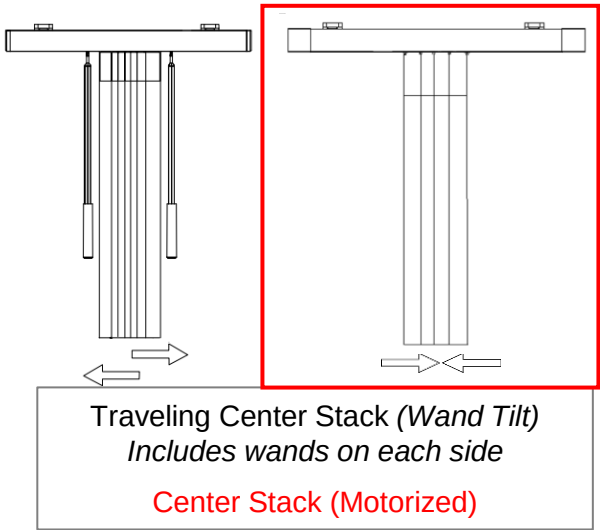


Side by Side Shades (Wand Tilt only)

Two independently operated shades butt together

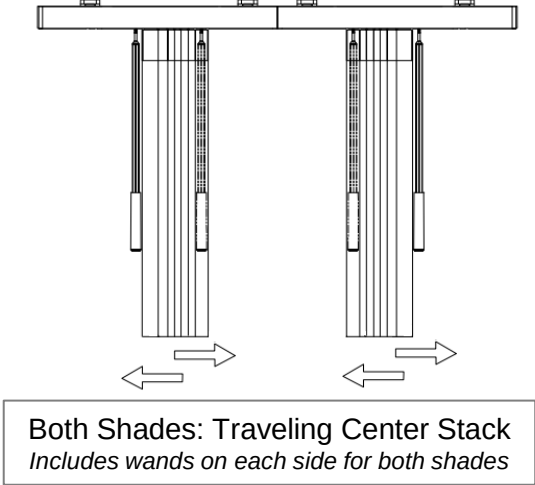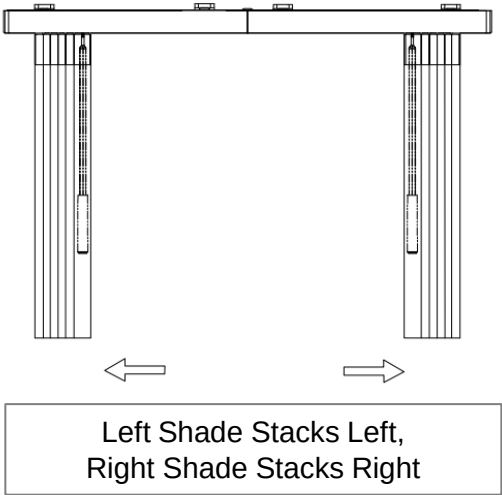


SmartDrape™


Wand tilt

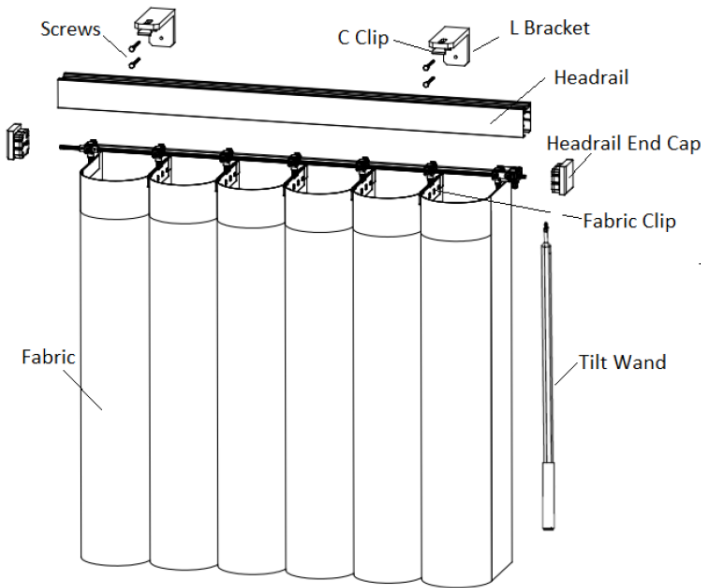


Motorized Operation
(Norman Smart Rechargeable Battery)

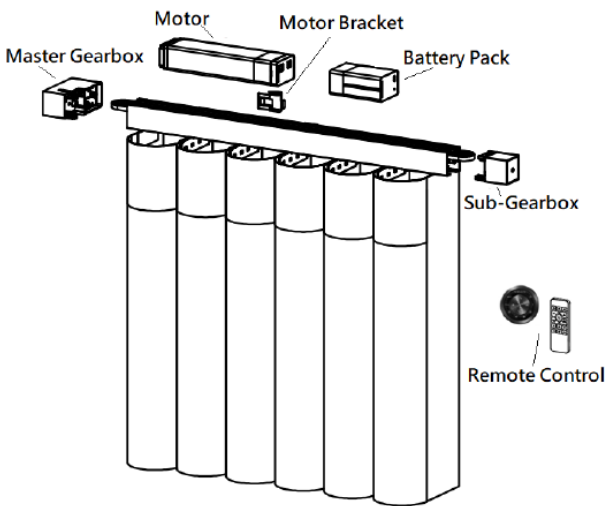


Motorized Operation
(Norman Smart AC Adapter Plug in)

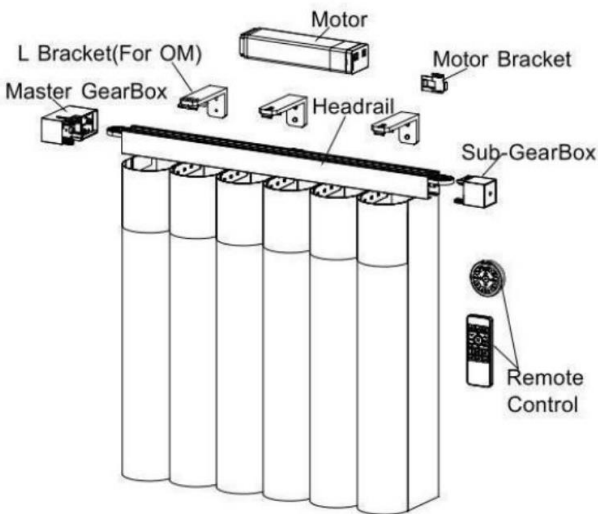

SmartDrape™ with SmartJoint™

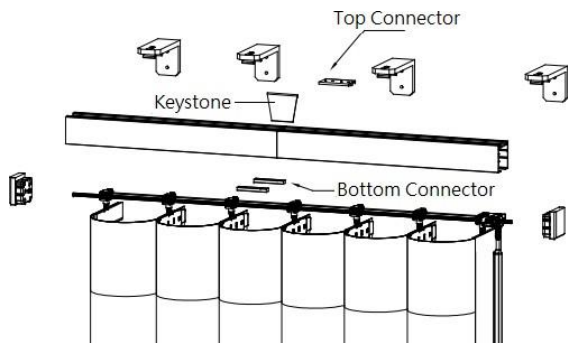

Spliced once with SmartJoint™
Single 97 5/8" ~ 189 5/8"
Side by Side 95 7/8" ~ 188 1/8"

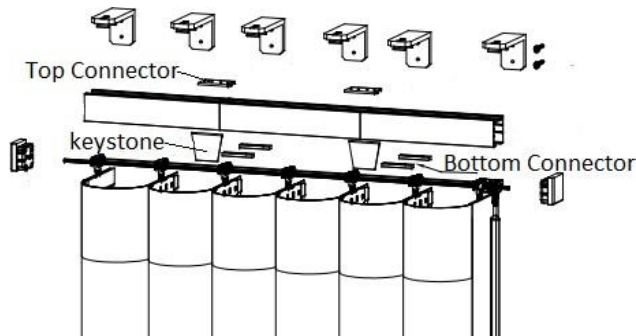


Spliced twice with SmartJoint™
Single 193 5/8" ~ 285 5/8"
Side by Side 192 1/8" ~ 284 3/8"

Shade Configurations

Configurations 1 – Single Shade (Wand Tilt)

Single: Left Stack, Right Stack, Traveling Center Stack											
No.	Track Width (R)	Shade Width (F)	Vane Qty	Stacking Width (Left/ Right stack)	Stacking Width (Traveling Center Stack)	No.	Track Width (R)	Shade Width (F)	Vane Qty	Stacking Width Left/ Right stack	Stacking Width Traveling Center Stack
1	17 5/8"	12 1/8"	3	6 5/16"	11 1/16"	35	153 5/8"	148 1/8"	37	22 3/8"	26"
2	21 5/8"	16 1/8"	4	6 15/16"	11 1/2"	36	157 5/8"	152 1/8"	38	22 13/16"	26 7/16"
3	25 5/8"	20 1/8"	5	7 1/2"	11 15/16"	37	161 5/8"	156 1/8"	39	23 1/4"	26 7/8"
4	29 5/8"	24 1/8"	6	8 1/8"	12 3/8"	38	165 5/8"	160 1/8"	40	23 11/16"	27 3/8"
5	33 5/8"	28 1/8"	7	8 11/16"	12 13/16"	39	169 5/8"	164 1/8"	41	24 1/8"	27 13/16"
6	37 5/8"	32 1/8"	8	9 5/16"	13 1/4"	40	173 5/8"	168 1/8"	42	24 9/16"	28 1/4"
7	41 5/8"	36 1/8"	9	9 7/8"	13 11/16"	41	177 5/8"	172 1/8"	43	25"	28 11/16"
8	45 5/8"	40 1/8"	10	10 7/16"	14 1/8"	42	181 5/8"	176 1/8"	44	25 7/16"	29 1/8"
9	49 5/8"	44 1/8"	11	11 1/16"	14 9/16"	43	185 5/8"	180 1/8"	45	25 7/8"	29 9/16"
10	53 5/8"	48 1/8"	12	11 5/8"	15"	44	189 5/8"	184 1/8"	46	26 3/8"	30"
11	57 5/8"	52 1/8"	13	12 1/4"	15 7/16"	45	193 5/8"	188 1/8"	47	26 13/16"	30 7/16"
12	61 5/8"	56 1/8"	14	12 1/4"	15 7/8"	46	197 5/8"	192 1/8"	48	27 1/4"	30 7/8"
13	65 5/8"	60 1/8"	15	12 11/16"	16 5/16"	47	201 5/8"	196 1/8"	49	27 11/16"	31 5/16"
14	69 5/8"	64 1/8"	16	13 1/8"	16 3/4"	48	205 5/8"	200 1/8"	50	28 1/8"	31 3/4"
15	73 5/8"	68 1/8"	17	13 9/16"	17 3/16"	49	209 5/8"	204 1/8"	51	28 9/16"	32 3/16"
16	77 5/8"	72 1/8"	18	14"	17 5/8"	50	213 5/8"	208 1/8"	52	29"	32 5/8"
17	81 5/8"	76 1/8"	19	14 7/16"	18 1/16"	51	217 5/8"	212 1/8"	53	29 7/16"	33 1/16"
18	85 5/8"	80 1/8"	20	14 7/8"	18 1/2"	52	221 5/8"	216 1/8"	54	29 7/8"	33 1/2"
19	89 5/8"	84 1/8"	21	15 5/16"	18 15/16"	53	225 5/8"	220 1/8"	55	30 5/16"	33 15/16"
20	93 5/8"	88 1/8"	22	15 3/4"	19 7/16"	54	229 5/8"	224 1/8"	56	30 3/4"	34 3/8"
21	97 5/8"	92 1/8"	23	16 3/16"	19 7/8"	55	233 5/8"	228 1/8"	57	31 3/16"	34 13/16"
22	101 5/8"	96 1/8"	24	16 5/8"	20 5/16"	56	237 5/8"	232 1/8"	58	31 5/8"	35 5/16"
23	105 5/8"	100 1/8"	25	17 1/16"	20 3/4"	57	241 5/8"	236 1/8"	59	32 1/16"	35 3/4"
24	109 5/8"	104 1/8"	26	17 1/2"	21 3/16"	58	245 5/8"	240 1/8"	60	32 1/2"	36 3/16"
25	113 5/8"	108 1/8"	27	17 15/16"	21 5/8"	59	249 5/8"	244 1/8"	61	32 15/16"	36 5/8"
26	117 5/8"	112 1/8"	28	18 7/16"	22 1/16"	60	253 5/8"	248 1/8"	62	33 3/8"	37 1/16"
27	121 5/8"	116 1/8"	29	18 7/8"	22 1/2"	61	257 5/8"	252 1/8"	63	33 13/16"	37 1/2"
28	125 5/8"	120 1/8"	30	19 5/16"	22 15/16"	62	261 5/8"	256 1/8"	64	34 5/16"	37 15/16"
29	129 5/8"	124 1/8"	31	19 3/4"	23 3/8"	63	265 5/8"	260 1/8"	65	34 3/4"	38 3/8"
30	133 5/8"	128 1/8"	32	20 3/16"	23 13/16"	64	269 5/8"	264 1/8"	66	35 3/16"	38 13/16"
31	137 5/8"	132 1/8"	33	20 5/8"	24 1/4"	65	273 5/8"	268 1/8"	67	35 5/8"	39 1/4"
32	141 5/8"	136 1/8"	34	21 1/16"	24 11/16"	66	277 5/8"	272 1/8"	68	36 1/16"	39 11/16"
33	145 5/8"	140 1/8"	35	21 1/2"	25 1/8"	67	281 5/8"	276 1/8"	69	36 1/2"	40 1/8"
34	149 5/8"	144 1/8"	36	21 15/16"	25 9/16"	68	285 5/8"	280 1/8"	70	36 15/16"	40 9/16"

- Single Tracks not available to combine as two Side by Side shades.
 - Tracks 97 5/8" through 189 5/8" will be spliced once at the center by SmartJoint™; keystone optional.
 - Tracks 193 5/8" through 285 5/8" will be spliced twice, evenly, by SmartJoint™; keystones optional.
- Stacking Width: Measurement from the end of the end cap to the end of the fabric when fabric vanes are completely stacked.
 - Tolerance: +/- 13/16" per shade. Fabric vane will soften over time so variance could be wider.
 - Field of view, from the end of the fabric to another end of the end cap when fabric vanes are completely stacked = Track Width- Stacking Width.


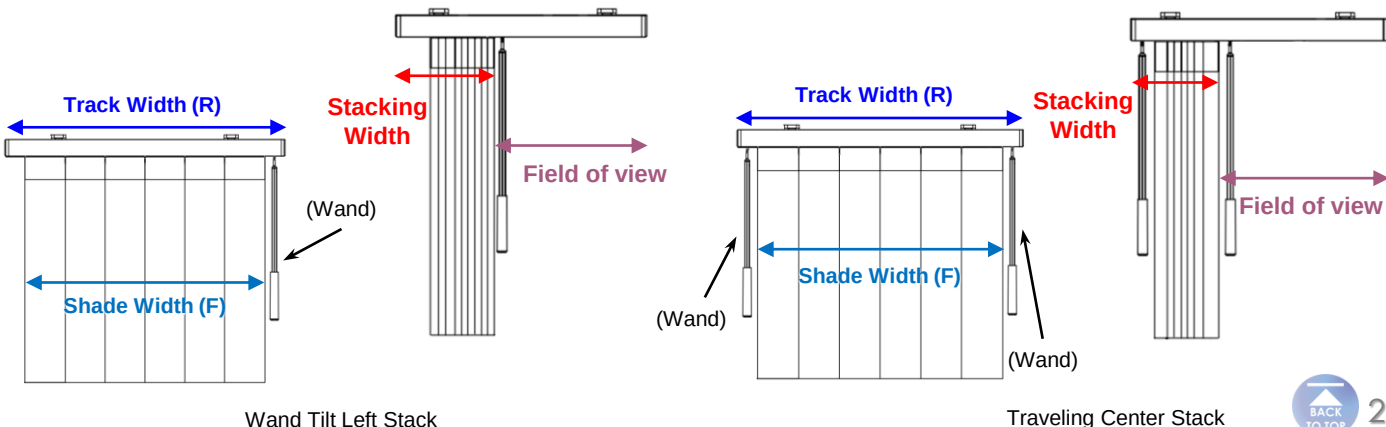


Shade Configurations


Configurations 1 – Single Shade (Motorized)

Single: Left, Right, Center Stack											
No.	Track Width (R)	Shade Width (F)	Vane Qty	Stacking Width Left/ Right stack	Stacking Width (Center Stack)	No.	Track Width (R)	Shade Width (F)	Vane Qty	Stacking Width Left/ Right stack	Stacking Width (Center Stack)
1	17 5/8"	12 1/8"	3	7 13/16"	7 1/4"	35	153 5/8"	148 1/8"	37	24 7/16"	23 3/4"
2	21 5/8"	16 1/8"	4	8 3/8"	7 7/8"	36	157 5/8"	152 1/8"	38	24 7/8"	24 3/16"
3	25 5/8"	20 1/8"	5	9"	8 7/16"	37	161 5/8"	156 1/8"	39	25 5/16"	24 5/8"
4	29 5/8"	24 1/8"	6	9 9/16"	9 1/16"	38	165 5/8"	160 1/8"	40	25 3/4"	25 1/16"
5	33 5/8"	28 1/8"	7	10 3/16"	9 5/8"	39	169 5/8"	164 1/8"	41	26 3/16"	25 1/2"
6	37 5/8"	32 1/8"	8	10 3/4"	10 1/4"	40	173 5/8"	168 1/8"	42	26 5/8"	25 15/16"
7	41 5/8"	36 1/8"	9	11 5/16"	10 13/16"	41	177 5/8"	172 1/8"	43	27 1/16"	26 3/8"
8	45 5/8"	40 1/8"	10	11 15/16"	11 3/8"	42	181 5/8"	176 1/8"	44	27 1/2"	26 13/16"
9	49 5/8"	44 1/8"	11	12 1/2"	12"	43	185 5/8"	180 1/8"	45	27 15/16"	27 5/16"
10	53 5/8"	48 1/8"	12	13 1/8"	12 9/16"	44	189 5/8"	184 1/8"	46	28 3/8"	27 3/4"
11	57 5/8"	52 1/8"	13	13 11/16"	13 3/16"	45	193 5/8"	188 1/8"	47	28 13/16"	28 3/16"
12	61 5/8"	56 1/8"	14	14 5/16"	13 5/8"	46	197 5/8"	192 1/8"	48	29 5/16"	28 5/8"
13	65 5/8"	60 1/8"	15	14 3/4"	14 1/16"	47	201 5/8"	196 1/8"	49	29 3/4"	29 1/16"
14	69 5/8"	64 1/8"	16	15 3/16"	14 1/2"	48	205 5/8"	200 1/8"	50	30 3/16"	29 1/2"
15	73 5/8"	68 1/8"	17	15 5/8"	14 15/16"	49	209 5/8"	204 1/8"	51	30 5/8"	29 15/16"
16	77 5/8"	72 1/8"	18	16 1/16"	15 3/8"	50	213 5/8"	208 1/8"	52	31 1/16"	30 3/8"
17	81 5/8"	76 1/8"	19	16 1/2"	15 13/16"	51	217 5/8"	212 1/8"	53	31 1/2"	30 13/16"
18	85 5/8"	80 1/8"	20	16 15/16"	16 1/4"	52	221 5/8"	216 1/8"	54	31 15/16"	31 1/4"
19	89 5/8"	84 1/8"	21	17 3/8"	16 11/16"	53	225 5/8"	220 1/8"	55	32 3/8"	31 11/16"
20	93 5/8"	88 1/8"	22	17 13/16"	17 1/8"	54	229 5/8"	224 1/8"	56	32 13/16"	32 1/8"
21	97 5/8"	92 1/8"	23	18 1/4"	17 9/16"	55	233 5/8"	228 1/8"	57	33 1/4"	32 9/16"
22	101 5/8"	96 1/8"	24	18 11/16"	18"	56	237 5/8"	232 1/8"	58	33 11/16"	33"
23	105 5/8"	100 1/8"	25	19 1/8"	18 7/16"	57	241 5/8"	236 1/8"	59	34 1/8"	33 7/16"
24	109 5/8"	104 1/8"	26	19 9/16"	18 7/8"	58	245 5/8"	240 1/8"	60	34 9/16"	33 7/8"
25	113 5/8"	108 1/8"	27	20"	19 3/8"	59	249 5/8"	244 1/8"	61	35"	34 5/16"
26	117 5/8"	112 1/8"	28	20 7/16"	19 13/16"	60	253 5/8"	248 1/8"	62	35 7/16"	34 3/4"
27	121 5/8"	116 1/8"	29	20 7/8"	20 1/4"	61	257 5/8"	252 1/8"	63	35 7/8"	35 1/4"
28	125 5/8"	120 1/8"	30	21 3/8"	20 11/16"	62	261 5/8"	256 1/8"	64	36 5/16"	35 11/16"
29	129 5/8"	124 1/8"	31	21 13/16"	21 1/8"	63	265 5/8"	260 1/8"	65	36 3/4"	36 1/8"
30	133 5/8"	128 1/8"	32	22 1/4"	21 9/16"	64	269 5/8"	264 1/8"	66	37 1/4"	36 9/16"
31	137 5/8"	132 1/8"	33	22 11/16"	22"	65	273 5/8"	268 1/8"	67	37 11/16"	37"
32	141 5/8"	136 1/8"	34	23 1/8"	22 7/16"	66	277 5/8"	272 1/8"	68	38 1/8"	37 7/16"
33	145 5/8"	140 1/8"	35	23 9/16"	22 7/8"	67	281 5/8"	276 1/8"	69	38 9/16"	37 7/8"
34	149 5/8"	144 1/8"	36	24"	23 5/16"	68	285 5/8"	280 1/8"	70	39"	38 5/16"

- Track width 17 5/8" is only available for Motorized Norman Smart AC Adapter Plug in.
 - Tracks 97 5/8" through 189 5/8" will be spliced once at the center by SmartJoint™; keystone optional.
 - Tracks 193 5/8" through 285 5/8" will be spliced twice, evenly, by SmartJoint™; keystones optional.
- Stacking Width: Measurement from the end of the gear box to the end of the fabric when fabric vanes are completely stacked.
 - Tolerance: +/- 13/16" per shade. Fabric vane will soften over time so variance could be wider
 - Field of view, from the end of the fabric to another end of the gear box when fabric vanes are completely stacked = Track Width- Stacking Width.

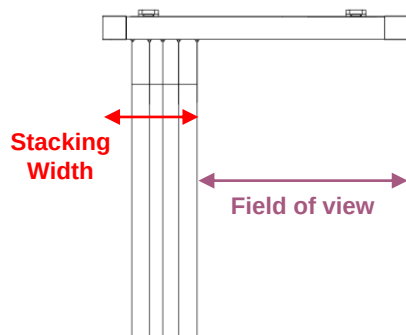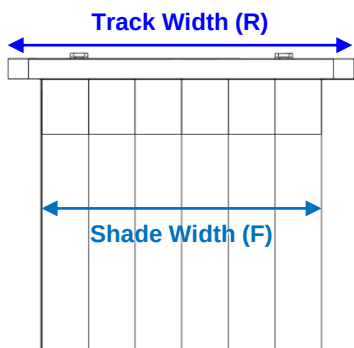

Motorized Left/ Right Stack

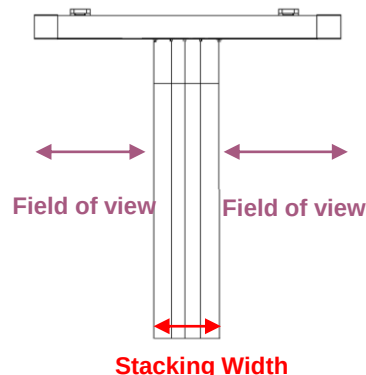

Motorized Center Stack


Shade Configurations

Configurations 2 –Side by Side Shades (Wand Tilt only)


Side by Side: Left/Right Stack, Traveling Center Stack											
No.	Track Width (R)	Shade Width (F)	Vane Qty	Stacking Width per shade (LL/RR)	Stacking Width per shade (Both Traveling Center Stack)	No.	Track Width (R)	Shade Width (F)	Vane Qty	Stacking Width per shade (LL/RR)	Stacking Width per shade (Both Traveling Center Stack)
1	15 5/8"	12 1/8"	3	7 1/16"	11 1/16"	35	152 1/8"	148 1/8"	37	23 9/16"	26"
2	19 5/8"	16 1/8"	4	7 11/16"	11 1/2"	36	156 1/8"	152 1/8"	38	24"	26 7/16"
3	23 5/8"	20 1/8"	5	8 1/4"	11 15/16"	37	160 1/8"	156 1/8"	39	24 7/16"	26 7/8"
4	27 5/8"	24 1/8"	6	8 7/8"	12 3/8"	38	164 1/8"	160 1/8"	40	24 7/8"	27 3/8"
5	31 5/8"	28 1/8"	7	9 7/16"	12 13/16"	39	168 1/8"	164 1/8"	41	25 5/16"	27 13/16"
6	35 5/8"	32 1/8"	8	10 1/16"	13 1/4"	40	172 1/8"	168 1/8"	42	25 3/4"	28 1/4"
7	39 5/8"	36 1/8"	9	10 5/8"	13 11/16"	41	176 1/8"	172 1/8"	43	26 1/4"	28 11/16"
8	43 5/8"	40 1/8"	10	11 1/4"	14 1/8"	42	180 1/8"	176 1/8"	44	26 11/16"	29 1/8"
9	47 5/8"	44 1/8"	11	11 13/16"	14 9/16"	43	184 1/8"	180 1/8"	45	27 1/8"	29 9/16"
10	51 5/8"	48 1/8"	12	12 3/8"	15"	44	188 1/8"	184 1/8"	46	27 9/16"	30"
11	55 5/8"	52 1/8"	13	13"	15 7/16"	45	192 1/8"	188 1/8"	47	28"	30 7/16"
12	59 5/8"	56 1/8"	14	13 7/16"	15 7/8"	46	196 1/8"	192 1/8"	48	28 7/16"	30 7/8"
13	63 5/8"	60 1/8"	15	13 7/8"	16 5/16"	47	200 1/8"	196 1/8"	49	28 7/8"	31 5/16"
14	67 5/8"	64 1/8"	16	14 5/16"	16 3/4"	48	204 1/8"	200 1/8"	50	29 5/16"	31 3/4"
15	71 5/8"	68 1/8"	17	14 3/4"	17 3/16"	49	208 1/8"	204 1/8"	51	29 3/4"	32 3/16"
16	75 5/8"	72 1/8"	18	15 3/16"	17 5/8"	50	212 1/8"	208 1/8"	52	30 3/16"	32 5/8"
17	79 7/8"	76 1/8"	19	15 5/8"	18 1/16"	51	216 3/8"	212 1/8"	53	30 5/8"	33 1/16"
18	83 7/8"	80 1/8"	20	16 1/16"	18 1/2"	52	220 3/8"	216 1/8"	54	31 1/16"	33 1/2"
19	87 7/8"	84 1/8"	21	16 1/2"	18 15/16"	53	224 3/8"	220 1/8"	55	31 1/2"	33 15/16"
20	91 7/8"	88 1/8"	22	16 15/16"	19 7/16"	54	228 3/8"	224 1/8"	56	31 15/16"	34 3/8"
21	95 7/8"	92 1/8"	23	17 3/8"	19 7/8"	55	232 3/8"	228 1/8"	57	32 3/8"	34 13/16"
22	99 7/8"	96 1/8"	24	17 13/16"	20 5/16"	56	236 3/8"	232 1/8"	58	32 13/16"	35 5/16"
23	103 7/8"	100 1/8"	25	18 5/16"	20 3/4"	57	240 3/8"	236 1/8"	59	33 1/4"	35 3/4"
24	107 7/8"	104 1/8"	26	18 3/4"	21 3/16"	58	244 3/8"	240 1/8"	60	33 11/16"	36 3/16"
25	111 7/8"	108 1/8"	27	19 3/16"	21 5/8"	59	248 3/8"	244 1/8"	61	34 3/16"	36 5/8"
26	115 7/8"	112 1/8"	28	19 5/8"	22 1/16"	60	252 3/8"	248 1/8"	62	34 5/8"	37 1/16"
27	119 7/8"	116 1/8"	29	20 1/16"	22 1/2"	61	256 3/8"	252 1/8"	63	35 1/16"	37 1/2"
28	123 7/8"	120 1/8"	30	20 1/2"	22 15/16"	62	260 3/8"	256 1/8"	64	35 1/2"	37 15/16"
29	127 7/8"	124 1/8"	31	20 15/16"	23 3/8"	63	264 3/8"	260 1/8"	65	35 15/16"	38 3/8"
30	131 7/8"	128 1/8"	32	21 3/8"	23 13/16"	64	268 3/8"	264 1/8"	66	36 3/8"	38 13/16"
31	135 7/8"	132 1/8"	33	21 13/16"	24 1/4"	65	272 3/8"	268 1/8"	67	36 13/16"	39 1/4"
32	139 7/8"	136 1/8"	34	22 1/4"	24 11/16"	66	276 3/8"	272 1/8"	68	37 1/4"	39 11/16"
33	144 1/8"	140 1/8"	35	22 11/16"	25 1/8"	67	280 3/8"	276 1/8"	69	37 11/16"	40 1/8"
34	148 1/8"	144 1/8"	36	23 1/8"	25 9/16"	68	284 3/8"	280 1/8"	70	38 1/8"	40 9/16"

Side by Side: two individually operated shades joined together, suitable for very large windows. To minimize the center gap between shades, the wands will be attached behind the fabric vanes on Side by Side shades. Left shade & Right shade for side by side must be have same length.

- Side by Side tracks not available as a single shade.
- Tracks 95 7/8" through 188 1/8" will be spliced once at the center by SmartJoint™; keystone optional.
- Tracks 192 1/8" through 284 3/8" will be spliced twice, evenly, by SmartJoint™; keystones optional.
- Keystones are also available for the center joinery for the two headrails.

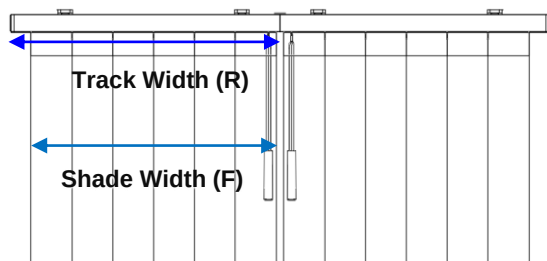

Wand Tilt, Side by Side
Left Shade Stacks Left, Right Shade Stacks Right;

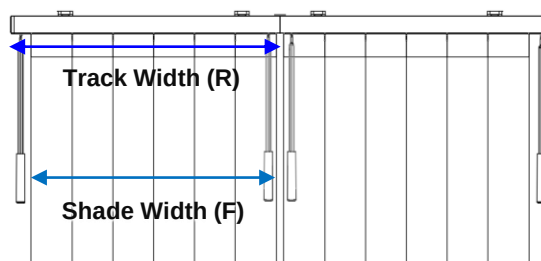


Wand Tilt, Side by Side
Both Traveling Center Stack


Shade Configurations

Configurations 2 –Side by Side Shades (Wand Tilt only)

- Stacking Width: Measurement from the end of the end cap to the end of the fabric of left/ right shade when fabric vanes are completely stacked.
 - Tolerance: +/- 13/16" per shade. Fabric will soften over time so variance could be wider.
 - Field of view, between the end of fabric of left shade to the end of fabric of right shade when fabric vanes are completely stacked = Total Track Width- Stacking width of left shade -Stacking Width of right shade.

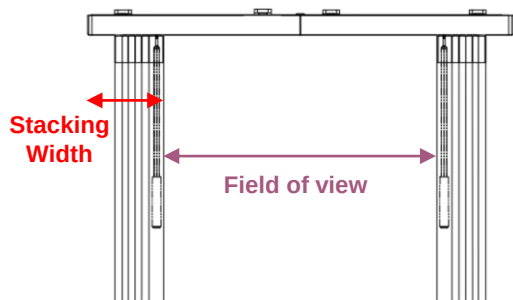

Wand Tilt, Side by Side
Left Shade Stacks Left, Right Shade Stacks Right;

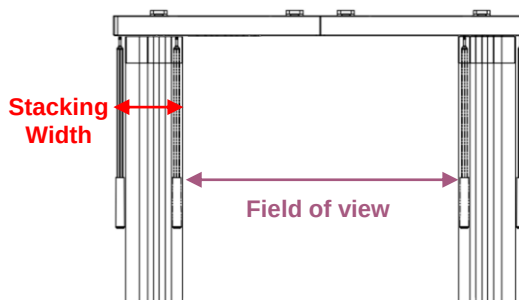


Wand Tilt, Side by Side
Both Traveling Center Stack

Center Gaps

- Side by Side shades will still include gaps at the center where the 2 headrails are combined. See the center gaps below based on the combined track sizes.
- When the vanes are open, the gap size between shades will be based on the two track sizes ordered.
- There is no gap when fabric vanes are closed.

First Track Width (R)	Second Track Width (R)	Gap (± 1/8")
$R \leq 78"$	$R \leq 78"$	1 1/2"
	$78" < R \leq 144"$	1 3/4"
	$144" < R \leq 216"$	2"
	$216" < R \leq 284 \frac{3}{8}"$	2 1/4"
$78" < R \leq 144"$	$78" < R \leq 144"$	2"
	$144" < R \leq 216"$	2 1/4"
	$216" < R \leq 284 \frac{3}{8}"$	2 1/2"
$144" < R \leq 216"$	$144" < R \leq 216"$	2 1/2"
	$216" < R \leq 284 \frac{3}{8}"$	2 3/4"
$216" < R \leq 284 \frac{3}{8}"$	$216" < R \leq 284 \frac{3}{8}"$	3"

A **C Clip** will be provided as a joinery for the two headrails; Optional **Keystone** is available.

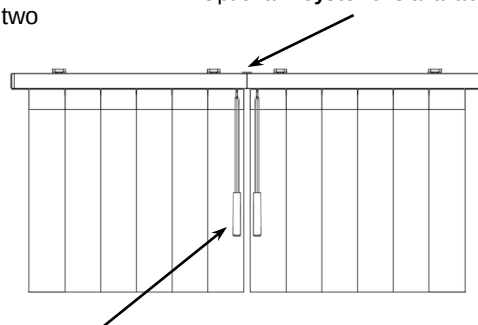

Wands at the center will be behind fabric vanes to minimize gaps.



Configurations 3 – Single Shade: Center Opening (Motorized only)


Center Opening									
No.	Track Width (R)	Shade Width (F)	Vane Qty	Stacking Width per side	No.	Track Width (R)	Shade Width (F)	Vane Qty	Stacking Width per side
1	30"	24 7/16"	6	11"	18	166 1/2"	160 15/16"	40	18 1/2"
2	38"	32 7/16"	8	11 7/16"	19	174 1/2"	168 15/16"	42	18 15/16"
3	46"	40 7/16"	10	11 7/8"	20	182 1/2"	176 15/16"	44	19 3/8"
4	54"	48 7/16"	12	12 5/16"	21	190 1/2"	184 15/16"	46	19 13/16"
5	62"	56 7/16"	14	12 3/4"	22	198 1/2"	192 15/16"	48	20 1/4"
6	70"	64 7/16"	16	13 3/16"	23	206 1/2"	200 15/16"	50	20 11/16"
7	78"	72 7/16"	18	13 5/8"	24	214 1/2"	208 15/16"	52	21 1/8"
8	86 1/4"	80 11/16"	20	14 1/8"	25	222 3/4"	217 3/16"	54	21 9/16"
9	94 1/4"	88 11/16"	22	14 9/16"	26	230 3/4"	225 3/16"	56	22 1/16"
10	102 1/4"	96 11/16"	24	15"	27	238 3/4"	233 3/16"	58	22 1/2"
11	110 1/4"	104 11/16"	26	15 7/16"	28	246 3/4"	241 3/16"	60	22 15/16"
12	118 1/4"	112 11/16"	28	15 7/8"	29	254 3/4"	249 3/16"	62	23 3/8"
13	126 1/4"	120 11/16"	30	16 5/16"	30	262 3/4"	257 3/16"	64	23 13/16"
14	134 1/4"	128 11/16"	32	16 3/4"	31	270 3/4"	265 3/16"	66	24 1/4"
15	142 1/4"	136 11/16"	34	17 3/16"	32	278 3/4"	273 3/16"	68	24 11/16"
16	150 1/2"	144 15/16"	36	17 5/8"	33	286 3/4"	281 3/16"	70	25 1/8"
17	158 1/2"	152 15/16"	38	18 1/16"					

- Not available to combine as two Side by Side shades.
 - The vane quantity for Center Opening must be even numbered so that the vanes that stack on either side stack are equal.
 - Track sizes 102 1/4" through 182 1/2" will be spliced once at the center by SmartJoint™; keystone optional.
 - Track sizes 190 1/2" through 286 3/4" will be spliced twice, evenly, by SmartJoint™; keystone optional.
- Stacking Width: Measurement from the end of the gear box to the end of fabric when fabric vanes are completely stacked.
 - Tolerance: +/- 13/16" per side. Fabric will soften over time so variance could be wider.
 - Field of view, between the end of the fabric to end of the fabric at another side when fabric vanes are completely stacked = Total Track Width - 2 Stacking Widths.

Center Gaps

- There is no gap when fabric vanes are closed.
- When the vanes are open, the gap size between shades will be based on the track size ordered.

Track Width (R)	Gap (± 1/8")
30"~78"	9/16"
86 1/4"~142 1/4"	3/4"
150 1/2"~214 1/2"	1"
222 3/4"~286 3/4"	1 1/4"

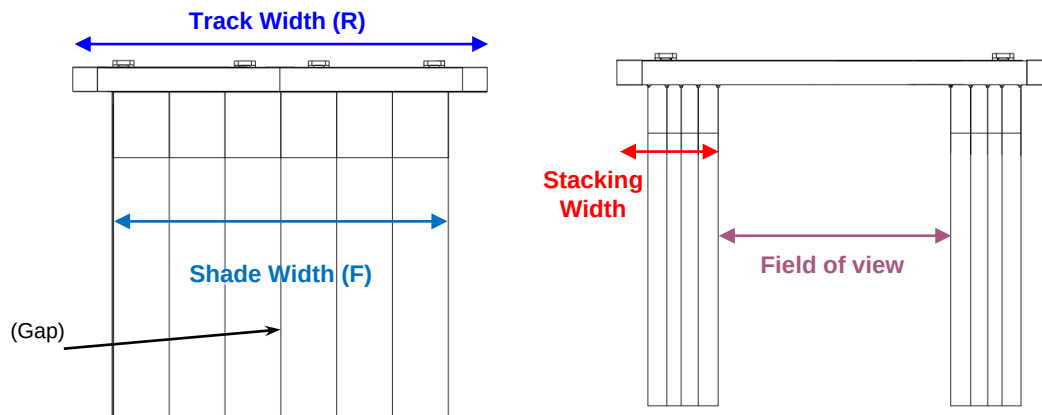


Motorized Center Opening

Mount Types


Available in Outside Mount only for windows or patio door applications

Mount Types:


- Wall Mount (L bracket)
- Ceiling Mount (Direct Mount using Pre-Drilled Headrail or C Clip)
- Ceiling Pocket Mount (Direct Mount using Pre-Drilled Headrail)

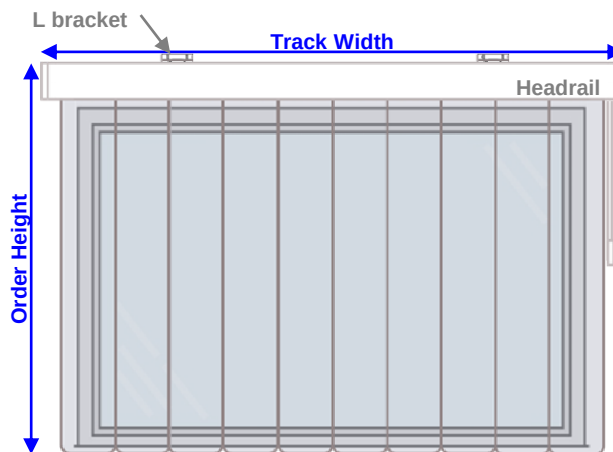

Wall Mount

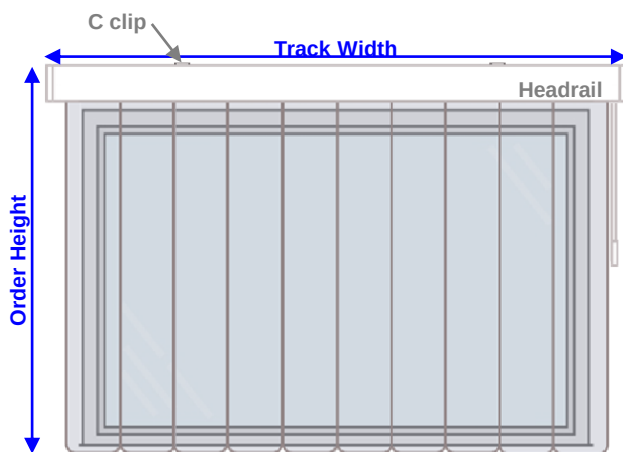

Ceiling Mount

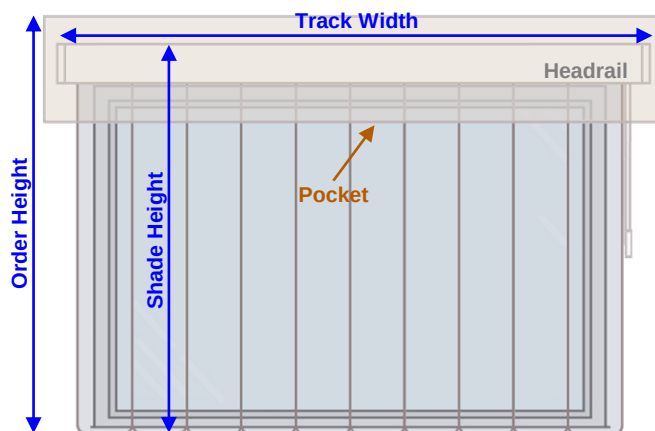

Ceiling Pocket Mount

Width Definitions:

Order Width = Track width (R)

Track Width (R): For wand tilt, measurement from the headrail left end cap to right end cap. For motorized, measurement from the master gearbox to the sub-gearbox.

Shade Width (F): Measurement from the first vane to the last vane in the open position.

No deductions will be taken.

Shade width tolerance: $\pm \frac{3}{4}$ "

Height Definitions:

For Wall Mount/ Ceiling Mount : Order Height = Shade height (Y1)
Measurement from top of headrail to bottom of fabric vane.

For Ceiling Pocket Mount:

Order Height : Measurement from top of the inner ceiling pocket to the end of the fabric vane.

Shade Height (Y1): Measurement from top of the headrail to the end of the fabric vane.

With hang strip= Shade height (Y1)= Order Height- Hang Strip Height

Without hang strip= Shade Height (Y1) = Order Height

Order height tolerance: $\pm \frac{1}{2}$ "


Recommendation for patio doors: fabric vanes should overlap the window opening by a minimum of 4" for width and 3" for height. Consider a $\frac{1}{2}$ " minimum for floor clearance.

Recommendations for windows: fabric vanes should overlap the window opening by a minimum of 4" for width and 3" for height.

Mount Types


- Wall Mount: L bracket sets are included for Wall Mount only.

Length of Standard L bracket 3 15/16"

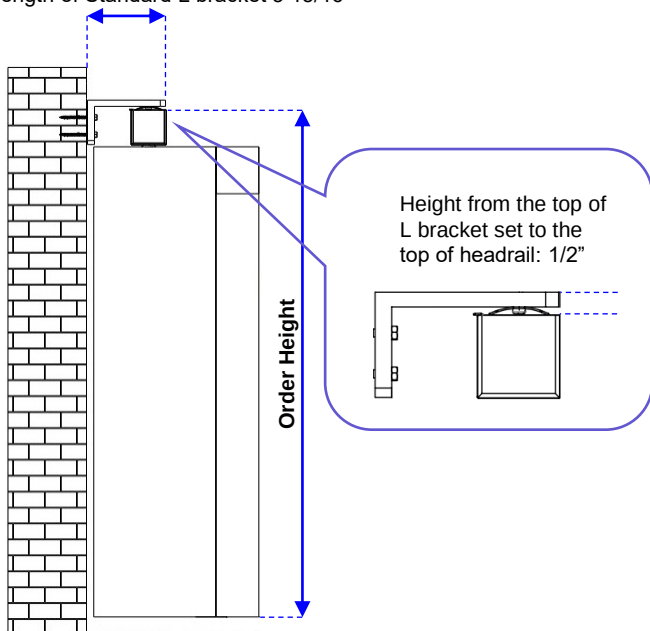

With Standard L Bracket Set

Length of Long L bracket 5 11/16"

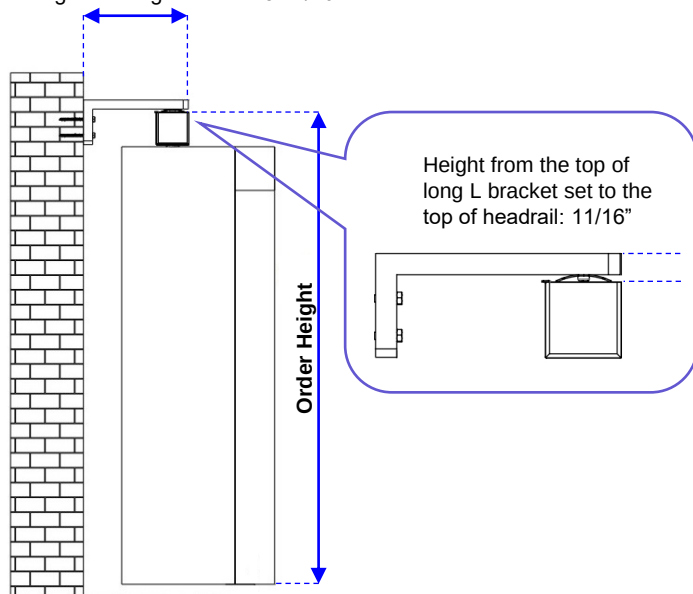


With Long L Bracket Set

- Ceiling Mount


Select mounting option: Direct Mount using Pre-Drilled Headrail, or C Clip.

Mounting Depth for headrail aligns with the wall: 4 3/8"

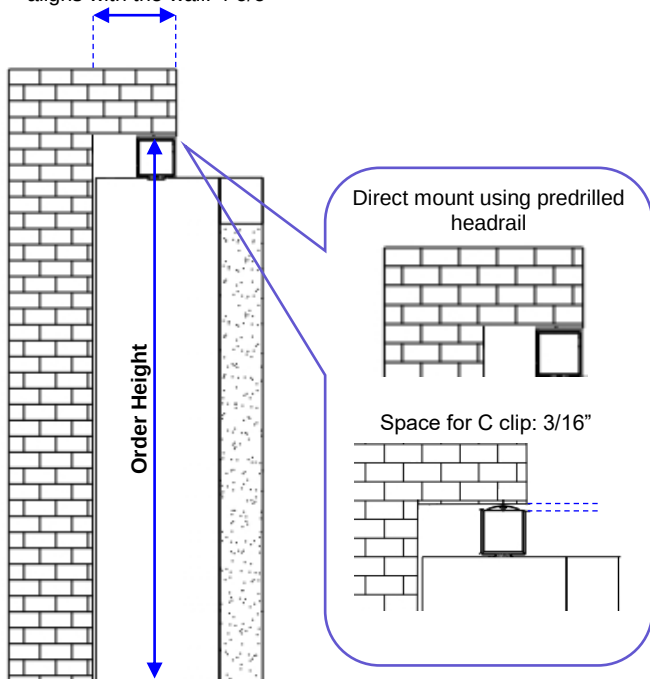

Headrail aligns with the wall

Mounting depth for fabric vane edge aligns with the wall" 8 1/4"


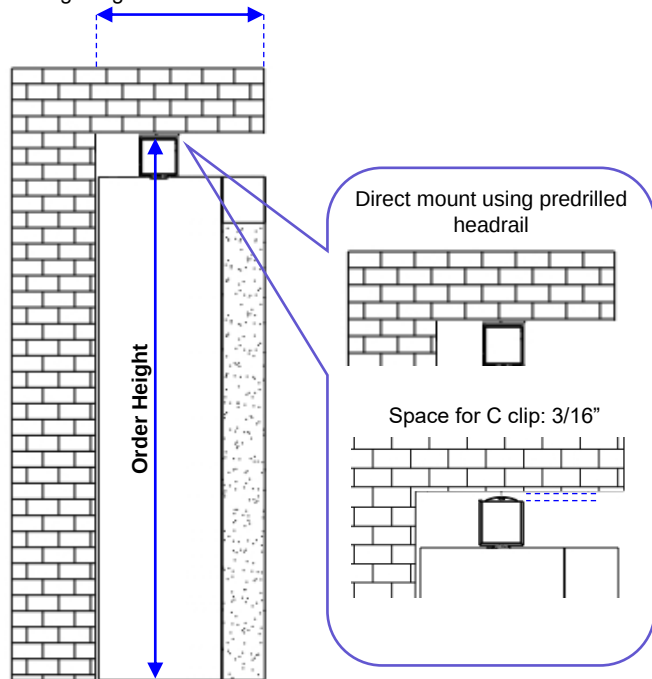


Fabric vane edge aligns with the wall



Mount Types

- Ceiling Pocket Mount: Direct Mount using Pre-Drilled Headrail.
- Ceiling Pocket depth (D) & inner height (H) & dimensions are required for order entry.
 - Min pocket depth: 4 7/8" • Min pocket height: *no min*
 - Max pocket depth: *no max* • Max pocket height: 4 5/8"
- Hang Strips (Wand Tilt shade):
 - Hang strip is provided in 5 sizes when ceiling pocket dimensions meets specified sizes as table below:









Wand Tilt			Motorized
Hang Strip Height	The ceiling pocket size		
1"	4 7/8" ≤ D ≤ 8 1/8"	1 3/4" < H < 2 3/4"	See motorization specifications.
1 9/16"		2 3/4" ≤ H < 3 3/8"	
2"		3 3/8" ≤ H < 3 3/4"	
2 3/8"		3 3/4" ≤ H < 4 1/8"	
2 15/16"		4 1/8" ≤ H ≤ 4 5/8"	

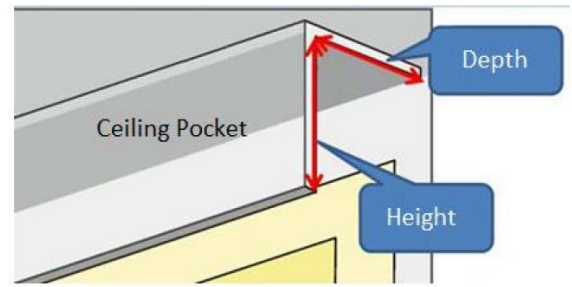

Hang Strip

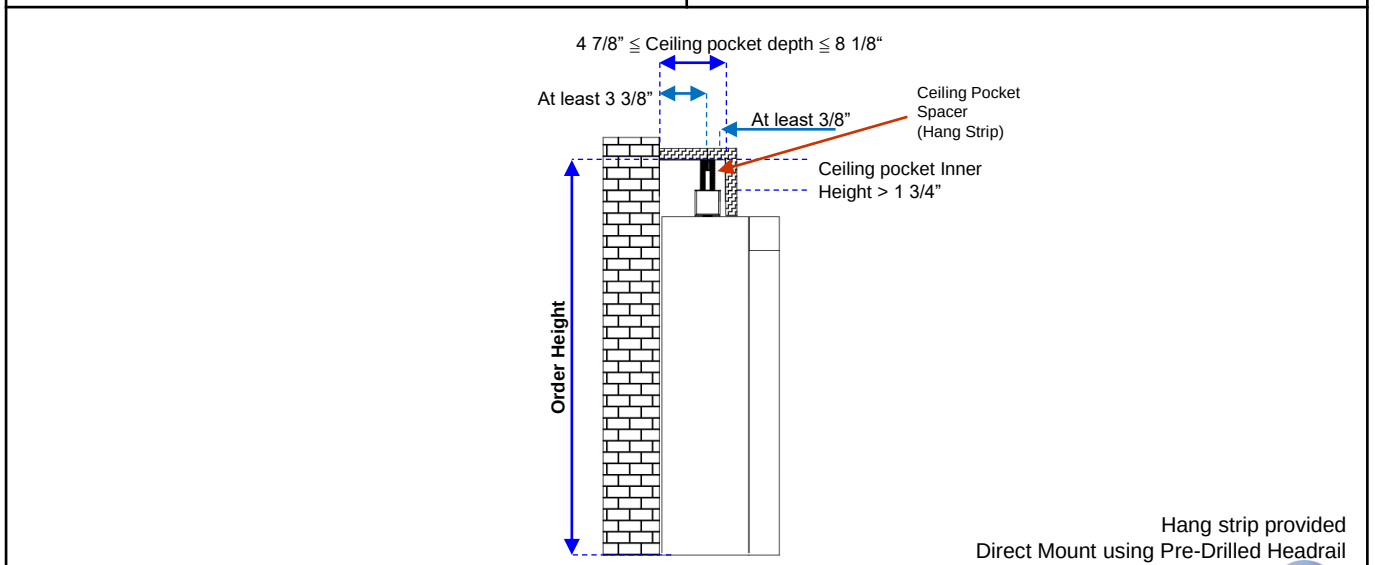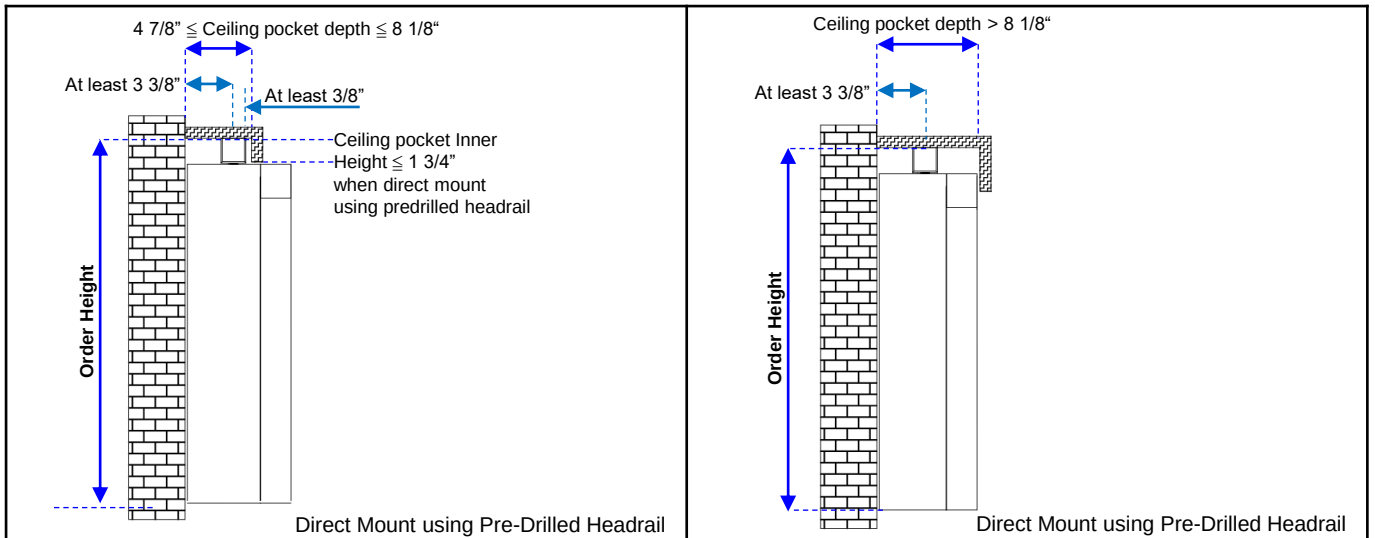

Hang strip provided
Direct Mount using Pre-Drilled Headrail

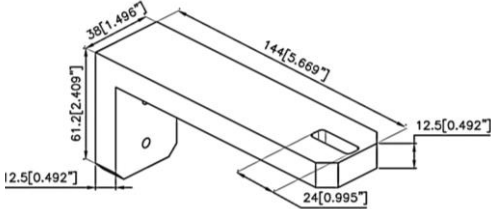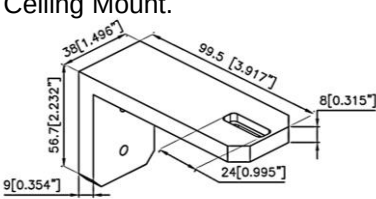Item	Drawing		
L Brackets	L brackets are included for Wall Mount only. Not available for Ceiling Pocket Mount or Ceiling Mount.  Standard L Bracket for Wand Tilt Shades -Aluminum Shims add-on option available - 3 15/16" long Long L Bracket (Optional) -Not available with Aluminum Shims -5 11/16" Long **0.59" actual adjustable distance for installation 		
Aluminum Shim (Optional)	 9/16"  One shim per L bracket will be provided.	Headrail	
C Clip	• Wall Mount: The C-clip is pre-attached to the L-bracket. • Ceiling Mount: The headrail can be either direct mounted by pre-drilled Headrail; or using C clips for installation. • Additional C-clips are included for connecting side-by-side headrails. 		
SmartJoint™ & Optional Keystone	Splices track at evenly, allowing for larger track widths for both Single and Side By Side applications. C clips are still used to combine 2 Side by Side tracks together. Nickel plated nuts on SmartJoint Connectors are running change to be color coordinated. A keystone is optional for SmartJoint™ tracks and Side by Side. Not available on non-spliced tracks.  Keystone  SmartJoint™ Top Connector  SmartJoint™ Bottom Connectors		
Fabric Vane	 *Approx. 7" in depth. All fabric vanes are cut down to the same size. The soft nature of the fabric is the variable.		

Additional Options

SmartJoint™ & Keystones

Includes connector pieces to combine a spliced headrail. This allows for larger track width options on a Single Shade and for each Side by Side Shade.


- A SmartDrape™ shade is operable under a spliced headrail and has no gaps, unlike the C clip joiner that is still required to combine 2 side by side shades together. There will be a gap in between 2 side by side shades depending on the headrail size. (See [shade configurations](#).)
- Added keystones are optional on SmartJoint™ tracks
- Optional keystone are also available for the center of Side by Side shades.
- Track Widths will be spliced once at the center with SmartJoint™ for select track sizes, and spliced twice for larger track sizes.



Keystone for SmartJoint™ and Side by Side


Aluminum Shims (for Standard L Bracket)

- Ideal for projecting the SmartDrape shade further out to provide adequate clearance when mounted above a trim or molding. (Adds 9/16" thickness)
- Available for wall mount only; not available for ceiling pocket mount or Ceiling Mount
- Shims are color coordinated with the hardware
- Upgrade applies per shim. One shim will be provided for each L bracket. See table below.

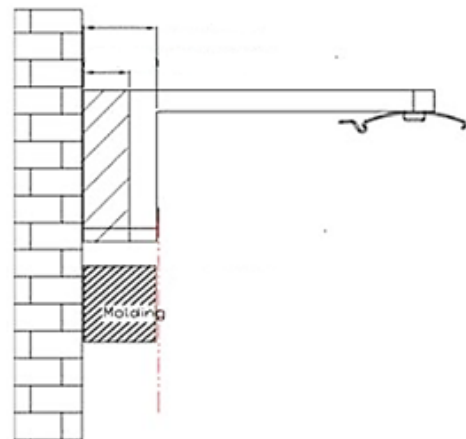

Long L Bracket

- Ideal when additional clearance is required for SmartDrape shades; no shims required.
- Extends further than Standard L bracket with 9/16" aluminum shims. Long L brackets not available to extend with Aluminum shims
- Upgrade applies per shade

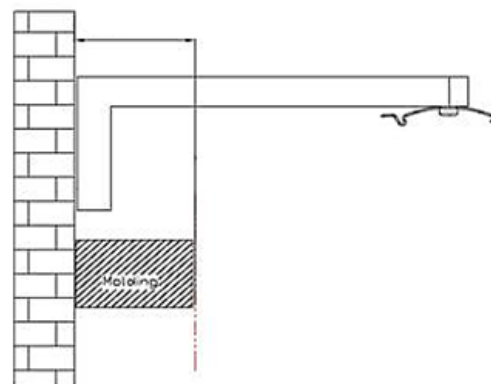

Molding	Recommended Installation
Molding $\leq 3/8"$	Standard L Bracket
$3/8" < \text{Molding} \leq 15/16"$	Standard L Bracket with Aluminum Shims (1 set)
$15/16" < \text{Molding} \leq 1 \frac{3}{4}"$	Long L Bracket

Hardware Quantity

Single Shade Wand Tilt/ Motorized	Side by Side Shades (Wand Tilt only)	SmartJoint™ Qty	Single Shade (Motorized only)	SmartJoint™ Qty
Right/ Left/ Center Stack	LL & RR/ Both Traveling Center Stack		Center Opening	
R (Track Width)			R (Track Width)	
17 5/8" ≤ R ≤ 93 5/8"	15 5/8" ≤ R ≤ 91 7/8"	N/A	30" ≤ R ≤ 94 1/4"	N/A
97 5/8" ≤ R ≤ 189 5/8"	95 7/8" ≤ R ≤ 188 1/8"	1	102 1/4" ≤ R ≤ 182 1/2"	1 per headrail
193 5/8" ≤ R ≤ 285 5/8"	192 1/8" ≤ R ≤ 284 3/8"	2	190 1/2" ≤ R ≤ 286 3/4"	2 per headrail

Hardware Quantity

For Single Shade (Wand Tilt), Right/ Left Stack & Traveling Center Stack

R (Track Width)	Wall Mount		C clip installation for Ceiling Mount		Ceiling Pocket Mount/ Direct mount using pre-drilled headrail for Ceiling Mount
	Aluminum Shim Qty/ L Bracket Qty/ C clip Qty	Screw Qty	C clip Qty	Screw Qty	Screw Qty
$17\ 5/8" \leq R \leq 69\ 5/8"$	2	4	2	2	2
$73\ 5/8" \leq R \leq 93\ 5/8"$	3	6	3	3	3
$97\ 5/8" \leq R \leq 141\ 5/8"$	4	8	4	4	4
$145\ 5/8" \leq R \leq 197\ 5/8"$	6	12	6	6	6
$201\ 5/8" \leq R \leq 285\ 5/8"$	9	18	9	9	9

For Single Shade (Motorized), Right/ Left / Center Stack

R (Track Width)	Wall Mount			C clip installation for Ceiling Mount		Ceiling Pocket Mount/ Direct mount using pre-drilled headrail for Ceiling Mount
	Aluminum Shim Qty/ L Bracket Qty	C clip Qty	Screw Qty	C clip Qty	Screw Qty	Screw Qty
$17\ 5/8" \leq R \leq 69\ 5/8"$	2	3	4	3	3	2
$73\ 5/8" \leq R \leq 93\ 5/8"$	3	4	6	4	4	3
$97\ 5/8" \leq R \leq 141\ 5/8"$	4	5	8	5	5	4
$145\ 5/8" \leq R \leq 197\ 5/8"$	6	7	12	7	7	6
$201\ 5/8" \leq R \leq 285\ 5/8"$	9	10	18	10	10	9

For Side by Side Shades (Wand Tilt only), Left Shade Stacks Left, Right Shade Stacks Right, Both Traveling Center Stack

R (Track Width)	Wall Mount		C clip installation for Ceiling Mount		Ceiling Pocket Mount/ Direct mount using pre-drilled headrail for Ceiling Mount
	Aluminum Shim Qty/ L Bracket Qty/ C clip Qty *	Screw Qty	C clip Qty	Screw Qty	Screw Qty
$15\ 5/8" \leq R \leq 71\ 5/8"$	2	4	2	2	2
$75\ 5/8" \leq R \leq 91\ 7/8"$	3	6	3	3	3
$95\ 7/8" \leq R \leq 139\ 7/8"$	4	8	4	4	4
$144\ 1/8" \leq R \leq 196\ 1/8"$	6	12	6	6	6
$200\ 1/8" \leq R \leq 284\ 3/8"$	9	18	9	9	9


* An extra 1 C clip is pre-attached to the headrail.

For Single Shade: Center Opening (Motorized only)


R(Track Width)	Wall Mount			C clip installation for Ceiling Mount		Ceiling Pocket Mount/ Direct mount using pre-drilled headrail for Ceiling Mount
	Aluminum Shim / L Bracket Qty	C clip Qty	Screw Qty	C clip Qty	Screw Qty	Screw Qty
$30" \leq R \leq 70"$	2	3	4	3	3	2
$78" \leq R \leq 94\ 1/4"$	3	4	6	4	4	3
$102\ 1/4" \leq R \leq 142\ 1/4"$	4	5	8	5	5	4
$150\ 1/2" \leq R \leq 190\ 1/2"$	6	7	12	7	7	6
$198\ 1/2" \leq R \leq 286\ 3/4"$	9	10	18	10	10	9

Control (Wands)

- Number of Wands:** SmartDrape™ comes standard with one tilt/draw wand located on the opposite side of the stack location. An additional wand is provided on all Traveling Center Stack shades (per shade) on the opposing side, allowing the shade to be drawn or tilted from either end. Available for Single and Side by Side applications.

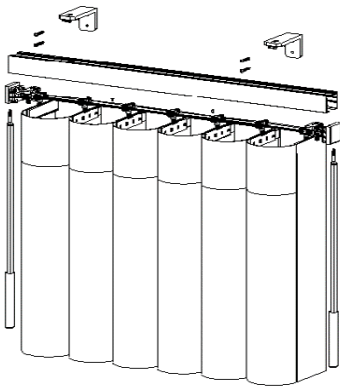


Traveling Center Stack
(Single)

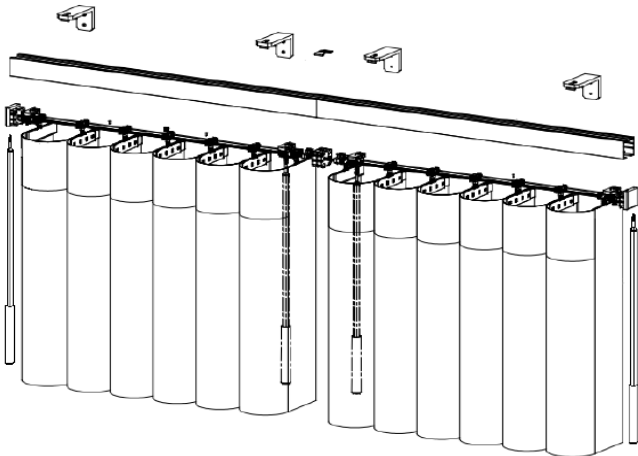

Traveling Center Stack
(Side by Side)

- Optional Wand Colors:** Wands can be selected in a different color from the headrail and other hardware components. This applies to all wands if Traveling Center Stack is selected.
- Wand Drop:** The wand drop is the wand length measurement which starts at the top of the headrail to the end of the wand. Available in standard or custom sizes.
 - Standard drop: The 7 standard wand drop sizes are based on the shade height chart below.
 - Custom drop: Custom wand drops are available from 12" to 90".

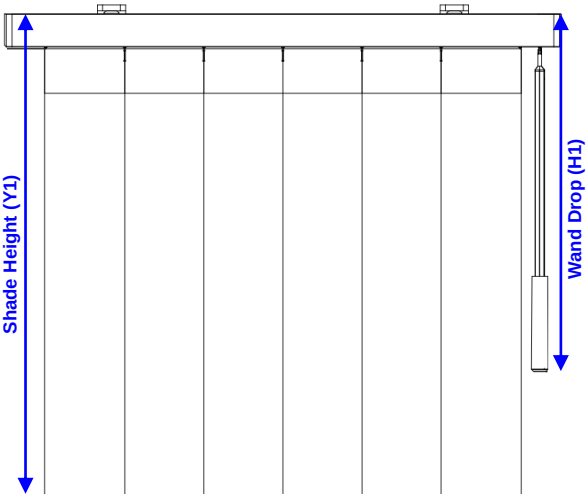


Shade Height	Standard Wand Drop
$Y1 < 36"$	24"
$36" \leq Y1 < 70"$	36"
$70" \leq Y1 < 90"$	40"
$90" \leq Y1 < 105"$	45"
$105" \leq Y1 < 110"$	55"
$110" \leq Y1 \leq 120"$	65"
$120" < Y1 \leq 144"$	78 3/4"


Alternating Colors

Select two fabric colors to alternate the vanes of your SmartDrape™. The two colors selected will alternate, starting from left to right.

- Available for Single & Side By Side shades
- Both color selections must be in the same fabric category: RD, LF, and LF Essentials.
Example: RD + RD or Essentials + Essentials
- There is no default color coordination. The wand, headrail and hardware component colors must be specified in order entry.

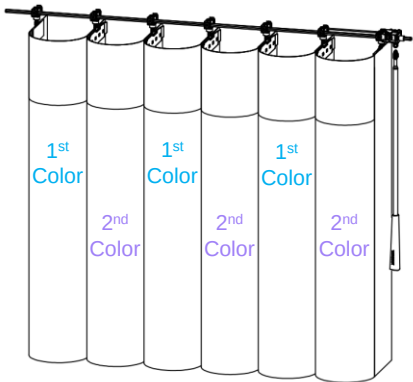

Shades with an **even** vane quantity will start and end with a vane in each color.

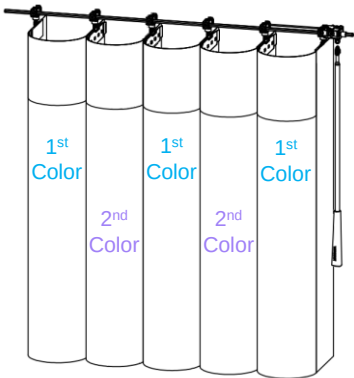

Shades with an **odd** vane quantity will start and end with the 1st color selection.

Refer to the [Shade Configuration](#) charts to determine the vane count. The desired vane count may be achieved by increasing or decreasing the ordered track width.

Additional Vanes

Extra fabric vanes can be requested with a SmartDrape™ shade order or purchased separately on a new order*. Each pack contains six vanes. The colors and types of vanes included will depend on the selected shade type, stacking type, and color selection.

Shade Type	Stacking Type	Additional Vanes (pack of 6)			
		One color		Alternating colors	
		Option A	Option B	Option A	Option B
Single shade	Left/ Right/ Traveling center stack (Wand Tilt) Center Stack (Motorized)	1x first vane 4x middle vanes 1x last vane	6 x middle vanes only	1x first vane (1 st color) 4x middle vanes (2x 1 st color+ 2x 2 nd color) 1x last vane (1 st or 2 nd color)**	6 x middle vanes only (3x 1 st color+ 3x 2 nd color)
	Center Opening	2x first vane 2x middle vanes 2x last vane		2x first vane(1 st color) 2x middle vanes (1x 1 st color+ 1x 2 nd color) 2x last vane (1 st or 2 nd color)**	
Side by Side	Left/Right and Traveling Center Stack	1x first vane 4x middle vanes 1x last vane		2x first vane(1 st color) 2x middle vanes (1x 1 st color+ 1x 2 nd color) 2x last vane (1 st or 2 nd color)**	

- For new orders without a shade, the original WO# is required to ensure the correct order details are provided.
- Pattern availability and color lot match cannot be assured for vane packs purchased after the original order.

* Packs ordered without a shade will have pricing that differs from packs selected as an option with a shade order.

**Last vane can be 1st color or 2nd color, depending on odd or even shade vane quantity.

See Color Coordination Chart for detailed color information.

Opacity / Fabric Type	Fabric Pattern	Color Code	Color Name	Default Color Coordination (Override Available)	
				Color	Finish
Light Filtering	Plain	F1124	Plain White	White	Smooth
		F1128	Plain Ivory	Cottage White	Smooth
		F1132	Plain Light Gray	Matte Silver	Brushed
		F1136	Plain Gray	Black	Brushed
		F1140	Plain Charcoal	Black	Brushed
		F1866	Plain French Silver	Matte Silver	Brushed
		F1867	Plain Alabaster	Cottage White	Smooth
		F1868	Plain Leather Brown	Bronze	Smooth
		F1341	Plain Cottonwood	Cottage White	Smooth
		F1345	Plain Platinum	Cottage White	Smooth
		F2128	Plain Linen White	White	Smooth
		F2129	Plain Linen Ivory	Cottage White	Smooth
		F2130	Plain Linen Cottonwood	Cottage White	Smooth
	Net	F1125	Net White	White	Smooth
		F1129	Net Ivory	Cottage White	Smooth
		F1133	Net Light Gray	Matte Silver	Brushed
		F1137	Net Gray	Black	Brushed
		F1141	Net Charcoal	Black	Brushed
		F1342	Net Cottonwood	Cottage White	Smooth
		F1346	Net Platinum	Cottage White	Smooth
	Pacific	F1126	Pacific White	White	Smooth
		F1130	Pacific Ivory	Cottage White	Smooth
		F1134	Pacific Light Gray	Matte Silver	Brushed
		F1138	Pacific Gray	Black	Brushed
		F1142	Pacific Charcoal	Black	Brushed
		F1869	Pacific French Silver	Matte Silver	Brushed
		F1870	Pacific Alabaster	Cottage White	Smooth
		F1871	Pacific Leather Brown	Bronze	Smooth
		F1343	Pacific Cottonwood	Cottage White	Smooth
		F1347	Pacific Platinum	Cottage White	Smooth
	Circle	F1127	Circle White	White	Smooth
		F1131	Circle Ivory	Cottage White	Smooth
		F1135	Circle Light Gray	Matte Silver	Brushed
		F1139	Circle Gray	Black	Brushed
		F1143	Circle Charcoal	Black	Brushed
		F1344	Circle Cottonwood	Cottage White	Smooth
		F1348	Circle Platinum	Cottage White	Smooth
	Coronado	F1585	Coronado White	White	Smooth
		F1586	Coronado Ivory	Cottage White	Smooth
		F1587	Coronado Light Gray	Matte Silver	Brushed
		F1588	Coronado Gray	Black	Brushed
		F1589	Coronado Charcoal	Black	Brushed
		F1590	Coronado Cottonwood	Cottage White	Smooth
	Teardrop	F1592	Teardrop White	White	Smooth
		F1593	Teardrop Ivory	Cottage White	Smooth
		F1594	Teardrop Light Gray	Matte Silver	Brushed
		F1595	Teardrop Gray	Black	Brushed
		F1596	Teardrop Charcoal	Black	Brushed
		F1597	Teardrop Cottonwood	Cottage White	Smooth

See Color Coordination Chart for detailed color information.

Opacity / Fabric Type	Fabric Pattern	Color Code	Color Name	Default Color Coordination (Override Available)	
				Color	Finish
Light Filtering: Essentials	Lakeshore Stripe	F1663	Lakeshore Stripe White	White	Smooth
		F1664	Lakeshore Stripe Light Gray	Matte Silver	Brushed
		F1665	Lakeshore Stripe Charcoal	Black	Brushed
		F1964	Lakeshore Stripe Warm White	White	Smooth
		F1965	Lakeshore Stripe Fog Mist	Cottage White	Smooth
		F2038	Lakeshore Stripe Reddish Brown	Bronze	Smooth
		F2039	Lakeshore Stripe Malibu Beige	Cottage White	Smooth
		F2040	Lakeshore Stripe Shadow	Matte Silver	Brushed
		F2041	Lakeshore Stripe Latte	Cottage White	Smooth
		F2042	Lakeshore Stripe Empirical Gray	Matte Silver	Brushed
Room Darkening		F1169	Soft White	White	Smooth
		F1170	Crema	Cottage White	Smooth
		F1171	Coffee	Black	Brushed
		F1172	Carbon	Black	Brushed
		F1603	Light Gray	Matte Silver	Brushed
		F1604	Cottonwood	Cottage White	Smooth
	Plain	F1854	Plain Soft White	White	Smooth
		F1855	Plain Crema	Cottage White	Smooth
		F1856	Plain Coffee	Black	Brushed
		F1857	Plain Carbon	Black	Brushed
		F1858	Plain Light Gray	Matte Silver	Brushed
		F1859	Plain Cottonwood	Cottage White	Smooth
	Pacific	F1860	Pacific Soft White	White	Smooth
		F1861	Pacific Crema	Cottage White	Smooth
		F1862	Pacific Coffee	Black	Brushed
		F1863	Pacific Carbon	Black	Brushed
		F1864	Pacific Light Gray	Matte Silver	Brushed
		F1865	Pacific Cottonwood	Cottage White	Smooth

Fabric Composition: 100% Polyester

Color Coordination Override:

Each fabric has coordinated default hardware colors based on the selected fabric.

To override the default colors, please select from any of the 6 colors during order entry. When the headrail default color is overridden, below components/ parts will match.

Color Availability	White	Cottage White	Matte Silver	Black	Bronze	Brass
Headrail / Keystone See Color Coordination for defaults; color override available	✓	✓	✓	✓	✓	✓
Wand for Wand Tilt Defaults to headrail selection; color override available.	✓	✓	✓	✓	✓	✓
Standard/ Long L Bracket Matches headrail selection	✓	✓	✓	✓	✓	✓
Optional Shims Matches headrail selection	✓	✓	✓	✓	✓	✓
Motor Components Matches headrail selection	✓	✓	✓	✓	✓	✓

Regardless headrail color, below component color defaults to selected fabric.

Optional Charging Extension Wand Defaults to selected fabric; color override available.	Available colors: Cloud Cream, Day Light, Silver, Black, Chocolate, and Moonbeam.
---	---

All fabrics will adjust to the environment and its environmental changes. These fabric adjustments may include color fading, fabric stretching, fabric shrinkage, or other damages.

Color Variation

- Colors may appear to vary depending on the time of day and lighting type under which the product is observed.
- All fabric colors gradually fade due to UV exposure. Fabrics will fade more evenly if fabrics are closed during the day. Naturally, parts of the fabric that are overlapped by another piece of fabric will not receive as much solar exposure, and thus the rate in which it fades will be slower than those parts that are more exposed.
- For the best color match, order all matching shades for a room at the same time. Pattern availability and color lot match between orders cannot be assured. Any variation in color is in accordance with industry standards.

Wrinkles

For SmartDrape™, wrinkles may occur after washing or long transportation. If your shade is wrinkled, hang it for a few days. This will help minimize the wrinkles, allowing them to usually disappear naturally. Or you may choose to steam or iron the fabric panels.

Vane Structure

Due to the natural, free-flowing characteristics of sheer fabric, the bottom of the fabric vanes may not form a perfect U shape. Taller height drapery with sheer fabrics can flare at the bottom and may not be as tight as the top of the drape. RGAs will not be accepted for this reason.

Room Darkening: RD fabrics in particular, are stiffer than LF fabrics due to their natural structure. If the bottom of the fabric vane is slightly curved when the shade is received, you can correct this issue by rolling the vane in the opposite direction and using a fabric steamer to soften the bend.



Operating SmartDrape™

Be sure the fabric vanes are in an open position when stacking the shade open or closed.

Product Care

Washing Instructions

1. Remove the fabric from the fabric vane clip.
2. Fold the fabrics and place them in a mesh laundry bag.
3. Wash with cold water; gentle cycle. **Note: Do not use bleach or cleaning products that contain bleach.
4. Do not add extra spin after wash. Remove the fabric.
5. Hang the fabrics to line dry, until the fabrics are slightly damp. Fan drying is acceptable.
6. Re-assemble all slats on the rail and leave the vanes open until completely dried. This will also help avoid wrinkles.

Ironing or steaming:

Use a steam iron to smooth out any wrinkles that may develop.

