




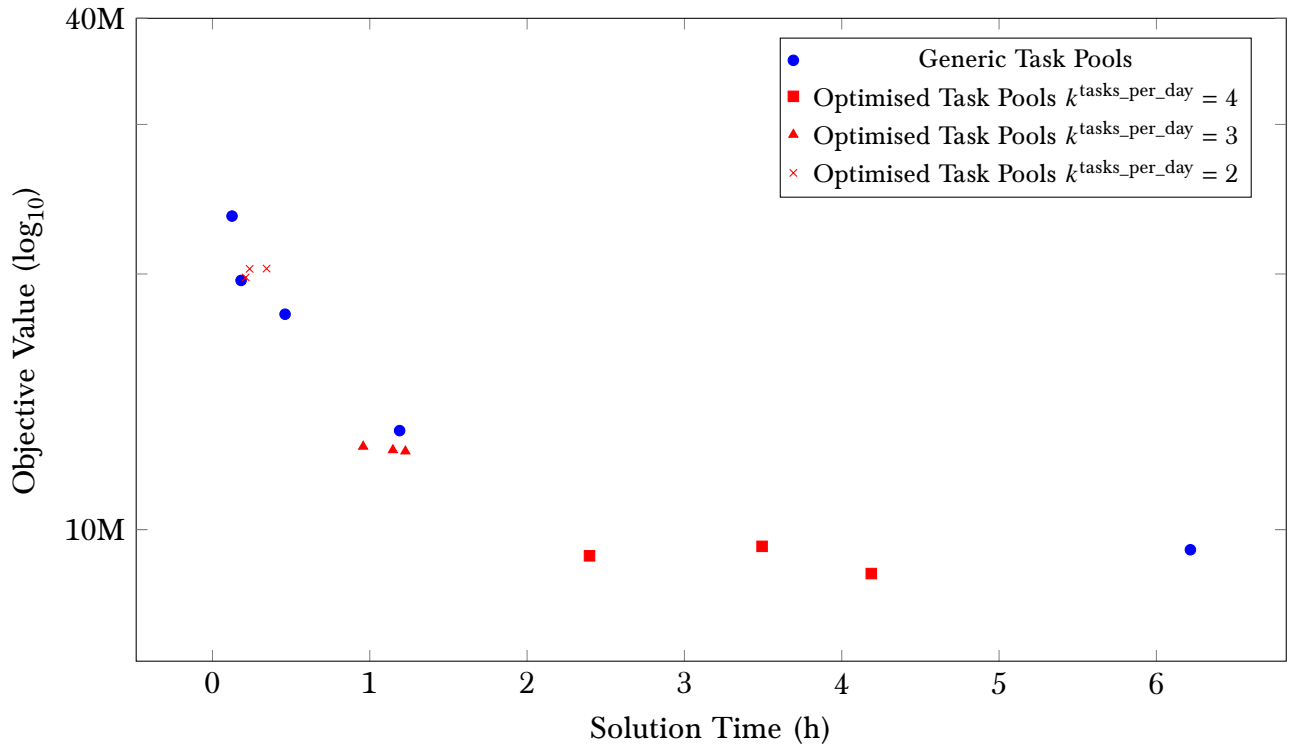


(a) Instance: A1

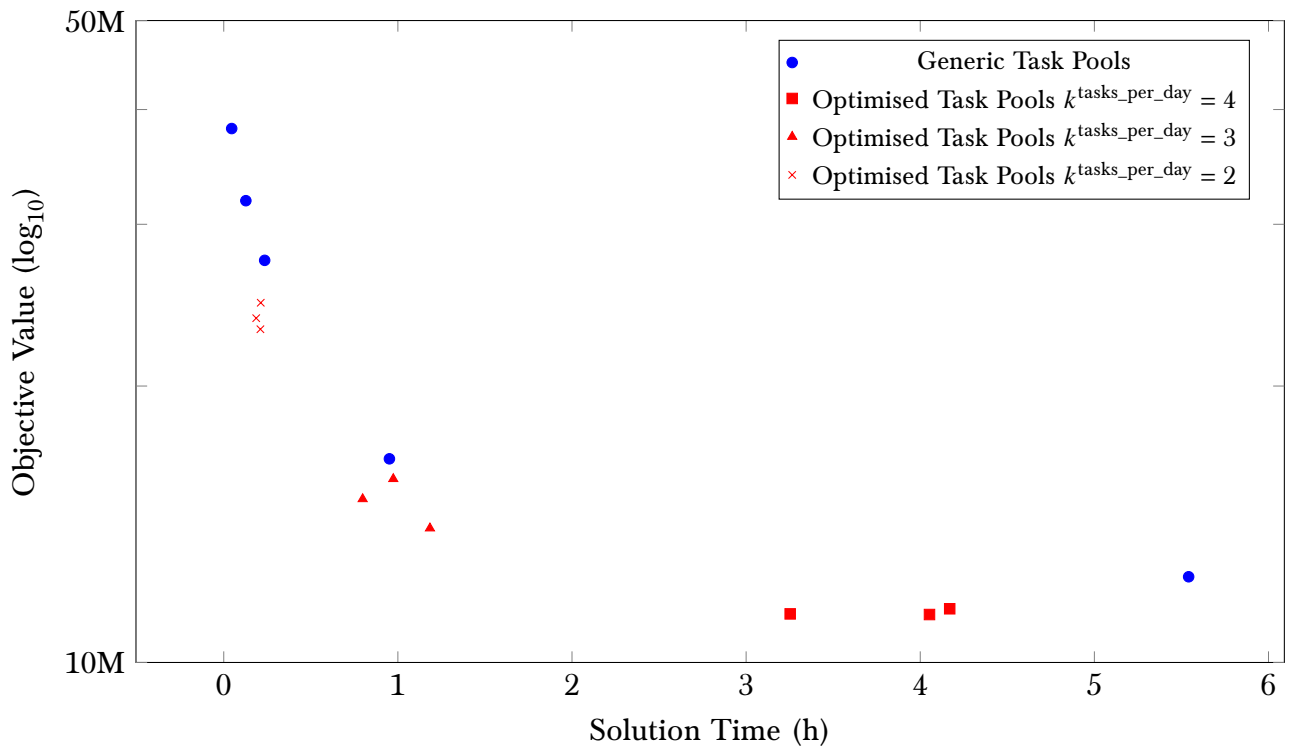

(b) Instance: A2

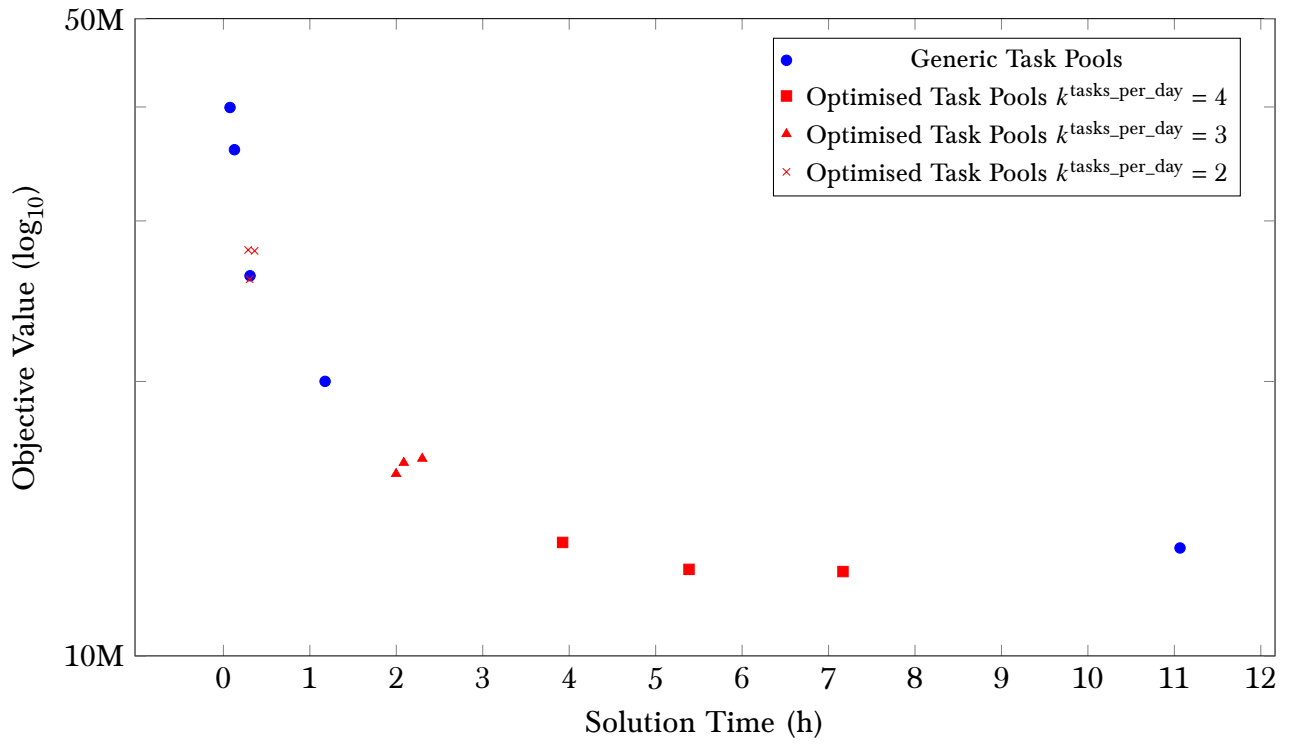

(c) Instance: A3

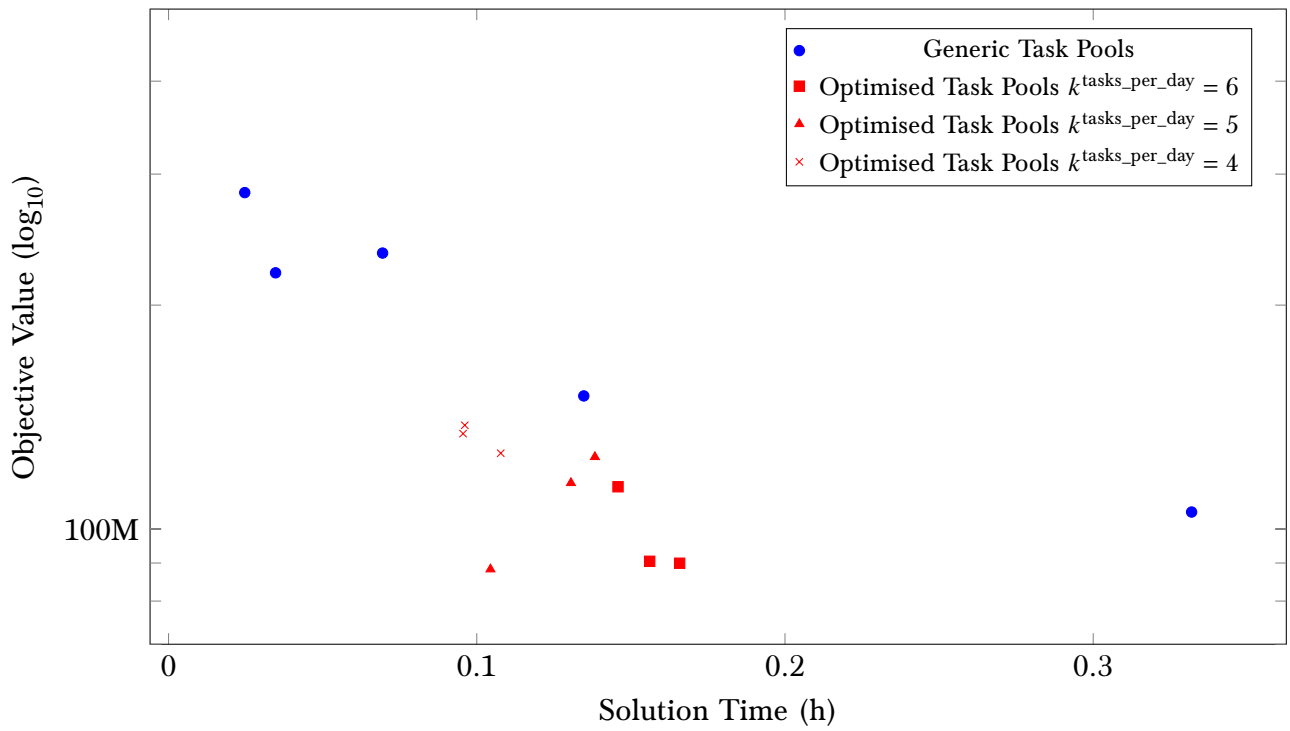

(d) Instance: B1

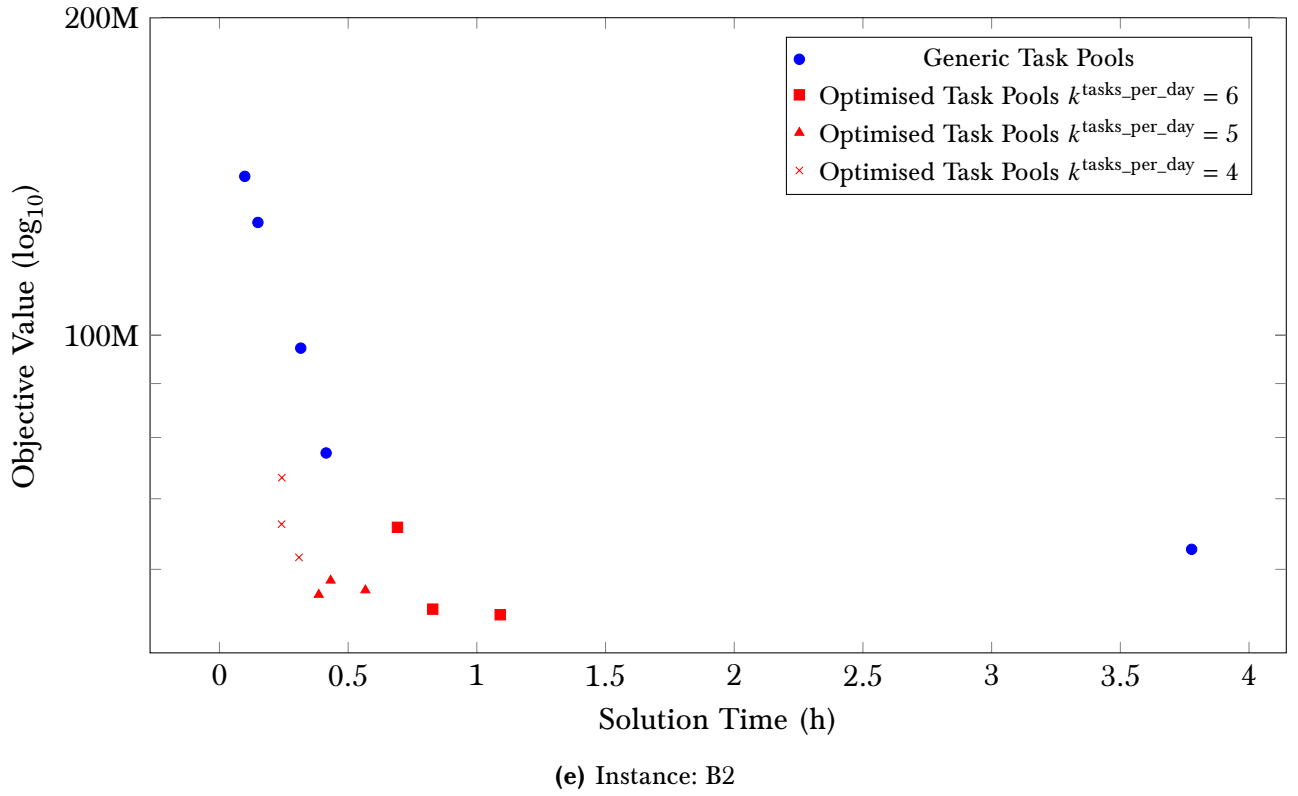


Figure 1: A comparison of the final LP solution quality (on a $\log_{10}$ scale) versus runtime for the recommended optimised task pools (Model [lexTPAP] with random rewards and Bi-Obj [■]) against the original rostering algorithm’s generic task pools (configuration:Base) for various task pool sizes. Each subfigure is a different problem instance.