Chapter 5


Large and Fast: Exploiting Memory Hierarchy



Associative Caches

- Fully associative
 - Allow a given block to go in any cache entry
 - Requires all entries to be searched at once
 - Comparator per entry (expensive)
- n-way set associative
 - Each set contains n entries
 - Block number determines which set
 - (Block number) modulo (#Sets in cache)
 - Search all entries in a given set at once
 - n comparators (less expensive)

Associative Cache Example

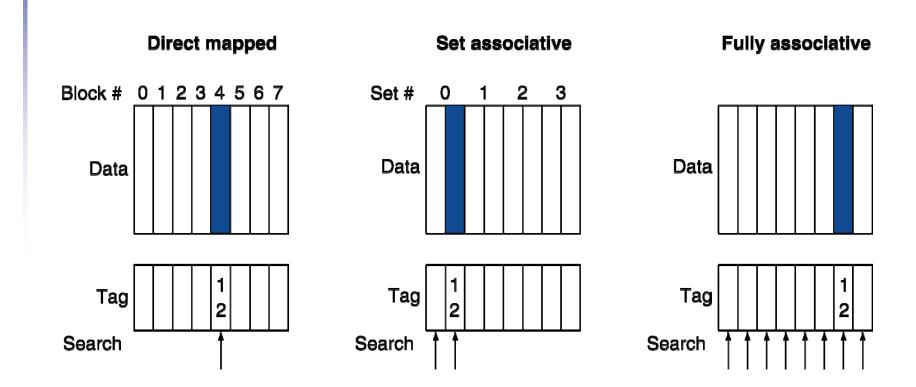

Spectrum of Associativity

For a cache with 8 entries

One-way set associative (direct mapped)

Block	Tag	Data
0		
1		
2		
3		
4		
5		
6		
7		

Two-way set associative

Set	Tag	Data	Tag	Data
0				
1				
2				
3				

Four-way set associative

Set	Tag	Data	Tag	Data	Tag	Data	Tag	Data
0								
1								

Eight-way set associative (fully associative)

Tag	Data														

Associativity Example

- Compare 4-block caches
 - Direct mapped, 2-way set associative, fully associative
 - Block access sequence: 0, 8, 0, 6, 8
- Direct mapped

Block	Cache	Hit/miss	Cache content after access					
address	index		0	1	2	3		
0	0	miss	Mem[0]					
8	0	miss	Mem[8]					
0	0	miss	Mem[0]					
6	2	miss	Mem[0]		Mem[6]			
8	0	miss	Mem[8]		Mem[6]			

Associativity Example

2-way set associative

Block	Cache	Hit/miss	Cache content after access				
address	index		Se	et O	Set 1		
0	0	miss	Mem[0]				
8	0	miss	Mem[0]	Mem[8]			
0	0	hit	Mem[0]	Mem[8]			
6	0	miss	Mem[0]	Mem[6]			
8	0	miss	Mem[8]	Mem[6]			


Fully associative

Block address	Hit/miss	Cache content after access						
0	miss	Mem[0]						
8	miss	Mem[0]	Mem[8]					
0	hit	Mem[0]	Mem[8]					
6	miss	Mem[0]	Mem[8]	Mem[6]				
8	hit	Mem[0]	Mem[8]	Mem[6]				

How Much Associativity

- Increased associativity decreases miss rate
 - But with diminishing returns
- Simulation of a system with 64KB
 D-cache, 16-word blocks, SPEC2000
 - 1-way: 10.3%
 - 2-way: 8.6%
 - 4-way: 8.3%
 - 8-way: 8.1%

Set Associative Cache Organization

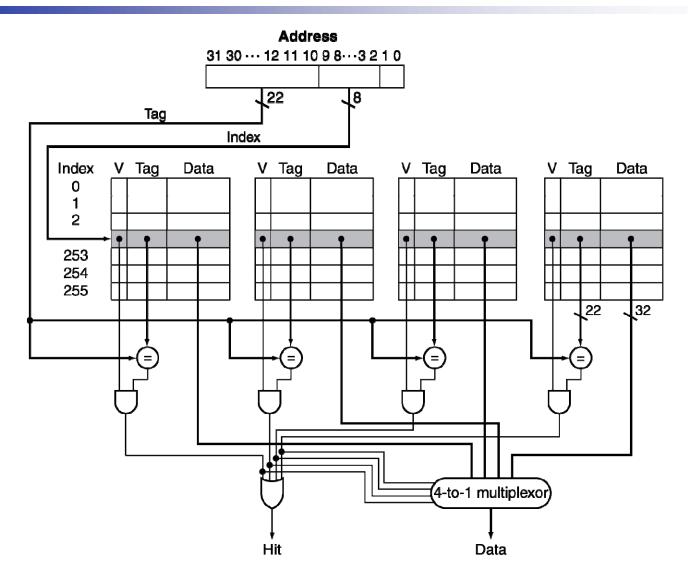

Chapter 5 — Large and Fast: Exploiting Memory Hierarchy — 8

Replacement Policy

- Direct mapped: no choice
- Set associative
 - Prefer non-valid entry, if there is one
 - Otherwise, choose among entries in the set
- Least-recently used (LRU)
 - Choose the one unused for the longest time
 - Simple for 2-way, manageable for 4-way, too hard beyond that
- Random
 - Gives approximately the same performance as LRU for high associativity