# MFCCs, Chroma Features, and Spectrogram Images for Deepfake Audio Classification Using Machine Learning

Nora Bakken, Shavil Singh, Makwana Prashant Lnu, and Tapadhir Das Department of Computer Science, University of the Pacific Stockton, California, USA n bakken@u.pacific.edu,tdas@pacific.edu

### **ABSTRACT**

## **CCS CONCEPTS**

• Mel-frequency cepstral coefficients (MFCCs) → Audio representation; • Convolutional Neural Networks → Machine Learning; • Adversarial attack protection → Cybersecurity.

## **KEYWORDS**

MFCCs, Spectrogram, VGG16, ResNet50, Chroma Features, SVM, Gradient Boosting, Deepfakes

#### **ACM Reference Format:**

#### 1 INTRODUCTION

### 2 MOTIVATION

With the rise of artificial intelligence (AI), deepfakes are more prevalent than ever, bringing with them a slough of potential dangers in a variety of areas. Likely the most well-known effect of deepfakes in everyday life is the rise of false media, especially targeting individuals.

The American Bar Association highlighted a targeted defamation attack involving an audio recording with the voice of a high school principal making racist and antisemitic comments. After the recording spread throughout the school, the principal was in danger of losing his livelihood. He denied making these comments. After a thorough investigation, the local police deemed the recording to have been manipulated using AI [Jr. 2024].

The less talked about consequence of accessible and easy to create deepfakes is the rise of non-consensual explicit deepfake attacks on individuals. These attacks, along with being traumatic to the individual, are expanding the ever-present gender gap at the global level, inflicting consequences at the societal level [Kim 2024].

In the recent United States election, nearly half of American voters stated that deepfakes had an influence on their ballots [Genovese

# Unpublished working draft. Not for distribution.

for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

Conf 2024, Date, Place

© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM. ACM ISBN XXX-X-XXXX-XXXX-X/XX/XX

https://doi.org/XXXXXXXXXXXXXXX

2024]. Looking at this problem from a purely monetary perspective, CFO states that 92 percent of companies have experienced financial loss due to a deepfake [Zaki 2024]. This is a significant economic impact.

These are just a few of many examples of individuals who have been hurt by deepfake attacks. There is no question about the negative impact that deepfakes actively have on our lives. It is now imperative that an application is developed to reliably identify deepfakes so that fewer individuals are harmed.

# 3 LITERATURE REVIEW

## 4 SYSTEM MODEL / BACKGROUND

Numerous technologies and algorithms were explored to gather insights on the most effective methods for deepfake audio detection. In this section we will explore the complex features we utilized in our data preprocessing pipeline and discuss the sophisticated machine learning models we employed in our experiments.

# 4.1 MFCCs

Mel-Frequency Cepstral Coefficients, or MFCCs, are a widely used feature set for speech recognition and other audio processing applications. They are a competitive feature set because they mimic what the human ear perceives [Hamza et al. 2022]. The process of extracting MFCCs involves several steps that convert raw audio into a compact representation of its spectral characteristics. One of the key stages in this process is the de-correlation of the log energies from a filter bank. The following quote provides a more detailed explanation of how MFCC coefficients are derived: HEEELLOO

"MFCC coefficients are obtained by de-correlating the output log energies of a filter bank which consists of triangular filters, linearly spaced on the Mel frequency scale. Conventionally an implementation of discrete cosine transform (DCT) known as distributed DCT (DCT - II) is used to de-correlate the speech as it is the best available approximation of the Karhunen-Loeve Transform (KLT)" [Hossan et al. 2010].

The resulting vector represents spectral acoustic features as floating-point numbers. These values capture essential characteristics of the audio that aid the model in distinguishing between real and fake samples. The vector's size is flexible and depends on user configuration.

Generating a vector of MFCC features was an essential step in our preprocessing efforts. A sample rate of 44100 Hz corresponding to a maximum sound frequency of 22050 Hz is usually used for recording sound, because a human can hear sounds ranging from 20 Hz to 20000 Hz [Tran and Lundgren 2020]. In our experiments, we

Conf 2024, Date, Place Bakken, Singh, & Lnu, et al.

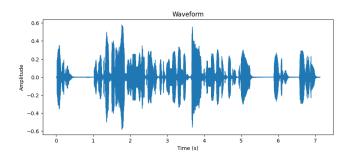


Figure 1: Waveform representation of a Real Audio Sample.

used a sampling rate of 22050 Hz. This is half of the common sample rate for recording sound, and is a common value for sampling rate when generating MFCCs. This resulted in 20 features for each audio sample. These features were then saved to a CSV file, making them available for later model training. These features played a pivotal role in the model's ability to make accurate decisions.

## 4.2 Mel-Spectrogram Images

A Mel-Spectrogram image is an alternative method for visually representing sound. Generally, we see sound visualized as a two-dimensional waveform showing amplitude over time. Figure 1 shows an example of a "real" audio sample as a commonly seen waveform. Conversely, figure 2 shows an example of a "fake" audio sample as a waveform. While these representations are helpful, they do not provide enough information for a model to be able to make a decision.

A spectrogram is a representation of an audio signal as its frequency spectrum varies over time. Similar to MFCCs, Mel-Spectrograms are generated by performing a number of transformations on an audio sample, then representing the results as a graph. First, the audio is divided into short segments of time. We used approximately 93 ms segments. Then, a Hamming window is applied to each segment.

The Hamming window can be found with the following formula [Tran and Lundgren 2020]:

$$w(n) = \alpha_0 - (1 - \alpha_0) \cos\left(\frac{2\pi n}{N - 1}\right), \quad 0 \le n \le N - 1$$
 (1)

where  $\alpha_0 = \frac{25}{46}$ , and *N* is the window length.

Following this operation, Fast Fourier transform (FFT) is applied to calculate the power spectrum of each frame. Lastly, we can obtain the Mel-Spectrogram by applying the Mel filter bank. Frequencies are convered to the Mel scale using the following formula [Tran and Lundgren 2020]:

$$mel = 2595 \lg \left( 1 + \frac{f}{700} \right)$$
 (2)

# 4.3 Convolutional Neural Networks

Nora TODO

4.3.1 VGG16. Nora TODO

4.3.2 ResNet50. Nora TODO




Figure 2: Waveform representation of a Fake Audio Sample.

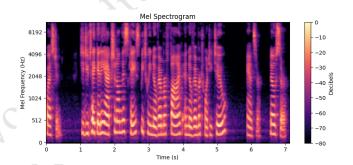


Figure 3: Spectrogram representation of a Real Audio Sample.




Figure 4: Spectrogram representation of a Fake Audio Sample.

233	4.4 Support Vector Machine (SVM)	8 CONCLUSION
234	4.5 Chroma Features	ACKNOWLEDGMENTS
235 236	4.6 Gradient Boosting	REFERENCES
237	5 METHODOLOGY	Daniella Genovese. 2024. Nearly 50% of voters election decision: survey. https://www.foxl said-deepfakes-had-some-influence-election
238	5.1 Probably a section about the data here	
239 240	would be good	Ameer Hamza, Abdul Rehman Rehman Jave Ahmad S. Almadhor, Zunera Jalil, and Ro
241	6 RESULTS	Detection via MFCC Features Using Mac 134018–134028. https://doi.org/10.1109/A0
242	6.1 for-original dataset	Md. Afzal Hossan, Sheraz Memon, and Mark MFCC feature extraction. In 2010 4th Intern and Communication Systems. 1–5. https://c Judge Herbert B. Dixon Jr. 2024. The "Deepfi drum. https://www.americanbar.org/group 2024/spring/deepfake-defense-evidentiary- Hyung-Jin Kim. 2024. In South Korea, rise of et and deepens gender divide. https://www.pb rise-of-explicit-deepfakes-wrecks-womens-
243 244		
245		
246	6.3 for-2sec dataset	
247	6.4 for-rerec dataset	
248 249	7 FUTURE WORK	cessed: 2024-12-03.
250	Nora TODO	Thanh Tran and Jan Lundgren. 2020. Drill Fa and Mel Spectrogram of Sound Signals Usi
251		(2020), 203655–203666. https://doi.org/10.1 Adam Zaki. 2024. 92 percent of companies
252 253		to a deepfake. https://www.cfo.com/new financial-loss-due-to-a-deepfake-regula-1
254		Licensed-Content&utm_source=yahoo&u 2024-12-03.
255		417 . 07
256 257		Received XX December 2024; revised XX
258		
259		4 : 10
260		
261 262		
263		113
264	C. C.	
265 266		
267		
268		
269 270		
271		
272		
273		
274 275		
276		
277		
278		
279 280		
281		
282		
283		
284 285		
286		
287		
288		

- said deepfakes had some influence on business.com/politics/nearly-50-voterson-decision. Accessed: 2024-12-03.
- d, Farkhund Iqbal, Natalia Kryvinska, ouba Borghol. 2022. Deepfake Audio hine Learning. IEEE Access 10 (2022), CCESS.2022.3231480
- A Gregory. 2010. A novel approach for national Conference on Signal Processing doi.org/10.1109/ICSPCS.2010.5709752
- fake Defense": An Evidentiary Conunos/judicial/publications/judges\_journal/ -conundrum/. Accessed: 2024-12-03.
- xplicit deepfakes wrecks women's lives os.org/newshour/world/in-south-korea--lives-and-deepens-gender-divide. Ac-
- ult Diagnosis Based on the Scalogram ng Artificial Intelligence. IEEE Access 8 109/ACCESS.2020.3036769
- have experienced financial loss due s/most-companies-have-experiencedreport/732094/?utm\_campaign=Yahootm\_medium=referral. Accessed:

X X XXXX; accepted X X XXXX

2024-12-04 21:38. Page 3 of 1-3.