

Natalie Leung
014790932
28 September 2026

Data 260 Homework 4

Personal Configuration and Domain

SID4	0932
PORT_BASE	8032
PREFIX	s0932
SEED	0932
VERIFY_SEED	260932
DOMAIN_ID	4 (open-source package vulnerabilities)


Hardware: nvidia geforce 4070, msi cpu

Local model used: ollama qwen3:8b

Tagged commit hash repo with most updated codes (submission on canvas only):

203e71e19ecece74d1a3802f9f7c45230a15fd70

<https://github.com/n-k-leung/data260-0932/tree/203e71e19ecece74d1a3802f9f7c45230a15fd70>

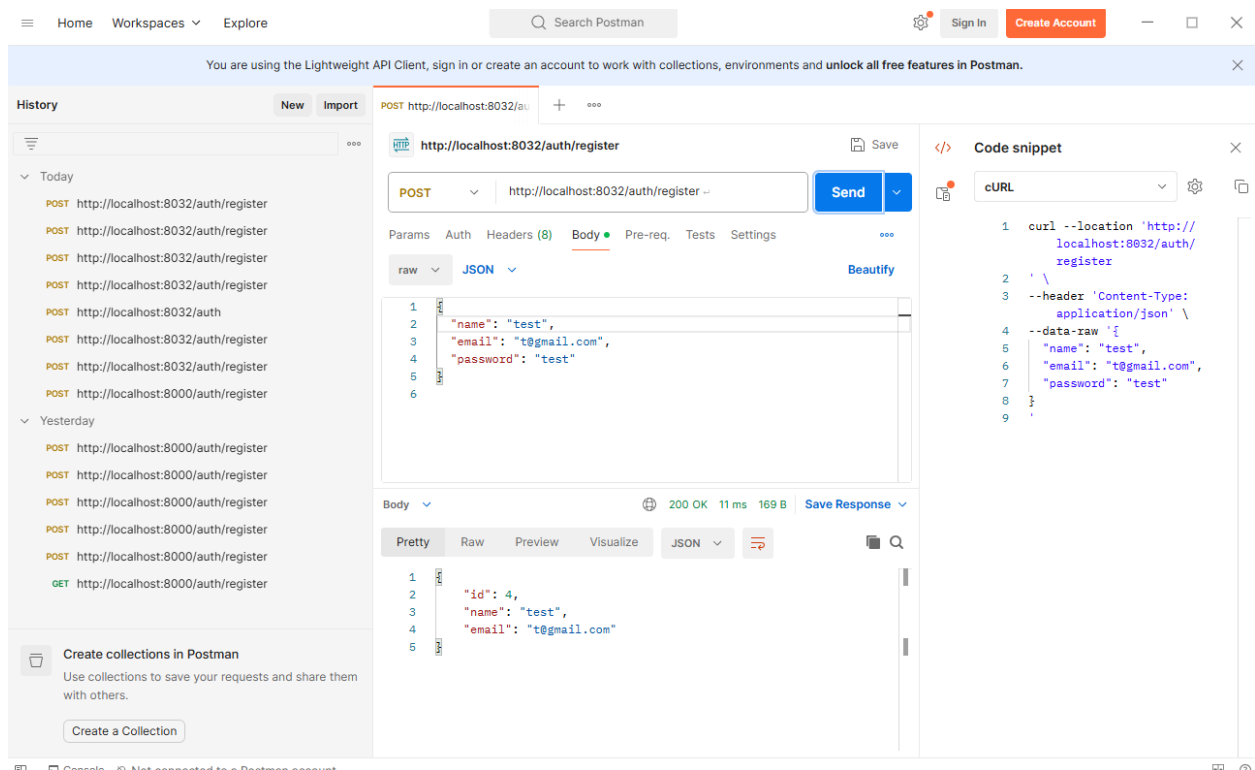

Part 1 - React Client

This homework builds on HW3. Your existing FastAPI backend becomes the backend for the React client below, and your domain data moves to MySQL.

I used the same routes in homework 3 and fit it with the homework 4 demo. I used the homework 4 demo CSS style.

```
PS C:\Users\natal\Documents\masters\fall 26\data 260\github\data260-0932\reports\hw04\frontend> npm run dev

> frontend@1.0.0 dev
> vite

VITE v5.4.21 ready in 210 ms

→ Local: http://localhost:5173/
→ Network: use --host to expose
→ press h + enter to show help

PS C:\Users\natal\Documents\masters\fall 26\data 260\github\data260-0932\reports\hw04\backend> uvicorn app.main:app --reload --port 8032
INFO: Will watch for changes in these directories: ['C:\Users\natal\Documents\masters\fall 26\data 260\github\data260-0932\reports\hw04\backend']
INFO: Uvicorn running on http://127.0.0.1:8032 (Press CTRL+C to quit)
INFO: Started reloader process [38488] using StatReload
INFO: Started server process [36704]
INFO: Waiting for application startup.
INFO: Application startup complete.
INFO: 127.0.0.1:65512 - "GET /auth/me HTTP/1.1" 200 OK
INFO: 127.0.0.1:65513 - "GET /auth/me HTTP/1.1" 200 OK
INFO: 127.0.0.1:65512 - "GET /vuls HTTP/1.1" 200 OK
```

Add a Login page/component (Login.jsx) that allows a user to log in using email + Password.

```

data260-0932 > reports > hw04 > frontend > src > pages > Login.jsx > Login > handleSubmit
1  import React, { useState } from "react";
2  import { useNavigate } from "react-router-dom";
3  import { login } from "../api/vulApi.js";
4
5  export default function Login({ setAuth }) {
6    const navigate = useNavigate();
7    const [email, setEmail] = useState("");
8    const [password, setPassword] = useState("");
9    const [error, setError] = useState("");
10
11    async function handleSubmit(e) {
12      e.preventDefault();
13      setError("");
14      try {
15        const res = await login(email, password);
16        setAuth({ loggedIn: true, userId: res.user_id });
17        navigate("/");
18      } catch (err) {
19        setError("Invalid email or password.");
20      }
21    }
22
23    return (
24      <div className="card">
25        <div className="card-header">
26          <div className="page-title">Login</div>
27          <div className="subtitle">Log in to view and manage vulnerability records</div>
28        </div>
29
30        <div className="card-body">
31          <form className="form" onSubmit={handleSubmit}>
32            <label>
33              Email
34              <input
35                type="email"
36                value={email}
37                onChange={(e) => setEmail(e.target.value)} />
38            </label>
39
40            <label>
41              Password
42              <input
43                type="password"
44                value={password}
45                onChange={(e) => setPassword(e.target.value)} />
46            </label>
47
48            {error && <div className="notice">{error}</div>}
49
50            <button className="btn primary" type="submit">
51              Login
52            </button>
53          </form>
54        </div>
55      </div>
56    );
57  }
58
59

```

- After successful login, the backend will set an HTTP-only cookie containing a server-side session token.

Open Source Package Vulnerability Manager

[Home](#)[Add Vulnerability Record](#)[Logout](#)

Vulnerabilities

+ Add Record

Session-based access: these open source vulnerabilities are fetched from FastAPI + MySQL using your cookie session.

ID	PACKAGE NAME	SEVERITY	ACTIONS
5002	nodejs 2.11.1	High	UpdateDelete

InspectorConsoleDebuggerNetworkStyle EditorPerformanceMemoryStorageAccessibilityApplication

Cache Storage

Cookies

Indexed DB

Local Storage

Filter items

Name	Value	Domain	Path	Expires / Max-Age	Size	HttpOnly	Secure	SameSite	Last Accessed	Partition Key
session_id	b68196b8ad39470d514e3b35240fd2d27fa9e3b493193cf93203ca0...	localhost	/	Mon, 28 Sep 2026 16:46:09...	74	true	false	Lax	Mon, 28 Sep 2026 16:16:09...	

Open Source Package Vulnerability Manager

HomeAdd Vulnerability RecordLogout

Vulnerabilities

Session-based access: these open source vulnerabilities are fetched from FastAPI + MySQL using your cookie session.

5002

nodejs 2.11.1

High

UpdateDelete

InspectorConsoleDebuggerNetworkStyle EditorPerformanceMemoryStorageAccessibilityApplication

Filter URLs

Filter Headers

Filter Cookies

Filter Request

Filter Response

Filter Timings

Filter Stack Trace

Method	Domain	File	Initiator	Type	Transferred	Size	Headers	Cookies	Request	Response	Timings	Stack Trace
GET	localhost:5173	login	document	html	cached	585 B						
GET	localhost:5173	client	script	js	cached	137.73...						
GET	localhost:5173	main.jsx	script	js	cached	2.85 kB						
GET	localhost:5173	@react-refresh	script	js	cached	117.55...						
GET	localhost:5173	react_jsx-dev-runtime.js?v=0c4335a2	script	js	cached	0 B						
GET	localhost:5173	react.js?v=0c4335a2	script	js	cached	219 B						
GET	localhost:5173	react-dom_client.js?v=0c4335a2	script	js	cached	0 B						
GET	localhost:5173	react-router-dom.js?v=0c4335a2	script	js	cached	0 B						
GET	localhost:5173	app.jsx	script	js	cached	19.56 kB						
GET	localhost:5173	styles.css	script	js	cached	7.55 kB						
GET	localhost:5173	env.mjs	script	js	cached	4.02 kB						
GET	localhost:5173	chunk-DRWLMN53.js?v=0c4335a2	script	js	cached	0 B						
GET	localhost:5173	chunk-G3PMV6ZZ.js?v=0c4335a2	script	js	cached	0 B						
GET	localhost:5173	chunk-PJEEZAML.js?v=0c4335a2	script	js	cached	0 B						
GET	localhost:5173	Navbar.jsx	script	js	cached	10.09 kB						
GET	localhost:5173	Home.jsx	script	js	cached	18.71 kB						
GET	localhost:5173	CreateRecord.jsx	script	js	cached	10.04 kB						
GET	localhost:5173	UpdateRecord.jsx	script	js	cached	12.31 kB						
GET	localhost:5173	DeleteRecord.jsx	script	js	cached	9.88 kB						
GET	localhost:5173	Login.jsx	script	js	cached	11.94 kB						
GET	localhost:5173	vulApi.js	script	js	cached	5.83 kB						
GET	localhost:5173	/?token=70VzptVyUfft	client:536 (webso...	plain	163 B	0 B						
GET	localhost:5173	axios.js?v=0c4335a2	script	js	cached	0 B						
GET	localhost:8032	me	axios.js:1728 (xhr)	json	267 B	26 B						
GET	localhost:8032	me	axios.js:1728 (xhr)	json	267 B	26 B						
GET	localhost:5173	favicon.ico	img	plain	cached	0 B						
POST	localhost:8032	login	axios.js:1728 (xhr)	json	401 B	35 B						
GET	localhost:8032	vuls	axios.js:1728 (xhr)	json	232 B	2 B						
POST	localhost:8032	vuls	axios.js:1728 (xhr)	json	291 B	60 B						

Response Headers (366 B)

access-control-allow-credentials: true
access-control-allow-origin: http://localhost:5173
content-length: 35
content-type: application/json
date: Mon, 28 Sep 2026 16:16:08 GMT
server: uvicorn
set-cookie: session_id=b68196b8ad39470d514e3b35240fd2d27a9e3b493193cf93203ca0149195827; HttpOnly; Max-Age=1800; Path=/; SameSite=lax
vary: Origin


Request Headers (502 B)

Accept: application/json, text/plain, */*
Accept-Encoding: gzip, deflate, br, zstd
Accept-Language: en-US,en;q=0.9
Connection: keep-alive
Content-Length: 41
Content-Type: application/json
Host: localhost:8032
Origin: http://localhost:5173/
Priority: u=0
Referer: http://localhost:5173/
Sec-Fetch-Dest: empty
Sec-Fetch-Mode: cors
Sec-Fetch-Site: same-site
Sec-GPC: 1
User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64; rv:156.0) Gecko/20100101 Firefox/156.0


Status	Method	Domain	File	Initiator	Type	Transferred	Size
304	GET	localhost:5173	/	document	html	cached	585 B
304	GET	localhost:5173	client	script	js	cached	137.73...
304	GET	localhost:5173	main.jsx	script	js	cached	2.85 kB
304	GET	localhost:5173	@react-refresh	script	js	cached	117.55...
200	GET	localhost:5173	react_jsx-dev-runtime.js?v=0c4335a2	script	js	cached	0 B
200	GET	localhost:5173	react.js?v=0c4335a2	script	js	cached	219 B
200	GET	localhost:5173	react-dom_client.js?v=0c4335a2	script	js	cached	0 B
200	GET	localhost:5173	react-router-dom.js?v=0c4335a2	script	js	cached	0 B
304	GET	localhost:5173	app.jsx	script	js	cached	19.56 kB
304	GET	localhost:5173	styles.css	script	js	cached	7.55 kB
304	GET	localhost:5173	env.mjs	script	js	cached	4.02 kB
200	GET	localhost:5173	chunk-DRWLMN53.js?v=0c4335a2	script	js	cached	0 B
200	GET	localhost:5173	chunk-G3PMV62Z.js?v=0c4335a2	script	js	cached	0 B
200	GET	localhost:5173	chunk-P1EEZAML.js?v=0c4335a2	script	js	cached	0 B
304	GET	localhost:5173	Navbar.jsx	script	js	cached	10.09 kB
304	GET	localhost:5173	Home.jsx	script	js	cached	18.71 kB
304	GET	localhost:5173	CreateRecord.jsx	script	js	cached	10.04 kB
304	GET	localhost:5173	UpdateRecord.jsx	script	js	cached	12.31 kB
304	GET	localhost:5173	DeleteRecord.jsx	script	js	cached	9.68 kB
304	GET	localhost:5173	Login.jsx	script	js	cached	11.94 kB
304	GET	localhost:5173	vulApi.js	script	js	cached	5.83 kB
401	GET	localhost:5173	/?token=7OVzptVyUfft	client:536 (webso...	plain	163 B	0 B
200	GET	localhost:5173	axios.js?v=0c4335a2	script	js	cached	0 B
200	GET	localhost:8032	me	axios.js:1728 (xhr)	json	261 B	30 B
200	GET	localhost:8032	me	axios.js:1728 (xhr)	json	261 B	30 B

Filter properties
logged_in: true
user_id: 4

- Only logged-in users should be allowed to view the record list and perform CRUD Operations.

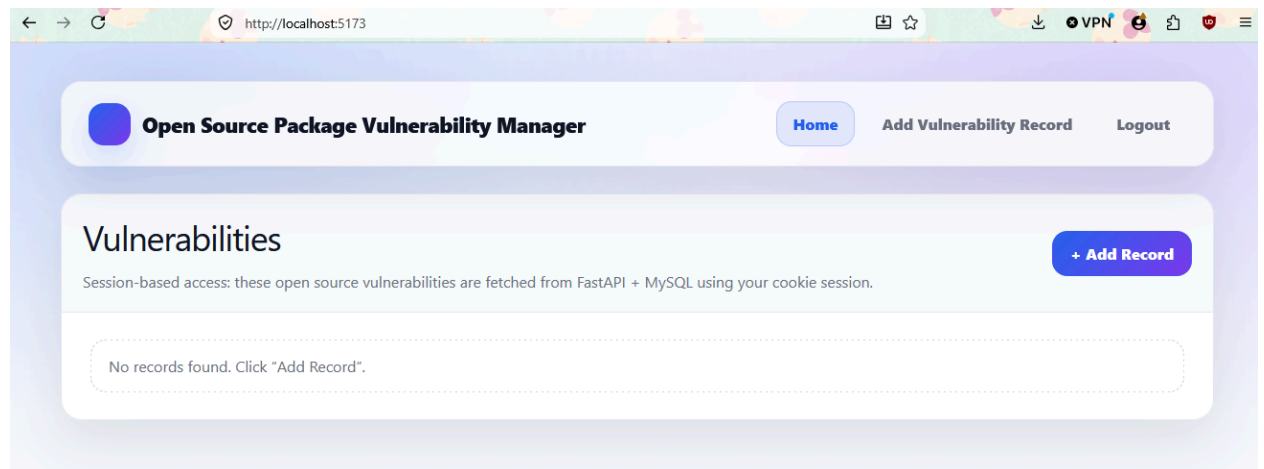

- If the user is not logged in: show a message "Login required", and/or disable/hide navigation buttons like "Add Record".

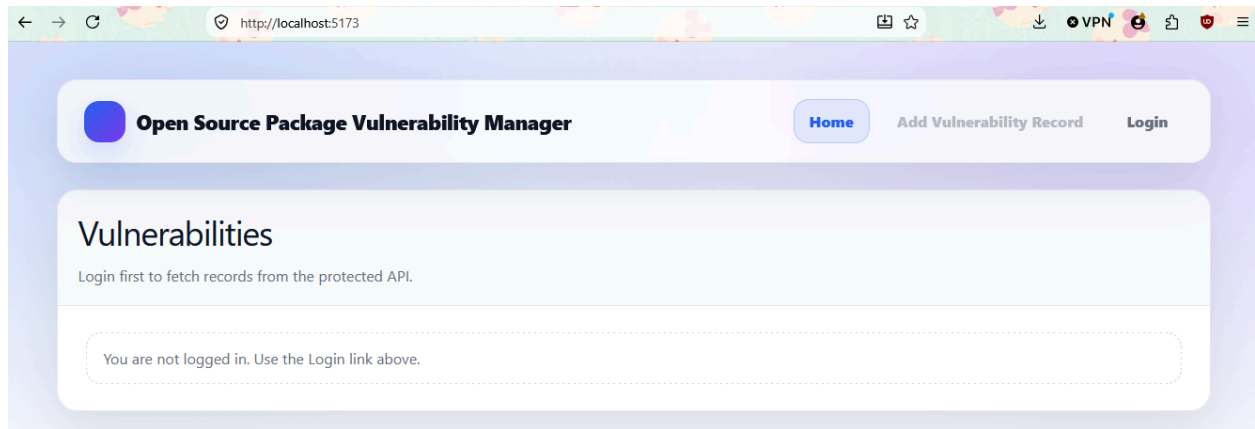

I. Home Page


Write the necessary code to create the Home.jsx component which will display all the records. The Home component should be rendered when the user is on the root route /.

```
data260-0932 > reports > hw04 > frontend > src > pages > Home.jsx > Home
1  import React from "react";
2  import { Link } from "react-router-dom";
3
4  export default function Home({ records, loading, auth }) {
5    // If not logged in, show a clear message (since backend is protected)
6    if (!auth.loggedIn) {
7      return (
8        <div className="card">
9          <div className="card-header">
10            <div>
11              <div className="page-title">Vulnerabilities</div>
12              <div className="subtitle">
13                Login first to fetch records from the protected API.
14              </div>
15            </div>
16          </div>
17          <div className="card-body">
18            <div className="notice">
19              You are not logged in. Use the Login link above.
20            </div>
21          </div>
22        </div>
23      );
24    }
25
26    // logged in: show vulnerabilities table
27
28    return (
29      <div className="card">
30        <div className="card-header">
31          <div>
32            <div className="page-title">Vulnerabilities</div>
33            <div className="subtitle">
34              Session-based access: these open source vulnerabilities are fetched from FastAPI + MySQL using your cookie session.
35            </div>
36          </div>
37          <Link className="btn primary" to="/create">
38            + Add Record
39          </Link>
40        </div>
41        <div className="card-body">
42          <div>
43            <div>
44              <div>
45                <div className="notice">loading records....</div>
46              </div>
47              <div>
48                <div className="notice">No records found. Click "Add Record".</div>
49              </div>
50            </div>
51            <div>
52              <div>
53                <div>
54                  <div>
55                    <div>
56                      <div>
57                        <div>
58                          <div>
59                            <div>
60                              <div>
```

```

61     {records.map((u) => (
62         <tr key={u.id}>
63             <td>{u.id}</td>
64             <td>{u.package_name}</td>
65             <td>{u.severity}</td>
66             <td className="actions">
67                 <Link className="btn" to={` /update/${u.id}`}>
68                     Update
69                 </Link>
70                 <Link className="btn danger" to={` /delete/${u.id}`}>
71                     Delete
72                 </Link>
73             </td>
74         </tr>
75     )]}
76 </tbody>
77 </table>
78 </div>
79 )}
80 </div>
81 </div>
82 );
83

```

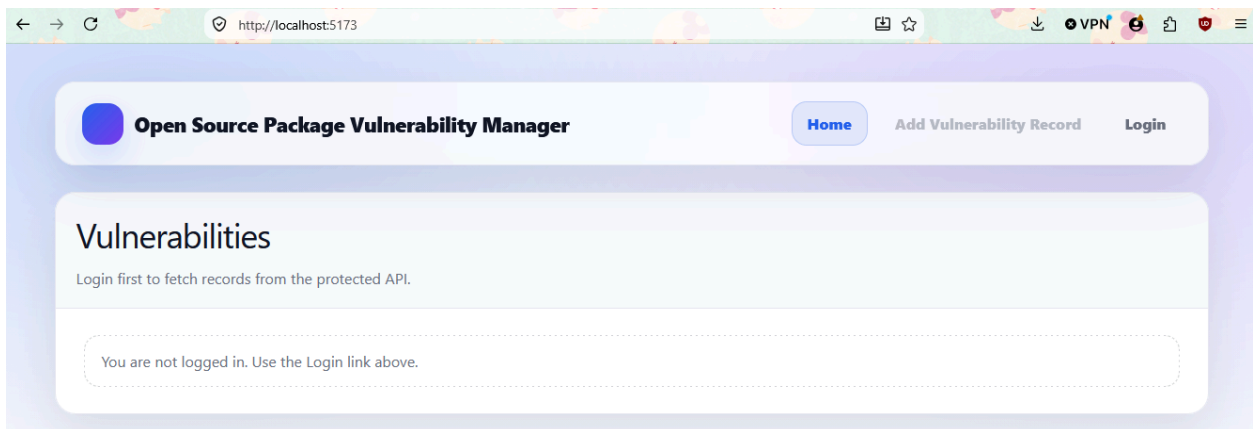

II. Add a New Record

Write the necessary code to create the `CreateRecord.jsx` component. The component should be rendered when the user is on the `/create` route.

```

data260-0932 > reports > hw04 > frontend > src > pages > CreateRecord.jsx > CreateRecord
1  import React, { useState } from "react";
2
3  export default function CreateRecord({ onAdd }) {
4    const [package_name, setPackageName] = useState("");
5    const [severity, setSeverity] = useState("");
6
7    async function handleSubmit(e) {
8      e.preventDefault();
9      await onAdd({ package_name: package_name, severity:severity });
10   }
11
12   return (
13     <div className="card">
14       <div className="card-header">
15         <div className="page-title">Add Record</div>
16         <div className="subtitle">Enter record details below</div>
17       </div>
18
19       <div className="card-body">
20         <form className="form" onSubmit={handleSubmit}>
21           <label>
22             Package Name
23             <input
24               value={package_name}
25               onChange={(e) => setPackageName(e.target.value)}
26             />
27           </label>
28
29           <label>
30             Severity
31             <input
32               value={severity}
33               onChange={(e) => setSeverity(e.target.value)}
34             />
35           </label>
36
37           <button className="btn primary" type="submit">
38             Add Record
39           </button>
40         </form>
41       </div>
42     </div>
43   );
44 }

```

The component should accept props to add the new record and have the following:

- An input field for entering the entity's primary field.
- An input field for entering the entity's secondary field.
- A submit button labeled appropriately for your domain.

The screenshot shows a web browser window with the URL `http://localhost:5173/create`. The page title is "Open Source Package Vulnerability Manager". The navigation bar includes links for "Home", "Add Vulnerability Record", and "Logout". The main heading is "Add Record", with a subtext "Enter record details below". The form contains two input fields: "Package Name" with the value "nodejs 22.1" and "Severity" with the value "High". A blue "Add Record" button is at the bottom.

Open Source Package Vulnerability Manager

Home Add Vulnerability Record Logout

Add Record

Enter record details below

Package Name

nodejs 22.1

Severity

High

Add Record

- When the user clicks the submit button:
- A new record should be added to the list with an auto-incremented ID.
- The user should be redirected to the home page to see the updated list.

The screenshot shows a web application titled "Open Source Package Vulnerability Manager" running on `http://localhost:5173`. The application has a navigation bar with links for "Home", "Add Vulnerability Record", and "Logout". The main section is titled "Vulnerabilities" and includes a session-based access note. Below this is a table of vulnerabilities:

ID	PACKAGE NAME	SEVERITY	ACTIONS
1	nodejs 22.1	High	Update Delete

Below the table is a network inspector showing a list of requests. The selected request is a GET request to `react-router-dom.js?v=0c4335a2` with a status of 200. The response is a JSON object:

```

{
  "id": 1,
  "package_name": "nodejs 22.1",
  "severity": "High"
}

```

III. Update Record

Write the necessary code to create the `UpdateRecord.jsx` component. The component should be rendered when the user is on the `/update` route.

```

data260-0932 > reports > hw04 > frontend > src > pages > UpdateRecord.jsx > UpdateRecord
1  import React, { useEffect, useState } from "react";
2  import { useParams } from "react-router-dom";
3  import { fetchVulById } from "../api/vulApi.js";
4
5  export default function UpdateRecord({ onUpdate }) {
6    const { id } = useParams();
7    const recordId = Number(id);
8
9    const [package_name, setPackageName] = useState("");
10   const [severity, setSeverity] = useState("");
11   const [loading, setLoading] = useState(true);
12
13   useEffect(() => {
14     (async () => {
15       try {
16         setLoading(true);
17         const record = await fetchVulById(recordId);
18         setPackageName(record.package_name);
19         setSeverity(record.severity);
20       } catch (e) {
21         console.error(e);
22       } finally {
23         setLoading(false);
24       }
25     })();
26   }, [recordId]);
27
28   async function handleSubmit(e) {
29     e.preventDefault();
30     await onUpdate(recordId, { package_name, severity });
31   }
32
33   if (loading) return <p>Loading record...</p>;
34
35   return (
36     <div className="card">
37       <div className="card-header">
38         <div className="page-title">Update Record (ID: {recordId})</div>
39       </div>
40
41       <div className="card-body">
42         <form className="form" onSubmit={handleSubmit}>
43           <label>
44             Package Name
45             <input
46               value={package_name}
47               onChange={(e) => setPackageName(e.target.value)}
48             />
49           </label>
50
51           <label>
52             Severity
53             <input
54               value={severity}
55               onChange={(e) => setSeverity(e.target.value)}
56             />
57           </label>
58
59           <button className="btn primary" type="submit">
60             Update Record
61           </button>
62         </form>
63       </div>
64     </div>
65   );
66

```

The component should accept props to update the record and have the following:

- An input field for the primary field.
- An input field for the secondary field.
- A submit button labeled appropriately for your domain.

The screenshot shows a web browser at the URL `http://localhost:5173/update/1`. The page header includes the application name "Open Source Package Vulnerability Manager" and navigation links for "Home", "Add Vulnerability Record", and "Logout". The main heading is "Update Record (ID: 1)". Below this, there are two input fields: "Package Name" containing "nodejs 22.1" and "Severity" containing "High". A blue "Update Record" button is positioned at the bottom of the form.

When the user clicks the submit button, the record should be updated through the backend API and persisted in MySQL and the user should be redirected to the home page showing the updated list.

This screenshot shows the same "Update Record (ID: 1)" form, but with updated input values. The "Package Name" field now contains "nodejs 22.3", while the "Severity" field remains "High". The "Update Record" button is still present at the bottom.

The screenshot shows a web application titled "Open Source Package Vulnerability Manager" with a navigation bar containing "Home", "Add Vulnerability Record", and "Logout". The main section is titled "Vulnerabilities" and includes a sub-header: "Session-based access: these open source vulnerabilities are fetched from FastAPI + MySQL using your cookie session." A "+ Add Record" button is present. Below this is a table with the following data:

ID	PACKAGE NAME	SEVERITY	ACTIONS
1	nodejs 22.3	High	Update Delete

The bottom part of the image shows the browser's developer tools, specifically the Network tab. It displays a list of network requests. The selected request is a GET request to "http://localhost:5173/react-router-dom.js?v=0c4335a2". The response is a JSON object with the following properties:

```

{
  "id": 1,
  "package_name": "nodejs 22.3",
  "severity": "High"
}

```

IV. Delete the Record

Write the necessary code to create the DeleteRecord.jsx component. The component should be rendered when the user is on the /delete route.


```


data260-0932 > reports > hw04 > frontend > src > pages > DeleteRecord.jsx > DeleteRecord > useEffect() callback >
1 import React, { useEffect, useState } from "react";
2 import { useParams } from "react-router-dom";
3 import { fetchVulById } from "../api/vulApi.js";
4
5 export default function DeleteRecord({ onDelete }) {
6   const { id } = useParams();
7   const recordId = Number(id);
8
9   const [record, setRecord] = useState(null);
10
11   useEffect(() => {
12     (async () => {
13       try {
14         const data = await fetchVulById(recordId);
15         setRecord(data);
16       } catch {
17         setRecord(null);
18       }
19     })();
20   }, [recordId]);
21
22   async function handleDelete() {
23     await onDelete(recordId);
24   }
25
26   return (
27     <div className="card">
28       <div className="card-header">
29         <div className="page-title">Delete Record</div>
30       </div>
31
32       <div className="card-body">
33         {record ? (
34           <>
35             <p style={{ fontSize: "18px", marginBottom: "24px" }}>
36               Are you sure you want to delete <strong>{record.package_name}</strong>
37             </p>
38
39             <button className="btn danger" onClick={handleDelete}>
40               Delete record
41             </button>
42           </>
43         ) : (
44           <div className="notice">
45             record not found (or already deleted).
46           </div>
47         )}
48       </div>
49     </div>
50   );
51 }

```

The component should accept props to delete a record and have the following:

- A button labeled appropriately for your domain (e.g., "Delete").

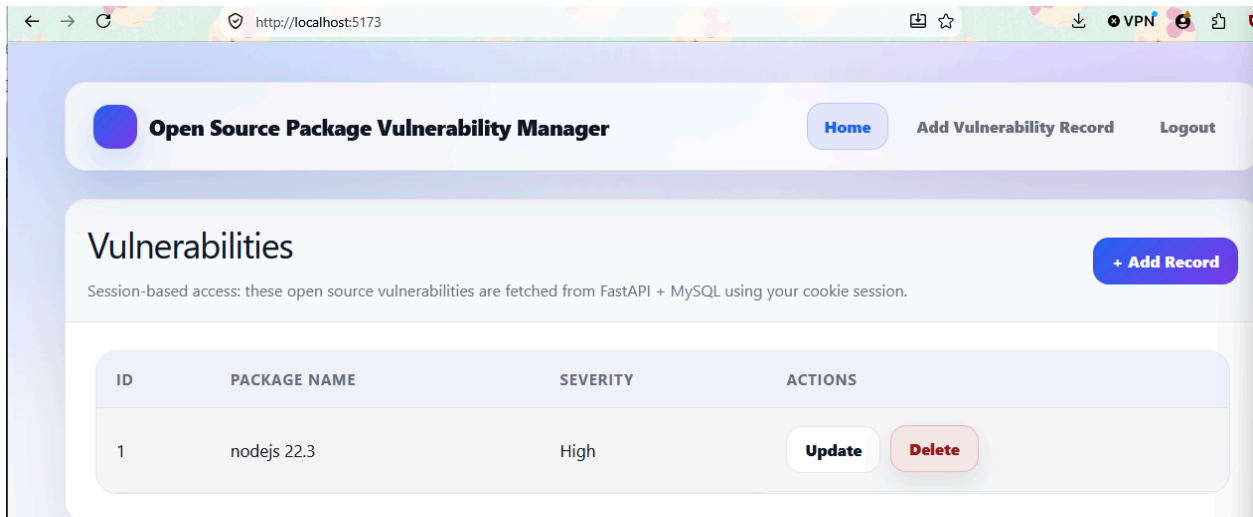

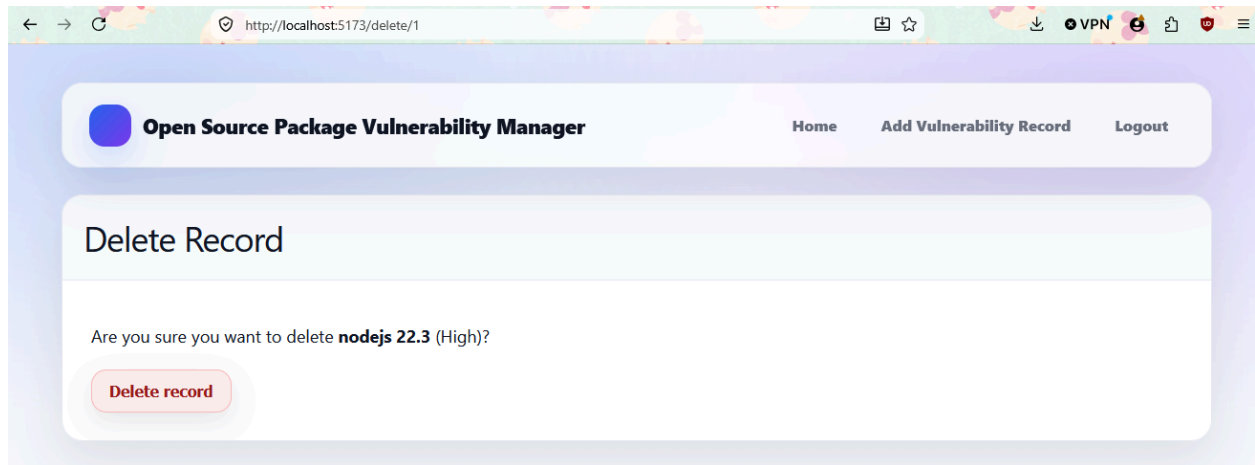

When the user clicks the delete button, the record should be deleted through the backend API and removed from MySQL and the user should be redirected to the home page showing the updated list.

The screenshot shows a web application running on `http://localhost:5173`. The application has a header with the title "Open Source Package Vulnerability Manager" and navigation links: "Home", "Add Vulnerability Record", and "Logout". Below the header is a section titled "Vulnerabilities" with a subtext: "Session-based access: these open source vulnerabilities are fetched from FastAPI + MySQL using your cookie session." There is a "+ Add Record" button in the top right of this section. A message box states: "No records found. Click 'Add Record'".

The browser's developer tools are open to the "Network" tab, displaying a list of network requests. The table below represents the data shown in the network tab:

Status	Method	Domain	File	Initiator	Type	Transferred	Size
200	GET	localhost:5173	chunk-DRWLMN53.js?v=0c4335a2	script	js	78.08 kB	77.82 kB
200	GET	localhost:5173	chunk-G3PMV62Z.js?v=0c4335a2	script	js	1.80 kB	1.54 kB
200	GET	localhost:5173	chunk-PJEEZAML.js?v=0c4335a2	script	js	928.36 kB	928.10 kB
200	GET	localhost:5173	Navbar.jsx	script	js	10.33 kB	10.09 kB
200	GET	localhost:5173	Home.jsx	script	js	18.95 kB	18.71 kB
200	GET	localhost:5173	CreateRecord.jsx	script	js	10.28 kB	10.04 kB
200	GET	localhost:5173	UpdateRecord.jsx	script	js	12.55 kB	12.31 kB
200	GET	localhost:5173	DeleteRecord.jsx	script	js	10.12 kB	9.88 kB
200	GET	localhost:5173	Login.jsx	script	js	12.18 kB	11.94 kB
200	GET	localhost:5173	vulApi.js	script	js	6.07 kB	5.83 kB
101	GET	localhost:5173	/?token=7OVzptVlyUft	client:536 (webso...	plain	163 B	0 B
200	GET	localhost:5173	axios.js?v=0c4335a2	script	js	85.73 kB	85.48 kB
200	GET	localhost:8032	me	axios.js:1728 (xhr)	json	261 B	30 B
200	GET	localhost:8032	me	axios.js:1728 (xhr)	json	261 B	30 B
404	GET	localhost:5173	favicon.ico	img	plain	143 B	0 B
200	GET	localhost:8032	vuls	axios.js:1728 (xhr)	json	232 B	2 B
200	POST	localhost:8032	vuls	axios.js:1728 (xhr)	json	286 B	55 B
200	OPTIO...	localhost:8032	vuls	xhr	plain	390 B	2 B
200	GET	localhost:8032	1	axios.js:1728 (xhr)	json	286 B	55 B
200	GET	localhost:8032	1	axios.js:1728 (xhr)	json	286 B	55 B
200	PUT	localhost:8032	1	axios.js:1728 (xhr)	json	286 B	55 B
200	OPTIO...	localhost:8032	1	xhr	plain	390 B	2 B
200	GET	localhost:8032	1	axios.js:1728 (xhr)	json	286 B	55 B
200	GET	localhost:8032	1	axios.js:1728 (xhr)	json	286 B	55 B
200	DELETE	localhost:8032	1	axios.js:1728 (xhr)	json	286 B	55 B

The "Response" tab for the last request shows a JSON object:

```

{
  "id": 1,
  "package_name": "nodejs 22.3",
  "severity": "High"
}

```

V. For all the above components, make sure to:

- Pass props for the Create, Update, and Delete components.

```

72 // Create (props)
73 async function onAdd(newRecord) {
74   const created = await createVul(newRecord);
75   setRecords(prev) => [...prev, created];
76   navigate("/");
77 }
78
79 // Update (props)
80 async function onUpdate(id, updatedRecord) {
81   const updated = await updateVul(id, updatedRecord);
82   setRecords(prev) => prev.map(u => (u.id === id ? updated : u));
83   navigate("/");
84 }
85
86 // Delete (props)
87 async function onDelete(id) {
88   await deleteVul(id);
89   setRecords(prev) => prev.filter(u => u.id !== id);
90   navigate("/");
91 }
92
93 return (
94   <div className="container">
95     <Navbar auth={auth} setAuth={setAuth}/>
96
97     /* Login session demo UI */
98     /* <Navbar auth={auth} setAuth={setAuth} /> */
99
100     <Routes>
101       <Route path="/" element=<Home records={records} loading={loading} auth={auth} /> />
102       <Route path="/login" element=<Login setAuth={setAuth}/> />
103       <Route path="/create" element=<RequireAuth auth={auth}><CreateRecord onAdd={onAdd} auth={auth} /></RequireAuth> />
104       <Route path="/update/:id" element=<RequireAuth auth={auth}><UpdateRecord onUpdate={onUpdate} auth={auth} /></RequireAuth> />
105       <Route path="/delete/:id" element=<RequireAuth auth={auth}><DeleteRecord onDelete={onDelete} auth={auth} /></RequireAuth> />
106     </Routes>
107   </div>
108 );
109

```

- Use hooks like useState and useEffect wherever necessary.

```

export default function App() {
  const navigate = useNavigate();
  // Auth state (cookie session is checked inside LoginBar via /auth/me)
  const [auth, setAuth] = useState({ loggedIn: false, userId: null });

  // Records data
  const [records, setRecords] = useState([]);
  const [loading, setLoading] = useState(false);

  useEffect(() => {
    (async () => {
      try {
        const data = await me();
        setAuth({ loggedIn: true, userId: data.user_id });
      } catch {
        setAuth({ loggedIn: false, userId: null });
      }
    })();
  }, []);

  // Fetch records only when logged in
  useEffect(() => {
    (async () => {
      if (!auth.loggedIn) {
        setRecords([]);
        setLoading(false);
        return;
      }

      try {
        setLoading(true);
        const data = await fetchVuls();
        setRecords(data);
      } catch (e) {
        console.error("fetchVuls failed:", e);
        // If session expired, backend returns 401; UI will show not logged in after next /auth/me check.
      } finally {
        setLoading(false);
      }
    })();
  }, [auth.loggedIn]);
}

```

- Use React Router (react-router-dom) for routing.

data260-0932 > reports > hw04 > frontend > src > app.jsx > App > useEffect() callback > <function>

```

1 import React, { useEffect, useState } from "react";
2 import { Routes, Route, useNavigate } from "react-router-dom";
3

```

data260-0932 > reports > hw04 > frontend > src > main.jsx

```

1 import React from "react";
2 import ReactDOM from "react-dom/client";
3 import { BrowserRouter } from "react-router-dom";

```

```
data260-0932 > reports > hw04 > frontend > src > components >  Navbar.jsx >  Navbar >  handleAddClick
1   import React from "react";
2   import { Link, NavLink, useNavigate } from "react-router-dom";
```

Part 2 - MySQL Persistence and Server-Side Sessions

In this part, you will apply the concepts learned in class to build a simple CRUD (Create, Read, Update, Delete) application using FastAPI and MySQL, using SQLAlchemy.

Database

Create MySQL database: <PREFIX>_rel

Table: your primary domain entity (auto-increment id, primary field, secondary field)

```
PS C:\Users\natal> & "C:\Program Files\MySQL\MySQL Server 8.0\bin\mysql.exe" -u root -p
Enter password: *****
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 8
Server version: 8.0.41 MySQL Community Server - GPL

Copyright (c) 2000, 2025, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> CREATE DATABASE IF NOT EXISTS s0932_rel
-> ;
Query OK, 1 row affected (0.03 sec)

mysql> exit;
Bye
```

```
mysql> DESCRIBE vulnerabilities;
+-----+-----+-----+-----+-----+-----+
| Field          | Type          | Null | Key | Default | Extra          |
+-----+-----+-----+-----+-----+-----+
| id             | int           | NO   | PRI | NULL    | auto_increment |
| package_name   | varchar(255)  | NO   |     | NULL    |                |
| severity       | varchar(255)  | NO   |     | NULL    |                |
+-----+-----+-----+-----+-----+-----+
3 rows in set (0.00 sec)
```

Also create tables for authentication/session management:

- users (id, name, email (unique), password_hash)

```

data260-0932 > reports > hw04 > backend > app > models.py > Vul
1  from sqlalchemy import Column, Integer, String, DateTime, ForeignKey
2  from .database import Base
3  from sqlalchemy.sql import func
4  from sqlalchemy.orm import relationship
5
6  class User(Base):
7      __tablename__ = "users"
8
9      id = Column(Integer, primary_key=True, index=True, autoincrement=True)
10     name = Column(String(255), nullable=False)
11     email = Column(String(255), nullable=False, unique=True)
12     password_hash=Column(String(255), nullable=False)

```

- sessions (id (session token), user_id, created_at, expires_at)

```

15  class SessionToken(Base):
16      __tablename__ = "sessions"
17
18      id = Column(String(64), primary_key=True, index=True) # session token
19      user_id = Column(Integer, ForeignKey("users.id", ondelete="CASCADE"), nullable=False)
20      created_at = Column(DateTime(timezone=True), server_default=func.now())
21      expires_at = Column(DateTime(timezone=True), nullable=False)

```

You are required to create a CRUD system for your domain entity that allows users to:

The screenshot shows the Postman API client interface. The top bar includes navigation links (Home, Workspaces, Explore), a search bar, and user options (Sign In, Create Account). A notification banner states: "You are using the Lightweight API Client, sign in or create an account to work with collections, environments and unlock all free features in Postman." The left sidebar displays a history of requests, categorized by "Today" and "Yesterday". The main panel shows a selected POST request to `http://localhost:8032/vuls`. The request body is a JSON object: `{"email": "t@gmail.com", "password": "test"}`. The response status is 200 OK, and the response body is a JSON object: `{"message": "logged in", "user_id": 4}`. The interface also includes tabs for Params, Authorization, Headers, Body, Pre-request Script, Tests, and Settings, as well as buttons for Send, Save, and Beautify.

- Add a new record (POST)

```
data260-0932 > reports > hw04 > backend > app > crud.py > update_user
44
45 #functions for vulnerabilities, follows same logic as useres demo
46 def create_vul(db: Session, payload: schema.VulCreate):
47     vul = models.Vul(package_name=payload.package_name, severity=payload.severity)
48     db.add(vul)
49     db.commit()
50     db.refresh(vul)
51     return vul
```

The screenshot displays the Postman API client interface. The top navigation bar includes 'Home', 'Workspaces', 'Explore', a search bar, and buttons for 'Sign In' and 'Create Account'. A notification banner states: 'You are using the Lightweight API Client, sign in or create an account to work with collections, environments and unlock all free features in Postman.'

The 'History' panel on the left shows a list of recent requests, categorized by 'Today' and 'Yesterday'. The main workspace shows a POST request to 'http://localhost:8032/vuls'. The request body is a JSON object:

```
{
  "package_name": "python 3.11",
  "severity": "Medium"
}
```

The bottom panel shows the response, which is a JSON object:

```
{
  "id": 2,
  "package_name": "python 3.11",
  "severity": "Medium"
}
```

The response status is '200 OK' with a response time of '15 ms' and a size of '182 B'. The response is displayed in 'Pretty' format.

Open Source Package Vulnerability Manager

Home Add Vulnerability Record Logout

Vulnerabilities

Session-based access: these open source vulnerabilities are fetched from FastAPI + MySQL using your cookie session.

+ Add Record

ID	PACKAGE NAME	SEVERITY	ACTIONS
2	python 3.11	Medium	Update Delete

Inspector Console Debugger Network Style Editor Performance Memory Storage Accessibility Application

Filter URLs

Status	Method	Domain	File	Initiator	Type	Transferred	Size
200	GET	localhost:5173	client	script	js	137.97 kB	137.73 kB
200	GET	localhost:5173	main.jsx	script	js	3.09 kB	2.85 kB
200	GET	localhost:5173	@react-refresh	script	js	117.79 kB	117.55 kB
200	GET	localhost:5173	react_jsx-dev-runtime.js?v=0c4335a2	script	js	37.29 kB	37.04 kB
200	GET	localhost:5173	react.js?v=0c4335a2	script	js	473 B	219 B
200	GET	localhost:5173	react-dom_client.js?v=0c4335a2	script	js	1.37 kB	1.12 kB
200	GET	localhost:5173	react-router-dom.js?v=0c4335a2	script	js	210.25 kB	209.99 kB
200	GET	localhost:5173	app.jsx	script	js	19.80 kB	19.56 kB
200	GET	localhost:5173	styles.css	script	js	7.78 kB	7.55 kB
200	GET	localhost:5173	env.mjs	script	js	4.26 kB	4.02 kB
200	GET	localhost:5173	chunk-DRWLMN53.js?v=0c4335a2	script	js	78.08 kB	77.82 kB
200	GET	localhost:5173	chunk-G3PMV62Z.js?v=0c4335a2	script	js	1.80 kB	1.54 kB
200	GET	localhost:5173	chunk-PJEEZAML.js?v=0c4335a2	script	js	928.36 kB	928.10 kB
200	GET	localhost:5173	Navbar.jsx	script	js	10.33 kB	10.09 kB
200	GET	localhost:5173	Home.jsx	script	js	18.95 kB	18.71 kB
200	GET	localhost:5173	CreateRecord.jsx	script	js	10.28 kB	10.04 kB
200	GET	localhost:5173	UpdateRecord.jsx	script	js	12.55 kB	12.31 kB
200	GET	localhost:5173	DeleteRecord.jsx	script	js	10.12 kB	9.88 kB
200	GET	localhost:5173	Login.jsx	script	js	12.18 kB	11.94 kB
200	GET	localhost:5173	vulApi.js	script	js	6.07 kB	5.83 kB
101	GET	localhost:5173	/?token=7OVzptVjUfIt	client:536 (webso...	plain	163 B	0 B
200	GET	localhost:5173	axios.js?v=0c4335a2	script	js	85.73 kB	85.48 kB
200	GET	localhost:8032	me	axios.js:1728 (xhr)	json	261 B	30 B
200	GET	localhost:8032	me	axios.js:1728 (xhr)	json	261 B	30 B
404	GET	localhost:5173	favicon.ico	img	plain	143 B	0 B
200	GET	localhost:8032	vuls	axios.js:1728 (xhr)	json	290 B	59 B

Filter properties

JSON

Raw

0: { id: 2, package_name: "python 3.11", severity: "Medium" }

- View all records (GET)

```
def get_vuls(db: Session):
    return db.query(models.Vul).order_by(models.Vul.id.asc()).all()
```

HomeWorkspacesExplore

Search Postman

Sign InCreate Account

You are using the Lightweight API Client, sign in or create an account to work with collections, environments and unlock all free features in Postman.

History

NewImport

POSThttp://localhost:8032/vuls

GEThttp://localhost:8032/vuls

POSThttp://localhost:8032/vuls

POSThttp://localhost:8032/auth/login

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8032/vuls

POSThttp://localhost:8032/vuls

POSThttp://localhost:8032/auth/records

POSThttp://localhost:8032/auth/records

POSThttp://localhost:8032/auth/login

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8000/auth/register

POSThttp://localhost:8000/auth/register

POSThttp://localhost:8000/auth/register

POSThttp://localhost:8000/auth/register

POSThttp://localhost:8000/auth/register

GEThttp://localhost:8000/auth/register

http://localhost:8032/vuls

GET

Send

ParamsAuthorizationHeaders (9)BodyPre-request ScriptTestsSettingsCookiesBeautify

noneform-datax-www-form-urlencodedrawbinaryJSON

```
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2379
2380
2381
2382
2383
2384
2385
2386
2387
2388
2389
2390
2391
2392
2393
2394
2395
2396
2397
2398
2399
2400
2401
2402
2403
2404
2405
2406
2407
2408
2409
2410
2411
2412
2413
2414
2415
2416
2417
2418
2419
2420
2421
2422
2423
2424
2425
2426
2427
2428
2429
2430
2431
2432
2433
2434
2435
2436
2437
2438
2439
2440
2441
2442
2443
2444
2445
2446
2447
2448
2449
2450
2451
2452
2453
2454
2455
2456
2457
2458
2459
2460
2461
2462
2463
2464
2465
2466
2467
2468
2469
2470
2471
2472
2473
2474
2475
2476
2477
2478
2479
2480
2481
2482
2483
2484
2485
2486
2487
2488
2489
2490
2491
2492
2493
2494
2495
2496
2497
2498
2499
2500
2501
2502
2503
2504
2505
2506
2507
2508
2509
2510
2511
2512
2513
2514
2515
2516
2517
2518
2519
2520
2521
2522
2523
2524
2525
2526
2527
2528
2529
2530
2531
2532
2533
2534
2535
2536
2537
2538
2539
2540
2541
2542
2543
2544
2545
2546
2547
2548
2549
2550
2551
2552
2553
2554
2555
2556
2557
2558
2559
2560
2561
2562
2563
2564
2565
2566
2567
2568
2569
2570
2571
2572
2573
2574
2575
2576
2577
2578
2579
2580
2581
2582
2583
2584
2585
2586
2587
2588
2589
2590
2591

```

← → ↻ http://localhost:5173

**Open Source Package Vulnerability Manager**

[Home](#)[Add Vulnerability Record](#)[Logout](#)

Vulnerabilities

Session-based access: these open source vulnerabilities are fetched from FastAPI + MySQL using your cookie session.

[+ Add Record](#)

ID	PACKAGE NAME	SEVERITY	ACTIONS
2	python 3.11	Medium	Update Delete
3	java 2.3	Medium	Update Delete

Inspector Console Debugger **Network** Style Editor Performance Memory Storage Accessibility Application

Filter URLs

|| + 🔍

All HTML CSS JS XHR Fonts Images Media WS Other ☒ Disable Cache No Throttling ⚙

Status	Meth...	Domain	File	Initiator	Type	Transferred	Size	Headers	Cookies	Request	Response	Timings	Stack Trace
200	GET	localhost:5173	client	script	js	137.97 kB	137.7...	Filter properties JSON 0: { id: 2, package_name: "python 3.11", severity: "Medium" } 1: { id: 3, package_name: "java 2.3", severity: "Medium" }					
200	GET	localhost:5173	main.jsx	script	js	3.09 kB	2.85 kB						
200	GET	localhost:5173	@react-refresh	script	js	117.79 kB	117.5...						
200	GET	localhost:5173	react_jsx-dev-runtime.js?v=0c4335a2	script	js	37.29 kB	37.04...						
200	GET	localhost:5173	react.js?v=0c4335a2	script	js	473 B	219 B						
200	GET	localhost:5173	react-dom_client.js?v=0c4335a2	script	js	1.37 kB	1.12 kB						
200	GET	localhost:5173	react-router-dom.js?v=0c4335a2	script	js	210.25 kB	209.9...						
200	GET	localhost:5173	app.jsx	script	js	19.80 kB	19.56...						
200	GET	localhost:5173	styles.css	script	js	7.78 kB	7.55 kB						
200	GET	localhost:5173	env.mjs	script	js	4.26 kB	4.02 kB						
200	GET	localhost:5173	chunk-PJEEZAML.js?v=0c4335a2	script	js	928.36 kB	928.1...						
200	GET	localhost:5173	chunk-DRWLMN53.js?v=0c4335a2	script	js	78.08 kB	77.82...						
200	GET	localhost:5173	chunk-G3PMV62Z.js?v=0c4335a2	script	js	1.80 kB	1.54 kB						
200	GET	localhost:5173	Navbar.jsx	script	js	10.33 kB	10.09...						
200	GET	localhost:5173	Home.jsx	script	js	18.95 kB	18.71...						
200	GET	localhost:5173	CreateRecord.jsx	script	js	10.28 kB	10.04...						
200	GET	localhost:5173	UpdateRecord.jsx	script	js	12.55 kB	12.31...						
200	GET	localhost:5173	DeleteRecord.jsx	script	js	10.12 kB	9.88 kB						
200	GET	localhost:5173	Login.jsx	script	js	12.18 kB	11.94...						
200	GET	localhost:5173	vulApi.js	script	js	6.07 kB	5.83 kB						
401	GET	localhost:5173	/token=7OVzptVyUfft	client536 (webs...	plain	163 B	0 B						
200	GET	localhost:5173	axios.js?v=0c4335a2	script	js	85.73 kB	85.48...						
200	GET	localhost:8032	me	axios.js:1728 (xhr)	json	261 B	30 B						
200	GET	localhost:8032	me	axios.js:1728 (xhr)	json	261 B	30 B						
404	GET	localhost:5173	favicon.ico	img	plain	143 B	0 B						
200	GET	localhost:8032	vuls	axios.js:1728 (xhr)	json	346 B	114 B						

- View a record by ID (GET)

```
def get_vul(db: Session, vul_id: int):  
    return db.query(models.Vul).filter(models.Vul.id == vul_id).first()
```

Home Workspaces Explore Search Postman Sign In Create Account

You are using the Lightweight API Client, sign in or create an account to work with collections, environments and unlock all free features in Postman.

History New Import POST http://localhost:8032/vul GET http://localhost:8032/vul

Today

- GET http://localhost:8032/vuls/3
- GET http://localhost:8032/vuls
- POST http://localhost:8032/vuls
- POST http://localhost:8032/vuls
- POST http://localhost:8032/auth/login
- POST http://localhost:8032/auth/register
- POST http://localhost:8032/auth/register
- POST http://localhost:8032/vuls
- POST http://localhost:8032/vuls
- POST http://localhost:8032/auth/records
- POST http://localhost:8032/auth/records
- POST http://localhost:8032/auth/login
- POST http://localhost:8032/auth/login

http://localhost:8032/vuls

GET http://localhost:8032/vuls/3

Send

Params Authorization Headers (9) Body Pre-request Script Tests Settings Cookies

Query Params

Key	Value	Bulk Edit
Key	Value	

Body Cookies (1) Headers (4) Test Results 200 OK 12 ms 179 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "id": 3,
3   "package_name": "java 2.3",
4   "severity": "Medium"
5 }
```

- Update record details (PUT)

```
def update_vul(db: Session, vul_id: int, payload: schema.VulUpdate):
    vul = get_vul(db, vul_id)
    if not vul:
        return None
    vul.package_name = payload.package_name
    vul.severity = payload.severity
    db.commit()
    db.refresh(vul)
    return vul
```

History New Import POST http://localhost:8032/vul PUT http://localhost:8032/vul

Today

- PUT http://localhost:8032/vuls/2
- GET http://localhost:8032/vuls/3
- GET http://localhost:8032/vuls
- POST http://localhost:8032/vuls
- POST http://localhost:8032/vuls
- POST http://localhost:8032/auth/login
- POST http://localhost:8032/auth/register
- POST http://localhost:8032/auth/register
- POST http://localhost:8032/vuls
- POST http://localhost:8032/vuls
- POST http://localhost:8032/auth/records
- POST http://localhost:8032/auth/records
- POST http://localhost:8032/auth/login
- POST http://localhost:8032/auth/login
- POST http://localhost:8032/auth/register

http://localhost:8032/vuls

PUT http://localhost:8032/vuls/2

Send

Params Authorization Headers (9) Body Pre-request Script Tests Settings Cookies Beautify

none form-data x-www-form-urlencoded raw binary JSON

```
1 {
2   "package_name": "python 3.14",
3   "severity": "Critical"
4 }
5
```

Body Cookies (1) Headers (4) Test Results 200 OK 16 ms 184 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "id": 2,
3   "package_name": "python 3.14",
4   "severity": "Critical"
5 }
```

Open Source Package Vulnerability Manager

Home Add Vulnerability Record Logout

Vulnerabilities

Session-based access: these open source vulnerabilities are fetched from FastAPI + MySQL using your cookie session.

+ Add Record

ID	PACKAGE NAME	SEVERITY	ACTIONS
2	python 3.14	Critical	Update Delete
3	java 2.3	Medium	Update Delete

Inspector Console Debugger Network Style Editor Performance Memory Storage Accessibility Application

Filter URLs

Status	Meth...	Domain	File	Initiator	Type	Transferred	Size	Headers	Cookies	Request	Response	Timings	Stack Trace
200	GET	localhost:5173	client	script	js	137.97 kB	137.7...						
200	GET	localhost:5173	main.jsx	script	js	3.09 kB	2.85 kB						
200	GET	localhost:5173	@react-refresh	script	js	117.79 kB	117.5...						
200	GET	localhost:5173	react_jsx-dev-runtime.js?v=0c4335a2	script	js	37.29 kB	37.04 ...						
200	GET	localhost:5173	react.js?v=0c4335a2	script	js	473 B	219 B						
200	GET	localhost:5173	react-dom_client.js?v=0c4335a2	script	js	1.37 kB	1.12 kB						
200	GET	localhost:5173	react-router-dom.js?v=0c4335a2	script	js	210.25 kB	209.9...						
200	GET	localhost:5173	app.jsx	script	js	19.80 kB	19.56 ...						
200	GET	localhost:5173	styles.css	script	js	7.78 kB	7.55 kB						
200	GET	localhost:5173	env.mjs	script	js	4.26 kB	4.02 kB						
200	GET	localhost:5173	chunk-PJEEZAML.js?v=0c4335a2	script	js	928.36 kB	928.1...						
200	GET	localhost:5173	chunk-DRWLMN53.js?v=0c4335a2	script	js	78.06 kB	77.82 ...						
200	GET	localhost:5173	chunk-G3PMV62Z.js?v=0c4335a2	script	js	1.80 kB	1.54 kB						
200	GET	localhost:5173	Navbar.jsx	script	js	10.33 kB	10.09 ...						
200	GET	localhost:5173	Home.jsx	script	js	18.95 kB	18.71 ...						
200	GET	localhost:5173	CreateRecord.jsx	script	js	10.28 kB	10.04 ...						
200	GET	localhost:5173	UpdateRecord.jsx	script	js	12.55 kB	12.31 ...						
200	GET	localhost:5173	DeleteRecord.jsx	script	js	10.12 kB	9.88 kB						
200	GET	localhost:5173	Login.jsx	script	js	12.18 kB	11.94 ...						
200	GET	localhost:5173	vulApi.js	script	js	6.07 kB	5.83 kB						
101	GET	localhost:5173	/?token=7OVzptVyuUft	client:536 (webs...	plain	163 B	0 B						
200	GET	localhost:5173	axios.js?v=0c4335a2	script	js	85.73 kB	85.48 ...						
200	GET	localhost:8032	me	axios.js:1728 (xhr)	json	261 B	30 B						
200	GET	localhost:8032	me	axios.js:1728 (xhr)	json	261 B	30 B						
200	GET	localhost:8032	vuls	axios.js:1728 (xhr)	json	348 B	116 B						

Filter properties

JSON

Raw

0: { id: 2, package_name: "python 3.14", severity: "Critical" }

1: { id: 3, package_name: "java 2.3", severity: "Medium" }

- Delete a record (DELETE)

```
def delete_vul(db: Session, vul_id: int):
    vul = get_vul(db, vul_id)
    if not vul:
        return None
    db.delete(vul)
    db.commit()
    return vul
```

HomeWorkspacesExplore

Search Postman

Sign InCreate Account

You are using the Lightweight API Client, sign in or create an account to work with collections, environments and unlock all free features in Postman.

HistoryNewImport

POST http://localhost:8032/vul

DEL http://localhost:8032/vul

+

...

http://localhost:8032/vuls

Save

</>

DELETE

http://localhost:8032/vuls/2

Send

...

ParamsAuthorizationHeaders (9)BodyPre-request ScriptTestsSettingsCookies

Query Params

Key	Value	Bulk Edit
Key	Value	

Body

Cookies (1)

Headers (4)

Test Results

200 OK16 ms184 B

Save Response

Pretty

Raw

Preview

Visualize

JSON

...

1

2

3

4

5

...

"id": 2,

"package_name": "python 3.14",

"severity": "Critical"

The screenshot shows a web browser at `http://localhost:5173` displaying the 'Open Source Package Vulnerability Manager' application. The application has a navigation bar with 'Home', 'Add Vulnerability Record', and 'Logout' links. The main section is titled 'Vulnerabilities' and includes a '+ Add Record' button. Below this, a session-based access message states: 'Session-based access: these open source vulnerabilities are fetched from FastAPI + MySQL using your cookie session.'

A table lists the vulnerabilities:

ID	PACKAGE NAME	SEVERITY	ACTIONS
3	java 2.3	Medium	<button>Update</button> <button>Delete</button>

Below the table, a network inspector is open, showing a list of requests. The selected request is a GET request to `/token=7OVzpVtUff` with a status of 200. The response is a JSON object: `{ id: 3, package_name: 'java 2.3', severity: 'Medium' }`.

You are free to name your API endpoints appropriately.

The session token issued at login must be stored server-side in the sessions table and referenced only by an opaque token in the browser's HTTP-only cookie - the cookie itself should never store user data directly.


The screenshot shows a web browser at the URL `http://localhost:5173/login`. The page title is "Open Source Package Vulnerability Manager". It features a navigation bar with links for "Home", "Add Vulnerability Record", and "Logout". The main content area is a login form with the heading "Login" and a subheading "Log in to view and manage vulnerability records". The form includes input fields for "Email" and "Password", and a "Login" button.


Below the login form, the browser's developer tools are open, showing the Network tab. The table below represents the data visible in the Network tab:

Status	Meth...	Domain	File	Initiator	Type	Transferred	Size	Headers	Cookies	Request	Response	Timings
200	GET	localhost:5173	login	document	html	816 B	565 B	Filter Headers				
200	GET	localhost:5173	client	script	js	137.97 kB	137.7...					
200	GET	localhost:5173	main.js	script	js	3.09 kB	2.85 kB					
200	GET	localhost:5173	@react-refresh	script	js	117.79 kB	117.5...					
200	GET	localhost:5173	react_jsx-dev-runtime.js?v=0c4335a2	script	js	37.29 kB	37.04 ...					
200	GET	localhost:5173	react.js?v=0c4335a2	script	js	473 B	219 B					
200	GET	localhost:5173	react-dom_client.js?v=0c4335a2	script	js	1.37 kB	1.12 kB					
200	GET	localhost:5173	react-router-dom.js?v=0c4335a2	script	js	210.25 kB	209.9...					
200	GET	localhost:5173	app.js	script	js	19.80 kB	19.56 ...					
200	GET	localhost:5173	styles.css	script	js	7.78 kB	7.55 kB					
200	GET	localhost:5173	env.mjs	script	js	4.26 kB	4.02 kB					
200	GET	localhost:5173	chunk-DRWLMNS3.js?v=0c4335a2	script	js	78.08 kB	77.82 ...					
200	GET	localhost:5173	chunk-G3PMV62Z.js?v=0c4335a2	script	js	1.80 kB	1.54 kB					
200	GET	localhost:5173	chunk-PJEEZAML.js?v=0c4335a2	script	js	928.36 kB	928.1...					
200	GET	localhost:5173	Navbar.js	script	js	10.33 kB	10.09 ...					
200	GET	localhost:5173	Home.js	script	js	18.95 kB	18.71 ...					
200	GET	localhost:5173	CreateRecord.js	script	js	10.28 kB	10.04 ...					
200	GET	localhost:5173	UpdateRecord.js	script	js	12.55 kB	12.31 ...					
200	GET	localhost:5173	DeleteRecord.js	script	js	10.12 kB	9.88 kB					
200	GET	localhost:5173	Login.js	script	js	12.18 kB	11.94 ...					
200	GET	localhost:5173	vulApi.js	script	js	6.07 kB	5.83 kB					
101	GET	localhost:5173	/token=7OVzptVvUfft	client:536 (webs...	plain	163 B	0 B					
200	GET	localhost:5173	axios.js?v=0c4335a2	script	js	85.73 kB	85.48 ...					
200	GET	localhost:8032	me	axios.js:1728 (xhr)	json	261 B	30 B					
200	GET	localhost:8032	me	axios.js:1728 (xhr)	json	261 B	30 B					
200	GET	localhost:8032	vuls	axios.js:1728 (xhr)	json	287 B	56 B					

The right-hand pane of the developer tools shows the details of the selected request (GET http://localhost:5173/login). It displays the status (200 OK), version (HTTP/1.1), transferred size (816 B), request priority (Highest), and DNS resolution (System). The response headers are listed below, including Cache-Control, Connection, Content-Length, Content-Type, Date, Etag, Keep-Alive, and Vary. The request headers are also shown, including Accept, Accept-Encoding, Accept-Language, Cache-Control, Connection, Cookie, Host, Pragma, Priority, Sec-Fetch-Dest, Sec-Fetch-Mode, Sec-Fetch-Site, and Sec-Fetch-User.

Additionally submit Postman API response screenshots for each operation. Also submit a screenshot of your database and your project folder structure

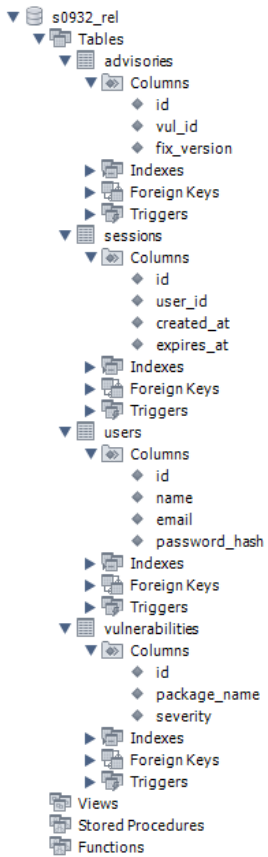

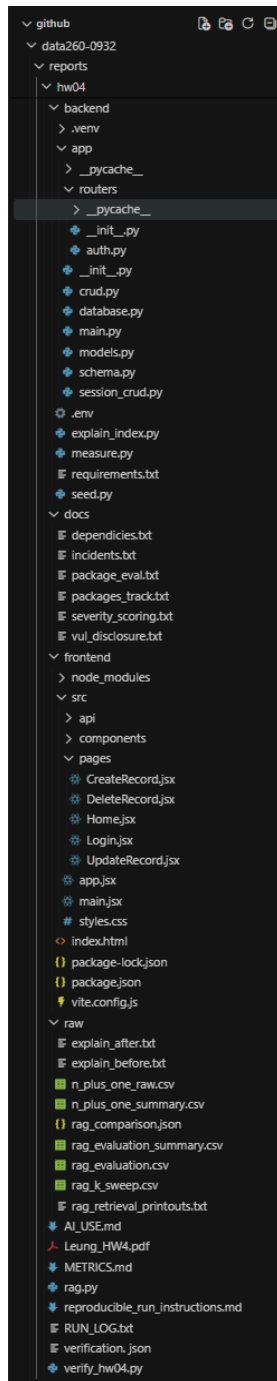

Part 3 - N+1 Measurement and Query Tuning

1 Seed 5,000 rows of your primary domain entity and 200 related rows, using your SEED value. This related table is just test data for now - you'll build a proper related entity with full CRUD in later homework. Commit your generator script and the schema/migration you used to create these rows.

```

data260-0932 > reports > hw04 > backend > seed.py > ...
1  import random
2  from sqlalchemy import text
3  from app.database import SessionLocal, engine, Base
4  from app import models
5
6  random.seed(932)
7
8
9  Base.metadata.drop_all(bind=engine)
10 Base.metadata.create_all(bind=engine)
11 db = SessionLocal()
12
13 db.query(models.Advisory).delete()
14 db.query(models.Vul).delete()
15 # make the ids start at 1 again
16 db.execute(text("ALTER TABLE vulnerabilities AUTO_INCREMENT = 1"))
17 db.execute(text("ALTER TABLE advisories AUTO_INCREMENT = 1"))
18 db.commit()
19
20 names = ["lodash", "express", "axios", "requests", "django", "flask", "numpy", "react", "vue",
21 severities = ["Low", "Medium", "High", "Critical"]
22
23 vulns = []
24 for i in range(5000):
25     vulns.append(models.Vul(
26         package_name=random.choice(names) + "-" + str(i),
27         severity=random.choice(severities),))
28
29 db.add_all(vulns)
30 db.commit()
31
32 ids = [row.id for row in db.query(models.Vul.id).order_by(models.Vul.id).all()]
33
34 advisories = []
35 for i in range(200):
36     fix = str(random.randint(1, 9)) + "." + str(random.randint(0, 9)) + "." + str(random.randint(0, 9))
37     advisories.append(models.Advisory(vul_id=random.choice(ids[:200]), fix_version=fix))
38 db.add_all(advisories)
39 db.commit()
40
41 print("Seeded", len(vulns), "vulnerabilities and", len(advisories), "advisories (SEED = 932)")
42

```

```

PS C:\Users\natal\Documents\masters\fall 26\data 260\github\data260-0932\reports\hw04\backend> python .\seed.py
Seeded 5000 vulnerabilities and 200 advisories (SEED = 932)

```

2 The 200 related rows must be associated with the primary domain entity, and the list endpoint's response must include this related data.

Open Source Package Vulnerability Manager

HomeAdd Vulnerability RecordLogout

Vulnerabilities

Session-based access: these open source vulnerabilities are fetched from FastAPI + MySQL using your cookie session.

+ Add Record

ID	PACKAGE NAME	SEVERITY	ACTIONS
1	vue-0	Low	UpdateDelete
2	vue-1	Critical	UpdateDelete

InspectorConsoleDebuggerNetworkStyle EditorPerformanceMemoryStorageAccessibilityApplication

Filter URLs

HTMLCSSJSXHRFontsImagesMediaWSOtherDisable CacheNo Throttling

Status	Meth...	Domain	File	Initiator	Type	Transferred	Size
200	GET	localhost:5173	client	script	js	137.97 kB	137.7...
200	GET	localhost:5173	main.jsx	script	js	3.09 kB	2.85 kB
200	GET	localhost:5173	@react-refresh	script	js	117.79 kB	117.5...
200	GET	localhost:5173	react_jsx-dev-runtime.js?v=0c4335a2	script	js	37.29 kB	37.04 ...
200	GET	localhost:5173	react.js?v=0c4335a2	script	js	473 B	219 B
200	GET	localhost:5173	react-dom_client.js?v=0c4335a2	script	js	1.37 kB	1.12 kB
200	GET	localhost:5173	react-router-dom.js?v=0c4335a2	script	js	210.25 kB	209.9...
200	GET	localhost:5173	app.jsx	script	js	19.80 kB	19.56 ...
200	GET	localhost:5173	styles.css	script	js	7.78 kB	7.55 kB
200	GET	localhost:5173	env.mjs	script	js	4.26 kB	4.02 kB
200	GET	localhost:5173	chunk-PJEEZAML.js?v=0c4335a2	script	js	928.36 kB	928.1...
200	GET	localhost:5173	chunk-DRWLMN53.js?v=0c4335a2	script	js	78.08 kB	77.82 ...
200	GET	localhost:5173	chunk-G3PMV62Z.js?v=0c4335a2	script	js	1.80 kB	1.54 kB
200	GET	localhost:5173	Navbar.jsx	script	js	10.33 kB	10.09 ...
200	GET	localhost:5173	Home.jsx	script	js	18.95 kB	18.71 ...
200	GET	localhost:5173	CreateRecord.jsx	script	js	10.28 kB	10.04 ...
200	GET	localhost:5173	UpdateRecord.jsx	script	js	12.55 kB	12.31 ...
200	GET	localhost:5173	DeleteRecord.jsx	script	js	10.12 kB	9.88 kB
200	GET	localhost:5173	Login.jsx	script	js	12.18 kB	11.94 ...
200	GET	localhost:5173	vulApi.js	script	js	6.07 kB	5.83 kB
101	GET	localhost:5173	?token=58zq8RgPaWA-	client536 (webs...	plain	163 B	0 B
200	GET	localhost:5173	axios.js?v=0c4335a2	script	js	85.73 kB	85.48 ...
200	GET	localhost:8032	me	axios.js:1728 (xhr)	json	261 B	30 B
200	GET	localhost:8032	me	axios.js:1728 (xhr)	json	261 B	30 B
404	GET	localhost:5173	favicon.ico		img	143 B	0 B
200	GET	localhost:8032	vuls	axios.js:1728 (xhr)	json	297.29 kB	297.0...

27 requests2.01 MB / 2.01 MB transferredFinish: 4.35 sDOMContentLoaded: 2.05 sInit: 2.28 s

Filter propertiesJSONRaw

[{"id": 4970, "package_name": "vue-4970", "severity": "Medium"}, {"id": 4971, "package_name": "requests-4971", "severity": "Low"}, {"id": 4972, "package_name": "numpy-4972", "severity": "High"}, {"id": 4973, "package_name": "react-4973", "severity": "Medium"}, {"id": 4974, "package_name": "flask-4974", "severity": "High"}, {"id": 4975, "package_name": "axios-4975", "severity": "Medium"}, {"id": 4976, "package_name": "jquery-4976", "severity": "High"}, {"id": 4977, "package_name": "vue-4977", "severity": "Critical"}, {"id": 4978, "package_name": "axios-4978", "severity": "Critical"}, {"id": 4979, "package_name": "flask-4979", "severity": "Critical"}, {"id": 4980, "package_name": "vue-4980", "severity": "Critical"}, {"id": 4981, "package_name": "django-4981", "severity": "Low"}, {"id": 4982, "package_name": "flask-4982", "severity": "High"}, {"id": 4983, "package_name": "jquery-4983", "severity": "Medium"}, {"id": 4984, "package_name": "axios-4984", "severity": "Critical"}, {"id": 4985, "package_name": "lodash-4985", "severity": "High"}, {"id": 4986, "package_name": "lodash-4986", "severity": "Low"}, {"id": 4987, "package_name": "react-4987", "severity": "Low"}, {"id": 4988, "package_name": "numpy-4988", "severity": "Medium"}, {"id": 4989, "package_name": "react-4989", "severity": "Medium"}, {"id": 4990, "package_name": "requests-4990", "severity": "Critical"}, {"id": 4991, "package_name": "axios-4991", "severity": "High"}, {"id": 4992, "package_name": "vue-4992", "severity": "Critical"}, {"id": 4993, "package_name": "flask-4993", "severity": "Critical"}, {"id": 4994, "package_name": "react-4994", "severity": "Low"}, {"id": 4995, "package_name": "requests-4995", "severity": "Low"}, {"id": 4996, "package_name": "flask-4996", "severity": "Medium"}, {"id": 4997, "package_name": "vue-4997", "severity": "Low"}, {"id": 4998, "package_name": "requests-4998", "severity": "Medium"}]

PS C:\Users\natal\Documents\masters\fall 26\data 260\github\data260-0932\reports\hw04\backend> python .\seed.py
Seeded 5000 vulnerabilities and 200 advisories (SEED = 932)

3 Build a list endpoint that runs one extra query per record to fetch its related data (this is the classic "N+1" problem - intentionally naive for now).

```
@app.get("/vuls/naive", response_model=list[Schema.VulAdvi])
def list_naive(response: Response, limit: int = 10, db: Session = Depends(get_db), _session = Depends(require_session)):
    query_count["n"] = 0
    vulns = db.query(models.Vul).order_by(models.Vul.id).limit(limit).all()
    result = []
    for v in vulns:
        # the extra query, run once per record
        advs = db.query(models.Advisory).filter(models.Advisory.vul_id == v.id).all()
        result.append({"id": v.id, "package_name": v.package_name, "severity": v.severity, "advisories": advs})
    response.headers["X-SQL-Count"] = str(query_count["n"])
    return result
```

Response Headers

- Permissions-Policy: join-ad-interest-group=(), run-ad-auction=(), browsing-topics=(), private-state-token-issuance=(), private-state-token-redemption=()
- content-length: 879
- content-type: application/json
- date: Mon, 28 Sep 2026 17:38:54 GMT
- server: uvicorn
- x-sql-count: 11

Request Headers

- Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
- Accept-Encoding: gzip, deflate, br, zstd
- Accept-Language: en-US,en;q=0.9
- Connection: keep-alive
- Host: localhost:8032
- Priority: u=0, i
- Sec-Fetch-Dest: document
- Sec-Fetch-Mode: navigate
- Sec-Fetch-Site: none
- Sec-Fetch-User: ?1
- Sec-GPC: 1
- Upgrade-Insecure-Requests: 1
- User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64; rv:156.0) Gecko/20100101 Firefox/156.0

4 Test this endpoint at page sizes 10, 50, and 200. For each size, run 30 requests and record how many SQL queries each request triggers, plus the p50/p95/p99 latency.

```
print(time.strftime("%Y-%m-%d %H:%M:%S"), "start measuring")
for size in SIZES:
    for version in ["naive", "fixed"]:
        times = []
        counts = []
        for n in range(1, 31):
            start = time.perf_counter()
            r = s.get(BASE + "/vuls/" + version, params={"limit": size})
            ms = (time.perf_counter() - start) * 1000
            sql_count = int(r.headers["X-SQL-Count"])
            times.append(ms)
            counts.append(sql_count)
            raw_rows.append([size, version, n, r.status_code, sql_count, round(ms, 2)])

p50, p95, p99 = percentile(times, 50), percentile(times, 95), percentile(times, 99)
summary_rows.append([size, version, round(p50, 2), round(p95, 2), round(p99, 2), counts[0]])
print(time.strftime("%Y-%m-%d %H:%M:%S"), "size", size, version, "p50", round(p50, 2), "p95", round(p95, 2), "p99", round(p99, 2), "stmts/req", counts[0])
```

```
PS C:\Users\natal\Documents\masters\fall 26\data 260\github\data260-0932\reports\hw04\backend> python .\measure.py
2026-09-28 10:20:05 start measuring
2026-09-28 10:20:05 size 10 naive p50 5.85 p95 6.5 p99 7.07 stmts/req 11
2026-09-28 10:20:05 size 10 fixed p50 3.06 p95 3.64 p99 4.96 stmts/req 1
2026-09-28 10:20:06 size 50 naive p50 17.3 p95 18.33 p99 18.54 stmts/req 51
2026-09-28 10:20:06 size 50 fixed p50 3.86 p95 4.64 p99 22.06 stmts/req 1
2026-09-28 10:20:08 size 200 naive p50 60.85 p95 66.89 p99 77.59 stmts/req 201
2026-09-28 10:20:08 size 200 fixed p50 6.06 p95 23.67 p99 25.55 stmts/req 1
2026-09-28 10:20:08 done, saved 180 requests to .. /raw/
```

5 Now fix the N+1 issue using a join or eager loading, and re-run the same Measurements.

```

print(time.strftime("%Y-%m-%d %H:%M:%S"), "start measuring")
for size in SIZES:
    for version in ["naive", "fixed"]:
        times = []
        counts = []
        for n in range(1, 31):
            start = time.perf_counter()
            r = s.get(BASE + "/vuls/" + version, params={"limit": size})
            ms = (time.perf_counter() - start) * 1000
            sql_count = int(r.headers["X-SQL-Count"])
            times.append(ms)
            counts.append(sql_count)
            raw_rows.append([size, version, n, r.status_code, sql_count, round(ms, 2)])

p50, p95, p99 = percentile(times, 50), percentile(times, 95), percentile(times, 99)
summary_rows.append([size, version, round(p50, 2), round(p95, 2), round(p99, 2), counts[0]
print(time.strftime("%Y-%m-%d %H:%M:%S"), "size", size, version, "p50", round(p50, 2), "p95", round(p95, 2), "p99", round(p99, 2), "stmts/req", counts[0])

```

```

@app.get("/vuls/fixed", response_model=list[schema.VulAdvi])
def list_fixed(response: Response, limit: int = 10, db: Session = Depends(get_db), _session = Depends(require_session)):
    query_count["n"]=0
    vulns = (db.query(models.Vul)
              .options(joinedload(models.Vul.advisories))
              .order_by(models.Vul.id).limit(limit).all())
    result = []
    for v in vulns:
        result.append({"id": v.id, "package_name": v.package_name, "severity": v.severity, "advisories": v.advisories})
    response.headers["X-SQL-Count"] = str(query_count["n"])
    return result

```

```

PS C:\Users\natal\Documents\masters\fall 26\data 260\github\data260-0932\reports\hw04\backend> python .\measure.py
2026-09-28 10:20:05 start measuring
2026-09-28 10:20:05 size 10 naive p50 5.85 p95 6.5 p99 7.07 stmts/req 11
2026-09-28 10:20:05 size 10 fixed p50 3.06 p95 3.64 p99 4.96 stmts/req 1
2026-09-28 10:20:06 size 50 naive p50 17.3 p95 18.33 p99 18.54 stmts/req 51
2026-09-28 10:20:06 size 50 fixed p50 3.86 p95 4.64 p99 22.06 stmts/req 1
2026-09-28 10:20:08 size 200 naive p50 60.85 p95 66.89 p99 77.59 stmts/req 201
2026-09-28 10:20:08 size 200 fixed p50 6.06 p95 23.67 p99 25.55 stmts/req 1
2026-09-28 10:20:08 done, saved 180 requests to ../raw/

```

6 Save the raw data for all 180 requests (3 page sizes × 2 versions × 30 requests) in reports/hw04/raw/, so your results can be double-checked.

```

print(time.strftime("%Y-%m-%d %H:%M:%S"), "start measuring")
for size in SIZES:
    for version in ["naive", "fixed"]:
        times = []
        counts = []
        for n in range(1, 31):
            start = time.perf_counter()
            r = s.get(BASE + "/vuls/" + version, params={"limit": size})
            ms = (time.perf_counter() - start) * 1000
            sql_count = int(r.headers["X-SQL-Count"])
            times.append(ms)
            counts.append(sql_count)
            raw_rows.append([size, version, n, r.status_code, sql_count, round(ms, 2)])

p50, p95, p99 = percentile(times, 50), percentile(times, 95), percentile(times, 99)
summary_rows.append([size, version, round(p50, 2), round(p95, 2), round(p99, 2), counts[0]
print(time.strftime("%Y-%m-%d %H:%M:%S"), "size", size, version, "p50", round(p50, 2), "p95", round(p95, 2), "p99", round(p99, 2), "stmts/req", counts[0])

```

```

with open("../raw/n_plus_one_raw.csv", "w", newline="") as f:
    w = csv.writer(f)
    w.writerow(["page_size", "version", "request_no", "status", "sql_statements", "latency_ms"])
    w.writerows(raw_rows)

```

```
data260-0932 > reports > hw04 > raw > n_plus_one_raw.csv > data
1 page_size,version,request_no,status,sql_statements,latency_ms
2 10,naive,1,200,11,7.07
3 10,naive,2,200,11,6.47
4 10,naive,3,200,11,6.02
5 10,naive,4,200,11,6.18
6 10,naive,5,200,11,6.1
7 10,naive,6,200,11,5.49
8 10,naive,7,200,11,6.16
9 10,naive,8,200,11,5.85
10 10,naive,9,200,11,5.71
11 10,naive,10,200,11,6.02
12 10,naive,11,200,11,5.88
13 10,naive,12,200,11,5.65
14 10,naive,13,200,11,5.7
15 10,naive,14,200,11,6.5
16 10,naive,15,200,11,6.3
17 10,naive,16,200,11,5.38
18 10,naive,17,200,11,5.64
19 10,naive,18,200,11,5.73
```

7 Report how much faster the fixed version is at each page size, and explain why the speed-up changes as the page size grows.

```
print(time.strftime("%Y-%m-%d %H:%M:%S"), "start measuring")
for size in SIZES:
    for version in ["naive", "fixed"]:
        times = []
        counts = []
        for n in range(1, 31):
            start = time.perf_counter()
            r = s.get(BASE + "/vuls/" + version, params={"limit": size})
            ms = (time.perf_counter() - start) * 1000
            sql_count = int(r.headers["X-SQL-Count"])
            times.append(ms)
            counts.append(sql_count)
            raw_rows.append([size, version, n, r.status_code, sql_count, round(ms, 2)])

p50, p95, p99 = percentile(times, 50), percentile(times, 95), percentile(times, 99)
summary_rows.append([size, version, round(p50, 2), round(p95, 2), round(p99, 2), counts[0]])
print(time.strftime("%Y-%m-%d %H:%M:%S"), "size", size, version, "p50", round(p50, 2), "p95", round(p95, 2), "p99", round(p99, 2), "stmts/req", counts[0])

with open("../raw/n_plus_one_summary.csv", "w", newline="") as f:
    w = csv.writer(f)
    w.writerow(["page_size", "version", "p50_ms", "p95_ms", "p99_ms", "stmts_per_req"])
    w.writerows(summary_rows)
```

```
data260-0932 > reports > hw04 > raw > n_plus_one_summary.csv > data
1 page_size,version,p50_ms,p95_ms,p99_ms,stmts_per_req
2 10,naive,5.85,6.5,7.07,11
3 10,fixed,3.06,3.64,4.96,1
4 50,naive,17.3,18.33,18.54,51
5 50,fixed,3.86,4.64,22.06,1
6 200,naive,60.85,66.89,77.59,201
7 200,fixed,6.06,23.67,25.55,1
8
```

The speed up changes as the page size grows because the naive adds one query per record. One query is done to fetch the vulnerabilities and another to fetch the advisors for one page record. The fix only does one query in total to get both results. Therefore, the speed up changes when the page size increases.

8 Add one index to your database, and show the EXPLAIN output before and after adding it - explain what changed.

Adding the index changed how MySQL found the matching rows. It scanned the whole table before and then filtered to the specific vul_id value. Now, it uses a ref query type to find the specific index and match the rows. This is more efficient because only one row was checked.

```

data260-0932 > reports > hw04 > backend > explain_index.py > ...
1 from sqlalchemy import text
2 from app.database import engine
3
4 query = "EXPLAIN SELECT * FROM advisories WHERE vul_id = 42"
5 index_name = "idx_advisories_vul_id"
6
7 def run_explain(conn):
8     result = conn.execute(text(query))
9     lines = [" | ".join(result.keys())]
10    for row in result.fetchall():
11        lines.append(" | ".join(str(x) for x in row))
12    return "\n".join(lines)
13
14 with engine.connect() as conn:
15     try:
16         conn.execute(text("DROP INDEX " + index_name + " ON advisories"))
17         conn.commit()
18     except Exception:
19         conn.rollback()
20
21     before = run_explain(conn)
22
23     # add the one index
24     conn.execute(text("CREATE INDEX " + index_name + " ON advisories (vul_id)"))
25     conn.commit()
26
27     after = run_explain(conn)
28
29 print(query)
30 print(" --- BEFORE (no index) --- ")
31 print(before)
32 print(" --- AFTER (index added) --- ")
33 print(after)
34
35 with open("../raw/explain_before.txt", "w") as f:
36     f.write(query + "\n" + before + "\n")
37 with open("../raw/explain_after.txt", "w") as f:
38     f.write(query + "\n" + after + "\n")

```

```

PS C:\Users\natal\Documents\masters\fall_26\data_260\github\data260-0932\reports\hw04\backend> python .\explain_index.py
EXPLAIN SELECT * FROM advisories WHERE vul_id = 42
--- BEFORE (no index) ---
id | select_type | table | partitions | type | possible_keys | key | key_len | ref | rows | filtered | Extra
1 | SIMPLE | advisories | None | ALL | None | None | None | None | 200 | 10.0 | Using where
--- AFTER (index added) ---
id | select_type | table | partitions | type | possible_keys | key | key_len | ref | rows | filtered | Extra
1 | SIMPLE | advisories | None | ref | idx_advisories_vul_id | idx_advisories_vul_id | 4 | const | 1 | 100.0 | None

```

```

data260-0932 > reports > hw04 > raw > explain_after.txt
1 EXPLAIN SELECT * FROM advisories WHERE vul_id = 42
2 id | select_type | table | partitions | type | possible_keys | key | key_len | ref | rows | filtered | Extra
3 1 | SIMPLE | advisories | None | ref | idx_advisories_vul_id | idx_advisories_vul_id | 4 | const | 1 | 100.0 | None
4

```

```

data260-0932 > reports > hw04 > raw > explain_before.txt
1 EXPLAIN SELECT * FROM advisories WHERE vul_id = 42
2 id | select_type | table | partitions | type | possible_keys | key | key_len | ref | rows | filtered | Extra
3 1 | SIMPLE | advisories | None | ALL | None | None | None | None | 200 | 10.0 | Using where
4

```

9 Include Postman screenshots showing both versions of the endpoint working correctly at each page size.

Naive size 10

HomeWorkspacesExplore

Search Postman

Sign InCreate Account

You are using the Lightweight API Client, sign in or create an account to work with collections, environments and unlock all free features in Postman.

HistoryNewImport

POSThttp://localhost:8032/vul

GEThttp://localhost:8032/vul

POSThttp://localhost:8032/vul

POSThttp://localhost:8032/vul

GEThttp://localhost:8032/vul

+

...

Today

GEThttp://localhost:8032/vuls/naive?limit=10

GEThttp://localhost:8032/vulnerabilities/naive?limit=10

GEThttp://localhost:8032/vulnerabilities/naive?limit=10

POSTGEThttp://localhost:8032/vulnerabilities/naive?limit=10

POSThttp://localhost:8032/auth/login

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8032/auth/login

POSThttp://localhost:8032/auth/login

GEThttp://localhost:8032/vulnerabilities/naive?limit=10

DELGEThttp://localhost:8032/vulnerabilities/naive?limit=10

DELhttp://localhost:8032/vuls/2

PUThttp://localhost:8032/vuls/2

GEThttp://localhost:8032/vuls/3

GEThttp://localhost:8032/vuls

POSThttp://localhost:8032/vuls

POSThttp://localhost:8032/vuls

POSThttp://localhost:8032/auth/login

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8032/vuls

POSThttp://localhost:8032/auth/records

POSThttp://localhost:8032/auth/records

POSThttp://localhost:8032/auth/login

POSThttp://localhost:8032/auth/login

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8032/auth/register

POSThttp://localhost:8000/auth/register

Yesterday

POSThttp://localhost:8000/auth/register

POSThttp://localhost:8000/auth/register

POSThttp://localhost:8000/auth/register

Create collections in Postman

Use collections to save your requests and share them with others.

Create a Collection

http://localhost:8032/auth/login

GET

http://localhost:8032/vuls/naive?limit=10

Send

Save

ParamsAuthorizationHeaders(9)BodyPre-request ScriptTestsSettingsCookies


Query Params

Key	Value	Bulk Edit
limit	10	
Key	Value	


BodyCookies(1)Headers(5)Test ResultsStatus: 200 OKTime: 23 msSize: 1022 BSave Response


PrettyRawPreviewVisualizeJSON


```
42      {
43        "id": 141,
44        "fix_version": "2.3.6"
45      }
46    ],
47  },
48  {
49    "id": 7,
50    "package_name": "requests-6",
51    "severity": "High",
52    "advisories": [
53      {
54        "id": 116,
55        "fix_version": "2.1.3"
56      },
57      {
58        "id": 177,
59        "fix_version": "2.8.3"
60      }
61    ]
62  },
63  {
64    "id": 8,
65    "package_name": "requests-7",
66    "severity": "High",
67    "advisories": []
68  },
69  {
70    "id": 9,
71    "package_name": "requests-8",
72    "severity": "Low",
73    "advisories": [
74      {
75        "id": 12,
76        "fix_version": "3.1.1"
77      }
78    ]
79  },
80  {
81    "id": 10,
82    "package_name": "numpy-9",
83    "severity": "High",
84    "advisories": [
85      {
86        "id": 4,
87        "fix_version": "1.3.3"
88      }
89    ]
90  }
91    ]
92  },
93  {
94    "id": 1,
95    "package_name": "requests-1",
96    "severity": "High",
97    "advisories": [
98      {
99        "id": 1,
100        "fix_version": "2.2.8"
101      }
102    ]
103  },
104  {
105    "id": 2,
106    "package_name": "requests-2",
107    "severity": "High",
108    "advisories": [
109      {
110        "id": 2,
111        "fix_version": "2.2.8"
112      }
113    ]
114  },
115  {
116    "id": 3,
117    "package_name": "requests-3",
118    "severity": "High",
119    "advisories": [
120      {
121        "id": 3,
122        "fix_version": "2.2.8"
123      }
124    ]
125  },
126  {
127    "id": 4,
128    "package_name": "requests-4",
129    "severity": "High",
130    "advisories": [
131      {
132        "id": 4,
133        "fix_version": "2.2.8"
134      }
135    ]
136  },
137  {
138    "id": 5,
139    "package_name": "requests-5",
140    "severity": "High",
141    "advisories": [
142      {
143        "id": 5,
144        "fix_version": "2.2.8"
145      }
146    ]
147  },
148  {
149    "id": 6,
150    "package_name": "requests-6",
151    "severity": "High",
152    "advisories": [
153      {
154        "id": 6,
155        "fix_version": "2.2.8"
156      }
157    ]
158  },
159  {
160    "id": 7,
161    "package_name": "requests-7",
162    "severity": "High",
163    "advisories": [
164      {
165        "id": 7,
166        "fix_version": "2.2.8"
167      }
168    ]
169  },
170  {
171    "id": 8,
172    "package_name": "requests-8",
173    "severity": "High",
174    "advisories": [
175      {
176        "id": 8,
177        "fix_version": "2.2.8"
178      }
179    ]
180  },
181  {
182    "id": 9,
183    "package_name": "requests-9",
184    "severity": "High",
185    "advisories": [
186      {
187        "id": 9,
188        "fix_version": "2.2.8"
189      }
190    ]
191  },
192  {
193    "id": 10,
194    "package_name": "requests-10",
195    "severity": "High",
196    "advisories": [
197      {
198        "id": 10,
199        "fix_version": "2.2.8"
200      }
201    ]
202  },
203  {
204    "id": 11,
205    "package_name": "requests-11",
206    "severity": "High",
207    "advisories": [
208      {
209        "id": 11,
210        "fix_version": "2.2.8"
211      }
212    ]
213  },
214  {
215    "id": 12,
216    "package_name": "requests-12",
217    "severity": "High",
218    "advisories": [
219      {
220        "id": 12,
221        "fix_version": "2.2.8"
222      }
223    ]
224  },
225  {
226    "id": 13,
227    "package_name": "requests-13",
228    "severity": "High",
229    "advisories": [
230      {
231        "id": 13,
232        "fix_version": "2.2.8"
233      }
234    ]
235  },
236  {
237    "id": 14,
238    "package_name": "requests-14",
239    "severity": "High",
240    "advisories": [
241      {
242        "id": 14,
243        "fix_version": "2.2.8"
244      }
245    ]
246  },
247  {
248    "id": 15,
249    "package_name": "requests-15",
250    "severity": "High",
251    "advisories": [
252      {
253        "id": 15,
254        "fix_version": "2.2.8"
255      }
256    ]
257  },
258  {
259    "id": 16,
260    "package_name": "requests-16",
261    "severity": "High",
262    "advisories": [
263      {
264        "id": 16,
265        "fix_version": "2.2.8"
266      }
267    ]
268  },
269  {
270    "id": 17,
271    "package_name": "requests-17",
272    "severity": "High",
273    "advisories": [
274      {
275        "id": 17,
276        "fix_version": "2.2.8"
277      }
278    ]
279  },
280  {
281    "id": 18,
282    "package_name": "requests-18",
283    "severity": "High",
284    "advisories": [
285      {
286        "id": 18,
287        "fix_version": "2.2.8"
288      }
289    ]
290  },
291  {
292    "id": 19,
293    "package_name": "requests-19",
294    "severity": "High",
295    "advisories": [
296      {
297        "id": 19,
298        "fix_version": "2.2.8"
299      }
300    ]
301  },
302  {
303    "id": 20,
304    "package_name": "requests-20",
305    "severity": "High",
306    "advisories": [
307      {
308        "id": 20,
309        "fix_version": "2.2.8"
310      }
311    ]
312  },
313  {
314    "id": 21,
315    "package_name": "requests-21",
316    "severity": "High",
317    "advisories": [
318      {
319        "id": 21,
320        "fix_version": "2.2.8"
321      }
322    ]
323  },
324  {
325    "id": 22,
326    "package_name": "requests-22",
327    "severity": "High",
328    "advisories": [
329      {
330        "id": 22,
331        "fix_version": "2.2.8"
332      }
333    ]
334  },
335  {
336    "id": 23,
337    "package_name": "requests-23",
338    "severity": "High",
339    "advisories": [
340      {
341        "id": 23,
342        "fix_version": "2.2.8"
343      }
344    ]
345  },
346  {
347    "id": 24,
348    "package_name": "requests-24",
349    "severity": "High",
350    "advisories": [
351      {
352        "id": 24,
353        "fix_version": "2.2.8"
354      }
355    ]
356  },
357  {
358    "id": 25,
359    "package_name": "requests-25",
360    "severity": "High",
361    "advisories": [
362      {
363        "id": 25,
364        "fix_version": "2.2.8"
365      }
366    ]
367  },
368  {
369    "id": 26,
370    "package_name": "requests-26",
371    "severity": "High",
372    "advisories": [
373      {
374        "id": 26,
375        "fix_version": "2.2.8"
376      }
377    ]
378  },
379  {
380    "id": 27,
381    "package_name": "requests-27",
382    "severity": "High",
383    "advisories": [
384      {
385        "id": 27,
386        "fix_version": "2.2.8"
387      }
388    ]
389  },
390  {
391    "id": 28,
392    "package_name": "requests-28",
393    "severity": "High",
394    "advisories": [
395      {
396        "id": 28,
397        "fix_version": "2.2.8"
398      }
399    ]
400  },
401  {
402    "id": 29,
403    "package_name": "requests-29",
404    "severity": "High",
405    "advisories": [
406      {
407        "id": 29,
408        "fix_version": "2.2.8"
409      }
410    ]
411  },
412  {
413    "id": 30,
414    "package_name": "requests-30",
415    "severity": "High",
416    "advisories": [
417      {
418        "id": 30,
419        "fix_version": "2.2.8"
420      }
421    ]
422  },
423  {
424    "id": 31,
425    "package_name": "requests-31",
426    "severity": "High",
427    "advisories": [
428      {
429        "id": 31,
430        "fix_version": "2.2.8"
431      }
432    ]
433  },
434  {
435    "id": 32,
436    "package_name": "requests-32",
437    "severity": "High",
438    "advisories": [
439      {
440        "id": 32,
441        "fix_version": "2.2.8"
442      }
443    ]
444  },
445  {
446    "id": 33,
447    "package_name": "requests-33",
448    "severity": "High",
449    "advisories": [
450      {
451        "id": 33,
452        "fix_version": "2.2.8"
453      }
454    ]
455  },
456  {
457    "id": 34,
458    "package_name": "requests-34",
459    "severity": "High",
460    "advisories": [
461      {
462        "id": 34,
463        "fix_version": "2.2.8"
464      }
465    ]
466  },
467  {
468    "id": 35,
469    "package_name": "requests-35",
470    "severity": "High",
471    "advisories": [
472      {
473        "id": 35,
474        "fix_version": "2.2.8"
475      }
476    ]
477  },
478  {
479    "id": 36,
480    "package_name": "requests-36",
481    "severity": "High",
482    "advisories": [
483      {
484        "id": 36,
485        "fix_version": "2.2.8"
486      }
487    ]
488  },
489  {
490    "id": 37,
491    "package_name": "requests-37",
492    "severity": "High",
493    "advisories": [
494      {
495        "id": 37,
496        "fix_version": "2.2.8"
497      }
498    ]
499  },
500  {
501    "id": 38,
502    "package_name": "requests-38",
503    "severity": "High",
504    "advisories": [
505      {
506        "id": 38,
507        "fix_version": "2.2.8"
508      }
509    ]
510  },
511  {
512    "id": 39,
513    "package_name": "requests-39",
514    "severity": "High",
515    "advisories": [
516      {
517        "id": 39,
518        "fix_version": "2.2.8"
519      }
520    ]
521  },
522  {
523    "id": 40,
524    "package_name": "requests-40",
525    "severity": "High",
526    "advisories": [
527      {
528        "id": 40,
529        "fix_version": "2.2.8"
530      }
531    ]
532  },
533  {
534    "id": 41,
535    "package_name": "requests-41",
536    "severity": "High",
537    "advisories": [
538      {
539        "id": 41,
540        "fix_version": "2.2.8"
541      }
542    ]
543  },
544  {
545    "id": 42,
546    "package_name": "requests-42",
547    "severity": "High",
548    "advisories": [
549      {
550        "id": 42,
551        "fix_version": "2.2.8"
552      }
553    ]
554  },
555  {
556    "id": 43,
557    "package_name": "requests-43",
558    "severity": "High",
559    "advisories": [
560      {
561        "id": 43,
562        "fix_version": "2.2.8"
563      }
564    ]
565  },
566  {
567    "id": 44,
568    "package_name": "requests-44",
569    "severity": "High",
570    "advisories": [
571      {
572        "id": 44,
573        "fix_version": "2.2.8"
574      }
575    ]
576  },
577  {
578    "id": 45,
579    "package_name": "requests-45",
580    "severity": "High",
581    "advisories": [
582      {
583        "id": 45,
584        "fix_version": "2.2.8"
585      }
586    ]
587  },
588  {
589    "id": 46,
590    "package_name": "requests-46",
591    "severity": "High",
592    "advisories": [
593      {
594        "id": 46,
595        "fix_version": "2.2.8"
596      }
597    ]
598  },
599  {
600    "id": 47,
601    "package_name": "requests-47",
602    "severity": "High",
603    "advisories": [
604      {
605        "id": 47,
606        "fix_version": "2.2.8"
607      }
608    ]
609  },
610  {
611    "id": 48,
612    "package_name": "requests-48",
613    "severity": "High",
614    "advisories": [
615      {
616        "id": 48,
617        "fix_version": "2.2.8"
618      }
619    ]
620  },
621  {
622    "id": 49,
623    "package_name": "requests-49",
624    "severity": "High",
625    "advisories": [
626      {
627        "id": 49,
628        "fix_version": "2.2.8"
629      }
630    ]
631  },
632  {
633    "id": 50,
634    "package_name": "requests-50",
635    "severity": "High",
636    "advisories": [
637      {
638        "id": 50,
639        "fix_version": "2.2.8"
640      }
641    ]
642  },
643  {
644    "id": 51,
645    "package_name": "requests-51",
646    "severity": "High",
647    "advisories": [
648      {
649        "id": 51,
650        "fix_version": "2.2.8"
651      }
652    ]
653  },
654  {
655    "id": 52,
656    "package_name": "requests-52",
657    "severity": "High",
658    "advisories": [
659      {
660        "id": 52,
661        "fix_version": "2.2.8"
662      }
663    ]
664  },
665  {
666    "id": 53,
667    "package_name": "requests-53",
668    "severity": "High",
669    "advisories": [
670      {
671        "id": 53,
672        "fix_version": "2.2.8"
673      }
674    ]
675  },
676  {
677    "id": 54,
678    "package_name": "requests-54",
679    "severity": "High",
680    "advisories": [
681      {
682        "id": 54,
683        "fix_version": "2.2.8"
684      }
685    ]
686  },
687  {
688    "id": 55,
689    "package_name": "requests-55",
690    "severity": "High",
691    "advisories": [
692      {
693        "id": 55,
694        "fix_version": "2.2.8"
695      }
696    ]
697  },
698  {
699    "id": 56,
700    "package_name": "requests-56",
701    "severity": "High",
702    "advisories": [
703      {
704        "id": 56,
705        "fix_version": "2.2.8"
706      }
707    ]
708  },
709  {
710    "id": 57,
711    "package_name": "requests-57",
712    "severity": "High",
713    "advisories": [
714      {
715        "id": 57,
716        "fix_version": "2.2.8"
717      }
718    ]
719  },
720  {
721    "id": 58,
722    "package_name": "requests-58",
723    "severity": "High",
724    "advisories": [
725      {
726        "id": 58,
727        "fix_version": "2.2.8"
728      }
729    ]
730  },
731  {
732    "id": 59,
733    "package_name": "requests-59",
734    "severity": "High",
735    "advisories": [
736      {
737        "id": 59,
738        "fix_version": "2.2.8"
739      }
740    ]
741  },
742  {
743    "id": 60,
744    "package_name": "requests-60",
745    "severity": "High",
746    "advisories": [
747      {
748        "id": 60,
749        "fix_version": "2.2.8"
750      }
751    ]
752  },
753  {
754    "id": 61,
755    "package_name": "requests-61",
756    "severity": "High",
757    "advisories": [
758      {
759        "id": 61,
760        "fix_version": "2.2.8"
761      }
762    ]
763  },
764  {
765    "id": 62,
766    "package_name": "requests-62",
767    "severity": "High",
768    "advisories": [
769      {
770        "id": 62,
771        "fix_version": "2.2.8"
772      }
773    ]
774  },
775  {
776    "id": 63,
777    "package_name": "requests-63",
778    "severity": "High",
779    "advisories": [
780      {
781        "id": 63,
782        "fix_version": "2.2.8"
783      }
784    ]
785  },
786  {
787    "id": 64,
788    "package_name": "requests-64",
789    "severity": "High",
790    "advisories": [
791      {
792        "id": 64,
793        "fix_version": "2.2.8"
794      }
795    ]
796  },
797  {
798    "id": 65,
799    "package_name": "requests-65",
800    "severity": "High",
801    "advisories": [
802      {
803        "id": 65,
804        "fix_version": "2.2.8"
805      }
806    ]
807  },
808  {
809    "id": 66,
810    "package_name": "requests-66",
811    "severity": "High",
812    "advisories": [
813      {
814        "id": 66,
815        "fix_version": "2.2.8"
816      }
817    ]
818  },
819  {
820    "id": 67,
821    "package_name": "requests-67",
822    "severity": "High",
823    "advisories": [
824      {
825        "id": 67,
826        "fix_version": "2.2.8"
827      }
828    ]
829  },
830  {
831    "id": 68,
832    "package_name": "requests-68",
833    "severity": "High",
834    "advisories": [
835      {
836        "id": 68,
837        "fix_version": "2.2.8"
838      }
839    ]
840  },
841  {
842    "id": 69,
843    "package_name": "requests-69",
844    "severity": "High",
845    "advisories": [
846      {
847        "id": 69,
848        "fix_version": "2.2.8"
849      }
850    ]
851  },
852  {
853    "id": 70,
854    "package_name": "requests-70",
855    "severity": "High",
856    "advisories": [
857      {
858        "id": 70,
859        "fix_version": "2.2.8"
860      }
861    ]
862  },
863  {
864    "id": 71,
865    "package_name": "requests-71",
866    "severity": "High",
867    "advisories": [
868      {
869        "id": 71,
870        "fix_version": "2.2.8"
871      }
872    ]
873  },
874  {
875    "id": 72,
876    "package_name": "requests-72",
877    "severity": "High",
878    "advisories": [
879      {
880        "id": 72,
881        "fix_version": "2.2.8"
882      }
883    ]
884  },
885  {
886    "id": 73,
887    "package_name": "requests-73",
888    "severity": "High",
889    "advisories": [
890      {
891        "id": 73,
892        "fix_version": "2.2.8"
893      }
894    ]
895  },
896  {
897    "id": 74,
898    "package_name": "requests-74",
899    "severity": "High",
900    "advisories": [
901      {
902        "id": 74,
903        "fix_version": "2.2.8"
904      }
905    ]
906  },
907  {
908    "id": 75,
909    "package_name": "requests-75",
910    "severity": "High",
911    "advisories": [
912      {
913        "id": 75,
914        "fix_version": "2.2.8"
915      }
916    ]
917  },
918  {
919    "id": 76,
920    "package_name": "requests-76",
921    "severity": "High",
922    "advisories": [
923      {
924        "id": 76,
925        "fix_version": "2.2.8"
926      }
927    ]
928  },
929  {
930    "id": 77,
931    "package_name": "requests-77",
932    "severity": "High",
933    "advisories": [
934      {
935        "id": 77,
936        "fix_version": "2.2.8"
937      }
938    ]
939  },
940  {
941    "id": 78,
942    "package_name": "requests-78",
943    "severity": "High",
944    "advisories": [
945      {
946        "id": 78,
947        "fix_version": "2.2.8"
948      }
949    ]
950  },
951  {
952    "id": 79,
953    "package_name": "requests-79",
954    "severity": "High",
955    "advisories": [
956      {
957        "id": 79,
958        "fix_version": "2.2.8"
959      }
960    ]
961  },
962  {
963    "id": 80,
964    "package_name": "requests-80",
965    "severity": "High",
966    "advisories": [
967      {
968        "id": 80,
969        "fix_version": "2.2.8"
970      }
971    ]
972  },
973  {
974    "id": 81,
975    "package_name": "requests-81",
976    "severity": "High",
977    "advisories": [
978      {
979        "id": 81,
980        "fix_version": "2.2.8"
981      }
982    ]
983  },
984  {
985    "id": 82,
986    "package_name": "requests-82",
987    "severity": "High",
988    "advisories": [
989      {
990        "id": 82,
991        "fix_version": "2.2.8"
992      }
993    ]
994  },
995  {
996    "id": 83,
997    "package_name": "requests-83",
1000    "severity": "High",
1001    "advisories": [
1002      {
1003        "id": 83,
1004        "fix_version": "2.2.8"
1005      }
1006    ]
1007  },
1008  {
1009    "id": 84,
1010    "package_name": "requests-84",
1011    "severity": "High",
1012    "advisories": [
1013      {
1014        "id": 84,
1015        "fix_version": "2.2.8"
1016      }
1017    ]
1018  },
1019  {
1020    "id": 85,
1021    "package_name": "requests-85",
1022    "severity": "High",
1023    "advisories": [
1024      {
1025        "id": 85,
1026        "fix_version": "2.2.8"
1027      }
1028    ]
1029  },
1030  {
1031    "id": 86,
1032    "package_name": "requests-86",
1033    "severity": "High",
1034    "advisories": [
1035      {
1036        "id": 86,
1037        "fix_version": "2.2.8"
1038      }
1039    ]
1040  },
1041  {
1042    "id": 87,
1043    "package_name": "requests-87",
1044    "severity": "High",
1045    "advisories": [
1046      {
1047        "id": 87,
1048        "fix_version": "2.2.8"
1049      }
1050    ]
1051  },
1052  {
1053    "id": 88,
1054    "package_name": "requests-88",
1055    "severity": "High",
1056    "advisories": [
1057      {
1058        "id": 88,
1059        "fix_version": "2.2.8"
1060      }
1061    ]
1062  },
1063  {
1064    "id": 89,
1065    "package_name": "requests-89",
1066    "severity": "High",
1067    "advisories": [
1068      {
1069        "id": 89,
1070        "fix_version": "2.2.8"
1071      }
1072    ]
1073  },
1074  {
1075    "id": 90,
1076    "package_name": "requests-90",
1077    "severity": "High",
1078    "advisories": [
1079      {
1080        "id": 90,
1081        "fix_version": "2.2.8"
1082      }
1083    ]
1084  },
1085  {
1086    "id": 91,
1087    "package_name": "requests-91",
1088    "severity": "High",
1089    "advisories": [
1090      {
1091        "id": 91,
1092        "fix_version": "2.2.8"
1093      }
1094    ]
1095  },
1096  {
1097    "id": 92,
1098    "package_name": "requests-92",
1099    "severity": "High",
1100    "advisories": [
1101      {
1102        "id": 92,
1103        "fix_version": "2.2.8"
1104      }
1105    ]
1106  },
1107  {
1108    "id": 93,
1109    "package_name": "requests-93",
1110    "severity": "High",
1111    "advisories": [
1112      {
1113        "id": 93,
1114        "fix_version": "2.2.8"
1115      }
1116    ]
1117  },
1118  {
1119    "id": 94,
1120    "package_name": "requests-94",
1121    "severity": "High",
1122    "advisories": [
1123      {
1124        "id": 94,
1125        "fix_version": "2.2.8"
1126      }
1127    ]
1128  },
1129  {
1130    "id": 95,
1131    "package_name": "requests-95",
1132    "severity": "High",
1133    "advisories": [
1134      {
1135        "id": 95,
1136        "fix_version": "2.2.8"
1137      }
1138    ]
1139  },
1140  {
1141    "id": 96,
1142    "package_name": "requests-96",
1143    "severity": "High",
1144    "advisories": [
1145      {
1146        "id": 96,
1147        "fix_version": "2.2.8"
1148      }
1149    ]
1150  },
1151  {
1152    "id": 97,
1153    "package_name": "requests-97",
1154    "severity": "High",
1155    "advisories": [
1156      {
1157        "id": 97,
1158        "fix_version": "2.2.8"
1159      }
1160    ]
1161  },
1162  {
1163    "id": 98,
1164    "package_name": "requests-98",
1165    "severity": "High",
1166    "advisories": [
1167      {
1168        "id": 98,
1169        "fix_version": "2.2.8"
1170      }
1171    ]
1172  },
1173  {
1174    "id": 99,
1175    "package_name": "requests-99",
1176    "severity": "High",
1177    "advisories": [
1178      {
1179        "id": 99,
1180        "fix_version": "2.2.8"
1181      }
1182    ]
1183  },
1184  {
1185    "id": 100,
1186    "package_name": "requests-100",
1187    "severity": "High",
1188    "advisories": [
1189      {
1190        "id": 100,
1191        "fix_version": "2.2.8"
1192      }
1193    ]
1194  },
1195  {
1196    "id": 101,
1197    "package_name":
```









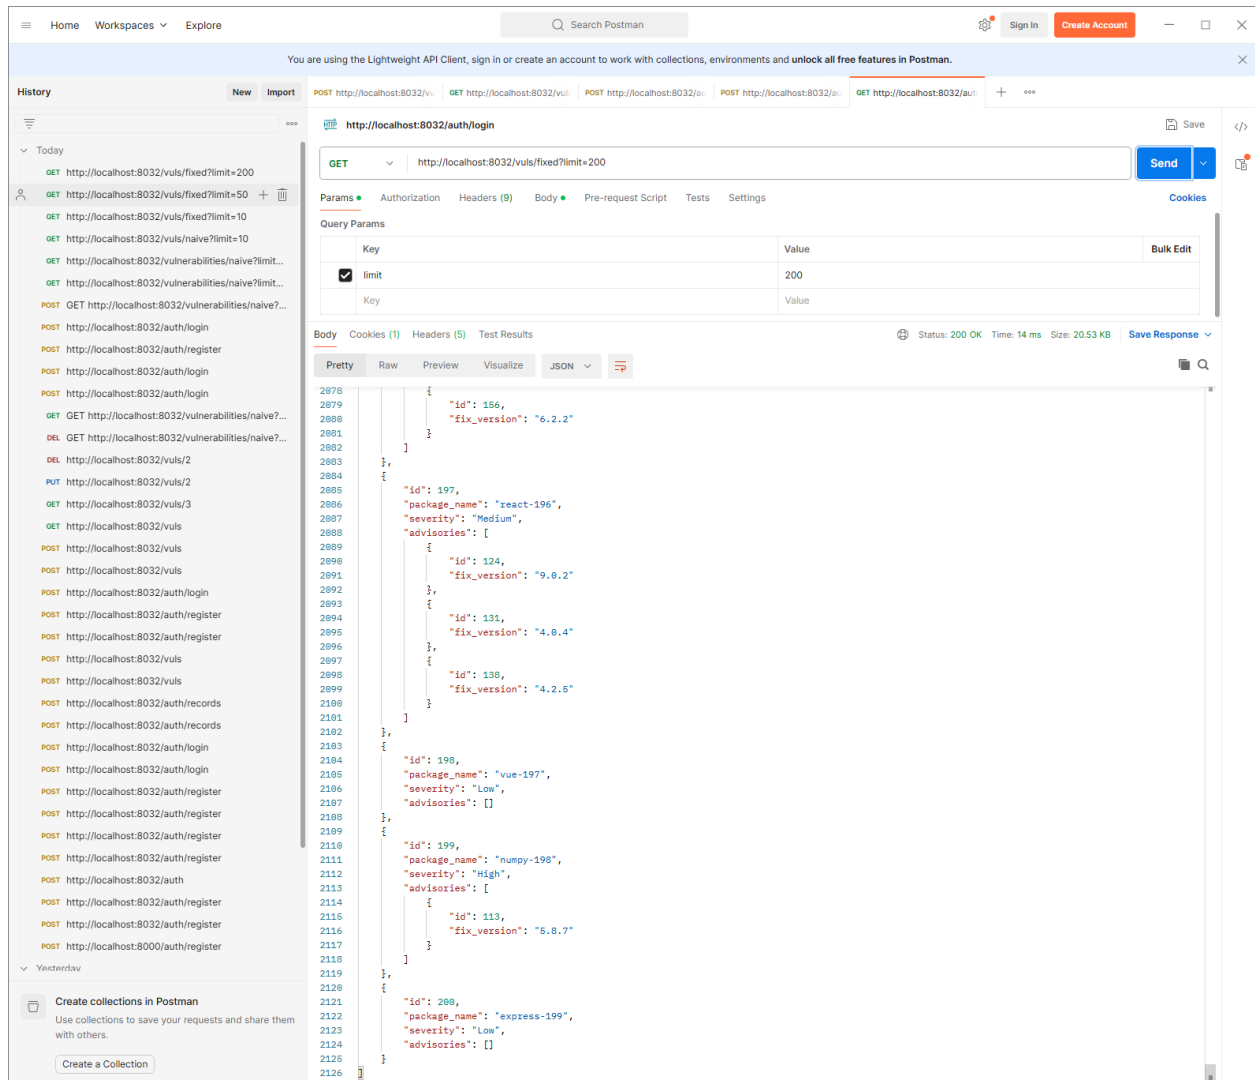

```
data260-0932 > reports > hw04 > METRICS.md
```

	Page size	Version	p50 (ms)	p95 (ms)	p99 (ms)	SQL stmts/req
1	10	naive	8.63	17.58	18.08	11
2	10	fixed	4.61	4.95	5.18	1
3	50	naive	26.15	29.56	57.69	51
4	50	fixed	5.78	6.51	6.74	1
5	200	naive	98.95	127.4	135.56	201
6	200	fixed	10.23	14.25	49.59	1

Part 4 - Build a Grounded RAG Question-Answering System

Build a small Retrieval-Augmented Generation (RAG) application that answers questions using only a supplied document collection and use it to study context engineering. Prompt engineering is how you ask the model; context engineering is what evidence you place in the model's window - the retrieved chunks, their ordering and de-duplication, and the token budget.

1. Corpus and index: use at least 5 documents (course notes, policies, or technical docs). Chunk them (start with `chunk_size = 500`, `chunk_overlap = 50`), storing each chunk's text, source name, and `chunk_id`; embed the chunks and load them into a vector store (FAISS, Chroma, or LlamaIndex VectorStoreIndex).

```
PS C:\Users\natal\Documents\masters\fall 26\data 260\github\data260-0932\reports\hw04> python .\rag.py
MODEL = qwen3:8b | SEED = 932 | chunks = 21 | chunk_size = 500 | overlap = 50
```

```
#read every document to cut it into chunks
chunks = []
DOCS = os.path.join(BASE, "docs")
for source in sorted(os.listdir(DOCS)):
    if not source.endswith(".txt"):
        continue
    path = os.path.join(DOCS, source)
    source = os.path.basename(path)
    text = open(path, encoding="utf-8").read()
    start = 0
    number = 0
    while True:
        chunks.append({
            "chunk_id": source + "#" + str(number),
            "source": source,
            "text": text[start:start + CHUNK_SIZE],
        })
        number = number + 1
        if start + CHUNK_SIZE >= len(text):
            break
        start = start + CHUNK_SIZE - CHUNK_OVERLAP

#chunk into a vector
vectorizer = TfidfVectorizer(stop_words="english")
vectors = vectorizer.fit_transform([c["text"] for c in chunks]).toarray().astype("float32")
faiss.normalize_L2(vectors)
index = faiss.IndexFlatIP(vectors.shape[1])
index.add(vectors)

#find the top-k chunks for a question, with their scores
def retrieve(question, k):
    q = vectorizer.transform([question]).toarray().astype("float32")
    faiss.normalize_L2(q)
    scores, ids = index.search(q, k)
    results = []
    for score, i in zip(scores[0], ids[0]):
        results.append({
            "chunk_id": chunks[i]["chunk_id"],
            "source": chunks[i]["source"],
            "text": chunks[i]["text"],
            "score": round(float(score), 3),
        })
    return results
```

2. Retrieval: for each question, retrieve the top-k chunks (start with `top_k = 3`) and print the retrieved chunks with source and score before calling the LLM, so a retrieval problem is visible separately from a generation problem.

```
#find the top-k chunks for a question, with their scores
def retrieve(question, k):
    q = vectorizer.transform([question]).toarray().astype("float32")
    faiss.normalize_L2(q)
    scores, ids = index.search(q, k)
    results = []
    for score, i in zip(scores[0], ids[0]):
        results.append({
            "chunk_id": chunks[i]["chunk_id"],
            "source": chunks[i]["source"],
            "text": chunks[i]["text"],
            "score": round(float(score), 3),
        })
    return results

def print_retrieval(qid, question, k, results):
    show(" == " + qid + " (top_k = " + str(k) + "): " + question)
    for n, r in enumerate(results, 1):
        show("#" + str(n) + " score=" + str(r["score"]) + " source=" + r["source"] + " chunk_id=" + r["chunk_id"])
        show("      " + r["text"].replace("\n", " ")[:150] + " ... ")
```

3. Run the same questions through three configurations:

- o (A) No RAG - question straight to the LLM, as a baseline.
- o (B) Basic RAG - top-3 raw chunks in the prompt.
- o (C) Context-engineered RAG - drop irrelevant and duplicate chunks, order and label the survivors with their sources, and add grounding rules: answer only from the context, cite the source number, and refuse with "I cannot answer this question from the provided documents" when the evidence is insufficient.

```
#drop chunks with a low score
def word_overlap(a, b):
    words_a = set(a.lower().split())
    words_b = set(b.lower().split())
    return len(words_a & words_b) / len(words_a | words_b)

def clean_chunks(results):
    kept = []
    for r in results:
        if r["score"] < MIN_SCORE:
            continue
        duplicate = False
        for k in kept:
            if word_overlap(r["text"], k["text"]) > 0.4:
                duplicate = True
        if not duplicate:
            kept.append(r)
    return kept

#A = no RAG, B = basic RAG (raw top-k chunks), C = context-engineered RAG (cleaned chunks, labelled with their source,
def prompt_a(question):
    return question

def prompt_b(question, results):
    context = "\n\n".join(r["text"] for r in results)
    return "Context:\n" + context + "\n\nQuestion: " + question + "\n\nAnswer:"

def prompt_c(question, results):
    context = ""
    for n, r in enumerate(results, 1):
        context = context + "[" + str(n) + "] (source: " + r["source"] + ")\n" + r["text"] + "\n\n"
    if context == "":
        context = "(no relevant context found) \n\n"
    rules = ("Rules:\n"
            "1. Answer only from the context below.\n"
            "2. After each fact, cite the source number like [1]. \n"
            "3. If the context does not have enough evidence, reply exactly: " + REFUSAL + "\n\n")
    return rules + "Context:\n" + context + "Question: " + question + "\n\nAnswer:"
```

```

PS C:\Users\natal\Documents\masters\fall 26\data 260\github\data260-0932\reports\hw04> python .\rag.py
MODEL = qwen3:8b | SEED = 932 | chunks = 21 | chunk size = 500 | overlap = 50
=== Q1 (top_k = 3): How many days do we have to fix a Medium severity vulnerability?
#1 score=0.375 source=dependencies.txt chunk_id=dependencies.txt#0
    Dependency Update Policy Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS ...
#2 score=0.333 source=severity_scoring.txt chunk_id=severity_scoring.txt#0
    Severity Scoring Guide Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS ...
#3 score=0.272 source=dependencies.txt chunk_id=dependencies.txt#1
    severity vulnerabilities must be fixed within 14 days. Medium severity vulnerabilities must be fixed within 30 days. Low severity vulnerabilities are f ...
correct retrieval: yes | relevant chunks: 1 | irrelevant chunks: 2
=== Q2 (top_k = 1): What CVSS score makes a vulnerability Critical, and how many days do we have to fix it?
#1 score=0.469 source=severity_scoring.txt chunk_id=severity_scoring.txt#0
    Severity Scoring Guide Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS ...
#2 score=0.428 source=severity_scoring.txt chunk_id=severity_scoring.txt#1
    0.1 to 3.9 is Low. A score from 4.0 to 6.9 is Medium. A score from 7.0 to 8. is High. A score from 9.0 to 10.0 is Critical. Reading the score . The ba ...
#3 score=0.29 source=dependencies.txt chunk_id=dependencies.txt#0
    Dependency Update Policy Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS ...
correct retrieval: yes | relevant chunks: 2 | irrelevant chunks: 1
=== Q2 (top_k = 3): What CVSS score makes a vulnerability Critical, and how many days do we have to fix it?
#1 score=0.469 source=severity_scoring.txt chunk_id=severity_scoring.txt#0
    Severity Scoring Guide Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS ...
#2 score=0.428 source=severity_scoring.txt chunk_id=severity_scoring.txt#1
    0.1 to 3.9 is Low. A score from 4.0 to 6.9 is Medium. A score from 7.0 to 8. is High. A score from 9.0 to 10.0 is Critical. Reading the score . The ba ...
#3 score=0.29 source=dependencies.txt chunk_id=dependencies.txt#0
    Dependency Update Policy Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS ...
#4 score=0.23 source=severity_scoring.txt chunk_id=severity_scoring.txt#2
    tabase to find the CVSS score of a vulnerability. Examples. A remote code execution bug that needs no login usually scores 9.8 and is Critical. A cro ...
#5 score=0.144 source=vul_disclosure.txt chunk_id=vul_disclosure.txt#1
    r if we accept it. Coordinated disclosure. We ask reporters to keep the problem private for 90 days while we prepare a fix. If the fix is ready earli ...
correct retrieval: yes | relevant chunks: 2 | irrelevant chunks: 3
=== Q3 (top_k = 3): What is the deadline for fixing a Critical vulnerability?
#1 score=0.218 source=incidents.txt chunk_id=incidents.txt#0
    Incident Response Playbook Purpose. This playbook is used when a vulnerability in an open source package is being attacked in the real world, also ca ...
#2 score=0.192 source=severity_scoring.txt chunk_id=severity_scoring.txt#0
    Severity Scoring Guide Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS ...
#3 score=0.168 source=dependencies.txt chunk_id=dependencies.txt#0
    Dependency Update Policy Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS ...
correct retrieval: no | relevant chunks: 1 | irrelevant chunks: 2
=== Q4 (top_k = 3): How long do we have to respond?
#1 score=0.146 source=packages_track.txt chunk_id=packages_track.txt#2
    rom the lockfile so they do not create extra risk. Build systems. Build servers must run in a clean environment and must not reuse caches from other ...
#2 score=0.0 source=dependencies.txt chunk_id=dependencies.txt#2
    approve a written exception. Every exception must be reviewed again after 30 days. Testing updates. Every dependency update must pass the full automa ...
#3 score=0.0 source=dependencies.txt chunk_id=dependencies.txt#1
    severity vulnerabilities must be fixed within 14 days. Medium severity vulnerabilities must be fixed within 30 days. Low severity vulnerabilities are f ...
correct retrieval: no | relevant chunks: 0 | irrelevant chunks: 3
=== Q5 (top_k = 3): What is the yearly budget of the security team?
#1 score=0.274 source=vul_disclosure.txt chunk_id=vul_disclosure.txt#0
    Vulnerability Disclosure Policy Purpose. This policy explains how people outside our team can report a security problem in the open source pa

```

```

nd which ...
correct retrieval: n/a | relevant chunks: 0 | irrelevant chunks: 3
=== Q6 (top_k = 3): How do I bake a chocolate cake?
#1 score=0.0 source=dependencies.txt chunk_id=dependencies.txt#2
    approve a written exception. Every exception must be reviewed again after 30 days. Testing updates. Every dependency update must pass the full automa ...
#2 score=0.0 source=dependencies.txt chunk_id=dependencies.txt#1
    severity vulnerabilities must be fixed within 14 days. Medium severity vulnerabilities must be fixed within 30 days. Low severity vulnerabilities are f ...
#3 score=0.0 source=dependencies.txt chunk_id=dependencies.txt#0
    Dependency Update Policy Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS ...
correct retrieval: n/a | relevant chunks: 0 | irrelevant chunks: 3

```

4. Test set of six questions:

- o Q1: answer in one chunk
- o Q2: answer needs two chunks
- o Q3: similar information across documents
- o Q4: ambiguous

- o Q5: answer not in the documents
- o Q6: unrelated
- Q5 and Q6 must be refused, not answered.

```
questions=[
{"id": "Q1", "type": "answer in one chunk", "question": "How many days do we have to fix a Medium severity vulnerability?", "key_facts": ["30 days"], "answer_all": ["30"], "answer_any": [], "must_refuse": false},
{"id": "Q2", "type": "answer needs two chunks", "question": "What CVSS score makes a vulnerability Critical, and how many days do we have to fix it?", "key_facts": ["9.0 to 10.0", "within 7 days"], "answer_all": ["9.0", "7"], "answer_any": [], "must_refuse": false},
{"id": "Q3", "type": "similar information across documents", "question": "What is the deadline for fixing a critical vulnerability?", "key_facts": ["within 7 days", "within 24 hours"], "answer_all": ["7 days", "24 hours"], "answer_any": [], "must_refuse": false},
{"id": "Q4", "type": "ambiguous", "question": "How long do we have to respond?", "key_facts": ["3 business days"], "answer_all": [], "answer_any": ["which", "clarify", "specify", "depends", "different", "several"], "must_refuse": false},
{"id": "Q5", "type": "answer not in the documents", "question": "What is the yearly budget of the security team?", "key_facts": [], "answer_all": [], "answer_any": [], "must_refuse": true},
{"id": "Q6", "type": "unrelated", "question": "How do I bake a chocolate cake?", "key_facts": [], "answer_all": [], "answer_any": [], "must_refuse": true},
]
```

```
Q1 A -> The number of days required to fix a Medium severity vulnerability depends on organizational pol
Q1 B -> The policy states that Medium severity vulnerabilities must be fixed within 30 days. Answer:
Q1 C -> The team must fix a Medium severity vulnerability within 30 days [1].
Q2 A -> The CVSS (Common Vulnerability Scoring System) defines a vulnerability as Critical if its CVSS
Q2 B -> A vulnerability is classified as Critical if its CVSS score falls within the range 9.0 to 10.0
Q2 C -> A CVSS score of 9.0 to 10.0 makes a vulnerability Critical [2]. The context does not specify how man
Q3 A -> The deadline for fixing a Critical vulnerability depends on several factors, including industry
Q3 B -> The deadline for fixing a Critical vulnerability is within 7 days. This is specified in the De
Q3 C -> I cannot answer this question from the provided documents. The context mentions an "Emergency deadli
Q4 A -> The time frame for responding depends on the specific context. Here are some common scenarios and ty
Q4 B -> The response time depends on the severity of the vulnerability: - High severity vulnerabilities
Q4 C -> I cannot answer this question from the provided documents.
Q5 A -> The yearly budget of a security team can vary significantly depending on the organization's size, in
Q5 B -> The provided context does not mention or specify the yearly budget of the security team. The documen
Q5 C -> I cannot answer this question from the provided documents.
Q6 A -> Baking a chocolate cake is a rewarding process! Here's a step-by-step guide to help you create a moi
Q6 B -> The context provided is about a software dependency update policy and does not relate to baking a ch
Q6 C -> I cannot answer this question from the provided documents.
```

- 5. Sweep the context size: run at least one question at $k = 1, 3$, and 5 , and report whether more context helped, when irrelevant chunks appeared, and which k was best**
- more context is not always better context.

```
q = questions[1]
sweep_rows = []
for k in [1, 3, 5]:
    raw_results = retrieve(q["question"], k)
    clean_results = clean_chunks(raw_results)
    for config in ["B", "C"]:
        if config == "B":
            used, prompt = raw_results, prompt_b(q["question"], raw_results)
        else:
            used, prompt = clean_results, prompt_c(q["question"], clean_results)
        answer = ask_llm(prompt)
        relevant = [r for r in used if facts_found([r], q["key_facts"])]
        print("sweep k =", k, config, "->", answer[:100].replace("\n", " "))
        sweep_rows.append([k, config, len(used), len(relevant), len(used) - len(relevant), is_correct(q, answer), answer.replace("\n", " ")])

with open(RAW + "/rag_k_sweep.csv", "w", newline="", encoding="utf-8") as f:
    w = csv.writer(f)
    w.writerow(["top_k", "config", "chunks_in_prompt", "relevant", "irrelevant", "correct_answer", "answer"])
    w.writerows(sweep_rows)

summary = []
for config in ["A", "B", "C"]:
    rows = [r for r in eval_rows if r[1] == config]
    accuracy = sum(1 for r in rows if r[3]) / 6
    faithful = sum(1 for r in rows if r[4]) / 6
    robust = sum(1 for r in rows if r[0] in ("Q5", "Q6") and r[5] is True) / 2
    fmt = sum(1 for r in rows if r[6] is True) / 6 if config == "C" else "n/a"
    summary.append([config, round(accuracy, 2), round(faithful, 2), fmt if fmt == "n/a" else round(fmt, 2), robust])
```

```
sweep k = 1 B -> Answer: A vulnerability is classified as Critical if its CVSS score is 9.0 or higher (
sweep k = 1 C -> I cannot answer this question from the provided documents. The context does not specify the CVSS sco
sweep k = 3 B -> A vulnerability is classified as Critical if its CVSS score falls within the range 9.0 to 10.0
sweep k = 3 C -> A CVSS score of 9.0 to 10.0 makes a vulnerability Critical [2]. The context does not specify how man
sweep k = 5 B -> A vulnerability is classified as Critical if its CVSS score falls within the range 9.0 to 10.0
sweep k = 5 C -> A CVSS score of 9.0 to 10.0 makes a vulnerability Critical [1][2]. The context mentions a 90-day per
```

- 6. Evaluate:** for each question and configuration, record correct retrieval, correct answer, grounded (answer supported by the cited chunks), and refused-when-needed; summarize accuracy, faithfulness, format compliance, and robustness in one table.

```

summary = []
for config in ["A", "B", "C"]:
    rows = [r for r in eval_rows if r[1] == config]
    accuracy = sum(1 for r in rows if r[3]) / 6
    faithful = sum(1 for r in rows if r[4]) / 6
    robust = sum(1 for r in rows if r[0] in ("Q5", "Q6") and r[5] is True) / 2
    fmt = sum(1 for r in rows if r[6] is True) / 6 if config == "C" else "n/a"
    summary.append([config, round(accuracy, 2), round(faithful, 2), fmt if fmt == "n/a" else round(fmt, 2), robust])

with open(RAW + "/rag_evaluation_summary.csv", "w", newline="", encoding="utf-8") as f:
    w = csv.writer(f)
    w.writerow(["config", "accuracy", "faithfulness", "format_compliance", "robustness"])
    w.writerows(summary)
print("config | accuracy | faithfulness | format_compliance | robustness")
for row in summary:
    print(row)

```

```

config | accuracy | faithfulness | format_compliance | robustness
['A', 0.5, 0.0, 'n/a', 0.0]
['B', 0.5, 0.5, 'n/a', 0.0]
['C', 0.5, 0.5, 1.0, 1.0]

```

7. Write a short analysis (300–500 words): which questions retrieved the right chunks, which context changes helped (top_k, de-duplication, chunk size, source metadata, ordering, shorter context, grounding rules), whether the model hallucinated on Q5/Q6, and how retrieval quality, context quality, and the prompt together shaped answer quality.

Question 1 got the right chunks defining the 30 day rule as the answer from dependencies.txt file. Q2 retrieved two chunks and got the severity level chunk. It only missed the score ranges for the severity levels. Q3 was retrieving the same information for all the files where the response time should be within 24hrs. Q4 there were issues because it treated respond and response with different words and not the say. Therefore, the policy was not retrieved correctly. Q5 did not work because there was no answer in the documents as well as Q6. Q6 was a question that was unrelated so it refused to answer too. Some context changes that helped was the grounding rules the most. I found that C was able to get the required sentence that it could not answer. I think for top_k, the value of 3 worked best for Q2. The lower value of 1 did not get enough chunks, while the higher value of 5 got irrelevant chunks. I had two documents called dependencies.txt and severity_scoring.txt that had duplicate paragraphs talking about security levels. With de duplication, I found that it negatively impacted the models because it could not find the right information. I think it was because it checked the wrong place and that is why some of the results showed it couldn't answer it correctly. For hallucination, I found that Config A gave a very different answer instead of saying it could not find the information. The best config was C because it always answered it could not find the information. As for retrieval quality, I found that prompts could not fix the error of the chunk with the correct answer missing. However, I did find that basic RAG was able to answer correctly when the retrieval is good. From this, I can conclude that the most important thing is the better the chunking and then the prompt. All three configurations had about the same context quality. However, the main point is that the chunking is what affected all the configurations and how they performed. Prompting can also improve the output when you ask it more simply. This gives it less room for assumptions and overcomplications.

Save your retrieved-chunk printouts

```
data260-0932 > reports > hw04 > raw > rag_retrieval_printouts.txt
1 MODEL = qwen3:8b | SEED = 932 | chunks = 21 | chunk_size = 500 | overlap = 50
2 == Q1 (top_k = 3): How many days do we have to fix a Medium severity vulnerability?
3 #1 score=0.375 source=dependencies.txt chunk_id=dependencies.txt#0
4   Dependency Update Policy Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS ...
5 #2 score=0.333 source=severity_scoring.txt chunk_id=severity_scoring.txt#0
6   Severity Scoring Guide Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS s ...
7 #3 score=0.272 source=dependencies.txt chunk_id=dependencies.txt#1
8   ertainty vulnerabilities must be fixed within 14 days. Medium severity vulnerabilities must be fixed within 30 days. Low severity vulnerabilities are f ...
9 correct retrieval: yes | relevant chunks: 1 | irrelevant chunks: 2
10 == Q2 (top_k = 1): What CVSS score makes a vulnerability Critical, and how many days do we have to fix it?
11 #1 score=0.469 source=severity_scoring.txt chunk_id=severity_scoring.txt#0
12   Severity Scoring Guide Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS s ...
13 correct retrieval: no | relevant chunks: 0 | irrelevant chunks: 1
14 == Q2 (top_k = 3): What CVSS score makes a vulnerability Critical, and how many days do we have to fix it?
15 #1 score=0.469 source=severity_scoring.txt chunk_id=severity_scoring.txt#0
16   Severity Scoring Guide Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS s ...
17 #2 score=0.428 source=severity_scoring.txt chunk_id=severity_scoring.txt#1
18   0.1 to 3.9 is Low. A score from 4.0 to 6.9 is Medium. A score from 7.0 to 8. is High. A score from 9.0 to 10.0 is Critical. Reading the score. The ba ...
19 #3 score=0.29 source=dependencies.txt chunk_id=dependencies.txt#0
20   Dependency Update Policy Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS ...
21 correct retrieval: yes | relevant chunks: 2 | irrelevant chunks: 1
22 == Q2 (top_k = 5): What CVSS score makes a vulnerability Critical, and how many days do we have to fix it?
23 #1 score=0.469 source=severity_scoring.txt chunk_id=severity_scoring.txt#0
24   Severity Scoring Guide Severity levels. Every vulnerability is given a severity level: Low, Medium, High or Critical. The level comes from the CVSS s ...
```

the three-configuration comparison

```
data260-0932 > reports > hw04 > raw > rag_comparison.json > ...
1 {
2   "model": "qwen3:8b",
3   "seed": 932,
4   "results": [
5     {
6       "question": "Q1",
7       "config": "A",
8       "chunks_used": [],
9       "answer": "The number of days required to fix a **Medium severity vulnerability** depends on organizational policies, industry standards, and the specific context of ..."
10    },
11    {
12      "question": "Q1",
13      "config": "B",
14      "chunks_used": [
15        "dependencies.txt#0",
16        "severity_scoring.txt#0",
17        "dependencies.txt#1"
18      ],
19      "answer": "The policy states that **Medium severity vulnerabilities must be fixed within 30 days**.\n\n**Answer:** 30 days."
20    },
21    {
22      "question": "Q1",
23      "config": "C",
24      "chunks_used": [
25        "dependencies.txt#0",
26        "dependencies.txt#1"
27      ],
28      "answer": "The team must fix a Medium severity vulnerability within 30 days [1]."
29    },
30    {
31      "question": "Q2",
32      "config": "A",
33      "chunks_used": [],
34      "answer": "The **CVSS (Common Vulnerability Scoring System)** defines a vulnerability as **Critical** if its **CVSS score is 9.0 or higher** (in CVSS v3.1, which is the current sta ..."
35    },
36    {
37      "question": "Q2",
38      "config": "B",
39      "chunks_used": [
40        "severity_scoring.txt#0",
41        "severity_scoring.txt#1",
42        "dependencies.txt#0"
43      ],
44      "answer": "A vulnerability is classified as **Critical** if its CVSS score falls within the range **9.0 to 10.0**. Critical vulnerabilities must be fixed within **7 days** ..."
45    },
46    {
47      "question": "Q2",
48      "config": "C",
49      "chunks_used": [
50        "severity_scoring.txt#0",
51        "severity_scoring.txt#1"
52      ],
53      "answer": "A CVSS score of 9.0 to 10.0 makes a vulnerability Critical [2]. The context does not specify how many days are allowed to fix it [1].\n\nI cannot answer this question ..."
54    },
55    {
56      "question": "Q3",
57      "config": "A",
58      "chunks_used": [],
```

the k-sweep results

```

1 top_k,config,chunks_in_prompt,relevant,irrelevant,correct_answer,answer
2 1,8,1,0,1,False,**Answer:** A vulnerability is classified as **Critical** if its CVSS score is **7.0 or higher** (ranging from 7.0 to 10.0). The exact number of days to
3 1,C,1,0,1,False,I cannot answer this question from the provided documents. The context does not specify the CVSS score range for "**Critical**" or the timeframe for fixing v
4 3,8,3,2,1,True,A vulnerability is classified as **Critical** if its CVSS score falls within the range **9.0 to 10.0**. According to the Dependency Update Policy, **Critici
5 3,C,2,1,1,False,A CVSS score of 9.0 to 10.0 makes a vulnerability Critical [2]. The context does not specify how many days are allowed to fix a Critical vulnerability [1].
6 5,8,5,2,3,True,A vulnerability is classified as **Critical** if its CVSS score falls within the range **9.0 to 10.0**. Critical vulnerabilities must be fixed within **7 day
7 5,C,4,1,3,False,A CVSS score of 9.0 to 10.0 makes a vulnerability Critical [1][2]. The context mentions a 90-day period for coordinated disclosure while preparing a fix, l
8

```

and the evaluation table in reports/hw04/raw/, and include your written analysis in report.pdf.

```

1 config,accuracy,faithfulness,format_compliance,robustness
2 A,0.5,0.0,n/a,0.0
3 B,0.5,0.5,n/a,0.0
4 C,0.5,0.5,1.0,1.0
5

```

```

1 question,config,correct_retrieval,correct_answer,grounded,refused_when_needed,format_ok
2 Q1,A,n/a,True,False,n/a,n/a
3 Q1,B,yes,True,True,n/a,n/a
4 Q1,C,yes,True,True,n/a,True
5 Q2,A,n/a,True,False,n/a,n/a
6 Q2,B,yes,True,True,n/a,n/a
7 Q2,C,no,False,False,n/a,True
8 Q3,A,n/a,False,False,n/a,n/a
9 Q3,B,no,False,False,n/a,n/a
10 Q3,C,no,False,False,n/a,True
11 Q4,A,n/a,True,False,n/a,n/a
12 Q4,B,no,True,True,n/a,n/a
13 Q4,C,no,False,False,n/a,True
14 Q5,A,n/a,False,False,False,n/a
15 Q5,B,n/a,False,False,False,n/a
16 Q5,C,n/a,True,True,True,True
17 Q6,A,n/a,False,False,False,n/a
18 Q6,B,n/a,False,False,False,n/a
19 Q6,C,n/a,True,True,True,True
20

```

Verification output

```

PS C:\Users\natal\Documents\masters\fall 26\data 260\github\data260-0932\reports\hw04> python .\verify_hw04.py
PASS backend responds on PORT_BASE -GET /health returned 200
PASS list endpoint needs login -GET /vuls without login returned 401
PASS login sets an HTTP-only session cookie -login returned 200, HTTP-only session cookie set: True
PASS naive list endpoint returns data -limit 50 -> 50 records
PASS fixed list endpoint returns data -limit 50 -> 50 records
PASS naive and fixed return the same data -naive and fixed return the same records: True
PASS raw/ has all 180 N+1 requests -raw/n_plus_one_raw.csv has 180 rows
PASS RAG corpus has at least 5 documents -6 documents in rag/docs

```

AI_USE.md

```

data260-0932 > reports > hw04 > AI_USE.md
1 1. I used the AI assistant to help me with debugging rag.py file. I also used it to help debug the verify_hw04.py file to
2 check the connection via port and seed because I was unfamiliar with checking react. I created the base rag.py file that
3 does the chunking and the three different approaches. I had issues with rag not displaying my output files because it was
4 not in the right folder directory. I accidentally set it to write to the /raw folder in my C drive because I did not specify
5 the path correctly. I used it for verify python to help figure out how to make sure the commit was checked and used in the
6 code as specified in the report pdf.
7
8 2. One thing the AI produced was that it told me to that the removing duplicates gave an accuracy error that was way lower
9 than it should be. I found that the cosine similarity after removing duplicates was odd so I looked into it and fixed that
10 step. The code still gives some chunking issues that I have fixed. So the outputs was able to give me the specific outputs
11 each of the six questions ask for. It also reports correctly when the it doesn't have any information.
12
13 3. I detected this problem because C said on question 2 the context did not say the correct day while B did. This led me to
14 realize the chunking was off. I verified it by showing the before chunking and after chunking after duplication to figure
15 out what the issue was.
16
17 4. I changed it so that the threshold for removing duplicates so that the duplicate chunks are removed without removing
18 anything extra. I think the threshold was causing the error. So I changed it to above 0.4 and that gave me a better
19 result. I verified this when I reran the command python rag.py. |

```