

Quantum Speedup on Exhaustive-search Attacks on Cryptosystems

Week 7 Report for Class 75

2017320009 Sangheon Lee

2017320023 Mingyu Cho

May 30, 2020

Table of Contents


- 1 S-DES
- 2 Grover's Algorithm
- 3 Quantum S-DES Oracle
- 4 Quantum S-DES Implementation
- 5 Quantum S-DES Testing
- 6 Current Works and Future Plans

S-DES

S-DES

- Simplified DES with 2 rounds
- Structure similar to DES but simplified with 10-bit key and 8-bit plaintext.
- Quantum oracle needs to be reversible, of which S-DES is (normally) not.

Structure of S-DES

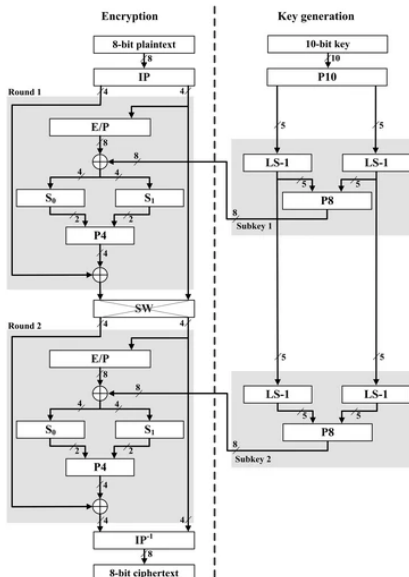


Structure of S-DES


Consists of two main parts:

- Key Scheduling, where we generate subkeys from the given key
- Feistel function, where we encrypt the plaintext using the scheduled keys

Structure of S-DES: Key Scheduling

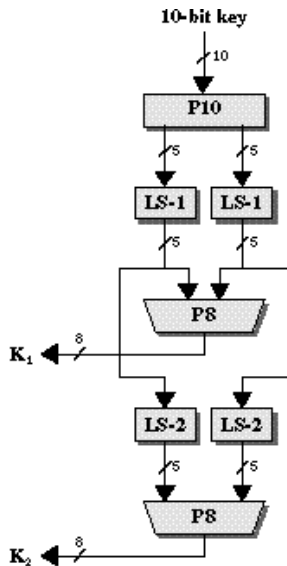

Structure of S-DES: Feistel function

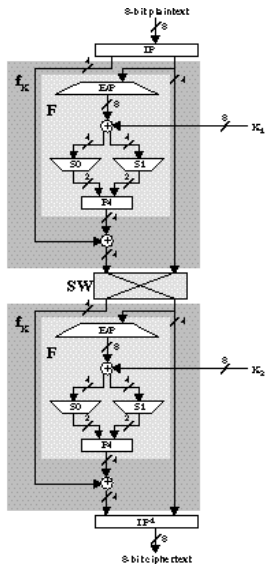

Grover's Algorithm

Overview

- Grover's algorithm can find a specific state satisfying some condition among $N = 2^n$ candidates in $O(\sqrt{N})$ time, compared to classical runtime complexity $O(N)$.
- Grover's algorithm exploits qualities of quantum amplitudes to gain advantage of probability separation.
- It can brute-force 128-bit symmetric cryptographic key in roughly 2^{64} iterations.

Algorithm

Input:

- A quantum oracle \mathcal{O} which performs the operation $\mathcal{O} |x\rangle = (-1)^{f(x)} |x\rangle$, where $f(x) = 0$ for all $0 \leq x < 2^n$ except x_0 , for which $f(x_0) = 1$.
 - Such quantum oracle is viable, and takes $O(1)$ time.
- n qubits initialized to the state $|0\rangle$

Output: x_0 , in runtime $O(\sqrt{2^n})$ with error rate $O(\frac{1}{2^n})$

Algorithm

Procedure:

- ① $|0\rangle^{\otimes n}$ (initial state)
- ② $H^{\otimes n} |0\rangle^{\otimes n} = \frac{1}{\sqrt{2^n}} \sum_{x=0}^{2^n-1} |x\rangle = |\psi\rangle$ (Hadamard transform)
- ③ $[(2|\psi\rangle\langle\psi| - I)\mathcal{O}]^R |\psi\rangle \approx |x_0\rangle$ (Grover iteration for $R \approx \frac{\pi}{4}\sqrt{2^n}$ times)
- ④ x_0 (measure)

Grover iteration in a nutshell: negate the amplitude of the desired state, followed by 'diffusion transform' which increases the amplitude of the desired state and lower the others.

Quantum S-DES Oracle

Quantumizing S-DES

- Most parts are permutations or compressions; no problems here.
- Two parts poses a challenge:
 - 1 S-Boxes
 - 2 Expansion

Dealing with Expansions

- Due to No-cloning theorem, directly copying a qubit is not possible.
- Use XOR operation to copy the information.

Dealing with S-boxes

Consists of Lookup tables: Not ideal for quantum computing


$$S_0 = \begin{bmatrix} 1 & 0 & 3 & 2 \\ 3 & 2 & 1 & 0 \\ 0 & 2 & 1 & 3 \\ 3 & 1 & 3 & 2 \end{bmatrix} \quad S_1 = \begin{bmatrix} 0 & 1 & 2 & 3 \\ 2 & 0 & 1 & 3 \\ 3 & 0 & 1 & 0 \\ 2 & 1 & 0 & 3 \end{bmatrix}$$

Dealing with S-boxes: Quine-McCluskey Method

- Break the S-Boxes into fundamental and/or/not-gates
- Letting the input bits into S-Boxes $ABCD$:
 - S0 bit 1: $AB'C' + A'B'C + BCD' + ABD + BC'D$
 - S0 bit 2: $AD' + B'D' + A'BC + ABC'$
 - S1 bit 1: $AB'C' + ACD + A'CD' + A'BD'$
 - S2 bit 2: $B'C'D + AB'C + BCD + BC'D'$
- Directly calculating this would cause too many ancilla bits to use, i.e. for each and/or operation, one ancilla bit is required.

Dealing with S-boxes: The Brute-force Method


For each possibility in the S-box input, use a circuit similar to this:

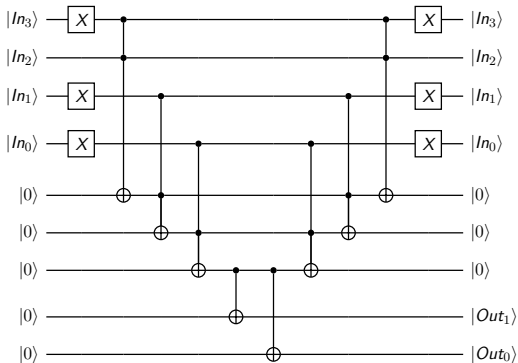

...which requires 3 ancilla qubits.

Dealing with S-boxes: The Brute-force Method

Thanks to the Microsoft Q# library, we don't need that much ancilla qubits.

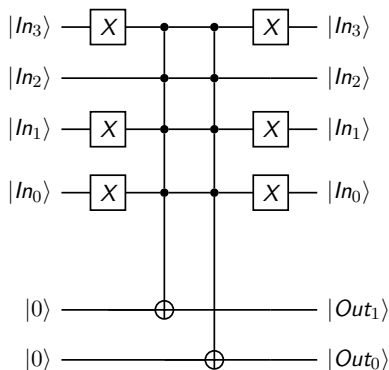

No (explicit) ancilla qubits are required!

Dealing with S-boxes: Combining the two methods?

- Still a hypothetical yet.
- The structure of Quine-McCluskey simplified S-Box is similar to Brute-force
- The number of terms may decrease significantly, and one ancilla bit can definitely be removed.
- Needs further testing...

Quantum S-DES Implementation

Quantum S-DES Implementation


Initially, 34 explicit qubits were used in total.

- 10 qubits for input key
- 1 qubit for making an encryption oracle
- 8 qubits for (intermediate) plaintext
- 8 qubits for expanded plaintext
- 4 qubits for storing S-Box result
- 3 qubit for S-Box ancilla

S-DES implementation is written in Microsoft Q#. Will it run?

Quantum S-DES Implementation

Yes, and no.

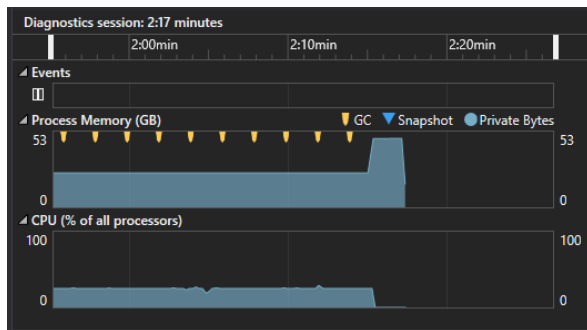

After allocating 48GB of RAM,
`System.Runtime.InteropServices.SEHException` was raised,
indicating an out-of-memory error.

Quantum S-DES Implementation

Reducing the number of qubits was necessary...!

- 10 qubits for input key
- 1 qubit for making an encryption oracle
- 8 qubits for (intermediate) plaintext
- 8 qubits for expanded plaintext
- 4 qubits for storing S-Box result
- 3 qubit for S-Box ancilla

Quantum S-DES Implementation

Reducing the number of qubits was necessary...!

- 10 qubits for input key
- 1 qubit for making an encryption oracle
- 8 qubits for (intermediate) plaintext
- ~~8 qubits for expanded plaintext~~
- 4 qubits for storing S-Box result
- 3 qubit for S-Box ancilla

We can directly use plaintext qubits to create result qubits from S-Box. After then we can undo all the operations (permutation, *etc.*) which altered plaintext.

Quantum S-DES Implementation

Reducing the number of qubits was necessary...!


- 10 qubits for input key
- 1 qubit for making an encryption oracle
- 8 qubits for (intermediate) plaintext
- ~~8 qubits for expanded plaintext~~
- 4 2 qubits for storing S-Box result
- 3 qubit for S-Box ancilla

We can directly use plaintext qubits to create result qubits from S-Box. After then we can undo all the operations (permutation, *etc.*) which altered plaintext.

Additionally, each S-Box operation is independent. Thus we can reuse S-box result qubits after re-initialization.

Quantum S-DES Implementation


After a bit of debugging and comparing with Python Implementation...

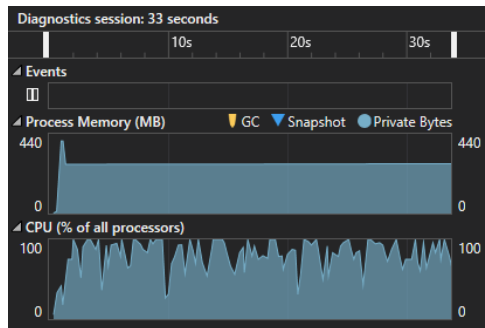

It ran well within 40s (before the second optimization, it took 4x time and memory)

Quantum S-DES Implementation

After a bit of debugging and comparing with Python Implementation...



```
Select Microsoft Visual Studio Debug Console

Round 1 finished
Round 2 finished
res1 : 110
[+] Plaintext: 199
[+] Cipher : 110
[+] Key : 934
[+] Result : One

C:\Users\User\source\repos\QSharpSimpleDES\QSharpSimpleDES\bin\Debug\netcoreapp3.1\QSharpSimpleDES.exe (process 19304) exited with code 0.
To automatically close the console when debugging stops, enable Tools->Options->Debugging->Automatically close the console when debugging stops.

Press any key to close this window . . .
```

Expected cipher matched with Python S-DES implementation output.

Quantum S-DES Implementation


However, applying Grover's was not simple as it looked

- The oracle should be adjoint, but current version includes measurement (in result ciphertext and S-Box)
- How to create an oracle qubit rather than measuring the result ciphertext?
 - perform CNOT gate 8 times (with 7 more qubits) : infeasible
 - Controlled functor : doable
 - All-one oracle : similar (which is faster?)

Quantum S-DES Implementation

- Measurement was wiped out smoothly with the cost of execution speed
- Each round need to be reversed, and so does the S-Box, increased runtime about 4x
- Qubit optimization in S-Box offset this demerit
 - Used the same 'all-one oracle' trick

Quantum S-DES Implementation

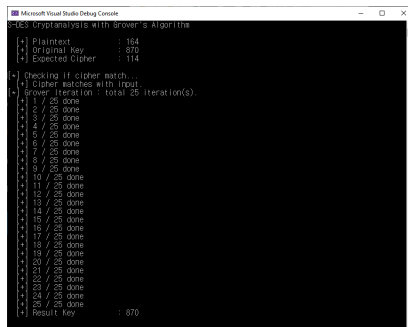

```
Microsoft Visual Studio Debug Console
S-DES Cryptanalysis with Grover's Algorithm
[+] Plaintext      : 164
[+] Original Key   : 870
[+] Expected Cipher : 114

[-] Checking if cipher match...
[+] Cipher matches with input.
[+] Grover iteration : total 25 iteration(s).
[+] 1 / 25 done
[+] 2 / 25 done
[+] 3 / 25 done
[+] 4 / 25 done
[+] 5 / 25 done
[+] 6 / 25 done
[+] 7 / 25 done
[+] 8 / 25 done
[+] 9 / 25 done
[+] 10 / 25 done
[+] 11 / 25 done
[+] 12 / 25 done
[+] 13 / 25 done
[+] 14 / 25 done
[+] 15 / 25 done
[+] 16 / 25 done
[+] 17 / 25 done
[+] 18 / 25 done
[+] 19 / 25 done
[+] 20 / 25 done
[+] 21 / 25 done
[+] 22 / 25 done
[+] 23 / 25 done
[+] 24 / 25 done
[+] 25 / 25 done
[+] Result key      : 870
```

Expected key matched with original key (with runtime 19 min 31 sec, performing each S-DES encryption within 45s on average).


Quantum S-DES Testing

Prerequisites

- Let $SDES(P, K) = C$ be a function s.t. encrypting plaintext P with S-DES and key K yields C .
- Let $f: \{0, 1\}^8 \times \{0, 1\}^8 \rightarrow \mathcal{P}(\{0, 1\}^{10})$ be a function such that $f(P, C) = \{K \in \{0, 1\}^{10} \mid SDES(P, K) = C\}$.
- Since key size is 4x of cipher size, we guessed that for arbitrary P and C , $|f(P, C)|$ is likely to be 4.

Prerequisites : Key Size

...and we were wrong!

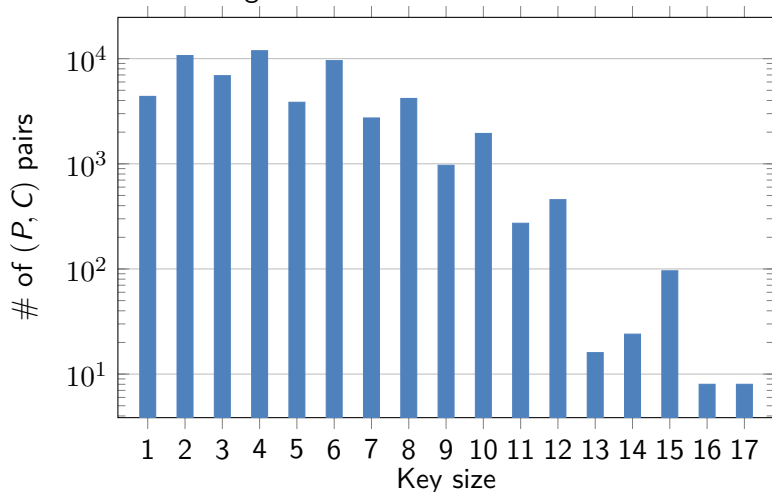

Quantum S-DES Testing : Testing with $\#Key = 1$

If $(P, C) = (10100100, 00110011)$. Then $f(P, C) = \{1101100110\}$.

- Program yielded correct key.
- By dumping key qubits, we can observe the probability of each basis.
 - At first, the probability of answer basis is 0.008766 while the others are 0.000969.
 - The gap widens next turn: 0.024224 and 0.000954.
 - Ultimately it becomes 0.999461 and 0.000001 (at 25th iteration).

Quantum S-DES Testing : Testing with $\#Key = 4$

If $(P, C) = (11000111, 00010100)$. Then $|f(P, C)| = 4$.

- Program yielded wrong key.
- By dumping key qubits, we can observe the probability of each basis.
 - At first, the probability of answer basis is 0.008698 while the others are 0.000946.
 - The gap widens next turn: 0.023659 and 0.000888.
 - It peaks at 12th iteration: 0.249987 and 0.000000.
 - However it goes back next turn: 0.246547 and 0.000014
 - Ultimately the probability of answer basis becomes lower than the others: 0.000575 and 0.000978.
- Although the algorithm and the implementation is correct, what happened here?

Quantum S-DES Testing: What Went Wrong?

- When running Grover's Algorithm, there is a number of desired steps, say n .
- If we overshoot that number of step, the probability of basis decreases!
- On the $2n$ -th step, the probability becomes all the same for each of the cases again, forming a cycle.

Current Works and Future Plans

Work in Progress(Mingyu Cho)

- Implemented a non-quantum S-DES(in python) for testing the quantum version.
- Implemented Brute-force attack on S-DES and developed a code for keycount for (plaintext, ciphertext) pair.
- Started preliminary analysis on the gate applications
- Looking for possible speedups on the quantum side to aid the simulation

Work in Progress(Sangheon Lee)

- Possibly reduce some quantum gates
- Analyze complexity of each gate
- Search for internal dumping library

Future Plans

- Construct and test S-DES and apply Grover's.
 - Since S-DES consists of various components, all of these must be implemented carefully and in order
- Hope to import Microsoft Q# implementation to qiskit (IBM Quantum Experience)
- Reduce complexity of quantum gates if possible (as Prof. Hong suggested)