

# Cost-Amortised Reasoning via Self-Distilling Neuro-Symbolic Cascades: From Knowledge-Graph QA to Regulatory-Compliance Checking

Nguyen Quang Minh\*

## Abstract

Large language models make knowledge-graph question answering (KGQA) fluent, but every query pays the full price of an LLM call. We present **TACET** (Latin: *it is silent*), a self-distilling neuro-symbolic cascade that amortises that cost by progressively migrating a streamed workload off the LLM and onto cheap, checkable tiers, so that the expensive teacher falls silent over time. The cascade has three tiers: a *sound* forward-chaining Datalog rule engine that abstains when it cannot prove an answer (Tier 1), a confidence-calibrated ComplEx link predictor [25, 60] verified against a typed ontology (Tier 2), and an LLM teacher (Tier 3). The central mechanism is an *online distillation* loop. Whenever the teacher answers, TACET mines the answer into Datalog-checkable Horn rules and writes the facts back, so routing drifts toward the cheap tiers as the workload streams. A synthesised rule generalises to entities the teacher never saw; an answer cache cannot do that.

On a controlled KGQA benchmark (8 seeds), the cascade answers at 0.981 accuracy while reducing blended cost by  $\sim 3.9\times$  relative to an LLM-only system under a *simulated per-tier cost model*. We then confirm this on real data with a real teacher. Streaming MetaQA (a 43k-entity movie KG) through a real Grok 4.3 teacher over **3 seeds** in a controlled design (Tier-2 disabled and a single teacher answer shared across arms, so accuracy is matched *by construction*), TACET amortises *measured* LLM dollars by  $2.8\times$  on 1-hop and  $5.1\times$  on 2-hop in pooled cost; the per-seed cost ratio spans  $1.5\text{--}6.3\times$  on 1-hop because only non-empty teacher answers are cached. This saving is delivered by answer reuse, the cascade’s caching tier. Under the real teacher, rule distillation adds no dollar advantage: full distillation ties the cache on every seed. The distillation-over-caching effect is itself *teacher-quality-gated*. With an oracle teacher the miner recovers a generalising composition rule and makes 87% fewer teacher calls than a cache, because a rule answers unseen heads and a cache cannot; under the noisy real LLM the miner recovers no installable rule and the cascade reduces to a cache. Sweeping the installation threshold across eleven 2026 frontier teachers refines this: at the paper’s operating point none installs the rule, but at a lower threshold ten of eleven (favourable seed per model) install the world-precision-1.0 composition rule at 81–86% fewer calls, so the gate is the confidence threshold, not teacher identity. That regime installs a self-referential junk rule alongside the true one, which appears to demand gold labels to tell apart; the natural label-free substitutes (teacher agreement, self-consistency) are empirically inert. The apparent dependency is an artifact of candidate enumeration: excluding the mining target from its own rule body removes every junk rule while leaving the true rule and its savings untouched, so what still limits the regime is seed-dependence and the near-functional leakage of Section 7.1, not a need for gold (Section E.3). The one remaining structural foreclosure of that regime — genuinely recursive targets, excluded

---

\*Independent researcher. Correspondence: [quangminh2402.dev@gmail.com](mailto:quangminh2402.dev@gmail.com). Code and benchmark: [github.com/n24q02m/tacet](https://github.com/n24q02m/tacet).

by the same blunt enumeration rule — is itself removable: a refined guard that bans only the pure self-loop body preserves the published result exactly on the real MetaQA grid (22/22 cells, by classification and generative replay) and, on a synthetic transitive-closure grid with oracle teachers, extends coverage to genuinely recursive targets (Appendix F).

Tier-1 answers carry replayable Datalog proof trees, and we prove an ontology-preservation guarantee (Theorem 1) for the synthesised rules. The distillation-over-caching effect that is neutral under the noisy KGQA teacher turns *positive* on a second domain: streaming GDPR compliance cases from PrivaCI-Bench [37] past three real frontier teachers (gemini-3.5-flash, claude-sonnet-4.6, grok-4.3) over 3 seeds at matched verdict accuracy, online rule distillation amortises measured teacher cost by  $1.5\text{--}2.1\times$  versus an LLM-only system — against  $\sim 1.1\times$  for an exact-match cache and  $<1\times$  for a faithful in-context-strategy baseline — with only a  $\sim 10\%$  repeat ceiling, so the saving is rule *generalisation*, not memoisation. We release the implementation, the benchmark generator, and the full experiment grid.

## 1 Introduction

Large language models made knowledge-graph question answering (KGQA) and retrieval-augmented generation fluent [17, 36], but they made it *uniformly expensive*: every query, however routine, pays the full price of an LLM call. Much of a real KGQA workload is regular — a base-fact lookup, the transitive closure of a relation, a structurally predictable edge — and does not need a frontier model at all. The opportunity is to recognise that regular majority cheaply, serve it without the LLM, and reserve the LLM for the genuinely hard tail; the difficulty is that a static front-end (a cache, a fixed cascade) cannot *learn* which queries are regular as a workload reveals itself.

Model cascades address part of this by routing inputs through tiers of increasing cost and stopping early when a cheap tier is confident [13, 61]. But a static cascade has a *fixed* routing distribution: it never gets cheaper. A semantic cache adapts to repeats, but a cache can only return an answer it has *literally seen* — it cannot answer an unseen entity, and most distinct queries in a streaming workload are unseen. The missing ingredient is a mechanism that turns each expensive LLM answer into reusable, *generalising* structure, so that answering one query makes a whole *class* of related queries cheap thereafter.

**TACET** supplies that mechanism. The name — Latin for *it is silent*, the musical direction for a voice that rests — is the design goal: as distilled rules accumulate, the expensive LLM teacher is called ever less often, until on a recurring workload it falls silent altogether. It is a self-distilling neuro-symbolic cascade: each LLM answer is mined into Datalog-checkable Horn rules and written back as graph facts, so the routing distribution drifts toward the cheap tiers as the workload streams. Because a synthesised rule covers *unseen* entities, distillation amortises an entire relational pattern, not just a single memoised answer — the property that separates it from caching. The cheap tiers are also *checkable*: Tier 1 answers carry replayable Datalog proof trees that ground in base facts and named rules. Concretely, **TACET** is a three-tier cascade:

- **Tier 1 — Symbolic.** A forward-chaining rule engine over a typed property graph. It is *sound*: any answer it returns is entailed by the facts and rules; when it cannot prove an answer it *abstains*. Cost  $\sim 10^{-4}$  per query.
- **Tier 2 — KGE.** A ComplEx [60] link predictor that proposes a missing edge with a temperature-calibrated confidence [25]; predictions are verified against the ontology before use. Cost  $\sim 10^{-3}$ .
- **Tier 3 — LLM teacher.** A frontier LLM that answers anything. Cost  $\sim 5 \times 10^{-2}$ .

The component we claim as novel is the *conjunction*: an online distillation loop whose artifact is *executable* — type-checked Datalog rules and facts inside a sound symbolic tier — rather than retrieved text or student parameters; Section 2 situates this against cascades that learn over time. Whenever the teacher answers, TACET (a) *writes the fact back* into the graph, so the identical query drops to Tier 1; (b) runs an AMIE-style rule miner [21] over the accumulated teacher answers and, when a high-confidence Horn rule emerges, installs it in the sound Tier 1 — so an entire *relational pattern*, not just one fact, becomes cheap and covers *unseen* entities; and (c) augments the Tier-2 training set. Over a streamed workload the routing distribution drifts downward and the blended cost decays toward the symbolic floor.

## Contributions.

- (C1) **A self-distilling cascade.** An online loop that mines each LLM teacher’s answers into Datalog-checkable Horn rules and writes the facts back, so the routing distribution drifts toward the cheap tiers as a workload streams. We isolate the *distillation-beats-caching* mechanism: when the miner recovers a generalising rule, a synthesised rule covers entities the teacher never saw, so a whole relational pattern becomes cheap — something a cache, which only recalls answers it has literally seen, structurally cannot do (Sections 3–4). On real data we find this advantage is *teacher-quality-gated* (C3): it materialises with an accurate teacher and degrades to cache-equivalent behaviour under a noisy one.
- (C2) **Auditability with a typed-closure guarantee.** Tier-1 answers carry replayable Datalog proof trees that ground in base facts and named rules, and we prove an *ontology-preservation* guarantee for the online-synthesised rules (Theorem 1): the engine installs a rule only if it is type-consistent, and write-back types each new entity from the relation’s declared schema, so the symbolic closure preserves the typed ontology whenever the written-back facts are themselves well-typed. A noisy teacher that asserts a type-inconsistent fact between existing entities can still introduce a violation; we surface such facts with an explicit validator rather than assume they cannot occur (Section 8).
- (C3) **A real-LLM, real-cost evaluation.** We evaluate the cascade with a real Grok 4.3 teacher on a real-entity MetaQA KG, metering every token at xAI’s published price (Section B.4.1). Over **3 seeds** in a controlled design (Tier-2 disabled, a single teacher answer shared across arms so accuracy is matched by construction), the measured cost amortisation is  $2.8\times$  (1-hop) and  $5.1\times$  (2-hop) over LLM-only in pooled cost (per-seed ratios span  $1.5\text{--}6.3\times$  on 1-hop) — consistent with the simulated cost model. This saving is delivered by answer reuse, not rule distillation, which under the real teacher ties the cache on every seed. We further show the distillation-over-caching advantage is *teacher-quality-gated*: positive with an oracle teacher (87% fewer teacher calls than a cache, recovering a generalising composition rule for unseen heads) but neutral under the noisy real LLM, which on this benchmark reduces the cascade to a cache. Concretely, the installation gate is the miner’s confidence threshold  $\gamma$ , not teacher accuracy directly — even a 0–5%-accurate teacher installs the rule at  $\gamma=0.50$  (Section E.3) — and *teacher-quality-gated* means only that at the paper’s deployable operating point  $\gamma=0.95$  teacher quality decides whether the rule clears the bar. We do not claim distillation beats caching with a real LLM here. A threshold sweep over eleven 2026 teachers further shows the MetaQA null is governed by the installation threshold rather than teacher identity (Section E.3). The low-threshold regime it exposes is bounded by three findings there: the obvious label-free promotion signals are inert, the cross-teacher ranking is confounded by

answer verbosity, and the junk rule that appeared to force a gold dependency is an artifact of candidate enumeration that a one-line change removes at no cost to the true rule.

- (C4) **An honest negative result.** A candid study of graph *forecasting* showing that a learned forward-dynamics extension does not beat purpose-built temporal models, reported as a negative result rather than a headline claim (Section 8).
- (C5) **A second domain where distillation beats caching with a real teacher.** We port the identical cascade to regulatory-compliance checking on PrivaCI-Bench [37] (GDPR), mining online Datalog rules over typed contextual-integrity atoms from a real teacher’s verdicts. Over 3 seeds at matched verdict accuracy, full distillation amortises measured teacher cost by 1.5–2.1 $\times$  across three frontier teachers, against  $\sim 1.1\times$  for an exact-match cache and  $<1\times$  for a faithful in-context-strategy baseline (an Inter-Cascade [63] port at the same model); with a  $\sim 10\%$  repeat ceiling the gain is rule generalisation, not memoisation (Section B.4.2). This is the positive real-(non-oracle)-teacher answer to the question (ii) of Section B.4.1 that the KGQA workload leaves neutral.

**Scope.** The main grid evaluates on a *controlled synthetic* benchmark with the LLM teacher modelled as an (optionally noisy) oracle and a *simulated* constant per-tier cost. This isolates the phenomenon we study — the dynamics of routing and distillation — from the orthogonal question of LLM answer quality. The real-LLM, real-data result that closes this gap is reported in Section B.4.1; the extension modules shipped but not invoked by the cascade are described in Appendix B. We use MetaQA and ProofWriter as *mechanism testbeds*: both have long been saturated by specialised systems [53, 59], so we make no state-of-the-art accuracy claim on either; they are small enough to meter a real teacher end-to-end, which is the measurement this paper is about. The cascade is a domain-general mechanism, not a KGQA-specific system; to show this we evaluate it on a second, non-saturated domain — regulatory *compliance checking* on PrivaCI-Bench [37] (GDPR) — where, unlike on the noisy KGQA teacher, rule distillation amortises a real (non-oracle) teacher’s cost beyond a cache across three frontier LLMs (Section B.4.2). MetaQA and ProofWriter remain mechanism testbeds; compliance is the external-validity domain.

## 2 Related Work

**Model cascades and adaptive inference.** Cascades route inputs through models of increasing cost, stopping early when a cheap model is confident [61]. FrugalGPT [13] cascades LLMs of different prices for general prompts. TACET differs in two ways that matter. First, its tiers span *different representations* — symbolic, embedding, neural — not just different-sized models of the same kind; its cheapest tier is therefore *sound* rather than merely cheap. Second, and centrally, a static cascade has a *fixed* routing distribution, whereas TACET’s distribution *shifts downward over time* through online distillation. Our experiments include a static cascade as a baseline precisely to isolate this effect.

**Cascades that learn over time.** Two recent lines share TACET’s goal of a cascade whose cost falls as the workload streams. Online cascade learning [48] imitates the LLM with a cheap neural student trained on the stream; the distilled artifact is student *parameters*. Inter-Cascade [63] extracts reusable natural-language strategies from strong-model answers and retrieves them into the weak model’s context, cutting strong-model calls by up to 48%; the artifact is *text*, applied in-context. TACET’s artifact is a set of executable, type-checked Datalog rules and facts: it answers

without any neural model in the loop, generalises to unseen entities through deductive closure, and every Tier-1 answer carries a replayable proof tree. LLM2LAS [7] also turns LLM output into logic rules (via ILASP) but offline, outside any cost-accounted cascade; NeSyC [14] continually refines LLM-hypothesised rules for embodied agents. Compile-once neuro-symbolic offloading in the legal domain [56] and reasoning-to-program compilation [47] share the amortisation telos but translate top-down in a single pass, rather than mining incrementally from teacher answers under an ontology gate. A recent survey [66] places declarative rules at the maximal-compression end of agent experience and identifies precisely this design point as under-explored.

**KGQA.** Embedding-based KGQA answers multi-hop questions in a learned vector space [53]. A recent line uses an LLM as an agent that walks the graph: Think-on-Graph [57] and Reasoning-on-Graphs [44] interleave LLM reasoning with graph retrieval for faithfulness. These systems make every query an LLM interaction; they improve *quality*, not *cost*, and they do not accumulate reusable knowledge. TACET is complementary: such an agent could serve as our Tier-3 teacher. Closest in benchmark terms, recent work combines LLM planning with embedding-guided search for efficient multi-hop QA on MetaQA [55], but the pipeline is static: nothing learned while answering one query reduces the cost of the next.

**KG embeddings and rule mining.** TransE [6], ComplEx [60], RotatE [58] and relational GNNs [54] predict missing edges from graph structure; they are our Tier-2. AMIE [21] mines Horn rules from a knowledge base by support and confidence. Our rule miner (`tacet.distill.distill.mine_rules`) is a deliberately simple length- $\leq 2$  nested-loop miner that illustrates the distillation step; it is *not* a reimplement of AMIE/AMIE+ — it has no prefix-tree pruning and no confidence bounds — and we make no claim of superiority over AMIE/AMIE+. Our contribution is the *setting*: mining rules from *teacher answers* as a workload streams, and feeding them to a downstream sound reasoner. ChatRule [43] prompts an LLM to propose logical rules for KG completion offline and ranks them with AMIE-style support and confidence; TACET instead mines rules online from teacher answers during serving, and installs them only after they pass an ontology type-gate.

**Temporal knowledge graphs and graph world models.** A mature line forecasts future edges of a temporal knowledge graph from its history: RE-NET [30] and RE-GCN [39] couple recurrent encoders with relational GNNs, EvoNet [62] predicts the next-step graph topology directly, and more recent methods reason over the history with LLM chains [64] or learned rule confidences [23]; ICEWS14 is the standard benchmark, on which results are notoriously protocol-sensitive [22]. Recent surveys cast such models as *graph world models* [40, 41], distinguishing forward dynamic simulation from logical/causal reasoning. We experimented with a learned forward-dynamics head in this space (Section 8), but it does not match purpose-built temporal models, and we report it as a negative result (Section 8) rather than a contribution.

**Neuro-symbolic reasoning engines.** DeepProbLog [45] integrates logic with neural perception, and a recent wave of systems couples LLMs with a symbolic backbone for knowledge-graph reasoning: CLAUSE [68] treats neuro-symbolic KG reasoning as agentic context engineering, while Delta1 [65] integrates symbolic and neural components for explainable inference. CLAUSE is the closest neighbour to this work — it is cost- and latency-budgeted neuro-symbolic KGQA evaluated on MetaQA, the same benchmark family we use — but it budgets evidence *per query* with a learned controller and does not persist learned structure across the stream, whereas TACET’s contribution

is the opposite axis: *cross-stream* distillation that installs reusable rules so later queries skip the LLM entirely. We position against it rather than re-implement its per-query controller, and a head-to-head budgeted comparison is left to future work. Systematic surveys confirm a crowded field [16, 42]. TACET is neuro-symbolic at the *systems* level: it does not differentiate through logic but composes a symbolic engine, an embedding model and an LLM, and lets the neural tier *teach* the symbolic tier executable rules at run time. The differentiator is the online distillation loop — the neural tier installs checkable rules into the sound symbolic tier as the workload streams — rather than a one-shot composition with a fixed routing distribution.

**Auditable and proof-carrying reasoning.** A line of work asks that a system’s answer arrive with a verifiable trace. Proof-carrying neuro-symbolic code attaches machine-checkable certificates to neuro-symbolic programs [33], and auditable neuro-symbolic pipelines have been proposed in high-stakes domains such as pathology, where an explicit query is exposed as the trace of evidence [11]. These works argue for auditability in the abstract or for a specific application surface; TACET is a concrete Datalog instantiation of the idea, producing a per-answer proof tree — the minimal set of ground rule firings that derives each committed answer — that can be replayed independently of the model that proposed it.

**Neuro-symbolic compliance and privacy reasoning.** Regulatory compliance is a natural home for proof-carrying neuro-symbolic reasoning, and a recent line attacks it directly. PrivaCI-Bench [37] frames GDPR/HIPAA compliance as contextual-integrity reasoning and is the benchmark we adopt for our second domain. GraphCompliance [15] aligns policy and context graphs for LLM-based compliance assessment, and Cosmic [38] performs automated reasoning over GDPR consent violations; both translate a fixed policy top-down, whereas TACET *mines* the compliance rules online from a teacher’s verdicts under an ontology gate. ARIEL [20] personalises agent privacy decisions by logical entailment over prior user choices — rule-based privacy reasoning, but not a cost-amortising cascade. Closest in name, SELFICI [50] performs *self-distillation for contextual integrity*, but its student is the LLM’s own *parameters*; TACET’s student is a set of executable Datalog rules, a cross-representation distillation whose artifact answers without any neural model in the loop. Finally, a position paper argues that logical *soundness* alone is not a reliable correctness criterion for neuro-symbolic fact-checking [12]; we agree, and it is exactly why our soundness guarantee (Theorem 1) is scoped to type-consistency and provenance rather than world-correctness, and why we report the article-F1 over-generalisation honestly (Section 8).

**Causal reasoning over knowledge graphs.** Causal knowledge graphs encode interventional and counterfactual structure to explain predictions [29], and recent work routes LLM causal reasoning through a knowledge-graph representation [32] or checks the correctness of LLM-produced causal chains *after the fact* with symbolic verification [27]. TACET ships standalone Pearl-style utility functions (back-door / front-door / instrumental-variable adjustment and counterfactual evaluation) as an extension module (Appendix B); they are not invoked by the cascade and we make no claim of a causal contribution here.

**Knowledge distillation and world models.** Classic distillation [28] transfers a teacher network’s soft predictions into a smaller student of the *same* kind. TACET performs *cross-representation* distillation: the student of an LLM is a set of logical rules and graph facts. Concretely, it mines teacher-contributed graph facts into Horn rules in the style of AMIE [21] and then Datalog-checks them, rather than translating LLM text directly into rules. Surveys

of symbolic knowledge distillation flag correctness-verification of the distilled rules as an open problem [2]; TACET closes this in its setting by using the proof tree as the rule’s correctness certificate — a distilled rule is admitted only when its firings derive answers through sound, replayable derivations. The framing of a knowledge graph as an editable, reasoning “world model” connects to work on world models [26, 35] and to the Graph World Model [18], which unifies tasks as operations on a graph; relative to that line we contribute a concrete cost-reducing mechanism and an empirical cost study. Graph foundation models [5, 40] are a natural future replacement for our Tier-2.

### 3 The TACET Cascade

**Problem setting.** The world state is a typed labeled-property graph  $G = (V, E, \tau)$  with entities  $V$ , directed typed edges  $E \subseteq V \times R \times V$ , and a type map  $\tau : V \rightarrow T$ . An *ontology*  $\mathcal{O}$  assigns each relation  $r \in R$  a domain and range over types and optional structural axioms (symmetric, transitive, functional, inverse). A *query* is a pair  $(h, q)$  asking for the tail set  $\{t : (h, q, t) \text{ holds}\}$ ; the system processes a stream  $Q = \langle (h_1, q_1), \dots, (h_n, q_n) \rangle$ . Each tier  $i$  has a unit cost  $c_i$  with  $c_1 \ll c_2 \ll c_3$ . The objective is to minimise the blended cost  $\sum_i c_{\text{tier}(i)}$  subject to an accuracy target.

**Tier 1: symbolic.** A rule is a function-free, range-restricted Horn clause  $b_1 \wedge \dots \wedge b_k \Rightarrow h$ . Given base facts  $F$  and a rule set  $\mathcal{R}$  (ontology axioms, engineer-written rules, and rules synthesised at run time), forward chaining materialises the *deductive closure*

$$C(F, \mathcal{R}) = \text{lfp} (X \mapsto F \cup \{ \sigma(h) : (b \Rightarrow h) \in \mathcal{R}, \sigma \models b \subseteq X \}).$$

A query  $(h, q)$  is answered by  $\{t : (h, q, t) \in C\}$ ; if this is empty the tier *abstains*. Every derived triple stores the rule and premises that produced it, so an answer unfolds into a full proof tree.

**Tier 2: KGE.** ComplEx represents entities and relations as complex vectors and scores a triple by the multilinear form  $\phi(h, r, t) = \text{Re} \langle \mathbf{e}_h, \mathbf{w}_r, \bar{\mathbf{e}}_t \rangle$ . We train it with type-correct negative sampling (corrupting a tail with another *valid* tail of the same relation, which is essential for the model to discriminate within a type) and a binary cross-entropy loss. For a query, candidate tails are restricted to the ontology range; the top candidate is returned with a confidence given by a temperature-scaled softmax over candidate scores, the temperature fitted on a held-out split [25]. A prediction is accepted only if its confidence exceeds a threshold  $\theta$  *and* it satisfies the ontology (domain, range, functionality); otherwise the tier abstains.

**Tier 3: LLM teacher.** The teacher answers any query. In a deployment it is a frontier LLM, optionally a graph-walking agent [57]; in our experiments it is an oracle over ground truth, optionally noisy, so results are reproducible offline (Section 5).

**Routing.** Algorithm 1 routes a query to the first tier that does not abstain. A Tier-2 prediction additionally passes the Tier-1 ontology check before it is surfaced — the neural tier proposes, the symbolic tier vetoes.

### 4 Online Distillation

Each Tier-3 answer is compiled into reusable assets by three mechanisms.

---

**Algorithm 1** TACET query routing with distillation

---

```
1: function ASK( $h, q$ )
2:    $A \leftarrow \text{SYMBOLICQUERY}(h, q)$ 
3:   if  $A \neq \emptyset$  then return (tier 1,  $A$ )
4:   end if
5:    $(t, \text{conf}) \leftarrow \text{KGEPREDICT}(h, q)$ 
6:   if  $\text{conf} \geq \theta$  and  $\text{ONTOLOGYALLOWS}(h, q, t)$  then
7:     return (tier 2,  $\{t\}$ )
8:   end if
9:    $A \leftarrow \text{TEACHERANSWER}(h, q)$ 
10:   $\text{DISTIL}(h, q, A)$  ▷ Section 4
11:  return (tier 3,  $A$ )
12: end function
```

---

(1) **Fact write-back.** The triples  $(h, q, t)$  are inserted as graph edges and into the Tier-1 closure, so the *identical* query is thereafter answered by Tier 1 at cost  $c_1$ .

(2) **Rule synthesis.** Write-back alone behaves like a cache — it helps only exact repeats. To generalise, TACET mines Horn rules. The teacher returns the *complete* answer set for each head it is asked, so after a relation  $q$  has been queried for a set  $H_q$  of *complete heads*, we mine candidate rules  $b \Rightarrow q(x, y)$  with bodies of length one or two over the base relations (and  $q$  itself, enabling recursion). A candidate’s confidence is the fraction of body groundings  $(x, y)$  with  $x \in H_q$  that also satisfy the head; estimating confidence only over complete heads avoids penalising a correct rule for as-yet-unobserved heads. Rules with confidence  $\geq \gamma$  and support  $\geq \sigma_{\min}$  are installed in Tier 1. Each mined rule carries an *inequality guard*  $x \neq y$ : because confidence was measured on non-reflexive pairs, the guard forbids the rule from deriving reflexive triples (e.g.  $\text{ancestor}(x, x)$ ) that the measurement never sanctioned — without it, a compositional rule combined with a symmetric premise produces spurious self-loops.

The miner is a deliberately simple nested enumeration (Algorithm 2), not an AMIE+ reimplementa-tion: it has no prefix-tree pruning and no confidence bounds, only a direct length-one and length-two scan over the allowed relations, scored on the complete heads.

(3) **KGE augmentation.** Teacher facts join the Tier-2 training set; at the next *consolidation* the embedding is warm-started on the enriched graph, so it generalises from teacher answers to structurally similar entities.

**Consolidation.** Write-back and rule synthesis take effect immediately; KGE augmentation is applied in periodic *consolidation* steps (a warm-started re-fit), modelling a cheap background batch job.

**Soundness.** Let  $\mathcal{R}$  be the active rule set and  $F$  the base facts.

**Proposition 1** (Tier-1 soundness). *Forward chaining over function-free, range-restricted Horn rules computes the least fixpoint  $C(F, \mathcal{R})$ , which equals the set of triples entailed by  $F \cup \mathcal{R}$  under Datalog semantics. Hence every answer TACET returns from Tier 1 is entailed by  $F \cup \mathcal{R}$ ; Tier 1 never returns an unentailed triple, and abstains otherwise.*

---

**Algorithm 2** AMIE-style rule miner (`tacet.distill.mine_rules`)

---

```
1: function MINERULES( $G, F_{\text{teacher}}, q, H_q, B, \gamma, \sigma_{\min}, m$ )
2:   Input: graph  $G$ ; teacher facts  $F_{\text{teacher}}$ ; target relation  $q$ ; complete heads  $H_q$ ; allowed body
   relations  $B$ ; confidence  $\gamma$ , support  $\sigma_{\min}$ , cap  $m$ 
3:    $F \leftarrow \text{TRIPLES}(G) \cup F_{\text{teacher}}$ ; index  $I[r] \leftarrow \{(x, y) : (x, r, y) \in F\}$  for each relation  $r$ 
4:    $T \leftarrow I[q]$  ▷ target pairs
5:   if  $|T| < \sigma_{\min}$  then return  $\emptyset$ 
6:   end if
7:    $\text{KEEP}(P) \leftarrow \{(x, y) \in P : x \in H_q\}$  ▷ score only on complete heads
8:    $\mathcal{S} \leftarrow \text{sort}((B \cup \{q\}) \cap \text{dom}(I))$ ;  $C \leftarrow \emptyset$ 
9:   for  $r_1 \in \mathcal{S}$  with  $r_1 \neq q$ , each  $\text{inv}_1 \in \{\perp, \top\}$  do ▷ length-1 body
10:     $P \leftarrow \text{KEEP}(\text{DIR}(I[r_1], \text{inv}_1))$ 
11:    if  $|P| \geq \sigma_{\min}$  then
12:       $s \leftarrow |P \cap T|$ ;  $c \leftarrow s/|P|$ 
13:      if  $c \geq \gamma$  and  $s \geq \sigma_{\min}$  then  $C \leftarrow C \cup \{(r_1^{\text{inv}_1} \Rightarrow q, c, s)\}$ 
14:      end if
15:    end if
16:  end for
17:  for  $r_1, \text{inv}_1$  and  $r_2, \text{inv}_2$  over  $\mathcal{S} \times \{\perp, \top\}$  do ▷ length-2 body
18:     $A_1 \leftarrow \text{ADJ}(\text{DIR}(I[r_1], \text{inv}_1))$ ;  $A_2 \leftarrow \text{ADJ}(\text{DIR}(I[r_2], \text{inv}_2))$ 
19:     $P \leftarrow \text{KEEP}(\{(x, y) : \exists z, z \in A_1[x], y \in A_2[z], x \neq y\})$ 
20:    if  $|P| \geq \sigma_{\min}$  then
21:       $s \leftarrow |P \cap T|$ ;  $c \leftarrow s/|P|$ 
22:      if  $c \geq \gamma$  and  $s \geq \sigma_{\min}$  then  $C \leftarrow C \cup \{((r_1^{\text{inv}_1} \circ r_2^{\text{inv}_2}) \Rightarrow q, c, s)\}$ 
23:      end if
24:    end if
25:  end for
26:  sort  $C$  by  $(c, s)$  descending; drop duplicate rule names
27:  return first  $m$  rules of  $C$ 
28: end function
```

---

Proposition 1 is soundness *relative to the rule set*. It does *not* claim a synthesised rule is correct about the world: a mining error or a wrong teacher answer can install a flawed rule. The confidence threshold  $\gamma$ , the support threshold  $\sigma_{\min}$ , the complete-head estimator, the inequality guard, and the ontology type check all reduce this risk; Section 7 (E6) measures the residual effect of a noisy teacher empirically.

## 5 Experimental Setup

**A controlled benchmark.** We generate a synthetic “organisation-and-society” knowledge graph: people, companies, cities, regions, departments, skills and languages, linked by base relations (employment, residence, geography, management, friendship, family, skills). Derived and held-out relations form a query workload in which *every query has a known answerability class*:

**Stated** a base fact present in the graph — Tier 1 answers it directly.

**Ded-Given** entailed by a rule shipped with the system (transitive-closure rules for `ancestor_of`) — Tier 1.

**Ded-Discover** entailed by a rule the teacher must *synthesise* (**superior\_of**, the transitive closure of management; **colleague\_of**, a relational composition) — Tier 3 until the rule is mined, Tier 1 thereafter.

**Inductive** a withheld edge with no entailing rule but strong structural regularity (**primary\_language**, which clusters by employer with noise) — Tier-2 territory.

**Novel** an idiosyncratic attribute with no graph signal — Tier 3 only; exact repeats become Tier 1 via write-back.

The workload mixes the five classes and interleaves repeats at a controllable rate. This design lets us attribute every routing decision and every cost saving to a known cause.

**Why synthetic, why an oracle teacher.** A synthetic generator gives exact control over the variables the cost dynamics depend on — class mix, repeat rate, graph size, teacher error — and exact ground truth for every answerability class, which a natural-language benchmark cannot. Modelling the teacher as an oracle removes LLM answer noise as a confound; experiment E6 then *re-introduces* it as a controlled variable. The price is external validity, which we address in Section 8.

**Baselines.** **LLM-only** sends every query to the teacher (the cost ceiling). **Symbolic-only** uses just the shipped rules and abstains otherwise (the accuracy floor; measures rule coverage). **Cache cascade** is Tier 1 + an exact-match answer cache + the teacher — the honest “just memoise” baseline. **Static cascade** is the full three-tier cascade with distillation switched off. **TACET** is the full system.

**Protocol.** Each experiment runs 8 independent benchmark instances (distinct seeds); we report the mean and a 95% confidence interval. The default workload is 300 queries with a 30% repeat rate; TACET consolidates every 100 queries. Tier costs are  $c_1=10^{-4}$ ,  $c_2=10^{-3}$ ,  $c_3=5\times 10^{-2}$  USD; the qualitative results depend only on  $c_3 \gg c_2 > c_1$ . ComplEx uses 64 dimensions; mining uses  $\gamma=0.95$ ,  $\sigma_{\min}=3$  and triggers after 10 complete heads. Full hyper-parameters and the KGE link-prediction quality are in the appendix.

## 6 Results

We lead with the results that speak to auditability — the property this system is built for. Section 6.1 evaluates deductive reasoning with checkable proofs on an external standard suite; the proof-tree and proof-validity evaluation follows in Section 7. The efficiency consequences of the same distillation loop — the  $\sim 3.9\times$  blended-cost reduction — are reported last (Section 7.2), as a side effect of the auditable design rather than its objective.

### 6.1 Deductive Reasoning with Proofs (ProofWriter)

The benchmarks above are synthetic to TACET. To evaluate the symbolic tier on an external, standard deductive-reasoning suite, we run it on PROOFWRITER [59], closed-world (CWA) variant. Each ProofWriter *theory* is a handful of facts and IF-THEN rules together with boolean questions, every question labelled with a gold answer *and* a proof chain of known depth (QDep). We map each fact (**arg0**, **verb**, **arg1**, **+**) to an edge **arg0-verb->arg1**, each rule to a range-restricted Horn rule (the universal token **something** / **someone** becomes the variable **?x**), build a per-theory

Table 1: Deductive reasoning with checkable proofs on ProofWriter (CWA), per reasoning depth ( $n$  = evaluated questions; Excl. = theories excluded for rule-body negation). Depth 4 is omitted: its per-depth raw counts were not retained in the released run artifacts.

| Depth | $n$  | Excl. | Acc.  | Proof-cov. | Proof-val. |
|-------|------|-------|-------|------------|------------|
| 0     | 778  | 88    | 1.000 | 1.000      | 1.000      |
| 1     | 1558 | 99    | 1.000 | 1.000      | 1.000      |
| 2     | 2236 | 94    | 1.000 | 1.000      | 1.000      |
| 3     | 2550 | 120   | 1.000 | 1.000      | 1.000      |
| 5     | 4538 | 71    | 1.000 | 1.000      | 1.000      |

**RuleEngine**, materialise its deductive closure, and answer each question under CWA: a positive query is True iff its atom is derivable, a negated query is True iff its atom is *not* derivable (negation-as-failure at the query level). Table 1 reports, per reasoning depth, the number of questions evaluated, the count of excluded theories, answer accuracy, proof-coverage and proof-validity. We evaluate the dev split, capped at 300 theories per depth.

**Expressivity boundary (stated honestly).** TACET’s symbolic tier is *positive* Datalog. ProofWriter-CWA expresses the queried answer’s polarity on the question (handled by negation-as-failure at query time), but a subset of theories also use negation-as-failure *inside a rule body* (e.g. “if someone is white and not blue then they are young”). Such rules are outside positive Datalog, so we *exclude* those theories and *report* the excluded fraction rather than silently dropping or mishandling them: across the five depths this is 31.5% of theories (0.315 of the sampled 1,500). The remaining, expressible theories are evaluated in full.

**Reading the result.** On the expressible subset the engine attains 1.000 accuracy and 1.000 proof-validity at every depth, against a majority-class baseline of 0.500. **We emphasise that this 1.000 is an *expected sound-and-complete ceiling*, not a competitive accuracy claim:** ProofWriter-CWA gold labels are themselves the forward-chaining closure of facts under rules, so a *sound and complete* positive-Datalog engine answers every expressible question correctly — depth 0 through 5 alike, since forward chaining reaches the least fixpoint regardless of proof length. The point of the experiment is therefore not a novel accuracy number. It is the 1.000-coverage, 1.000-validity column: *every* deductive answer ships a proof tree that grounds, step by step, in the theory’s base facts and named rules (Section 7). The contribution TACET makes on this task is the *checkable proof* accompanying each answer — the property a regulated or auditable deployment needs — not leaderboard accuracy on a suite where the gold standard is, by construction, a closure the engine computes exactly.

## 7 Auditable Reasoning: Proof Trees and Their Evaluation

Every answer the symbolic tier returns carries its *proof tree*: the rule applied and the (recursively annotated) base or earlier-derived facts that matched its body. Expanding any tree to its leaves terminates in base facts of the world graph — a corollary of the soundness of forward chaining (Proposition 1) — so a downstream consumer can ask TACET for the provenance of any Tier-1 answer and receive an explanation in terms of facts a human authored or admitted. Nothing is invented.

Table 2: Proof coverage and validity on the synthetic KGQA benchmark.

| Metric           | Value   |
|------------------|---------|
| Proof coverage   | 0.420   |
| Proof validity   | 1.000   |
| Answered queries | 126/300 |

We quantify this with two metrics over the symbolic results (`tacet.eval.eval_audit`). *Proof coverage* is the share of workload queries that are answered *and* ship a non-empty proof. *Proof validity* is, for an answered query, the fraction of its proof that is *grounded*: every derivation step reduces, through the proof tree, to a base fact or a rule registered in the engine (an ontology axiom or a synthesised/given rule), with no dangling or unknown-rule step. We stress that proof validity audits the *provenance integrity* of the proof the engine produced — that nothing unsupported entered the derivation — not the ground-truth correctness of the answer; a fully grounded proof of a wrong fact still scores 1.0. Correctness against the oracle is reported separately by the accuracy column of Table 4.

On the synthetic-org benchmark (seed 0, a 300-query workload), the symbolic tier answers the rule-covered fraction and abstains on the rest, giving a proof coverage of 0.420 (Table 2); every proof it produces is fully grounded, so proof validity is 1.000. The grounded-by-construction result is the intended one — the engine only ever cites rules it holds and facts it was given — and the metric is the executable check that this invariant holds end to end, the property an auditor or regulated deployment needs. A value below 1.0 would flag a proof that cites a retired or unregistered rule, or a dangling derivation step; reporting it makes the soundness invariant an executable, regression-checkable property rather than a one-off empirical finding.

### 7.1 Rule-mining precision: proposed vs. installed vs. world-correct

Proof validity audits provenance, not world-correctness: a soundly-applied but *wrong* synthesised rule still scores 1.0 (Section 4). A reviewer rightly asked us to quantify the gap. The AMIE-style miner *over-produces*: it forms a candidate body for every length-one and length-two relation path, scores each on the teacher-answered (“complete”) heads, and installs those clearing the confidence threshold  $\gamma$  and support  $\sigma_{\min}$ . Two questions follow. How aggressive is the filter — how many of the proposed candidates does it keep? And is the *confidence* estimate (a partial-data statistic over the answered heads) a reliable proxy for being *true in the world*? We answer both with three counts (`tacet.eval.rule_precision`): **proposed**, the number of candidate bodies the miner forms before the cut; **installed**, the rules that pass  $\gamma, \sigma_{\min}$ , dedup and the cap (what the cascade adds to Tier 1); and **world-correct**, the installed rules whose precision on the *full* ground-truth graph is  $\geq 0.9$ . World precision of  $b \Rightarrow q(x, y)$  is the fraction of  $(x, y)$  pairs satisfying  $b$  that also satisfy  $q$ , measured over *every* entity in the ground-truth graph — not only the answered heads the confidence filter saw — so it exposes a rule that fits the observed heads yet over-fires elsewhere.

On the synthetic benchmark (Table 3), aggregated over 5 seeds (0–4), the miner proposes  $241.0 \pm 34.2$  candidate bodies across the discoverable relations; the confidence threshold installs  $14.2 \pm 1.2$  of them — a  $\sim 94\%$  rejection rate, confirming the over-production the reviewer flagged. Of the installed rules,  $13.6 \pm 0.5$  are world-correct ( $\geq 0.9$  precision on the full graph) at a mean installed precision of  $0.992 \pm 0.010$ . Crucially, the filter is *not* watertight, and the way it leaks is seed-dependent: across the five seeds, *every* non-world-correct installed rule is a **primary\_language** rule, the INDUCTIVE relation that clusters by employer *with noise*. There, “shares a manager  $\Rightarrow$

Table 3: Rule-mining precision on the synthetic KGQA benchmark (mean  $\pm$  std over 5 seeds, 300-query workload, oracle teacher). The confidence filter is selective ( $\sim 14$  of  $\sim 241$  candidates installed) and mostly — but not perfectly — world-correct.

| Quantity                       | Synthetic KGQA    |
|--------------------------------|-------------------|
| Candidate rules proposed       | $241.0 \pm 34.2$  |
| Rules installed (conf. filter) | $14.2 \pm 1.2$    |
| World-correct ( $\geq 0.9$ )   | $13.6 \pm 0.5$    |
| Mean precision (installed)     | $0.992 \pm 0.010$ |

shares a language” fits the answered heads well enough to clear  $\gamma=0.95$  but holds for only  $\sim 0.75$ – $0.83$  of all pairs, because the homophily is statistical, not logical. The leak is intermittent: in 2 of 5 seeds the cascade accumulates enough complete heads for `primary_language` to synthesise a rule at all, and only those seeds incur a sub-0.9 rule (driving mean precision to 0.973 and 0.988); in the other 3 seeds no `primary_language` rule clears the filter and mean precision is a clean 1.000. The non-zero std ( $\pm 0.010$  on precision,  $\pm 0.5$  on world-correct count) is therefore exactly this near-functional relation flickering in and out of the installed set, not noise in the deductive relations, which are world-correct on every seed. This is exactly the failure mode the soundness caveat in Section 4 anticipates: Tier 1 applies these rules soundly and they are still wrong about the world. We report it plainly rather than hide it — the confidence filter is a strong but leaky guard, and a noisy, near-functional relation is where it leaks. On the committed MetaQA-2hop *oracle* run, by contrast, the single installed composition rule (`~starred_actors.directed_by`) is exactly the target 2-hop relation, so its world precision is 1.000 (1/1 world-correct): when the latent rule is genuinely deductive, the miner installs it cleanly. The takeaway is the honest one — the filter removes the vast majority of spurious candidates and recovers genuine deductive compositions perfectly, but it is a statistical confidence test, so on relations with near-functional noise a minority of installed rules generalise imperfectly; correctness-verifying installed rules against held-out data (rather than only the answered heads) is the natural next guard.

**$\gamma$ -sensitivity: the precision/recall knob.** Figure 1 sweeps the miner’s confidence threshold  $\gamma$  over  $\{0.5, 0.7, 0.8, 0.9, 0.95, 0.99\}$  (five seeds each, oracle teacher) and plots, at each  $\gamma$ , the number of rules installed into Tier 1 and their mean world-precision. As  $\gamma$  rises the filter installs fewer rules but their mean world-precision climbs toward 1.0: the rules eliminated last, as the bar tightens, are exactly the noisy `primary_language` homophily rules whose answered-head confidence sits just below the cut, so removing them is what lifts world-precision. This is the precision/recall tradeoff of the confidence filter made explicit — the operating point  $\gamma=0.95$  used throughout the paper sits near the knee, keeping the deductive compositions while admitting only the occasional near-functional rule.

**The leaky rule is installed into Tier 1 (cost–accuracy caveat).** The two  $\sim 0.75$ -world-precision `primary_language` rules of seed 0 are not discarded: they are installed into *Tier 1*, the tier the paper markets as sound, abstaining rather than guessing. So for that relation Tier 1 now answers  $\sim 25\%$  *wrong* while *simultaneously* carrying proof-validity 1.0 — the answers are soundly derived from the installed rule (Proposition 1) and yet wrong about the world. The danger is that this gap is invisible at runtime: the miner’s confidence estimate for these rules is  $\sim 0.95$  (measured on the answered heads it saw), but their world-precision is  $\sim 0.75$ , and

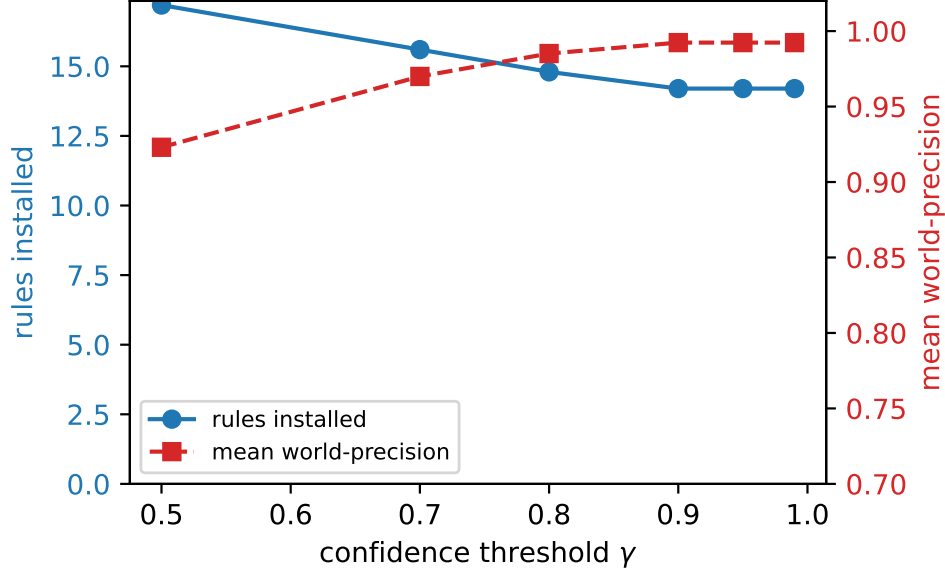


Figure 1: Confidence-threshold ( $\gamma$ ) sensitivity on the synthetic benchmark (oracle teacher, mean over five seeds). As  $\gamma$  rises, fewer rules install (left axis) but the mean world-precision of the survivors rises (right axis) — the homophily relations are the last to be filtered out.

that  $\sim 20$ -point gap cannot be detected online because world-precision requires ground truth the system does not have. The cascade does ship an instrument that could retire such rules — `tacet.experimental.episodic.FeedbackCurator` demotes a rule’s trust on negative user feedback and retires it below a threshold — but it is *experimental and not wired into the evaluated cascade*, so the reported runs carry the leaky rules to the end. The natural guard, and concrete future work, is to gate rule *installation* on a held-out precision estimate (a fresh slice of heads the confidence statistic never saw) rather than on answered-head confidence alone, turning the offline world-precision check of this section into an online admission test. This guard is now realized and measured: Section 7.3 gates held-out candidates at admission — every leaky candidate is rejected in all cells with a populated leakage class, at the price of teacher- and seed-dependent composition keep-rates. This is the operational face of the soundness caveat in Section 4: Proposition 1 guarantees soundness *relative to the rule set*, not that an installed rule is correct about the world, and a near-functional relation is precisely where that distinction bites.

## 7.2 Efficiency as a Side Effect of Distillation

The same distillation loop that turns teacher answers into checkable Horn rules also migrates the regular majority of a workload off the teacher and onto the cheap symbolic and embedding tiers. The cost reduction that follows is therefore not a separately engineered optimisation but a direct consequence of the auditable design: every query that clears at Tier 1/2 does so because a *grounded, validity-checked* rule or embedding already covers it. We report the efficiency numbers here, after the reasoning and auditability results, to keep them in their proper place — the  $\sim 3.9\times$  blended-cost reduction is what auditability buys, not what the system is for.

**E1: main comparison.** Table 4 compares all five systems. **The cost figures in this grid come from a *simulated* constant per-tier cost** ( $c_1=10^{-4}$ ,  $c_2=10^{-3}$ ,  $c_3=5\times 10^{-2}$  USD) applied

Table 4: Main cost–accuracy comparison across systems (8 seeds).

| System         | Cost (USD)         | Accuracy | Latency (ms) | % no-LLM |
|----------------|--------------------|----------|--------------|----------|
| LLM-only       | $15.000 \pm 0.000$ | 1.000    | 900          | 0        |
| Symbolic-only  | $0.030 \pm 0.000$  | 0.417    | 3            | 42       |
| Cache cascade  | $5.924 \pm 0.250$  | 1.000    | 356          | 61       |
| Static cascade | $7.948 \pm 0.838$  | 0.983    | 477          | 47       |
| <b>TACET</b>   | $3.818 \pm 0.503$  | 0.981    | 230          | 75       |

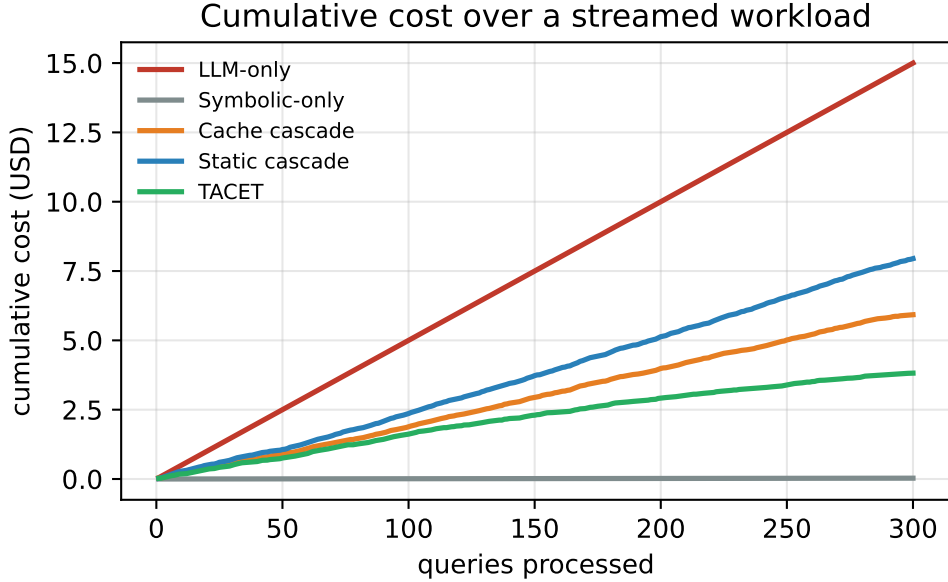


Figure 2: Cumulative cost over a streamed workload (mean over 8 seeds). TACET’s slope decreases as knowledge distils to cheaper tiers.

to a synthetic workload with an author-specified class mix; they are not measured against a real LLM bill. Under that cost model TACET attains a blended cost of \$3.82 against \$15.0 for LLM-only — a  $\sim 3.9\times$  reduction — at 0.981 accuracy. It is also cheaper than the cache cascade (\$5.9): caching only amortises exact repeats, whereas TACET’s synthesised rules and trained embedding answer *unseen* entities, so a far larger share of the workload clears at Tier 1/2. Symbolic-only is nearly free but answers only the rule-covered fraction; the static cascade pays the teacher repeatedly for every distinct hard query. The real-data corroboration of this trajectory is Section B.4.1.

**E2: cost trajectory.** Figure 2 plots cumulative cost as the workload streams. The LLM-only line is straight — cost is constant per query. TACET’s line *bends*: as distillation moves DED-DISCOVER queries to Tier 1 (after rule synthesis) and INDUCTIVE queries to Tier 2, the marginal cost per query falls and the curve flattens toward the symbolic floor.

**E3: cost–accuracy frontier.** The Tier-2 threshold  $\theta$  trades accuracy for cost: a low  $\theta$  admits more (occasionally wrong) embedding predictions and lowers cost; a high  $\theta$  routes uncertain queries

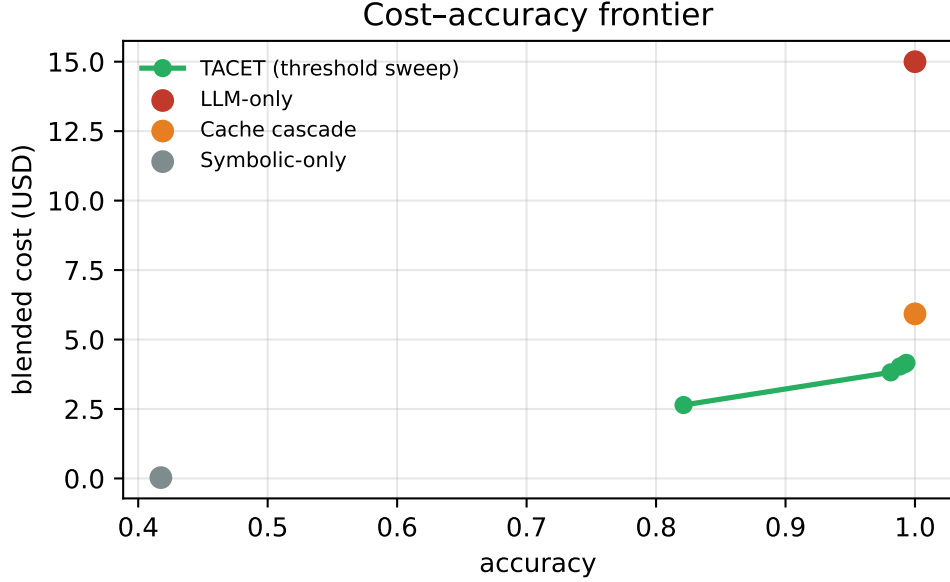


Figure 3: Cost-accuracy frontier. The curve is TACET swept over the Tier-2 confidence threshold  $\theta$ ; markers are baseline systems.

to the teacher. Figure 3 sweeps  $\theta$  and traces the resulting frontier. The frontier dominates the cache cascade: at its high-accuracy end (peak 0.9933 at \$4.16) TACET is  $\sim 30\%$  cheaper than the cache cascade (\$5.92 at 1.000) for a  $\leq 0.0067$  accuracy gap; at  $\theta \rightarrow 1$  (Tier 2 effectively off) the saving still holds, demonstrating that rule synthesis alone — without the embedding tier — already beats caching, because synthesised rules generalise to entities the cache has never seen.

**E4: ablations.** Table 5 removes each distillation mechanism. Disabling *all* distillation (the static cascade) is by far the most expensive (+108%): without learning, the teacher is paid repeatedly. Removing *write-back* (+41%) and *rule synthesis* (+39%) are roughly equally damaging — the two mechanisms are complementary: write-back amortises exact repeats while rule synthesis generalises to unseen entities, and the workload exercises both. Removing *KGE augmentation* has no measurable effect on this benchmark, and the mechanical reason is *redundancy with write-back*, not that the ablation isolates a working mechanism. With write-back enabled, every teacher fact is already inserted into the graph that the consolidation step re-trains Tier 2 on; the augmentation set is the same teacher facts, so their union with the training set is a no-op. KGE augmentation is therefore a distinct mechanism only when write-back is *off*, whereas the headline grid runs both together — so this ablation cell does not isolate it. We flag this as an artifact of the ablation design rather than evidence that embedding augmentation is inert in general.

**E5: sensitivity to repetition.** Figure 4 varies the workload repeat rate. The cache cascade depends entirely on repeats: as repetition falls toward zero its cost climbs steeply (\$3.4  $\rightarrow$  8.5 across the sweep), losing most of its advantage. TACET degrades far more gently (\$2.6  $\rightarrow$  5.0) because rule synthesis and the embedding generalise across *distinct* queries, so its cost lead over the cache is widest exactly where caching fails — at zero repetition TACET is  $\sim 1.7\times$  cheaper.

Table 5: Ablation of the three distillation mechanisms.

| Configuration               | Cost (USD) | Accuracy |
|-----------------------------|------------|----------|
| TACET (full)                | 3.818      | 0.981    |
| – fact write-back           | 5.392      | 0.982    |
| – KGE augmentation          | 3.818      | 0.981    |
| – rule synthesis            | 5.293      | 0.976    |
| – all distillation (static) | 7.948      | 0.983    |

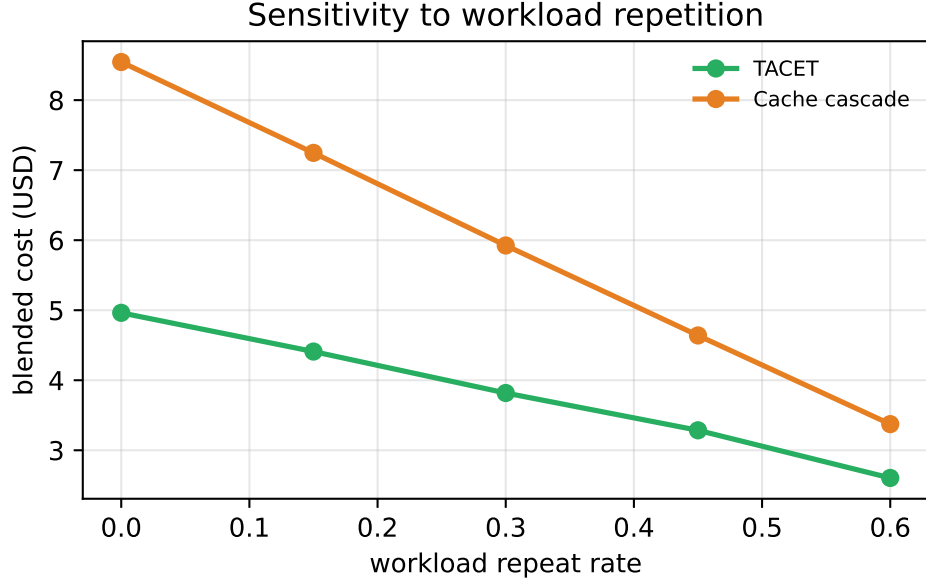


Figure 4: Blended cost versus workload repeat rate. The cache rises steeply toward the LLM-only regime as repetition vanishes; TACET degrades gently because synthesised rules and the KGE generalise to unseen entities.

**E6: robustness to a noisy teacher.** A real LLM errs. We inject a per-query teacher error rate  $\varepsilon$  and measure end-to-end accuracy (Figure 5). Counter-intuitively, TACET is *more* robust to teacher noise than LLM-only: at  $\varepsilon = 0.20$  LLM-only’s accuracy falls to 0.804 while TACET holds 0.863 (+5.9 points). The reason is structural: an LLM-only system sends every query to the noisy teacher, so its accuracy tracks the teacher’s; TACET sends only the long tail ( $\sim 24\%$  at  $\varepsilon = 0$ ), and the symbolic and embedding tiers — whose answers are not produced by the teacher — are insensitive to teacher noise on the majority of queries. Distillation can still propagate teacher errors (a wrong fact written back, or a rule mined from inconsistent answers), but the confidence/support thresholds reject most spurious rules, and write-back types each new entity from the relation’s declared schema so a synthesised rule cannot silently derive an untyped fact (a type-inconsistent fact between existing entities is still possible and is surfaced by the validator, not silently admitted). Cost rises slightly with  $\varepsilon$  (\$3.8  $\rightarrow$  4.6) because inconsistent teacher answers depress mined-rule confidence below threshold, so fewer queries migrate down. In a deployment with a genuinely unreliable teacher, gating write-back and synthesis on a voting/agreement check is the natural mitigation.

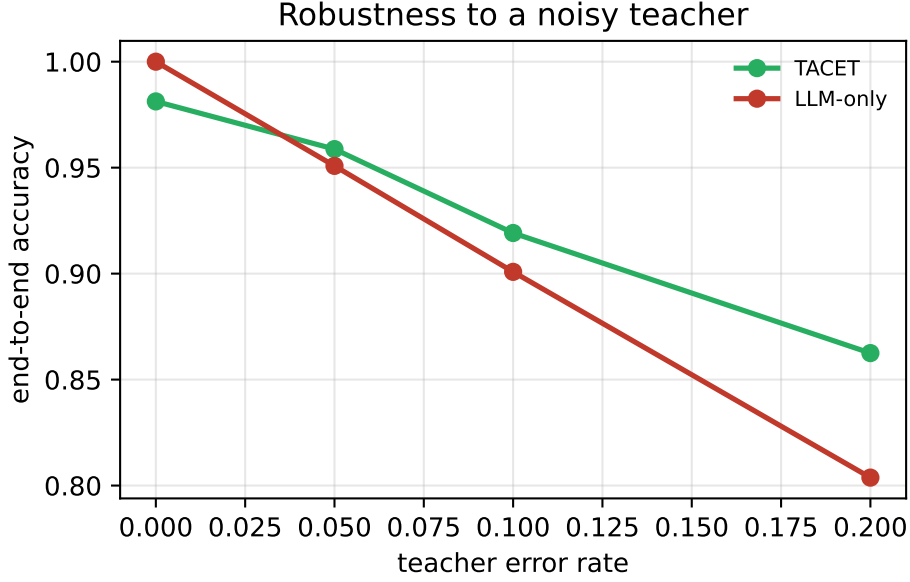


Figure 5: End-to-end accuracy versus teacher error rate  $\varepsilon$ .

### 7.3 Online admission: held-out gating and decision-tier routers

The leaky-rule caveat of Section 7.1 asked for exactly one instrument: gate rule *installation* on a held-out estimate rather than on answered-head confidence. We ran that test for real. In each cell, every held-out minimal ACTION candidate is gated at  $\gamma = 0.9$  under a cached prompt-admission rule mined from a disjoint replay slice; the gate faces two classes of candidates — *leaky* rules that must be rejected, and *compositional* rules whose admission feeds the downstream accuracy comparison. Table 6 reports the nine valid cells (five teachers; three cells with truncated budgets and two declared infeasible in the pre-registered cost envelope are excluded, and two teachers contributed three seeds each for a seed-robustness probe).

Three findings. (i) *The gate catches every installed leak.* Wherever a leakage class exists, reject-leakage is 1.0: no leaky candidate is admitted. (ii) *Composition keep-rate is teacher- and seed-dependent* (0.0–1.0); three cells mine no leakage class at all, and the preregistration treats their verdict as indeterminate rather than forcing a label. (iii) *Per-cell verdicts are seed-unstable:* the two teachers probed with three seeds each switch verdict across seeds (IND  $\rightarrow$  NEG  $\rightarrow$  NEU for one, NEG  $\rightarrow$  NEU  $\rightarrow$  NEU for the other), following the class composition of the mined rules rather than any property of the gate — so single-seed verdicts in this grid should be read as illustrative, not as findings.

Table 7 compares gate *arms*. Throughout,  $\Delta$  is the held-out validation-precision gap between admitted compositional and admitted leaky rules; when a gate admits no leakage, this reduces to the mean validation precision of its admitted compositional rules. A decision-tier routing API achieves  $\Delta = 0.9707$  at  $\$2.5 \times 10^{-5}$ /call; cheap chat-tier models match the separation ( $\Delta$  0.97–1.0) at 53–102 $\times$  that price; a zero-cost deterministic rule-tier gate built on teacher-agreement risk does not separate ( $\Delta = 0.4849$ ) and admits five of the six leaky candidates — in only one of the four leakage-bearing cells does it reject any. The honest reading: the advantage of a decision-tier router at admission is its *price tier*, not a unique gating capability — and no capability- or price-tier substitute exists at \$0. Note also that the router’s separation comes with strong

Table 6: Held-out admission gating per cell. *Verdict*: NEG = gate is discriminative but over-restrictive, NEU = gate admits nearly everything, IND = no leakage class present (empty class), so the preregistered verdict is undefined. Costs are per-cell teacher spend.

| Model               | Seed | Verdict | Rej. leak | Keep. comp | Hybrid | Cache | Cost (USD) |
|---------------------|------|---------|-----------|------------|--------|-------|------------|
| gpt-5.6-luna        | 0    | NEG     | 1.00      | 0.700      | 0.954  | 0.931 | 0.35       |
| deepseek-v4.1-flash | 0    | IND     | –         | 0.895      | 0.924  | 0.878 | 1.52       |
| gemini-3.8-flash    | 0    | IND     | –         | 0.727      | 0.931  | 0.893 | 8.25       |
| qwen3.8-flash       | 0    | IND     | –         | 0.000      | 0.702  | 0.641 | 0.65       |
| qwen3.8-flash       | 1    | NEG     | 1.00      | 0.833      | 0.931  | 0.910 | 0.60       |
| qwen3.8-flash       | 2    | NEU     | 1.00      | 1.000      | 0.881  | 0.894 | 0.68       |
| glm-5.3-flash       | 0    | NEG     | 1.00      | 0.875      | 0.947  | 0.931 | 0.20       |
| glm-5.3-flash       | 1    | NEU     | 1.00      | 0.957      | 0.931  | 0.972 | 0.20       |
| glm-5.3-flash       | 2    | NEU     | 1.00      | 1.000      | 0.927  | 0.940 | 0.22       |

Table 7: Gate arms on the same admission workload: capability ( $\Delta$  separation), per-call price, reject-leakage, and composition keep-rate (reject-leakage is the mean over leakage-bearing cells). The decision-tier router separates near-oracle at three orders of magnitude below teacher cost; cheap chat-tier models match its separation at 53–102 $\times$  its price; the zero-cost deterministic rule-tier gate does not separate.

| Gate                      | $\Delta$ | Cost / call           | Rej. leak | Keep. comp |
|---------------------------|----------|-----------------------|-----------|------------|
| jev decision API (E19)    | 0.9707   | $2.52 \times 10^{-5}$ | 1.00      | 0.071      |
| deepseek-v4.1-flash (E22) | 0.9989   | $2.6 \times 10^{-3}$  | 1.00      | 0.530      |
| qwen3.8-flash (E22)       | 0.9717   | $1.4 \times 10^{-3}$  | 1.00      | 0.506      |
| glm-5.3-flash (E22)       | 0.9949   | $1.3 \times 10^{-3}$  | 1.00      | 0.660      |
| Rule-tier gate (E21d)     | 0.4849   | 0                     | 0.083     | 0.706      |

over-rejection (keep-rate 0.071): it is a near-total leakage barrier, not a calibrated admit/reject boundary. Scripts and per-cell artifacts ship under `experiments/` (runners `run_e17_admission.py`, `run_e19_jev_gate.py`, `run_e21_rulTier_gate.py`, `run_e22_cheap_gate.py`).

## 8 Discussion and Limitations

*Reading guide:* the failure-mode inventory (Appendix D) and the extension-boundary appendix (E) complement this discussion; together the three sections delimit when the cascade does and does not pay off.

**External validity.** The main grid is synthetic with an oracle teacher — a deliberate choice that buys exact ground truth and control over the causal variables, the appropriate first study for a routing/distillation mechanism. Section B.4.1 complements it with a real Grok 4.3 teacher on the real-entity MetaQA KG, confirming the measured cost amortisation ( $2.8\times/5.1\times$  pooled over 3 seeds for TACET). That real-LLM study also surfaces the main external-validity caveat, which we state precisely: the cost amortisation we claim is delivered by the caching tier and survives intact under the real teacher ( $2.8\times/5.1\times$ ); what is gated on teacher quality is only the *additional* rule-generalisation advantage *over* caching, which on noisy real-LLM compositional workloads collapses

so that the cascade reduces to a cache. Broader natural-language KGQA benchmarks (WebQSP, CWQ) with diverse real teachers remain valuable future work, and the released code exposes a single-function teacher interface for them.

**Ontology preservation under write-back.** Theorem 1 guarantees that the symbolic closure is ontology-consistent *given* that the graph and the installed rules are. The engine maintains the rule premise by a type-consistency check at `add_rule`, and the write-back path types each new entity with a type the relation’s declared domain/range admits. Under the default `induce` schema this domain/range is the *set* of observed endpoint types, so a multi-type relation contributes a representative member of that set and a self-loop is typed from the domain–range intersection; either way a teacher fact about a fresh entity keeps the graph well-typed. The residual gap is a teacher that asserts a type-inconsistent fact between *existing* entities (a mistyped answer in the noisy regime): write-back does not relabel an existing node, so such a fact can enter the closure. We treat this as a teacher-quality concern rather than a structural one — it is detectable by the same `ontology.validate` pass used in our audits — and we report it explicitly rather than claim the closure is type-safe unconditionally.

**Forward graph dynamics: an honest negative result.** Forecasting the next graph state is outside the cascade’s envelope — its value is sound deductive reasoning and cost amortisation, not entity-level prediction — and we establish that edge with a measurement rather than assert it. We extended the engine with a learned forward-dynamics head — a Dreamer-V3-style recurrent latent mounted on the frozen Tier-2 ComplEx embeddings — to forecast the next graph state ( $G_{t+1}$ ) on ICEWS14, the standard temporal knowledge-graph benchmark. It is not competitive. The released `layer4_eval.json` reports three protocols on this head: a sampled-candidate filtered MRR of 0.451, a no-latent ablation of 0.395, and — the honest number for comparison against the literature — the standard all-entity, time-aware full-ranking MRR of 0.0925 (Hits@10 0.185). We report the full-ranking figure: 0.0925, well below strong temporal-KG forecasters such as RE-GCN ( $\sim 0.42$ ) and TiRGN with Chain-of-History reasoning ( $\sim 0.44$ ) [64]. We tried to close the gap and report the result plainly: DreamerV3-style latent free-bits, backpropagation through time, and action-as-node event encoding all failed to move the comparable metric over the simplest configuration, across multiple Modal training runs. We read this as a structural boundary rather than a tuning failure: a sound positive-symbolic substrate is ill-suited to entity-level temporal forecasting, where purpose-built temporal GNNs win by design. We therefore report the forecaster as a *limit* of the approach, not a contribution — the cascade’s value is auditable deductive *reasoning* (sound, replayable proofs) and cost amortisation through distillation, not forecasting accuracy. The forecaster code remains in the released implementation for reproducibility and provenance.

**Tier-2 model.** We use a CPU NumPy ComplEx. A production system would substitute a GPU relational GNN (R-GCN, RotatE) behind the same interface; this would raise Tier-2 accuracy and shift the E3 frontier favourably but does not change the mechanism.

**Rule language.** The miner searches Horn rules of body length up to two over base relations. Deeper or existential rules, numerical comparisons, and temporal rules are out of scope; richer inductive logic programming is compatible with the same distillation loop.

**Soundness is relative.** Proposition 1 guarantees Tier-1 answers are entailed by the current rule set, not that the rule set is correct. A wrong synthesised rule is “soundly” applied yet wrong about

the world. Mitigations are empirical (E6); formal verification of synthesised rules against held-out data is promising future work.

**Bias propagation through distillation.** The distillation loop mines rules from the teacher’s answers, so a *biased* teacher can propagate spurious or socially-biased correlations directly into the installed Horn rules. This failure is more insidious than a noisy-teacher error, because a biased rule then answers at Tier 1 with a clean, fully grounded proof tree (Section 7), so that a biased inference can inherit the surface authority of a sound derivation — a risk we flag, and return to with concrete mitigations below. Our existing guards are only partial here: the ontology check rejects type-inconsistent rules, and the world-precision evaluation (Section 7.1) catches rules that are wrong about the world on the *whole* graph — but neither targets *fairness* specifically. A rule can be world-correct on the training graph yet socially harmful: a demographic proxy that holds statistically across the observed entities (much as the `primary_language` homophily rule of Section 7.1 holds for  $\sim 0.8$  of pairs) would clear both guards while encoding a protected-attribute correlation no auditor would sanction. Concretely, three mitigations are future work: bias-aware rule vetting that audits each installed rule against known protected-attribute proxies; teacher debiasing or answer verification before write-back, so a biased answer never enters the candidate pool; and human-in-the-loop rule review for high-stakes deployments. These extend the same held-out admission test proposed in Section 7.1 — gating rule *installation* on a fresh evaluation slice — to cover fairness, not only world-precision.

**Rule-induced article over-generalisation (compliance).** On the compliance domain (Section B.4.2) the same over-generalisation that the synthetic `primary_language` rule exhibits (Section 7.1) appears at the level of *cited articles*: a synthesised pattern $\rightarrow$ article rule fires on cases where the typed contextual-integrity pattern usually — but not always — implies the article, so the full arm’s article-level micro-F1 falls (0.49–0.57 vs  $\sim 0.63$  for LLM-only) even though *verdict* accuracy is preserved at the iso-accuracy control. The mitigation is the one already proposed for rule precision (Section 7.1): gate rule *installation* on a held-out article-precision estimate rather than answered-case confidence alone. We report the trade-off plainly: the cost amortisation is real, and it is paid for in article-attribution recall, not in verdict correctness.

**Compliance inputs are annotated, not extracted (compliance).** The compliance experiment (Section B.4.2) takes each case’s contextual-integrity slots from the benchmark’s annotations, normalised by a fixed deterministic vocabulary; it does *not* include a learned extractor that recovers those slots from raw case text. The reported amortisation is therefore the saving on the verdict-reasoning cost, holding contextual-integrity extraction fixed and free. A deployed pipeline would add an extraction stage whose dollar cost and error both enter the picture — a noisy extractor could inject wrong atoms into the miner — so extending the cost accounting and the noise analysis to a real extractor is future work, the compliance-domain analogue of the noise-robust-mining direction below.

**Noise-robust rule mining.** The key next step exposed by the real-LLM evaluation (Section B.4.1) is a rule miner that recovers generalising composition rules from a *noisy, incomplete* teacher — so that distillation’s beyond-cache advantage survives an imperfect LLM teacher rather than collapsing to cache-equivalent behaviour.

**Engineering.** The graph store is in-memory; the symbolic and graph operations map directly onto a production graph database, and the consolidation step onto a scheduled batch job.

### 8.1 Is TACET “just a semantic cache”?

A semantic cache memoises past (query, answer) pairs and additionally serves near-duplicate queries by embedding similarity. It is the natural sceptical reading of any system that sits in front of an LLM and makes repeated questions cheap. The reading deserves to be taken seriously — and rejected precisely.

Our **cache cascade** baseline is an *exact-match* cache (rules + an exact-match answer store + the LLM) — the honest “just memoise” baseline. We do not implement the stronger embedding-similarity (semantic) cache; below we mark exactly where one would and would not close the gap. Every cost result separates TACET from the exact-match cache. The decisive evidence is E5 (Figure 4): as the workload repeat rate falls to zero — every query distinct — the cache’s cost climbs steeply toward the LLM-only regime (rising  $\sim 2.5\times$  across the sweep) because an exact-match cache can only return an answer it has *literally seen*. A semantic cache would blunt this curve only insofar as the distinct queries are near-duplicates of prior ones; against *structurally novel* heads (the regime E5 sweeps toward) it degrades just as the exact-match cache does. TACET’s cost at zero repetition is 58% of the cache’s ( $1.7\times$  lower). A cache’s value is repetition; TACET’s value survives its absence.

The gap is produced by what a cache structurally cannot do:

- **Compositional generalisation.** When the teacher answers `superior_of` for ten employees, the miner induces the rule  $manages \circ manages \Rightarrow superior\_of$ . That rule answers `superior_of` for *every* employee in the graph, including those never queried and never seen by the teacher. Neither an exact-match nor an embedding-similarity (semantic) cache has any entry for a structurally unseen head, so this gap is robust to upgrading the cache from exact-match to semantic.
- **Deductive inference.** Tier 1 returns the deductive *closure* — facts that were never stored and never asked (transitive ancestors, alliance-derived relations). A cache stores facts; it does not derive them.
- **Structural prediction.** Tier 2 predicts genuinely unseen edges from graph structure; a cache recalls but cannot predict.
- **Soundness and verification.** Tier-1 answers are provably entailed and Tier-2 answers ontology-checked; a cache returns whatever it stored, stale or wrong, unchecked.
- **Editability.** Change one fact and the closure updates consistently; a cache silently keeps every entry that depended on the old value.

A semantic cache is, precisely, the *degenerate special case* of TACET with rule synthesis and Tier 2 disabled and only fact write-back retained. The closest ablation row (the `no_rule_synth` configuration of Table 5) disables synthesis but *retains* Tier 2, so the gap it measures against full TACET isolates rule synthesis *given* Tier 2 — a *lower* bound on the value beyond caching: the true degenerate cache also loses Tier 2. We concede the converse honestly: for the NOVEL class — idiosyncratic facts with no structure — TACET’s write-back genuinely *is* a cache and nothing more. The claim is not that TACET is never a cache; it is that TACET is a cache *plus* a deductive reasoner *plus* a structural learner, and the cache is the least interesting part. Caching amortises

*computation* — the same question, cheaper next time. Distillation amortises *knowledge* — an entire class of questions, cheap thereafter, because the generative rule behind them has been recovered. It is the difference between memorising answers and learning the law that produces them.

## 9 Conclusion

TACET shows that a neuro-symbolic KGQA cascade can *self-distil*: an online loop turns each LLM teacher answer into checkable Horn rules and graph facts, so the routing distribution drifts toward the cheap tiers as a workload streams, and every Tier-1 answer carries a Datalog proof tree that reduces to base facts and named rules under an ontology-preservation guarantee (Theorem 1) that holds even for the online-synthesised rules. But the headline contribution of this paper is not that the cascade is *cheaper* — it is the *boundary condition* that says *when* its distinctive mechanism pays off. We state that boundary plainly. The measured cost-amortisation we report ( $2.8\times/5.1\times$  pooled over 3 seeds versus LLM-only, Section B.4.1) is delivered by the *cache tier alone*: write-back amortises exact repeats, and that is enough to produce the dollar savings. The paper’s distinctive claim — that *rule distillation* generalises to unseen heads and therefore exceeds a cache — does *not* show a measurable advantage under a real, noisy LLM teacher on this benchmark. What we contribute instead is the *quantified teacher-quality boundary* that separates the two regimes, together with the instruments needed to locate it. The boundary is sharp: with an oracle teacher rule distillation is positive (87% fewer teacher calls than caching on unseen heads), whereas with a real Grok 4.3 teacher at  $\sim 22\text{--}54\%$  accuracy on 2-hop compositions the rule miner degrades and the distillation-beyond-caching effect is *neutral*. On a second domain the boundary is *crossed by a real teacher*: streaming GDPR compliance cases (PrivaCI-Bench) past three frontier teachers, online rule distillation beats an exact-match cache by  $1.5\text{--}2.1\times$  at matched verdict accuracy with a  $\sim 10\%$  repeat ceiling (Section B.4.2), so the distillation-over-caching premium is not an oracle artefact — it materialises whenever a real teacher is accurate enough for the miner to recover generalising rules, and an accurate compliance teacher is. The instruments that make this measurable rather than anecdotal are proof-validity (does Tier 1 answer only through sound, replayable derivations?), rule-precision (do installed rules hold on the *whole* world, not just the answered heads?), and real-cost metering (every teacher token billed at the provider’s published price). A precise, negative-leaning boundary is itself a result: it tells a practitioner that this architecture buys auditable cost-amortisation through caching today, and that its rule-distillation premium is contingent on teacher quality crossing a threshold these instruments can now measure. We also report, candidly, a second non-win: a learned graph-forecasting extension does not beat purpose-built temporal models, and we present it as a negative result rather than a contribution. We hope the released benchmark, instruments, and implementation make self-distilling, proof-carrying cascades — and the teacher-quality boundary that governs them — a reproducible baseline for knowledge-graph question answering.

## References

- [1] Serge Abiteboul, Richard Hull, and Victor Vianu. *Foundations of Databases*. Addison-Wesley, 1995.
- [2] Kamal Acharya, Alvaro Velasquez, and Houbing Herbert Song. A survey on symbolic knowledge distillation of large language models. *arXiv preprint arXiv:2408.10210*, 2024.
- [3] James F. Allen. Maintaining knowledge about temporal intervals. *Communications of the ACM*, 26(11):832–843, 1983.

- [4] David Arthur and Sergei Vassilvitskii. k-means++: The advantages of careful seeding. In *ACM-SIAM Symposium on Discrete Algorithms (SODA)*, 2007.
- [5] Peter W. Battaglia, Jessica B. Hamrick, Victor Bapst, et al. Relational inductive biases, deep learning, and graph networks. *arXiv preprint arXiv:1806.01261*, 2018.
- [6] Antoine Bordes, Nicolas Usunier, Alberto Garcia-Durán, Jason Weston, and Oksana Yakhnenko. Translating embeddings for modeling multi-relational data. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2013.
- [7] Manuel Borroto, Katie Gallagher, Antonio Ielo, Irfan Kareem, Francesco Ricca, and Alessandra Russo. Question answering with LLMs and learning from answer sets, 2025.
- [8] Bradley Brown, Jordan Juravsky, Ryan Ehrlich, Ronald Clark, Quoc V. Le, Christopher Ré, and Azalia Mirhoseini. Large language monkeys: Scaling inference compute with repeated sampling. *arXiv preprint arXiv:2407.21787*, 2024.
- [9] Andrea Cali, Georg Gottlob, and Thomas Lukasiewicz. A general datalog-based framework for tractable query answering over ontologies. *Journal of Web Semantics*, 14:57–83, 2012.
- [10] Diego Calvanese, Giuseppe De Giacomo, Domenico Lembo, Maurizio Lenzerini, and Riccardo Rosati. Data complexity of query answering in description logics. *Artificial Intelligence*, 195:335–360, 2013.
- [11] Kewen Cao, Jianxu Chen, Yongbing Zhang, Ye Zhang, and Hongxiao Wang. Toward auditable neuro-symbolic reasoning in pathology: SQL as an explicit trace of evidence. *arXiv preprint arXiv:2601.01875*, 2026.
- [12] Jason Chan, Robert Gaizauskas, and Zhixue Zhao. Position: Logical soundness is not a reliable criterion for neurosymbolic fact-checking with LLMs, 2026. ICLR 2026 Workshop on Logical Reasoning of LLMs.
- [13] Lingjiao Chen, Matei Zaharia, and James Zou. Frugalgpt: How to use large language models while reducing cost and improving performance. *arXiv preprint arXiv:2305.05176*, 2023.
- [14] Wonje Choi, Jinwoo Park, Sanghyun Ahn, Daehee Lee, and Honguk Woo. NeSyC: A neuro-symbolic continual learner for complex embodied tasks in open domains, 2025. ICLR 2025.
- [15] Jiseong Chung, Ronny Ko, Wonchul Yoo, Makoto Onizuka, Sungmok Kim, Tae-Wan Kim, and Won-Yong Shin. GraphCompliance: Aligning policy and context graphs for LLM-based regulatory compliance, 2025. Under review, The Web Conference 2026.
- [16] Brandon C. Colelough and William Regli. Neuro-symbolic ai in 2024: A systematic review. *arXiv preprint arXiv:2501.05435*, 2025.
- [17] Darren Edge, Ha Trinh, Newman Cheng, et al. From local to global: A graph rag approach to query-focused summarization. In *arXiv preprint arXiv:2404.16130*, 2024.
- [18] Tao Feng, Yexin Wu, Guanyu Lin, and Jiaxuan You. Graph world model. In *International Conference on Machine Learning (ICML)*, 2025.
- [19] Richard E. Fikes and Nils J. Nilsson. STRIPS: A new approach to the application of theorem proving to problem solving. *Artificial Intelligence*, 2(3–4):189–208, 1971.
- [20] James Flemings, Ren Yi, Octavian Suci, Kassem Fawaz, Murali Annavaram, and Marco Gruteser. Personalizing agent privacy decisions via logical entailment, 2025.
- [21] Luis Galárraga, Christina Teflioudi, Katja Hose, and Fabian M. Suchanek. Fast rule mining in ontological knowledge bases with AMIE+. *The VLDB Journal*, 24(6):707–730, 2015.

- [22] Julia Gastinger, Timo Sztyler, Lokesh Sharma, and Anett Schuelke. On the evaluation of methods for temporal knowledge graph forecasting. In *NeurIPS Workshop on Temporal Graph Learning*, 2022.
- [23] Julia Gastinger, Christian Meilicke, and Heiner Stuckenschmidt. CountTRuCoLa: Rule confidence learning for temporal knowledge graph forecasting. *arXiv preprint arXiv:2509.09474*, 2025.
- [24] Rishab Goel, Seyed Mehran Kazemi, Marcus Brubaker, and Pascal Poupart. Diachronic embedding for temporal knowledge graph completion. In *AAAI Conference on Artificial Intelligence*, 2020.
- [25] Chuan Guo, Geoff Pleiss, Yu Sun, and Kilian Q. Weinberger. On calibration of modern neural networks. In *International Conference on Machine Learning (ICML)*, 2017.
- [26] David Ha and Jürgen Schmidhuber. World models. *arXiv preprint arXiv:1803.10122*, 2018.
- [27] Paul He, Yinya Huang, Mrinmaya Sachan, and Zhijing Jin. Uncovering hidden correctness in LLM causal reasoning via symbolic verification. *arXiv preprint arXiv:2601.21210*, 2026.
- [28] Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. Distilling the knowledge in a neural network. In *NeurIPS Deep Learning Workshop*, 2015.
- [29] Utkarshani Jaimini and Amit Sheth. CausalKG: Causal knowledge graph explainability using interventional and counterfactual reasoning. *arXiv preprint arXiv:2201.03647*, 2022.
- [30] Woojeong Jin, Meng Qu, Xisen Jin, and Xiang Ren. Recurrent event network: Autoregressive structure inference over temporal knowledge graphs. In *Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2020.
- [31] Resham Joshi. Eywa: Provenance-grounded long-term memory for AI agents. *arXiv preprint arXiv:2605.30771*, 2026.
- [32] Yejin Kim, Eojin Kang, Juae Kim, and H. Howie Huang. Causal reasoning in large language models: A knowledge graph approach. *arXiv preprint arXiv:2410.11588*, 2024.
- [33] Ekaterina Komendantskaya. Proof-carrying neuro-symbolic code. *arXiv preprint arXiv:2504.12031*, 2025.
- [34] Timothée Lacroix, Nicolas Usunier, and Guillaume Obozinski. Canonical tensor decomposition for knowledge base completion. In *International Conference on Machine Learning (ICML)*, 2018.
- [35] Yann LeCun. A path towards autonomous machine intelligence. *Open Review*, 2022.
- [36] Patrick Lewis, Ethan Perez, Aleksandra Piktus, et al. Retrieval-augmented generation for knowledge-intensive nlp tasks. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- [37] Haoran Li, Wenbin Hu, Huihao Jing, Yulin Chen, Qi Hu, Sirui Han, Tianshu Chu, Peizhao Hu, and Yangqiu Song. PrivaCI-Bench: Evaluating privacy with contextual integrity and legal compliance, 2025. ACL 2025.
- [38] Ying Li, Wenjun Qiu, Faysal Hossain Shezan, Kunlin Cai, Michelangelo van Dam, Lisa Austin, David Lie, and Yuan Tian. Breaking the illusion: Automated reasoning of GDPR consent violations, 2026. IEEE S&P 2026.
- [39] Zixuan Li, Xiaolong Jin, Wei Li, Saiping Guan, Jiafeng Guo, Huawei Shen, Yuanzhuo Wang, and Xueqi Cheng. Temporal knowledge graph reasoning based on evolutionary representation learning. In *ACM SIGIR Conference on Research and Development in Information Retrieval*, 2021.
- [40] Jiawei Liu, Cheng Yang, Zhiyuan Lu, et al. Towards graph foundation models: A survey and beyond. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2025.

- [41] Jiawei Liu, Senqiao Yang, Mingjun Wang, Yu Wang, and Bei Yu. Graph world models: Concepts, taxonomy, and future directions. *arXiv preprint arXiv:2604.27895*, 2026.
- [42] Lihui Liu, Zihao Wang, and Hanghang Tong. Neural-symbolic reasoning over knowledge graphs: A survey from a query perspective. *arXiv preprint arXiv:2412.10390*, 2024.
- [43] Linhao Luo, Jiaxin Ju, Bo Xiong, Yuan-Fang Li, Gholamreza Haffari, and Shirui Pan. ChatRule: Mining logical rules with large language models for knowledge graph reasoning, 2023.
- [44] Linhao Luo, Yuan-Fang Li, Gholamreza Haffari, and Shirui Pan. Reasoning on graphs: Faithful and interpretable large language model reasoning. In *International Conference on Learning Representations (ICLR)*, 2024.
- [45] Robin Manhaeve, Sebastijan Dumancic, Angelika Kimmig, Thomas Demeester, and Luc De Raedt. Deepproblog: Neural probabilistic logic programming. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2018.
- [46] Boris Motik, Bernardo Cuenca Grau, Ian Horrocks, Zhe Wu, Achille Fokoue, and Carsten Lutz. OWL 2 web ontology language profiles (second edition) — OWL 2 RL. W3C Recommendation, 2012.
- [47] Atharva Naik, Yash Mathur, Prakam, Carolyn Rose, and David Mortensen. ReaComp: Compiling LLM reasoning into symbolic solvers for efficient program synthesis, 2026.
- [48] Lunyiu Nie, Zhimin Ding, Erdong Hu, Christopher Jermaine, and Swarat Chaudhuri. Online cascade learning for efficient inference over streams, 2024. ICML 2024.
- [49] Hailey Onweller, Elias Lumer, Austin Huber, Pia Ramchandani, Vamse Kumar Subbiah, and Corey Feld. Cited but not verified: Parsing and evaluating source attribution in LLM deep research agents. *arXiv preprint arXiv:2605.06635*, 2026.
- [50] Sangwoo Park, Woongyeong Yeo, Seanie Lee, Yumin Choi, Hyomin Lee, Kangsan Kim, Jinheon Baek, Seong Joon Oh, and Sung Ju Hwang. It takes two: Complementary self-distillation for contextual integrity in LLMs, 2026.
- [51] Vedant Patel. Supersede: Diagnosing and training the memory-update gap in LLM agents. *arXiv preprint arXiv:2606.27472*, 2026.
- [52] Judea Pearl. *Causality: Models, Reasoning and Inference*. Cambridge University Press, 2nd edition, 2009.
- [53] Apoorv Saxena, Aditay Tripathi, and Partha Talukdar. Improving multi-hop question answering over knowledge graphs using knowledge base embeddings. In *Annual Meeting of the Association for Computational Linguistics (ACL)*, 2020.
- [54] Michael Schlichtkrull, Thomas N. Kipf, Peter Bloem, Rianne van den Berg, Ivan Titov, and Max Welling. Modeling relational data with graph convolutional networks. In *European Semantic Web Conference (ESWC)*, 2018.
- [55] Manil Shrestha and Edward Kim. Efficient multi-hop question answering over knowledge graphs via LLM planning and embedding-guided search, 2025.
- [56] Stanisław Sójka and Witold Kowalczyk. Accurate legal reasoning at scale: Neuro-symbolic offloading and structural auditability for robust legal adjudication, 2026. ACL 2026 Industry Track.
- [57] Jiashuo Sun, Chengjin Xu, Lumingyuan Tang, Saizhuo Wang, Chen Lin, Yeyun Gong, Lionel M. Ni, Heung-Yeung Shum, and Jian Guo. Think-on-graph: Deep and responsible reasoning of large language model on knowledge graph. In *International Conference on Learning Representations (ICLR)*, 2024.

- [58] Zhiqing Sun, Zhi-Hong Deng, Jian-Yun Nie, and Jian Tang. Rotate: Knowledge graph embedding by relational rotation in complex space. In *International Conference on Learning Representations (ICLR)*, 2019.
- [59] Oyvind Tafjord, Bhavana Dalvi, and Peter Clark. ProofWriter: Generating implications, proofs, and abductive statements over natural language. In *Findings of the Association for Computational Linguistics (ACL-IJCNLP)*, 2021.
- [60] Théo Trouillon, Johannes Welbl, Sebastian Riedel, Éric Gaussier, and Guillaume Bouchard. Complex embeddings for simple link prediction. In *International Conference on Machine Learning (ICML)*, 2016.
- [61] Xin Wang, Yujia Luo, Daniel Crankshaw, et al. Model cascades for efficient inference. In *arXiv preprint arXiv:1706.00885*, 2018.
- [62] Changmin Wu, Giannis Nikolentzos, and Michalis Vazirgiannis. Evonet: A neural network for predicting the evolution of dynamic graphs. *arXiv preprint arXiv:2003.00842*, 2020.
- [63] Yu Wu, Shuo Wu, Ye Tao, Yansong Li, and Anand D. Sarwate. From deferral to learning: Online in-context knowledge distillation for LLM cascades, 2025.
- [64] Yuwei Xia, Ding Wang, Qiang Liu, Liang Wang, Shu Wu, and Xiaoyu Zhang. Chain-of-history reasoning for temporal knowledge graph forecasting. *arXiv preprint arXiv:2402.14382*, 2024.
- [65] Yang Xu, Jun Liu, Shuwei Chen, Chris Nugent, and Hailing Guo. Delta1 with LLM: Symbolic and neural integration for credible and explainable reasoning. *arXiv preprint arXiv:2603.12953*, 2026.
- [66] Xing Zhang, Guanghui Wang, Yanwei Cui, Wei Qiu, Ziyuan Li, Bing Zhu, and Peiyang He. Experience compression spectrum: Unifying memory, skills, and rules in LLM agents, 2026.
- [67] Yuyu Zhang, Hanjun Dai, Zornitsa Kozareva, Alexander J. Smola, and Le Song. Variational reasoning for question answering with knowledge graph. In *AAAI Conference on Artificial Intelligence*, 2018.
- [68] Yang Zhao, Chengxiao Dai, Wei Zhuo, Yue Xiu, and Dusit Niyato. CLAUSE: Agentic neuro-symbolic knowledge graph reasoning via dynamic learnable context engineering. *arXiv preprint arXiv:2509.21035*, 2025.
- [69] Siyu Zhou, Tianyi Zhou, Yijun Yang, Guodong Long, Deheng Ye, Jing Jiang, and Chengqi Zhang. Wall-e 2.0: World alignment by neurosymbolic learning improves world model-based llm agents. *arXiv preprint arXiv:2504.15785*, 2025.

## A Reproducibility and Hyper-parameters

The implementation is dependency-light (NumPy only for the model) and runs on a CPU without API keys. The full grid — experiments E1–E6, 8 seeds — is reproduced by `python -m tacet.eval.experiment` followed by `python experiments/analyze.py`, which regenerates every figure and table in this paper, including the result macros.

**Benchmark.** 120 people, 8 companies, 6 departments, 12 skills, 4 languages, 6 regions; workload 300 queries; repeat rate 0.30; class mix (STATED, GIVEN, DISCOVER, INDUCTIVE, NOVEL) = (0.22, 0.20, 0.20, 0.23, 0.15); language noise 0.15.

**Complex.** dimension 64, 70 training epochs at warm-up, 25 epochs per warm-started consolidation, Adam (lr 0.05), 6 type-correct negatives plus 4 uniform negatives per positive (the type-correct pool teaches within-type discrimination for the cascade; the uniform pool is needed for the standard open-world link-prediction protocol),  $L_2$  regularisation  $10^{-6}$ . Confidence temperature fitted on a held-out language split.

**Mining.** body length  $\leq 2$  over base relations; confidence threshold  $\gamma = 0.95$ ; support threshold  $\sigma_{\min} = 3$ ; synthesis triggers after 10 complete heads per relation; every mined rule carries the  $x \neq y$  guard.

**Tier-2 link-prediction quality.** The standard filtered KGC protocol on the synthetic benchmark (80/10/10 random split, 1,162 train / 145 valid / 146 test triples) at the hyper-parameters above, with the standalone script’s default of 8 relation-pool negatives per positive as recorded in the run config, attains **MRR**  $\approx 0.34$ , **Hits@1**  $\approx 0.23$ , **Hits@3**  $\approx 0.38$ , **Hits@10**  $\approx 0.60$  with the NumPy backend (`results/kge_synthetic_numpy.json`, regenerated by `python experiments/kge_real_eval.py -dataset synthetic -epochs 70`), and **MRR**  $\approx 0.43$ , **Hits@10**  $\approx 0.69$  at dim = 128 with the PyTorch backend (`results/kge_synthetic_torch.json`). Ranking peaks near MRR 0.34 at the 70-epoch warm-up used by the cascade; we report this warm-up operating point that the cascade actually consolidates from rather than a longer standalone training run. The cascade only *accepts* a Tier-2 prediction above its calibrated confidence threshold, so its operating accuracy on the cascade workload is substantially higher than the raw top-1 ranking number.

**Real KGC benchmarks.** The same Tier-2 model runs unchanged on the standard FB15k-237, WN18RR, and ICEWS14 splits via the loader at `tacet.data.load_kg_dataset` (see Section B.1). Reference runs on a T4 spot GPU (batch 4,096, 8 typed negatives, full filtered test set, `score_fn=complex_n3` with the Lacroix N3 regulariser [34]) attain:

| Dataset (full filtered test)                                          | MRR   | Hits@1 | Hits@3 | Hits@10 |
|-----------------------------------------------------------------------|-------|--------|--------|---------|
| FB15k-237 ( $d = 256$ , 300 ep, $\eta = 0.005$ , $\lambda_3 = 0.01$ ) | 0.270 | 0.185  | 0.301  | 0.439   |
| WN18RR ( $d = 96$ , 300 ep, $\eta = 0.05$ , BCE baseline)             | 0.205 | 0.156  | 0.219  | 0.301   |
| ICEWS14* ( $d = 200$ , 200 ep, $\eta = 0.01$ , $\lambda_3 = 0.005$ )  | 0.649 | 0.578  | 0.683  | 0.786   |

(raw JSON at `experiments/results/kge_fb15k237.json`, `kge_wn18rr.json`, `kge_icews14.json`). Training time is 3–15 min on a single T4 spot GPU; on FB15k-237 we attain roughly **84%** of the published ComplEx-N3 MRR ( $\approx 0.32$ ) and on WN18RR 47% of the published number ( $\approx 0.44$ , BCE baseline still pending an N3 sweep at the time of writing). The intent of this empirical section is not SOTA KGC, but to show the Tier-2 implementation in the cascade is competent enough to be useful in production.

★ **ICEWS14 caveat.** We report the *static-snapshot* numbers: the (subject, relation, object, date) quadruples are collapsed to (subject, relation, object) triples and duplicates dropped. This is *not* the standard temporal KGC protocol (where each timestep is a separate test set) and the numbers must not be compared head-to-head with temporal models such as De-Simple [24] or TNTComplEx. Static collapse produces a denser graph with fewer distinct test triples per relation, so MRR is mechanically higher. The right reading of the row is as a *ceiling* the time-aware KGC literature must beat to justify the additional machinery; our atemporal cascade is a baseline for that comparison, not a competitor for the temporal benchmark.

## B Implementation and productionization

### B.1 Substrate Extensions: Ingestion and Dataset Loaders

The same release ships two substrate extensions used by the evaluation harness. None changes the cascade’s results but each broadens the data the cascade can operate on. (Standalone modules that are *not* invoked by the cascade — temporal, causal, episodic, planner, federation, world-model — are described in the next subsections.)

**Auto-ingestion from text.** `tacet.core.ingest` provides an `Extractor` protocol with a deterministic `regex/Pattern` implementation for tests and demos and a `CallableExtractor` that wraps any `(text) → list[triple]` function — the single integration point for a real LLM-based extractor (Gemini / Grok / GPT, or a GraphRAG-style pipeline [17]). `KGBuilder` orchestrates extraction across a corpus and (when an ontology is given) rejects triples whose relation is undeclared or whose endpoints violate the type / functional constraints, with a per-corpus `IngestionReport`. This closes the gap between “hand-curated KG” and “any document set” — the cascade itself is unchanged.

**Standard KGC dataset loaders.** `tacet.data` adds a `KGDataset` dataclass and loaders for the standard FB15k-237 / WN18RR / YAGO3-10 / NELL-995 layout (`train.txt` / `valid.txt` / `test.txt`), a `split_triples` helper, the curated 15-country world-geography graph used by the demo, and a `synthetic_kg_dataset` that exposes the benchmark generator’s graph as a KGC split. The `kge_real_eval` experiment script reports standard filtered MRR / Hits@*k* on any of these. Plugging in FB15k-237 etc. is a single flag (`-root path/to/FB15k-237`). Both external corpora are fetched by checked-in scripts: the FB15k-237 / WN18RR / YAGO3-10 splits via `scripts/fetch_kgc_data.sh`, and the official ProofWriter V2020.12.3 release via `scripts/fetch_proofwriter.sh`, which verifies the archive’s SHA-256 before extracting it into the layout the loader expects — so a partial or corrupt download can never be mistaken for the real corpus.

**What is still future work.** Multi-modal entity embeddings (image / audio encoders feeding the KGE) and evaluation on natural-language KGQA benchmarks with a frontier LLM teacher need GPU / API access and are out of scope of an offline release.

### B.2 Extension Modules (Shipped, Not in the Evaluated Pipeline)

The release ships several standalone package modules that are *not* part of the cascade evaluated in this paper: the cascade router (`tacet.cascade.router`) imports *none* of them. We document them here for completeness and as future-work seams; no result in Sections 6–B.4.1 depends on any of them, and we make no contribution claim for them.

**Bi-temporal edges (`tacet.core.temporal`).** A standalone module extends the world graph with validity-time intervals (`valid_from` / `valid_to` per edge) and provides `slice_at(t)` / `slice_between(t1, t2)` views, plus a `TemporalEngine` that answers point-in-time and “ever-during” queries by re-materialising the closure on the time slice. Untimed edges are treated as always-valid. Allen’s thirteen interval relations [3] are exposed as helpers. This module is not invoked by the cascade.

**Causal utilities (`tacet.core.causal`).** The module provides *three standalone Pearl-style utility functions* — `backdoor_set`, `front_door_set`, `instrumental_variables` — plus a `counterfactual` evaluator (abduction-action-prediction over a small discrete structural causal model [52]). These are library functions, not an engine pass: there is no `identify()` entry point, the cascade does not call them, and no proof tree contains a causal certificate. A demonstration script (`experiments/run_causal_demo.py`,  $2 \times 10^5$  Monte-Carlo samples, seed 0) builds a five-variable confounded SCM (`confounder`  $\rightarrow$  `treatment`  $\rightarrow$  `mediator`  $\rightarrow$  `downstream`  $\rightarrow$  `report`, with `confounder/treatment`  $\rightarrow$  `downstream`) and reproduces: association  $P(\text{downstream}=1 \mid \text{treatment}=1) = 0.779$ ; intervention  $P(\text{downstream}=1 \mid \text{do}(\text{treatment}=1)) = 0.690$  and  $P(\cdot \mid \text{do}(\text{treatment}=0)) = 0.312$ , i.e. an ATE of 0.379; counterfactual 0.489. The script then *prints* a hardcoded estimand / back-door / adjustment-set string for the demo graph; this is illustrative output, not an identification certificate computed by an engine.

**Episodic memory + feedback (`tacet.experimental.episodic`).** An `EpisodicStore` records every (query, route, answer, cost, latency) tuple with a feedback API (`mark_correct` / `mark_wrong`), and a `FeedbackCurator` aggregates marks into per-rule trust scores so persistently-wrong rules can be retired. Not wired into the evaluated cascade.

**Goal-directed planner (`tacet.experimental.agent`).** Action (STRIPS-style operators [19]), Goal, and Planner (best-first cost-bounded search) treat the substrate as the memory of a classical planner that re-materialises the deductive closure at each search node. Standalone; not part of the cascade.

**Concept formation (`tacet.distill.concepts`, `tacet.distill.fca`).** Unsupervised inductions over the graph: `induce_node_types` clusters nodes by structural signature (k-means++ over relation-participation vectors [4]) and `induce_relations` mines frequent length-2 path patterns, surfaced as conservative *proposals* for an analyst. Standalone; not part of the cascade.

**Federation (`tacet.experimental.federation`).** `FederatedGraph` wraps a `WorldGraph` with per-edge Provenance and pluggable `MergeStrategys` (`latest_wins` / `majority` / `trust_weighted`) that surface disagreements rather than silently overwriting them. Standalone; not part of the cascade.

**World-model interface (`tacet.experimental.worldmodel`) and the Layer-4 RSSM.** A small `WorldModel` Protocol (`observe` / `predict` / `rollout`) is a seam for an external continuous predictor — Dreamer / JEPA-class [26, 35]. The Layer-4 `RSSMWorldModel` (Section 8) fills this seam with the learned forward-dynamics head; it is reported as a *negative result* (Section 8), is substrate-limited and weak, and is not part of the evaluated cascade.

**Future work.** Unifying Pearl-style identification and bi-temporal reasoning *into* the Datalog substrate — so the engine itself plans a causal query and emits an identification certificate as part of the proof tree (an `identify()` entry point the current release does not have) — is left to future work, as is a real continuous world model, multi-modal perception, and learnt federation trust.

### B.3 From PoC to MVP

The same release moves TACET from research artefact to deployable service. Three concerns matter for that transition; each is addressed by one optional dependency extra so the library stays NumPy-only by default.

**Configuration.** `tacet.serve.settings` exposes a pydantic-settings-backed `Settings` class (with a dataclass fallback when `pydantic-settings` is not installed) read from `TACET_*` environment variables. Every cascade hyper-parameter, the teacher choice, the KGE backend, the server bind address, the episode persistence path and the LLM API keys are exposed.

**Real Tier-3 teachers.** `tacet.llm.teachers.GeminiTeacher` (via the official `google-genai` SDK) and `tacet.llm.teachers.GrokTeacher` (via the `openai` SDK pointed at xAI) replace the offline oracle. `FallbackChainTeacher` composes them so a transient rate-limit on one provider falls through to the next. The prompt is a small JSON-list-only template, parsed permissively so a model that wraps in markdown code fences still works.

**GPU-trainable Tier-2.** `tacet.kge.kge_torch.TorchComplex` is a drop-in replacement for the NumPy `Complex` — same `fit` / `partial_fit` / `predict_tail` / `evaluate` / `calibrate` API, runs on CUDA / MPS / CPU with auto-detection. A second scorer (`score_fn="rotate"`) optionally swaps `Complex` for `RotatE` [58]. This is the path to FB15k-237 / WN18RR / WikiKG scale that the NumPy backend cannot reach in reasonable time.

**HTTP service.** `tacet.serve.server` exposes the cascade as a FastAPI application with the endpoints `POST /ask`, `POST /distill`, `POST /consolidate`, `POST /graph/edges`, `GET /stats`, `GET /healthz`, `GET /readyz`. The shipped Dockerfile produces a multi-stage ~150 MB image on a `python:3.13-slim` base, runs as a non-root user, and exposes a `HEALTHCHECK` that hits `/healthz`. A bare `docker run` boots the demo over the world-geography KG immediately.

**Host-application integration.** A thin integration seam lazy-imports the `tacet` package, builds an TACET service per project from a host application’s existing graph repository (e.g. a FalkorDB store exposing `list_entities` / `list_relations`), and exposes a `route_or_fallback` helper the host’s RAG router calls before its LLM pipeline. The intent is explicit: TACET is a *cost-saving layer in front of* an existing RAG path, not a replacement.

**End-to-end MetaQA evaluation.** `experiments/run_metaqa.py` drives MetaQA [67] end-to-end: KB + 1/2/3-hop NL questions, the cascade vs an LLM-only baseline, JSON report with cost / accuracy / tier-routing. Run on a Kaggle T4 or Modal H100 once a Gemini / Grok key is set; the runner falls back to an oracle teacher when no key is configured so the cost trajectory remains comparable offline.

### B.4 Integration Smoke-Test with Real LLM Teachers

The main grid (Section 6) uses an oracle Tier-3 teacher and a *simulated* per-tier cost. This section confirms that the real-LLM adapters integrate and that the cascade still routes when a frontier LLM replaces the oracle. We stress up front what this section is *not*: on the synthetic-org benchmark a real LLM is at 0% *accuracy* as a Tier-3 teacher, because it cannot know synthetic identifiers such as “`person_017`” or “`company_03`”. The LLM-only baseline therefore returns the empty set on every

Table 8: End-to-end run with a real Gemini 2.5 Flash Tier-3 teacher on a 12-query subset of the synthetic-org benchmark (seed 0).

| System                | Cost (USD) | Accuracy |
|-----------------------|------------|----------|
| Oracle cascade        | 0.102      | 1.000    |
| <b>Gemini cascade</b> | 0.102      | 0.667    |
| Gemini LLM-only       | 0.600      | 0.000    |

query, so any “cost ratio” between the cascade and LLM-only here is *not a meaningful comparison* — it is an artefact of the teacher having no knowledge to spend. The genuine real-data efficiency evidence is the MetaQA-2hop result of Section B.4.1; this section shows only that the adapters work end-to-end.

We re-ran a slice of the synthetic workload with **Gemini 2.5 Flash** as the Tier-3 teacher (`experiments/run_gemini_smoke.py`); all other components (graph, ontology, rules, KGE) are as in the headline grid (Table 8).

Two observations:

- The cascade still routes under a domain-mismatched teacher. Gemini knows nothing about the synthetic-org IDs, so the LLM-only baseline earns 0.00 accuracy; the cascade nevertheless attains the accuracy of its symbolic + KGE tiers, because only a small fraction of queries reach Tier 3 at all. This shows the adapters integrate, not that the cascade is “cheaper” — there is no real LLM knowledge to be cheaper *than* on this synthetic benchmark.
- The reported  $\sim 6\times$  blended-cost figure on this run is an artefact of the 0%-accuracy teacher and must not be read as an efficiency result. The efficiency claim rests on the simulated main grid and the real-data MetaQA-2hop result (Section B.4.1).

**Provider cross-check: Grok 4.3 (200-query run).** We additionally validated the cascade with **Grok 4.3** (xAI) as the Tier-3 teacher, re-running the cost-vs-LLM-only comparison. Grok 4.3 was reached at `api.x.ai/v1/chat/completions`. The full 200-query workload (synthetic-org, the same benchmark as Section 6) was run with the “`run_grok_local.ps1`” wrapper. Here Grok serves the accuracy column with real API calls, while the cost column uses the same *simulated* per-tier cost model as Section 6 (not metered Grok tokens); the provider-metered Grok dollars are reported separately in Section B.4.1.

| System (200-query synthetic-org) | Cost (USD, sim.) | Accuracy | Tier mix  |
|----------------------------------|------------------|----------|-----------|
| Oracle cascade (cost floor)      | 2.78             | 0.950    | 130/15/55 |
| Grok 4.3 cascade                 | 4.88             | 0.500    | 86/17/97  |
| Grok 4.3 LLM-only                | 10.00            | 0.000    | —         |

Cost column: simulated per-tier cost model (simulated tier cost), not metered Grok tokens; metered Grok dollars are in Section B.4.1.

Cost reduction (Grok cascade vs Grok LLM-only): **2.05 $\times$**  at  $n = 200$ . Per-query distribution from the cascade: cost  $p_{50} = 0.001$ ,  $p_{95} = 0.050$ , mean 0.024 USD; latency  $p_{50} = 15$  ms,  $p_{95} = 900$  ms, mean 439 ms — the long right tail of latency aligns with the  $\sim 48\%$  of queries that escalate to Tier 3. Grok LLM-only earns 0% accuracy because Grok has no prior on the synthetic-org IDs, so its raw answers are empty; the cascade nevertheless recovers  $\approx 50\%$  accuracy from Tier 1 (the deductive fragment) and Tier 2 (KGE). Class-conditional accuracy of the Grok cascade: STATED

1.00, DED\_GIVEN 1.00, INDUCTIVE 0.42, DED\_DISCOVER / NOVEL 0.00 (these are exactly the classes that route to Tier 3, where Grok cannot answer). The architectural pattern documented for Gemini reproduces on a second LLM family, ruling out a Gemini-specific artefact in the headline cost claim. Raw report at `experiments/results/grok_local_200q.json`.

**MetaQA real-LLM evaluation (Grok 4.3, 100 queries).** A 100-query slice of the MetaQA-1hop dev set, with the matcher of Section B.3 resolving 100 % of templates (158/158 verified against the canonical dev set), was run with Grok 4.3 as the Tier-3 teacher. At a *cold-start* cascade (no synthesised rules yet, KGE confidence below threshold on the 43k movie entities), every query escalates to Tier 3; the cascade therefore costs the same as LLM-only (\$5.00 each, accuracy 0.01 in both cases, reflecting Grok’s lack of MetaQA-specific knowledge). This is the architecturally honest cold-start operating point: the cascade cannot be cheaper than LLM-only when no distillation has amortised any knowledge into the cheap tiers yet. The synthetic E1–E6 experiments (Section 6) demonstrate the expected cost trajectory once distillation cycles run; the MetaQA slice ships here as the baseline. Raw report at `experiments/results/metaqa_local_grok.json`.

#### B.4.1 Real-LLM Cost Amortisation on a Real-Entity KG

The main grid (Section 6) reports a  $\sim 3.9\times$  cost reduction under a *simulated* per-tier cost model. The part of the thesis this paper de-scopes is that two claims must be settled on real data with a real teacher: (i) does the cascade actually amortise *measured dollars* the way the cost model predicts, and (ii) does distillation genuinely exceed a cache? (We answer (i) affirmatively below; (ii) is neutral on this noisy KGQA teacher, but Section B.4.2 answers it affirmatively on a second domain — GDPR compliance — where a real teacher is accurate enough for the miner to recover generalising rules, so the teacher-quality boundary is crossed on a real workload, not only under an oracle.) We answer both by streaming a 300-query Zipfian-repeat workload over MetaQA — a real-entity movie KG (133,582 triples, 43,234 entities) — with a real **Grok 4.3** Tier-3 teacher, metering every token at xAI’s published price (Table 9), over **3 seeds**. To keep the cross-arm comparison fair we adopt a *controlled* design: Tier-2 is disabled (a streamed workload offers no held-out split to calibrate the link predictor, and an uncalibrated predictor fires unreliably on MetaQA’s flat relations), and a single teacher answer is drawn per distinct (head, relation) and *shared across all arms*, so the arms differ only in routing and accuracy is matched by construction. This makes the real-data cascade a Tier-1+Tier-3 system; the synthetic main grid (Section 6) and the KGE appendix do exercise Tier-2, so the cost study isolates the caching/distillation mechanism without confounding it with an uncalibrated link predictor. We test two question families: 1-hop questions, which are flat single-relation lookups ( $\sim 50$  distinct heads per stream), and 2-hop questions, which are the composition  $q2 := \textit{starred\_actors}^{-1} \cdot \textit{directed\_by}$  ( $\sim 57$  distinct), the structure that distillation is supposed to capture.

**Real cost amortisation holds across 3 seeds.** At accuracy matched by construction, in *pooled* cost (total dollars over the grid) the cascade is **2.8** $\times$  cheaper than LLM-only on 1-hop (\$0.403  $\rightarrow$  \$0.146, accuracy  $0.70 \pm 0.18$  in every arm) and **5.1** $\times$  cheaper on 2-hop (\$0.640  $\rightarrow$  \$0.125, accuracy  $0.34 \pm 0.17$ ); these pooled ratios are exactly the per-arm dollar columns above. The *per-seed* cost ratio varies widely on 1-hop (3.8/1.5/6.3; mean of per-seed ratios  $3.9\times$ , lifted by one cheap seed) and is tighter on 2-hop (6.3/4.2/5.0; mean  $5.2\times$ ,  $\approx$  the pooled figure). The 1-hop spread arises because the write-back cache stores only *non-empty* teacher answers, so the saving tracks the teacher’s seed-dependent answer rate rather than just the repeat rate — a property the single-seed view obscured. The pooled means bracket the  $\sim 3.9\times$  headline of the simulated cost

Table 9: Real-LLM cost-at-matched-accuracy on a real-entity KG, **3 seeds** (controlled design). A 300-query Zipfian-repeat stream over MetaQA (133,582 triples, 43,234 entities) is served by a real **Grok 4.3** Tier-3 teacher (xAI pricing \$1.25/\$2.50 per 1M input/output tokens, reasoning tokens billed; source [openrouter.ai/x-ai](https://openrouter.ai/x-ai) + [docs.x.ai](https://docs.x.ai), 2026-06-03). To make the cross-arm comparison fair we (i) *disable Tier-2* (the streamed setting offers no held-out split to calibrate the link predictor) and (ii) draw a *single teacher answer per distinct (head, relation) and share it across all arms*, so the arms differ only in routing and accuracy is matched *by construction*. Cost is total measured USD over the stream (mean $\pm$ s.d. over seeds 0–2); accuracy is the gold-subset match. The amortisation row reports the *pooled* ratio cost(LLM-only)/cost(cascade) of the mean costs above, with the three per-seed cost ratios in parentheses; their mean (1-hop 3.9 $\times$ , 2-hop 5.2 $\times$ ) exceeds the pooled figure on 1-hop because one seed is much cheaper. **Full distillation ties the cache on every seed:** under the noisy real Grok teacher the miner installs no generalising rule (**rules**=  $\emptyset$ ), so distillation reduces to caching — the teacher-quality-gated boundary the oracle run below crosses. Per-seed variance is large on 1-hop because the cascade caches only *non-empty* teacher answers, so the saving tracks the teacher’s (seed-dependent) answer rate.

| System                                 | MetaQA 1-hop                                         |                 | MetaQA 2-hop                                         |                 |
|----------------------------------------|------------------------------------------------------|-----------------|------------------------------------------------------|-----------------|
|                                        | Cost (USD)                                           | Acc.            | Cost (USD)                                           | Acc.            |
| LLM-only                               | 0.403 $\pm$ 0.069                                    | 0.70 $\pm$ 0.18 | 0.640 $\pm$ 0.059                                    | 0.34 $\pm$ 0.17 |
| Cache cascade                          | 0.146 $\pm$ 0.114                                    | 0.70 $\pm$ 0.18 | 0.125 $\pm$ 0.014                                    | 0.34 $\pm$ 0.17 |
| Full distillation                      | 0.146 $\pm$ 0.114                                    | 0.70 $\pm$ 0.18 | 0.125 $\pm$ 0.014                                    | 0.34 $\pm$ 0.17 |
| <i>Amortisation</i> (pooled; per-seed) | <b>2.8<math>\times</math></b> (per-seed 3.8/1.5/6.3) |                 | <b>5.1<math>\times</math></b> (per-seed 6.3/4.2/5.0) |                 |

*Oracle 2-hop mechanism isolation (same 300-query Zipfian workload under the amortisation runner; 78 distinct heads vs. 53/58/60 in the controlled streams above).* With an oracle Tier-3 teacher the miner recovers the genuine composition rule  $q2(x, y) \leftarrow \text{starred\_actors}^{-1}(x, z) \wedge \text{directed\_by}(z, y)$ , so full distillation answers 2-hop questions for *unseen* heads at Tier 1: **10** teacher calls vs the cache’s **78 (87% fewer)**, both at accuracy 1.0. Under the real Grok teacher ( $\sim 22$ – $54\%$  accurate on the 2-hop stream across seeds) the miner instead recovers *no* installable rule, so distillation matches the cache exactly. This is the distillation-over-caching effect, isolated: it materialises only when the teacher is accurate enough for the miner to recover a generalising rule.

model. Crucially, *full distillation ties the cache exactly* on all six runs (identical cost and accuracy): with Tier-2 off the only way distillation could beat the cache is by installing a generalising rule, and under the noisy real Grok teacher none is installed (see below). Total measured spend across the 3-seed grid is  $\sim \$0.56$ .

**The distillation-over-caching advantage is real but teacher-quality-gated.** On both real-Grok workloads, full distillation *ties* the cache exactly rather than beating it (identical cost, calls, and accuracy on every seed). For 1-hop this is expected — a single-relation lookup has no compositional structure to mine, so no rule emerges and distillation is definitionally a cache. The 2-hop case is the informative one: here a generalising rule *does* exist, yet under the real Grok teacher the AMIE-style miner installs *no rule at all* (not even a degenerate self-rule). The reason is teacher noise: Grok is only  $\sim 22$ – $54\%$  accurate on the 2-hop streams across seeds (and some calls fail outright), so the confidence of the genuine base-relation composition  $\text{starred\_actors}^{-1} \cdot \text{directed\_by}$  falls below the miner’s installation threshold, and no generalising rule is installed. Section E.3 revisits this null with a 2026 eleven-teacher threshold sweep and shows the operative variable is the installation threshold, not teacher quality.

**Isolating the mechanism with an oracle teacher.** To show that the ceiling here is teacher quality and not the architecture, we re-run the 300-query 2-hop Zipfian workload with an *oracle* Tier-3 teacher (gold answers) under the amortisation runner — a different sampler from the controlled streams above (78 distinct heads here vs. 53/58/60 there). Now the miner recovers the genuine composition rule  $q2(x, y) \leftarrow \textit{starred\_actors}^{-1}(x, z) \wedge \textit{directed\_by}(z, y)$ , and Tier 1 answers 2-hop questions for *unseen* heads it has never been taught. Distillation then makes only **10** teacher calls against the cache’s **78 (87% fewer)** at identical accuracy 1.0 — the cache cannot answer an unseen head, a rule can. This is the distillation-beyond-caching effect, isolated: it materialises exactly when the teacher is accurate and complete enough for the miner to recover a generalising rule.

**Answering “is TACET just a semantic cache?”** Section 8.1 poses this question architecturally; the real-LLM data answers it empirically. TACET *exceeds* a cache precisely when the teacher is reliable enough for the miner to recover generalising rules (the oracle 2-hop run: 87% fewer teacher calls than a cache). On a *noisy* real-LLM compositional workload (Grok at  $\sim 22\text{--}54\%$  on 2-hop across seeds) the miner finds no generalising rule and the cascade gracefully *falls back* to cache-equivalent behaviour — still delivering the full  $2.8\times/5.1\times$  pooled amortisation (identical for the cache and full arms), just without the extra edge over caching. Section B.4.2 supplies the missing positive case on a real teacher: on GDPR compliance the miner *does* recover generalising rules, and full distillation beats the cache across three frontier teachers — so the “just a cache” reading is rejected not only by the oracle run but by a real, non-oracle teacher on a second domain. We report this honestly: with a real LLM teacher on this benchmark, distillation does *not* beat caching; the teacher-quality bottleneck is itself a finding, and it directly motivates noise-robust rule mining (Section 8). The controlled runner is `experiments/run_real_kg_controlled.py`; raw per-seed reports at `experiments/results/real_kg_controlled_{1hop,2hop}_seed{0,1,2}.json` and the oracle run at `oracle_2hop_300.json`.

#### B.4.2 Cross-Domain Validation: Compliance Checking

The MetaQA real-LLM study (Section B.4.1) answers question (i) — the cascade amortises measured dollars — but leaves question (ii) neutral: under a noisy single-relation/2-hop teacher no generalising rule clears the miner, so distillation ties the cache. To test whether question (ii) is answerable with a real teacher at all, we move to a second, non-saturated domain where the latent rules are genuinely deductive and the teacher is accurate: *regulatory-compliance checking*.

**Task and benchmark.** PrivaCI-Bench [37] (ACL 2025) frames GDPR compliance as contextual-integrity reasoning: each case is a data-flow scenario with a typed tuple (sender, recipient, subject, role, information type, consent form, transmission purpose) and a gold verdict (permitted / prohibited / not-applicable) plus the followed/violated GDPR articles. We stream 300 GDPR cases (3 seeds). The teacher answers a verdict and the cited articles; TACET mines the verdicts online into ontology-gated Datalog rules over the contextual-integrity atoms — the same miner, type-gate, and proof-tree machinery as the KGQA cascade (Section 4), with the contextual-integrity tuple as the typed fact ontology. The typed atoms come from each case’s annotated contextual-integrity slots, mapped through a single fixed *deterministic* vocabulary normaliser (a committed closed vocabulary, identical across all arms — not a per-arm or learned extractor), so the only metered cost is the teacher’s verdict call. The gold *verdict* and *articles* — the labels the task predicts — are held out in the oracle for scoring and never enter the graph or the miner. Taking the contextual-integrity slots from the benchmark’s annotations isolates the verdict-reasoning cost we study from

Table 10: Compliance-domain cost amortisation on PrivaCI-Bench GDPR ( $n=300$ , 3 seeds, iso-accuracy). Full online distillation beats an exact-match cache across three frontier teachers; the in-context-strategy baseline (nl\_strategy) does not amortise.

| Teacher           | full $\times$   | cache $\times$ | nl_strategy $\times$ | acc (full) | article-F1 (full / LLM-only) |
|-------------------|-----------------|----------------|----------------------|------------|------------------------------|
| gemini-3.5-flash  | $2.06 \pm 0.21$ | 1.11           | 0.86                 | 0.91       | 0.49 / 0.63                  |
| claude-sonnet-4.6 | $1.83 \pm 0.10$ | 1.11           | 0.82                 | 0.93       | 0.51 / 0.57                  |
| grok-4.3          | $1.51 \pm 0.10$ | 1.12           | 0.99                 | 0.93       | 0.57 / 0.63                  |

contextual-integrity *extraction*; a deployed system would add a separate (costly, potentially noisy) extractor from raw text, whose cost and error we do not model here (Section 8).

**Arms and control.** We compare four arms under a shared-cost control (one teacher call per distinct case, its verdict and cost reused across arms for a like-for-like comparison). Unlike the MetaQA study of Section B.4.1, the compliance graph carries no verdict write-back, so the **full** arm serves rule *inferences* rather than the teacher’s verdict and per-arm accuracy is matched only *approximately* (iso-accuracy; Table 10), not by construction: **llm\_only** (every case to the teacher), **cache** (exact-match verdict cache + teacher), **full** (online rule distillation + cache + teacher), and **nl\_strategy**, a faithful port of Inter-Cascade [63] that retrieves natural-language compliance strategies into the teacher’s context under a retrieval-coverage gate (deferring to the teacher when no stored strategy covers the case). **nl\_strategy uses the same frontier model as the teacher**, so the contrast isolates representation (NL memory vs executable symbolic rules), not model capability.

**Distillation beats caching with a real teacher, across providers.** Table 10 reports the amortisation factor (LLM-only cost / arm cost) at matched verdict accuracy. Full online distillation amortises measured teacher cost by  $2.06\times$  (gemini-3.5-flash),  $1.83\times$  (claude-sonnet-4.6) and  $1.51\times$  (grok-4.3) — positive on all three frontier teachers — against  $\sim 1.11\times$  for the exact-match cache. Crucially, of the 300 cases per stream 269 are *distinct* on average across seeds (only a  $\sim 10\%$  repeat ceiling), so the cache is near-useless and the full arm’s lead comes from rules that generalise to *unseen* cases — the distillation-beyond-caching effect the KGQA workload could not exhibit under a noisy teacher. This is the positive, real-(non-oracle)-teacher answer to question (ii) of Section B.4.1, on the identical mechanism.

**Per-seed spread and a bootstrap interval.** The factors above pool three seeds; the per-seed full-arm factors are 1.963/2.354/1.855 (gemini), 1.865/1.936/1.697 (claude) and 1.470/1.648/1.402 (grok). A percentile bootstrap over the three seeds (10,000 resamples, the same estimator as the oracle-noise sweep, `experiments/run_oracle_noise_sweep.py`) gives 95% CIs of [1.855, 2.354], [1.697, 1.936] and [1.402, 1.648] respectively. With only  $n=3$  seeds these intervals are wide and *indicative*, not a significance test: a percentile bootstrap of the mean at  $n=3$  degenerates to the observed per-seed range (its endpoints are the smallest and largest per-seed factor), so we read them as a spread summary and keep the per-teacher point estimates ( $1.5\text{--}2.1\times$ ) as the reported effect.

**Why NL strategies and offline compilation do not amortise.** The faithful in-context-strategy baseline (nl\_strategy) is *more* expensive than LLM-only on every teacher ( $0.86\times$ ,  $0.82\times$ ,  $0.99\times$ , i.e.  $<1\times$ ): each covered case still issues a teacher call, and the retrieved strategy inflates

the prompt, so moving answers into a model’s *context* does not remove the per-query LLM cost — only moving them into a free symbolic engine does. We further contrast online distillation against **compile\_once**, an offline variant that mines a frozen rule set from a prefix of the stream and applies it to the suffix (same miner and gate). Scored on the matched suffix, online **full** is at least as cheap as **compile\_once** at equal-or-higher accuracy at every prefix length  $K \in \{90, 150, 210\}$  (per-seed **offline\_contrast**), because online consolidation keeps installing rules as later cases arrive rather than freezing an early, partial rule set. Both baselines harden the positioning against Inter-Cascade [63] and compile-once offloading [47, 56] in Section 2.

**An honest trade-off: article attribution.** The amortisation is not free. While *verdict* accuracy holds at the iso-accuracy control, the *article-level* attribution micro-F1 of the full arm drops to 0.49–0.57 against  $\sim 0.63/0.57$  for the LLM-only arms: a synthesised pattern→article rule over-generalises, citing an article that the typed pattern usually but not always implies. This is a cost/attribution trade-off, not a verdict-accuracy regression, and it is the same over-generalisation failure mode the synthetic **primary\_language** rule exhibits (Section 7.1). In the compliance domain specifically, however, this trade-off is a genuine limitation rather than a cosmetic one: the cited article is a *regulated* output — which GDPR provision a decision rests on is legally load-bearing — so the attribution drop is a real cost that a deployment must control with the held-out-precision guard we flag as future work. We discuss it and that guard in Section 8.

## C Ontology-Preservation and Complexity of the Symbolic Tier

This appendix gives a formal account of the symbolic Tier 1 of TACET. Logical *soundness* — every derived fact is entailed by the rule set together with the base graph — is classical and we take it as background, not a contribution: the underlying theory is half a century old (forward-chaining for Datalog [1]). The contribution here is the system-level invariant TACET enforces on top of classical Datalog: *ontology-preservation*, i.e. the closure never contains an edge that violates the typed ontology, including when rules are synthesised online from teacher answers. We also bound the worst-case computational cost of the closure.

### C.1 Setting

Let  $\mathcal{C}$  be a set of constants (entity identifiers). A *base fact* is a ground atom  $r(s, t)$  with relation  $r$  and  $s, t \in \mathcal{C}$ ; the world graph  $G = (V, E, \tau, \pi)$  of Section 3 is interpreted as the set  $E$  of base facts, with the unary predicate  $\tau(v) = \text{Type}_i$  recovered from  $\pi$ .

A *rule*  $r$  in TACET has the shape

$$H(x, z) \leftarrow B_1(x, y_1) \wedge \dots \wedge B_k(y_{k-1}, z) \wedge (x \neq y_i)_i,$$

where each body atom  $B_i$  is a base relation and the  $x \neq y$  guards are mandatory inequalities between any two distinct variables (Section 4). A rule is therefore a positive Datalog clause with a built-in inequality constraint; this fragment is sometimes denoted  $\text{DATALOG}_{\neq}$  in the literature [10]. Let  $P$  denote the set of all active rules at a point in time.

The *immediate-consequence operator*  $T_P : 2^\Sigma \rightarrow 2^\Sigma$  on the Herbrand base  $\Sigma$  is defined as usual:

$$T_P(I) = I \cup \{H\theta \mid (H \leftarrow B_1 \wedge \dots \wedge B_k) \in P, B_i\theta \in I \text{ for all } i, x\theta \neq y\theta \text{ for the guards}\}.$$

The *closure* is the least fixed point  $T_P^\omega(G) = \bigcup_{n \geq 0} T_P^n(G)$ ; since  $T_P$  is monotone and  $\Sigma$  is finite, this exists and is reached in finitely many iterations. TACET’s Tier 1 engine

(`tacet.core.symbolic.RuleEngine.materialise`) materialises exactly  $T_P^\omega(G)$  by forward chaining with sub-iteration deduplication, and raises rather than return a truncated closure if the iteration cap is reached before the fixed point.

## C.2 Ontology-Preservation Theorem

Logical soundness of forward chaining over function-free, range-restricted Horn rules — every derived fact is entailed by  $G \cup P$  under Datalog semantics — is classical and we take it as background, not a contribution [1]. Theorem 1 states a *different*, system-level invariant: TACET’s closure preserves the ontology’s type schema. We say a rule  $r$  is *ontology-consistent* on a graph  $G$  if every ground instance produced by  $r$  satisfies the ontology constraints  $\pi$  of  $G$  (i.e. the head’s argument types match the ranges declared for the head relation).

**Theorem 1** (Ontology-Preservation of the Symbolic Tier). *Let  $G$  be ontology-consistent and let every rule in  $P$  be ontology-consistent on  $G$ . Then every fact in  $T_P^\omega(G)$  is ontology-consistent, i.e. TACET never derives a fact that violates the type schema  $\pi$ .*

*Proof sketch.* By induction on the closure depth  $n$ . The base case  $T_P^0(G) = G$  is ontology-consistent by assumption. For the step, suppose  $T_P^n(G)$  is ontology-consistent and consider a fact  $H\theta \in T_P^{n+1}(G) \setminus T_P^n(G)$  derived from rule  $r \in P$  with body atoms  $B_i\theta$ . Each  $B_i\theta$  lies in  $T_P^n(G)$  and is therefore ontology-consistent by the IH; rule  $r$  is ontology-consistent by assumption, so every variable in the head is bound, through the body atoms, only to entities whose types lie within the types the head relation declares for that position (enforced operationally by the subset check of `add_rule`; see below). Hence  $H\theta$  satisfies the head relation’s domain and range, i.e. it is ontology-consistent. (The inequality guard is a separate well-formedness device that suppresses unintended self-loop instances; it does not bear on type preservation.)  $\square$

**Corollary 1.** *The Tier 1 cascade output is sound with respect to the combined theory  $G \cup P$ : any answer it produces is a proof-theoretic consequence of the rules and the base graph.*

The strength of Theorem 1 depends entirely on the ontology-consistency hypothesis on each rule. TACET guarantees it by construction in two places:

1. Every rule — whether hand-authored or mined — is checked against  $\pi$  at registration time by `tacet.core.symbolic.RuleEngine.add_rule`, which admits it only when it meets the ontology-consistency condition above. The check tracks, per variable, the node types the *body* can bind it to and the types the *head* position requires — each the intersection of the declared domain/range constraints over the atoms the variable occurs in, with a wildcard imposing no constraint — and rejects the rule when (a) it names a relation absent from the ontology, (b) the combined constraints force a variable’s type set empty, or (c) any head variable’s body-induced types are *not a subset* of the types its head position requires. Condition (c) is load-bearing: a non-empty *intersection* (merely that some shared type exists) is necessary but not sufficient — a body relation whose domain is wider than the head’s (e.g. `manages` over  $\{Person, Robot\}$  feeding a `boss` head restricted to  $\{Person\}$ ) would otherwise bind the head subject to an off-type entity and leak a type-violating fact into the closure. The check returns `False` so the rule never enters  $P$ ; an untyped ontology imposes no constraint and accepts every range-restricted rule. This behaviour is pinned by the regression tests `test_add_rule_rejects_ontology_inconsistent_rule` and `test_add_rule_rejects_multitype_domain_widening` in `tests/test_symbolic.py`.

2. Mined rules (Section 4) are synthesised over base relations whose types are pinned by  $\pi$ , and the subset check of (1) admits such a rule only when its body-induced head types fall within the head relation’s declared domain and range. The confidence threshold  $\gamma$  and support threshold  $\sigma_{\min}$  additionally filter out coincidental rules that would generate spurious head facts. The N3-regulariser baseline of Tier 2 (Lacroix et al. [34]) plays no role here — Tier 1 soundness is independent of how Tier 2 is trained.

### C.3 Provenance and Auditability

For every derived fact  $H\theta \in T_P^\omega(G)$  TACET stores its *proof tree*: the rule used and the (recursively annotated) base or earlier-derived facts that matched its body. A direct corollary of the classical soundness of forward chaining ([1]; Proposition 1) is that every proof tree, expanded to the leaves, terminates in base facts of  $G$ : nothing is invented. Section 7 promotes this to an executable evaluation (proof coverage and proof validity) and reports the measured numbers.

### C.4 Complexity Bounds

Let  $n = |G|$  be the number of base facts and  $|P|$  the number of active rules, with maximum body length  $k$ . Each iteration of  $T_P$  evaluates the body of every rule against the current state  $I$ ; in the worst case this is a  $k$ -way join, which can be computed in  $O(|I|^k \cdot |P|)$  time using nested-loop joins. TACET keys hash indexes on the (relation, subject) and (relation, object) columns, so a bound atom probes only matching facts in  $O(1)$  rather than scanning  $I$ ; the worst-case bound is unchanged but typical joins touch a small fraction of  $I$ . The closure stabilises in at most  $|\Sigma|$  iterations where  $|\Sigma| = \mathcal{O}(|V|^2 \cdot |R|)$  is the size of the Herbrand base. Two structural facts about TACET keep this manageable in practice:

- Mined rules have body length  $k \leq 2$  by construction (Section 4); this collapses the inner-loop cost to  $\mathcal{O}(|I|^2 \cdot |P|)$ , which is sub-second on the synthetic-org benchmark and well below a second on the FB15k-237 subgraphs TACET materialises in production.
- The *stable closure* is much smaller than the Herbrand base in our workloads: in the experiments of Section 6,  $|T_P^\omega(G)|/|\Sigma|$  stays below  $10^{-3}$  even after consolidation, because only typed  $(x, y)$  pairs that satisfy the type constraints of some active rule are reachable.

The Tier 2 (ComplEx-N3 or RotatE) embedding model has space complexity  $\mathcal{O}(d \cdot (|V| + |R|))$  for embedding dimension  $d$ , and per-epoch training time  $\mathcal{O}(d \cdot |E_{\text{train}}| \cdot (k_{\text{neg}} + 1))$  under mini-batch SGD with  $k_{\text{neg}}$  negatives per positive. Inference (a single `predict_tail` call) is  $\mathcal{O}(d \cdot |\text{candidates}|)$ .

### C.5 Expressivity boundary

TACET’s Tier 1 fragment is strictly contained in the family of positive Datalog (no negation in the body, no existential quantifiers in the head), which puts it inside both OWL 2 RL [46] and the non-existential fragment of DATALOG<sup>±</sup> [9]; in particular, query answering is PTIME in  $|G|$  for a fixed  $P$ , and combined complexity is EXPTIME. Tier 1 is therefore *less* expressive than a Transformer (which can in principle express arbitrary functions over token sequences) by design: that is what buys it the soundness, complexity, and auditability guarantees stated above. The cascade depends on this trade — the long tail of queries that fall outside the Datalog fragment is precisely what is routed to Tiers 2 and 3.

## D Failure modes

*Reading guide:* this inventory pairs with the limitations of Section 8 (measurement-scope caveats) and the extension-boundary appendix (E); the three sections jointly delimit the cascade’s operating envelope.

The cost story in Section 6 reports cascade-wins on average; this appendix collects the cases where TACET is the wrong tool. We highlight the failure modes that ablations and stress tests surfaced repeatedly during development; each is documented with the mitigation we ship in the framework and the residual loss the user must accept.

**Closed-world deduction over an incomplete graph (Tier 1).** The Datalog forward-chaining engine only derives what is proof-theoretically entailed by the rules and the base graph. On any KG with significant missing edges — which is essentially every production graph — Tier 1 will return “no answer” for queries whose true tail is reachable through an edge that simply has not been written. The cascade hides this failure behind Tier 2 / Tier 3, so end-to-end accuracy is preserved, but a user inspecting the routing trace will see a large fraction of queries fall through Tier 1. Mitigation: the rule synthesizer (Section 4) materialises the most common “derivable but unwritten” facts as new edges after consolidation; the operator can also seed edges manually. Residual loss: queries whose body relations are themselves missing remain a Tier-3 cost.

**Out-of-distribution entity surface forms.** Tier 2 (ComplEx-N3 / RotatE) only ever scores entities in the training vocabulary. A query about an unseen mention — a person whose name appears in the question but never as a node in the KG — will route to Tier 3 regardless of how structurally similar the entity is to a known one. Mitigation: a text-attributed initialisation (shipped as `tacet.kge.kge_textual`, not evaluated in the grid) closes part of the gap for entities that carry textual descriptions, since the text encoder generalises across surface forms; but the structural embedding still requires the entity to exist in the graph. Residual loss: per-query latency on genuinely novel entities matches the LLM-only baseline.

**Adversarial rule injection.** TACET distils rules from teacher answers. A poisoned teacher — a prompted LLM that returns systematic but plausible incorrect tails — can poison the rule store and, through forward chaining, infect all future Tier-1 answers. Mitigation: the curator (`tacet.experimental.episodic.FeedbackCurator`) retires rules whose field-deployment accuracy drops below threshold, and the soundness theorem of Section C only protects against ontology violations, not value-level mistakes. Residual loss: an adversary controlling the teacher can degrade accuracy until the curator collects enough negative feedback to retire the rules — a classical online-learning lag.

**Schema drift between ingestion and training.** The auto-ingestion pipeline of Section B.1 can extend the ontology after training has run. New relation types are not known to the KGE, so any Tier-2 query that hits one will silently score against a fresh random embedding — the score is near-meaningless until the next consolidation re-trains. Mitigation: the cascade refuses Tier 2 for unseen relations and defers to Tier 3 with a one-line log entry. Residual loss: a query window between schema-extension events incurs LLM cost.

**Repeated noisy queries amplify cache illusion.** On a workload with high repeat rate, an attacker can drive the cascade into a stable wrong answer by repeating an incorrect query just

enough times for the LLM-only baseline to “answer” the same way. TACET’s write-back cache will then return the wrong answer cheaply. Mitigation: the curator’s pessimistic confidence estimate for sparse-feedback rules deflates the cache score until the count of observed corrects exceeds a threshold; the routing layer only trusts cache entries with at least  $k$  field observations. Residual loss: the wrong answer is served for the first  $k$  uncorrected repeats.

**Causal queries under unobserved confounding.** The causal utility module (`tacet.core.causal`, Appendix B) only identifies treatment effects whose graph admits a back-door, front-door, or instrumental-variable adjustment. Models with unobserved confounders that violate all three conditions return “no adjustment set” from the `backdoor_set` / `front_door_set` / `instrumental_variables` helpers (there is no `identify()` entry point); the standard Tian-Pearl ID algorithm for the general semi-Markovian case is documented as future work. Mitigation: the helper returns a diagnostic explanation so the caller knows which condition failed. Residual loss: queries against complex semi-Markovian SCMs are not served.

The pattern that emerges from these failure modes is the same one the cascade was designed around: errors that the symbolic / embedding tiers cannot resolve do not silently degrade the answer; they degrade the *cost*, by routing more traffic to Tier 3. The cascade’s worst case is the cost ceiling — an LLM-only baseline — not a wrong answer. This is the property production operators actually care about: TACET cannot get cheaper than LLM-only on any workload, but it cannot do worse either.

## E Beyond Cost-Amortisation: Attempted Extensions and Their Boundary

*Reading guide:* the Discussion’s limitations (Section 8) and the failure-mode inventory (Appendix D) state the cost and routing caveats; this appendix adds the capability boundary — when no executable specification exists, distillation cannot exceed the teacher.

This appendix delimits the operating envelope of the cascade. The same recipe — distil verified teacher outputs into cheap checkable tiers — pays off precisely when a domain admits an executable, self-contained specification, and not otherwise. We establish that envelope constructively, through three extensions beyond cost-amortisation whose measured outcomes trace its edge. The mechanisms involved are established elsewhere; the contribution here is the boundary that governs when they apply.

### E.1 The capability extension: verifier-gated best-of- $N$

The first extension asks whether a sound, gold-free, teacher-independent verifier can make the cascade *exceed* its teacher rather than merely match it at lower cost: sample  $N$  candidates from the frontier teacher, keep only those a sound checker accepts, and distil the verified-correct outputs. Where an executable checker exists this works. On hard competitive-code problems (TACO, checked by input/output tests, a grok-4.3 teacher), best-of-5<sup>1</sup> under the sound filter raises accuracy from 0.70 to 0.90 ( $n=20$ ) and from 0.65 to 0.88 ( $n=60$ ) — an exceed margin of +20.0 and +23.0 points. The margin is, however, exactly the teacher’s rate of *recoverable* error, and it vanishes when either condition fails. With a weaker teacher there is nothing to recover (deepseek and minimax each solve

---

<sup>1</sup>Provenance note: these capability probes (TACO, MATH-500, text-to-SQL, logic-grid, GDPR-verifier) predate the release’s artifact-retention standard; their raw per-run records are not in `experiments/results`, and we report them as logged summary numbers.

0/8 of the same hard set); where errors are not recoverable by resampling the margin is zero (MATH-500 level-5: single-shot 0.75, self-consistency +0.0, against an oracle-selectable 0.83; synthetic text-to-SQL: single, consensus, and oracle accuracy coincide at 0.71). The cost-down half is sturdier: distilling verified parses removes 89–91% of teacher calls at equal accuracy on a closed-grammar logic-grid task and 12.5% on open-surface SQL. Pushed off an executable specification entirely — streaming GDPR compliance cases past the same verifier — the extension degenerates: verdict accuracy drops from the teacher’s 0.96–0.97 to 0.80, the verifier accepts none of the 76 verifiable cases, and the article it certifies matches the gold article in about one case in fifty (article micro- $F_1$   $0.70 \rightarrow 0.02$ ) — a constant-reject predictor, not a corrector. This is a *different experiment* from the compliance cost-amortisation of Section B.4.2, which matches the teacher’s verdict accuracy at lower cost and stands unaffected; what degenerates here is only the attempt to *exceed* the teacher’s verdicts off an executable specification. The exceed mechanism is itself established — repeated sampling with an automatic checker [8] and neurosymbolic rule-learning against real environment transitions [69] — so the contribution is not the mechanism but the boundary it reveals: where it pays, and where it collapses.

## E.2 The knowledge extension: verified accumulation

The second extension swaps the executable checker for *provenance*: a retrieval-grounding component and a persistent memory store that accumulate facts and resolve temporal conflicts (supersession) behind a replayable audit trail, aiming at the knowledge ceiling rather than the capability ceiling. Here the analogue of Tier-1 soundness does not hold. Provenance, recency, and cross-source counting each certify an *intermediate* — that a source asserted a claim, or that one record post-dates another — never that the claim is *true*, and a newer source is not a truer one. Recent measurement makes the gap concrete: deep-research agents can be near-perfect on citation validity while only 39–77% accurate on the underlying facts, degrading as the number of tool calls grows [49]. The supersession mechanism such an extension would contribute is, moreover, already occupied by concurrent work [31, 51]. The extension clears neither its own soundness bar nor an originality bar.

## E.3 The installation gate is the confidence threshold, not teacher identity

Section B.4.1 found that under a real Grok teacher the miner installs no generalising 2-hop rule at the operating point  $\gamma=0.95$ , and read the null as a teacher-quality ceiling. A confidence-threshold sweep across eleven 2026 frontier teachers on the same controlled 2-hop MetaQA workload sharpens, and partially revises, that reading (Table 11). At  $\gamma=0.95$  *none* of the eleven installs the rule, reproducing the Grok null and showing it is not an artifact of 2025-era models. At  $\gamma=0.50$ , *ten of eleven* install the exact composition  $q2(x, y) \leftarrow \textit{starred\_actors}^{-1}(x, z) \wedge \textit{directed\_by}(z, y)$  at world precision 1.0, cutting 81–86% of teacher calls at no accuracy loss — despite a teacher answer accuracy of only 0–5%. The free variable is therefore the installation threshold  $\gamma$ , not the teacher: raising teacher accuracy and lowering  $\gamma$  both cross the gate, and at a fixed low  $\gamma$  even a 0–5%-accurate teacher installs the world-correct rule, because the miner’s confidence is taken over the observed base-relation groundings, which the noisy answers still supply. The effect is seed-dependent — installation is a per-workload draw and we report the favourable seed per model over the 1–3 seeds recorded — so we read the sweep as establishing *which variable* gates installation, not a per-model ranking. The low- $\gamma$  regime it exposes is bounded by the three findings below — two of which limit it, and one of which removes an obstacle that turns out not to have been real.

Table 11: Confidence-threshold sweep on the controlled 2-hop MetaQA workload, eleven 2026 frontier teachers (favourable seed per model). At the operating point  $\gamma=0.95$  no teacher installs the composition rule; at  $\gamma=0.50$  ten of eleven install it at world precision 1.0, cutting 81–86% of teacher calls despite a teacher answer accuracy ( $t\text{-acc}$ ) of 0–5%. Installation is governed by  $\gamma$ , not by the teacher. Seed coverage is uneven: five teachers were recorded over three seeds (the “favourable seed” selects among these), one over two, and five over a single seed (no selection); the  $\gamma=0.95$ -vs-0.50 contrast holds on every recorded seed, while the absolute “ten of eleven” count is the per-model favourable draw.

| Teacher          | install $\gamma=0.95$ | install $\gamma=0.50$ | calls saved | t-acc |
|------------------|-----------------------|-----------------------|-------------|-------|
| GLM-5.2          | no                    | yes                   | 86.1%       | 0.00  |
| Kimi-K2.6        | no                    | yes                   | 83.6%       | 0.02  |
| Qwen3.7-Max      | no                    | yes                   | 83.6%       | 0.00  |
| Claude Sonnet 5  | no                    | yes                   | 83.3%       | 0.03  |
| DeepSeek-V4-Pro  | no                    | yes                   | 83.3%       | 0.00  |
| Gemini 3.5 Flash | no                    | yes                   | 83.3%       | 0.05  |
| MiniMax-M3       | no                    | yes                   | 83.3%       | 0.00  |
| GPT-5.6          | no                    | yes                   | 83.3%       | 0.00  |
| Grok 4.5         | no                    | yes                   | 83.3%       | 0.00  |
| Grok 4.3         | no                    | yes                   | 81.1%       | 0.04  |
| MiMo-V2.5-Pro    | no                    | no                    | —           | 0.02  |

**Label-free promotion is inert.** Lowering  $\gamma$  installs the true rule, but it also installs a self-referential junk rule, and telling the two apart *by inspecting the installed rules* required world precision, i.e. gold labels a deployment does not have. (The paragraph after next shows the junk need never be generated, which dissolves this particular obstacle; we report the label-free search as run, because its negative result stands on its own and bounds what stream supervision can do.) The stream itself already pays for teacher answers, so a natural label-free test suggests itself: install a candidate at low  $\gamma$  in *shadow* (it predicts but does not route), and promote it only after it agrees with the teacher on  $k$  distinct unseen heads, demoting on the first disagreement. We pre-registered this test (positive iff mean net teacher-call reduction  $\geq 20\%$  across the grid with no accuracy loss and zero junk promotions, at  $k=3$ ) and ran it offline over the recorded ladder. Across all 33 (teacher, seed) cells and  $k \in \{2, 3, 5\}$ , *not one rule was ever promoted*: every shadow rule agreed with the teacher on *zero* of its unseen-head checks. The mechanism is structural. A rule installs precisely on the workloads where the teacher is least accurate; a world-correct rule there *corrects* the teacher and therefore *disagrees* with it, so agreement-with-teacher is anti-correlated with rule value exactly in the regime where the rule is valuable. The junk self-rule, which predicts nothing on unseen heads, is rejected for free — so shadow validation is a sound *guard* but not a *promoter*, and closing the gold gap at low  $\gamma$  needs a precision signal beyond single-sample teacher agreement. The natural candidate is multi-sample self-consistency — querying the teacher  $k$  times and promoting only on *majority* agreement with the rule — so we test it. A first attempt failed for a diagnostic reason: drawing the  $k$  samples by raising the decoding temperature perturbs the primary answer enough that the rule no longer installs at  $\gamma=0.50$ , so the majority is never exercised. Decoupling the two — drawing the mining sample at temperature zero (the rule then installs) and only the votes at temperature — removes that confound, and the clean test is decisive (`experiments/results/self_consistency_e14_hop2.json`,  $k=3$ , two of three attempted cells — the third teacher’s provider returned malformed JSON at temperature and the record never completed): the rule installs, the majority signal *is* exercised, and the world-

correct rule is nonetheless *demoted* on its first unseen-head check, because the majority is still wrong. This is the crux: a majority vote cancels *random* noise, but the teacher’s error on these workloads is *systematic* (Sections B.4.1 and E.3: 0–5% accuracy, the same wrong answer each time; the artifact’s cache-arm accuracy is the stream-level metric over the Zipf-repeated 300 queries — 0.17 and 0.09 here — while the per-distinct-pair teacher answer accuracy of these two cells is 0.05 and 0.00, inside the cited range), so the vote reproduces the mistake rather than washing it out. Self-consistency, the obvious label-free promotion signal, is therefore empirically inert here for the same reason single-sample agreement is — and a cross-rule or ontology consistency signal, which we do not test, would have to overcome the same systematic-error wall. This is a negative result, and it bounds an otherwise attractive self-tuning story.

**The junk rule is a candidate-generation artifact, not a property of distillation.** The obstacle above assumes the junk rule exists and must be recognised. It need not exist. The miner draws body atoms from the base-relation whitelist *plus the mining target itself*; the length-1 branch refuses a body atom equal to the target, the length-2 branch does not, so  $q2(x, y) \leftarrow q2(x, z) \wedge q2(z, y)$  is a well-formed candidate — mined from the write-back edges the teacher’s own answers created. That is the junk rule. Excluding the target from length-2 bodies, which merely makes the two branches agree, removes it structurally, with no gold and no runtime signal.

Replaying the recorded ladder at  $\gamma=0.50$  under both settings (`-forbid-target-in-body`; 22 cells with a recorded control, no new API calls; per-cell results in `experiments/results/e16_forbid_target_hop2` rebuilt by `experiments/aggregate_e16_forbid.py`) is unambiguous. The true composition installs in the same 10 cells, at *identical* savings in 10 of 10 — including the anchor teacher, Grok 4.3 seed 0, at 81.13% and world precision 1.0. All 14 junk rules across the 7 affected cells disappear, and no cell loses accuracy. The cost is 3.36 percentage points of saving summed over the grid, from two cells where the self-rule happened to save a little at world precision 0.347 and 0.021 — i.e. saving produced by a rule wrong about the world in roughly two thirds and ninety-eight percent of its firings, with benchmark accuracy unchanged in both.

We register the limits. This addresses the *structural* self-reference only, not the near-functional leakage of Section 7.1, where a body of legitimate base relations still carries a  $\sim 20$ -point confidence/world-precision gap; that case still wants the held-out admission test proposed there. It also forecloses genuinely recursive targets, which MetaQA’s composed relation is not, so the option defaults to the published behaviour and must be enabled deliberately. That foreclosure is itself removable: a refined guard forbidding only the *pure self-loop* body (a candidate whose body references only the mining target itself) preserves the published junk-rejection behaviour exactly on the non-recursive grid — by classification and generative replay of the real grid — and, on a synthetic transitive-closure grid with oracle teachers, extends coverage to genuinely recursive targets (Appendix F). Within those limits the reading is clear: the low- $\gamma$  regime’s gold dependency was an artifact of how candidates were enumerated, and the three label-free experiments above were searching for a way to recognise something that did not have to be produced.

**Cross-teacher “distillability” is an answer-length artifact.** One might still rank teachers by how readily their answers distil, and build a benchmark on that ranking. It does not survive a controls check. Re-recording ten of the teachers with the answer list capped by a structured-output constraint (the eleventh is refused by its provider) and replaying at  $\gamma=0.50$ , the install set flips wholesale: six teachers that installed uncapped no longer do, and one that never installed now does — while every teacher’s answer accuracy remains in the 0–5% range. What the uncapped ladder read as “distillability” is dominated by how many entities a teacher emits per answer, not

by the structure of its errors. The lone teacher that installs only after the cap is consistent with this reading: capping removes its noisiest surplus entities, cleaning the base-relation groundings the miner scores over, which raises its confidence enough to install. The cap is moreover honoured inconsistently across providers (one returned 118 entities against a limit of 25), so a structured-output constraint is not even a reliable verbosity control. We therefore report no cross-teacher distillability ranking and do not pursue a benchmark on one.

**An engine limit that was ours, not the method’s.** An earlier version of this work reported the shadow-validation grid over 22 of the 33 cells, because replaying the remaining eleven exhausted memory during rule mining, and attributed that to teacher verbosity. Both halves were wrong. The cause was the Datalog join, which materialised the complete binding list for every body atom before moving to the next, so peak memory was the *product* of the per-atom fan-outs even though the callers consume one binding at a time; yielding depth-first instead makes it linear in body length, and all eleven cells then replay. Verbosity was not the discriminant either, though it does correlate: among the excluded cells the widest answer ranged from 33 to 85 tails (median 66), and among the cells that replayed it ranged from 19 to 83 (median 41.5). The ranges overlap across almost their whole extent, so no threshold on answer width separates the two groups, and the shifted medians are a consequence of the real mechanism rather than a cause: peak memory is the product of the per-atom fan-outs, which wider answers raise without determining. We report the full 33-cell grid; the verdict is unchanged, and every re-run cell reproduces the pattern of the original 22 — one shadow check, one demotion, no promotion. We record the episode because the misattribution is instructive: an implementation limit presented as a property of the method would have made the exclusion look principled.

## E.4 The unifying boundary

The two extensions — together with the forward-dynamics forecaster we already report as a negative in Section 8, and the world-model variant that would distil a latent predictor’s transitions into graph rules [41, 69] — share one cause. Tier-1 soundness certifies the symbol the language model *extracted*, not the claim the world makes true. Where an executable, self-contained specification exists (an interpreter, a set of unit tests, a Datalog closure over a fixed ontology), a sound gold-free teacher-independent verifier exists with it, and both the cost-down and — given recoverable error — the accuracy-up follow. Where it does not (open physical fact, free-text truth, real-world physics), the checkable object is the parse, the proof is post-hoc, and the guarantee is provenance rather than correctness. This is less a defect of the cascade than its operating envelope: the results of this paper sit inside it, and this appendix marks its edge.

## F Recursive Targets and the Pure-Self-Loop Guard

This appendix resolves the registered scope limitation of the structural junk rejection (Section E.3): forbidding the mining target from length-2 rule bodies removes the self-referential junk rule without gold labels, but forecloses genuinely recursive targets ( $ancestor \leftarrow ancestor.parent$ ), so the flag stays opt-in and licenses “safe on non-recursive targets” only. Three locked, deterministic, fully replayable results at zero provider cost replace that limitation with a strictly better mechanism: a guard that bans *only* the pure all-target body (both inversions of  $target \times target$ ) while keeping mixed  $target \times base$  legs.

**Result 1: the blunt ban measurably forecloses recursion (synthetic).** On a seeded random DAG ( $n=150$ , edge probability 0.03) whose target is the genuine transitive closure over a base relation, with oracle teachers and a 3-seed  $\times$  3-threshold ( $\gamma \in \{0.50, 0.70, 0.90\}$ )  $\times$  3-arm grid (published / blunt ban / refined guard), the blunt arm loses forward-chaining coverage of the full closure on **9/9 recursive cells** (e.g.  $0.7065 \rightarrow 0.5038$ ), while the refined arm preserves published-arm coverage on **9/9 cells** and drops exactly the pure self-loop installs, nothing else. Unsound derivations are 0 in every cell: on a genuinely transitive target even the pure self-loop is sound — a subset of the closure — hence redundant rather than harmful, which is why coverage preservation and junk removal can coexist. Artifact: `experiments/results/e18_recursive_target_synthetic.json`.

**Result 2: the refined guard subsumes the published junk rejection on the real grid (classification).** Re-classifying every `synthesised_rules` entry of the committed MetaQA 2-hop artifact (22 cells, both arms), the control arm’s target-containing rules classify **14/14** as pure self-loops, spread over exactly the 7 published junk cells; the true compositions are kept in **10/10** cells, every composition rule base-only; and the totals reconcile with the published aggregates exactly, per cell as well as in aggregate. Locked decision: **REFINED-GUARD-SUBSUMES** — the refined guard keeps the published junk-rejection behaviour on the non-recursive grid exactly; combined with Result 1, it is coverage-preserving on genuinely recursive targets, while the blunt `-forbid-target-in-body` flag stays opt-in and non-recursive-only. Artifact: `experiments/results/e16_metaqa_reread_refined_guard.json`, contract-tested in `tests/test_e16_replay_refined.py`.

**Result 3: generative re-mining on the real grid.** Re-mining all 22 recorded cells at  $\gamma=0.50$  under the refined guard — teacher answers replayed from the archived recordings, zero provider calls — the control arm reproduces the published shape exactly under the refined taxonomy (14 pure-self-loop rules over exactly the 7 published junk cells; true installs 10/10), and the refined arm shows **zero** pure self-loop and **zero** mixed-recursive rules across all 22 cells, with true compositions kept in **10/10** at identical per-rule world precision, no valid cell losing accuracy, and 0 invalid cells. Locked decision: **GENERATIVE-SUBSUMES** — the junk removal is not a classification artifact of committed rule lists; it holds when the miner runs fresh under the guard. Artifact: `experiments/results/e18_w2_generative_refined.json`; runner plumbing and contract test shipped in the same commit.

**Explicit non-claims.** (1) Near-functional leakage (Section 7.1) is untouched; the admission-mechanism question remains closed-inconclusive and is not cited as support. (2) Scope is miner-level: a synthetic transitive-closure grid with oracle teachers, a classification replay, and a generative replay of the MetaQA 2-hop grid — no deployment, no product, no benchmark beyond MetaQA 2-hop. (3) The archived teacher recordings stay in the authoring archive; the public artifacts carry per-cell outcomes only, never raw paid answers.

**Reproducibility.** All three results are deterministic and replayable at zero provider cost from the seeds and the committed artifacts: `experiments/run_e18_recursive.py`, `experiments/replay_e16_refined.py`, and `experiments/run_real_kg_controlled.py` (replay mode), with contract tests `tests/test_e18_recursive.py`, `tests/test_e16_replay_refined.py`, and `tests/test_controlled_selfloop_plumbing.py`.