


2) Its basically a tree structure that works around characters instead of plain numbers

↳ its goal is to allow search and insertion of elements in $O(1)$ time compl.

→ the focal point of this structure is to allow the user to search words by using its prefix

obs: AutoComplete features are based on prefix-tree implementation, given its goal is to present all available words given its prefix

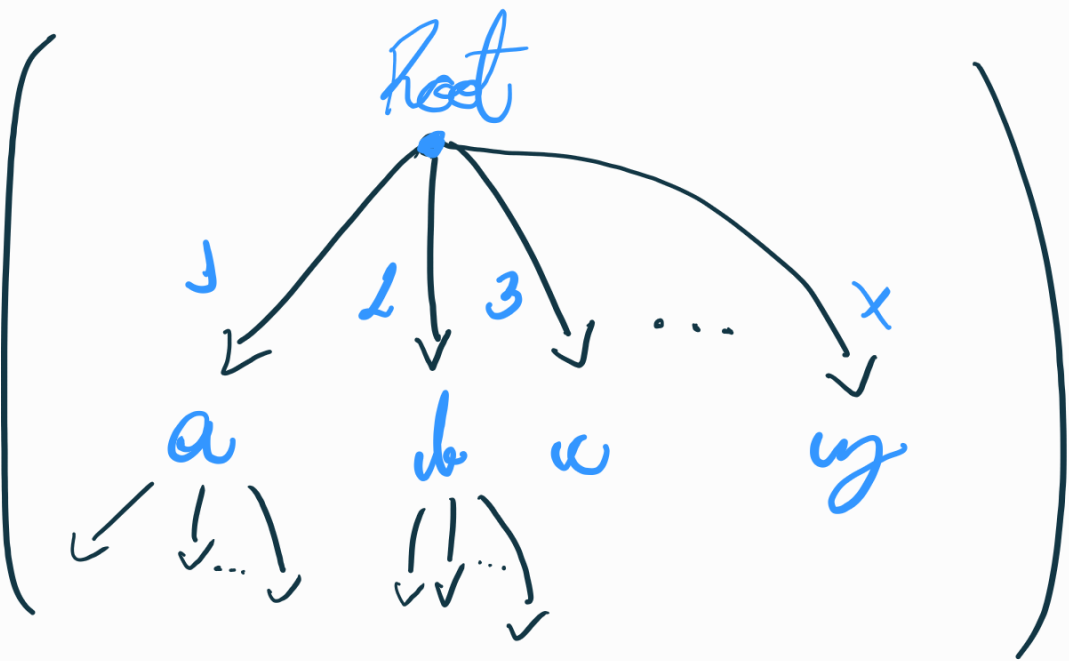

→ Note that the root node is always

empty.

- for example, all the words that start with an "a" are children to root ↴ (a) and so on...
- in terms of implementation, every node is composed from a root value (string) and its children, which will be stored on a HashMap. To allow O(1) when reading/writing on/to it.

○ trieNode default definition:

```
↳ trieNode {  
    boolean isleaf;  
    Map<Character, trieNode> children;  
}
```

↳ isleaf identifier is used to determine whenever a node is the end of its subtree

↳ this implementation set only enforces that initial root node never holds any

value, its children are what matters