

C Program Tasks



NATIONAL UNIVERSITY
of Computer & Emerging Sciences

Assignment title: C Program Tasks

Subject Name: Programming Fundamentals Lab

Submitted By: Nabiha Shaukat

Roll Number: 26k-3166

Submitted To: Sir Shayan Ali

Date Of Submission: 10 Sep 2026

QUESTION 01:

```
main.c Run ▶

1 // Online C compiler to run C program online
2 #include <stdio.h>
3
4 int main() {
5     int studentmarks,familyincome;
6     // Write C code here
7     printf("\nEnter studentmarks");
8     scanf("%d", &studentmarks);
9
10    printf("\nEnter familyincome");
11    scanf("%d", &familyincome);
12
13    if
14        (studentmarks >= 80 && familyincome > 50000)
15    {
16        printf("\nstudent qualifies for scholarship");
17        printf("\nfamily qualifies for scholarship");
18    }
19    else
20    {
21        printf("scholarship denied");
22    }
23
24    }
25    return 0;
26 }
```

Fig 1: Input of Scholarship eligibility criteria using if-else on C Compiler

```
Output 🔗 ⋮

Enter studentmarks

55

Enter familyincome
60000
scholarship denied

=== Code Execution Successful ===
```

Fig 2: Output of Scholarship eligibility criteria using if-else on C Compiler

QUESTION 01:

```
main.c Run ▶

1 // Online C compiler to run C program online
2 #include <stdio.h>
3
4 int main()
5 {
6     int studentmarks,familyincome;
7     printf("Enter studentmarks");
8     scanf("%d", &studentmarks);
9
10    printf("Enter familyincome");
11    scanf("%d", &familyincome);
12    //using or operator to check eligibility criteria
13    if
14        ("studentmarks >= 80 \\\ family income > 50000")
15    {
16        printf("qualifies for scholarship");
17    }
18    else
19        printf("does not qualify for scholarship");
20
21    return 0;
22 }
```

Fig 3: Input of Scholarship eligibility criteria using OR Operator on C Compiler

```
Output 🔗 ⋮

Enter studentmarks
76
Enter familyincome
45000
qualifies for scholarship

=== Code Execution Successful ===
```

Fig 4: Output of Scholarship eligibility criteria using OR Operator on C Compiler

QUESTION 02:

```
main.c Run ▶

1 // Online C compiler to run C program online
2 #include <stdio.h>
3
4 int main() {
5     int numeroflatedays;
6     printf("\nEnter number of latedays");
7     scanf("%d", &numeroflatedays);
8
9     if (numeroflatedays==0)
10    {
11        printf("\ndisplay no fine");
12    }
13    else if
14        (numeroflatedays <=5)
15        {
16            printf("\ndisplay fine =50");
17        }
18    else if
19        (numeroflatedays <=10)
20        {
21            printf("\ndisplay fine =100");
22        }
23    else
24        {
25            printf("\ndisplay fine =200");
26        }
27    return 0;
28 }
```

Fig 5: Input of fine using if-else on C Compiler

```
Output 🔗 ⋮

Enter number of latedays
6

display fine =100

=== Code Execution Successful ===
```

Fig 6: Output of fine using if-else on C Compiler

QUESTION 03:

```
main.c Run ▶

1 // Online C compiler to run C program online
2 #include <stdio.h>
3
4 int main()
5 {
6
7     char name [50];
8     printf("Enter your full name :");
9     fgets(name,50,stdin); //safer alternatives to gets()
10
11     printf("Your name is :");
12     puts(name);
13
14     printf("Enter first charactor of name : %c",name[1]);
15
16
17     return 0;
18 }
```

Fig 7: Input of name & character using f-gets on C Compiler

```
Output 🔗 ⋮

Enter your full name :Nabiha Shaukat
Your name is :Nabiha Shaukat

Enter first charactor of name : a

=== Code Execution Successful ===
```

Fig 8: Output of name & character using f-gets on C Compiler

QUESTION 04:

```
main.c Run ▶

1 // Online C compiler to run C program online
2 #include <stdio.h>
3
4 int main()
5 {
6     int length,width;
7     printf("Enter length");
8     scanf("%d", &length);
9     printf("Enter width");
10    scanf("%d", &width);
11
12    printf("\nArea = %d",length*width);
13    printf("\nPerimeter = %d",2*length+2*width);
14
15    return 0;
16 }
```

Fig 9: Input of area of rectangular room on C Compiler

```
Output 🔗 ⋮


Enter length
24
Enter width
20

Area = 480
Perimeter = 88

=== Code Execution Successful ===
```


Fig 10: Output of area of rectangular room on C Compiler

QUESTION 05:

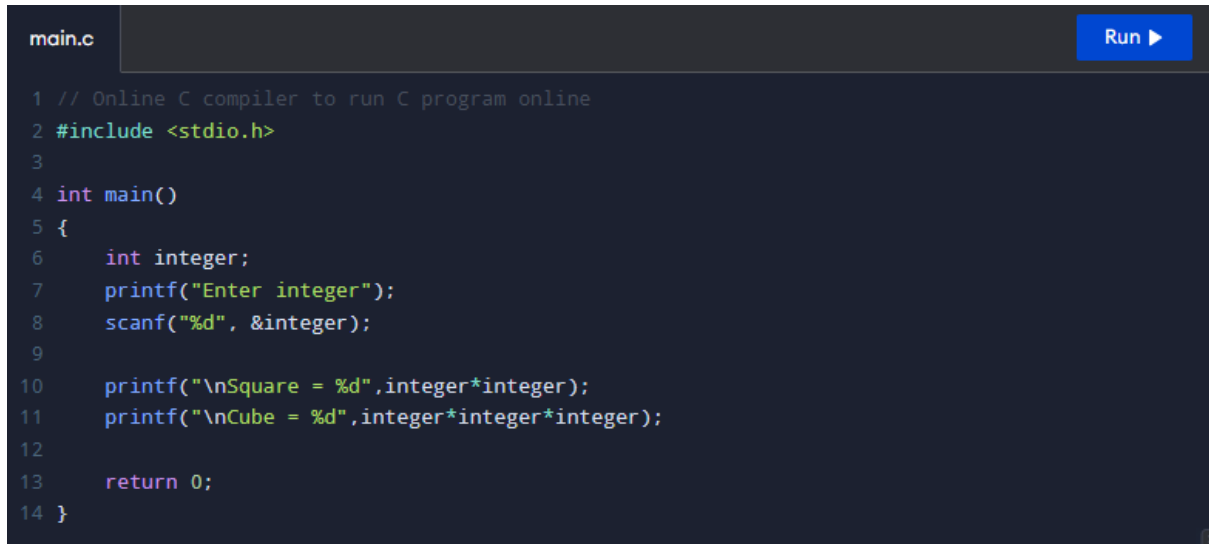

```
main.c Run ▶  
  
1 // Online C compiler to run C program online  
2 #include <stdio.h>  
3  
4 int main()  
5 {  
6     int integer;  
7     printf("Enter integer");  
8     scanf("%d", &integer);  
9  
10    printf("\nSquare = %d",integer*integer);  
11    printf("\nCube = %d",integer*integer*integer);  
12  
13    return 0;  
14 }
```


Fig 11: Input of square & cube of an integer on C Compiler

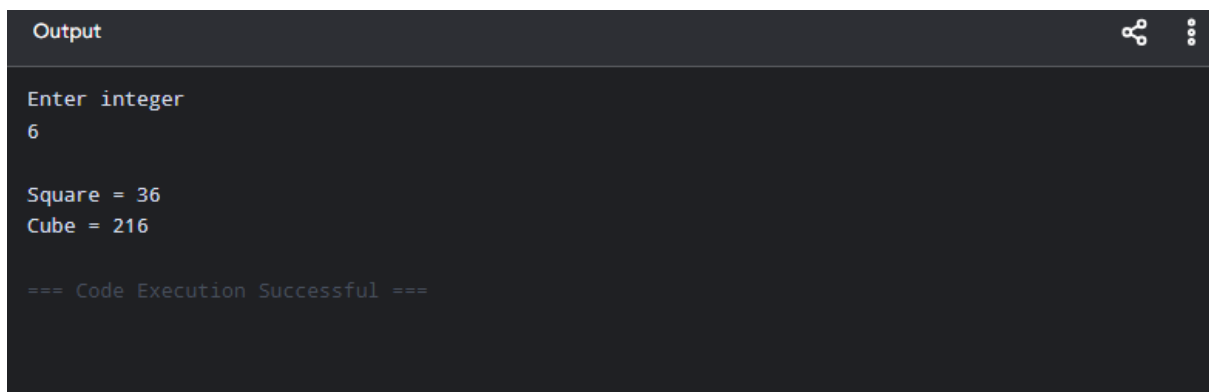

```
Output 🔗 ⋮  
  
Enter integer  
6  
  
Square = 36  
Cube = 216  
  
=== Code Execution Successful ===
```

Fig 12: Output of square & cube of an integer on C Compiler


QUESTION 06:

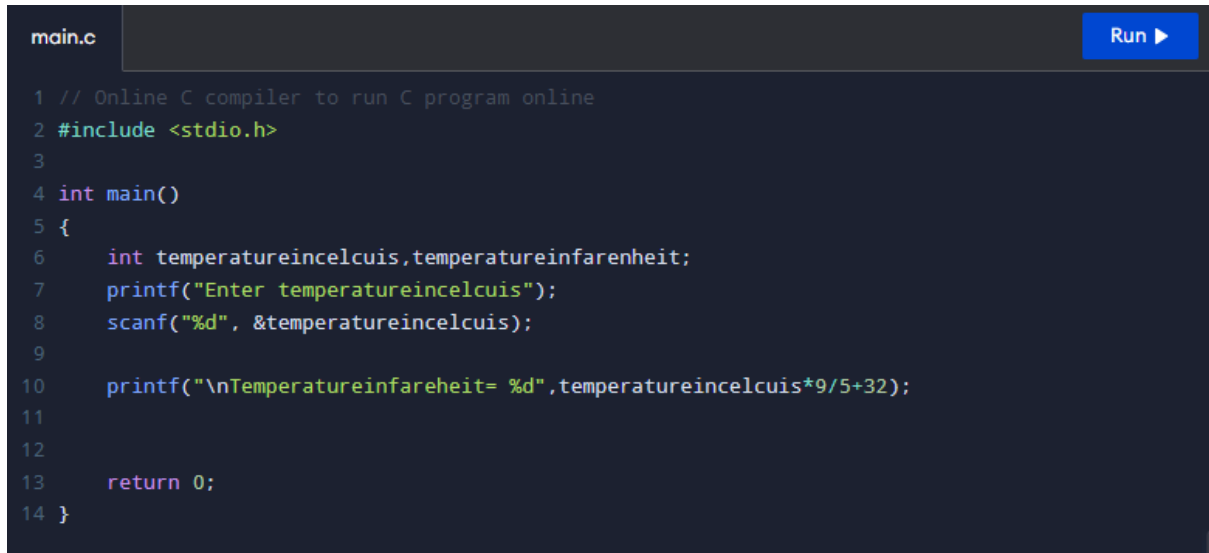

The screenshot shows a C compiler interface with a dark theme. At the top, there is a tab labeled 'main.c' and a blue 'Run' button with a right-pointing triangle. Below the tab, the C source code is displayed in a monospaced font with syntax highlighting. The code is as follows:

```
1 // Online C compiler to run C program online
2 #include <stdio.h>
3
4 int main()
5 {
6     int temperatureincelcuis,temperatureinfahrenheit;
7     printf("Enter temperatureincelcuis");
8     scanf("%d", &temperatureincelcuis);
9
10    printf("\nTemperatureinfareheit= %d",temperatureincelcuis*9/5+32);
11
12
13    return 0;
14 }
```

Fig 13: Input of conversion of temperature on C Compiler

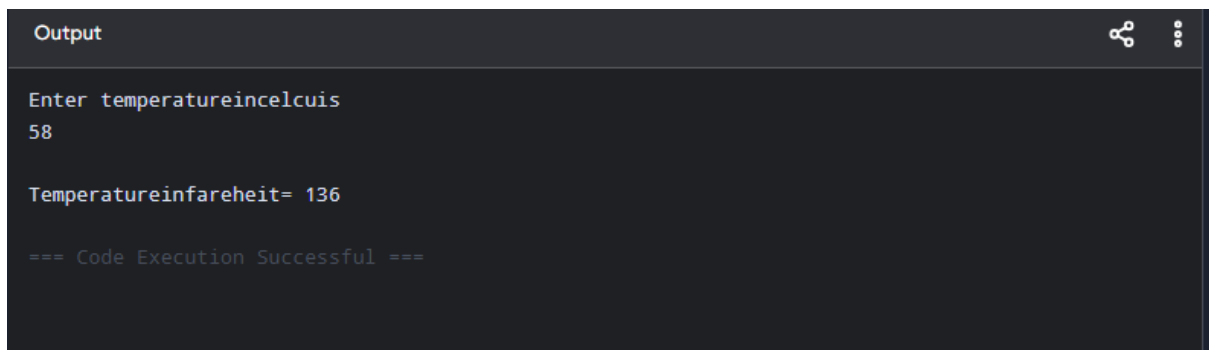

The screenshot shows the 'Output' window of the C compiler. The title bar says 'Output' and there are icons for sharing and a menu. The output text is as follows:


```
Enter temperatureincelcuis
58

Temperatureinfareheit= 136

=== Code Execution Successful ===
```


Fig 14: Output of conversion of temperature on C Compiler

QUESTION 07:

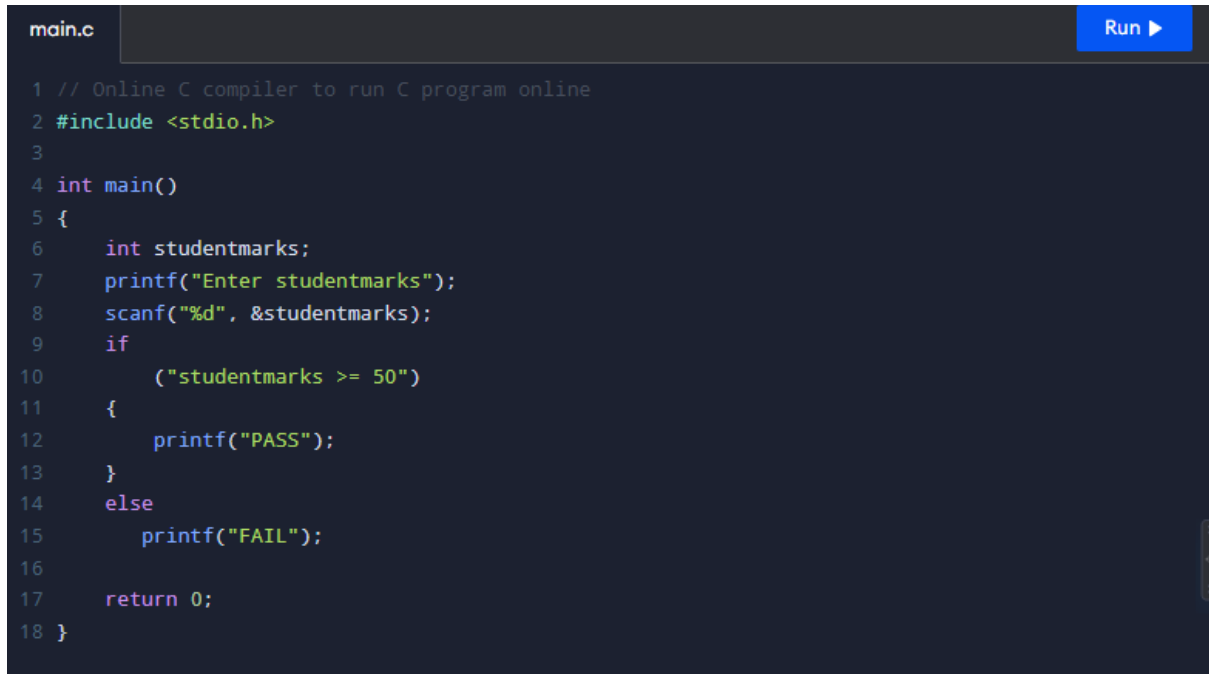

```
main.c Run ▶  
1 // Online C compiler to run C program online  
2 #include <stdio.h>  
3  
4 int main()  
5 {  
6     int studentmarks;  
7     printf("Enter studentmarks");  
8     scanf("%d", &studentmarks);  
9     if  
10      ("studentmarks >= 50")  
11     {  
12         printf("PASS");  
13     }  
14     else  
15         printf("FAIL");  
16  
17     return 0;  
18 }
```

Fig 15: Input of student marks using if-else on C Compiler

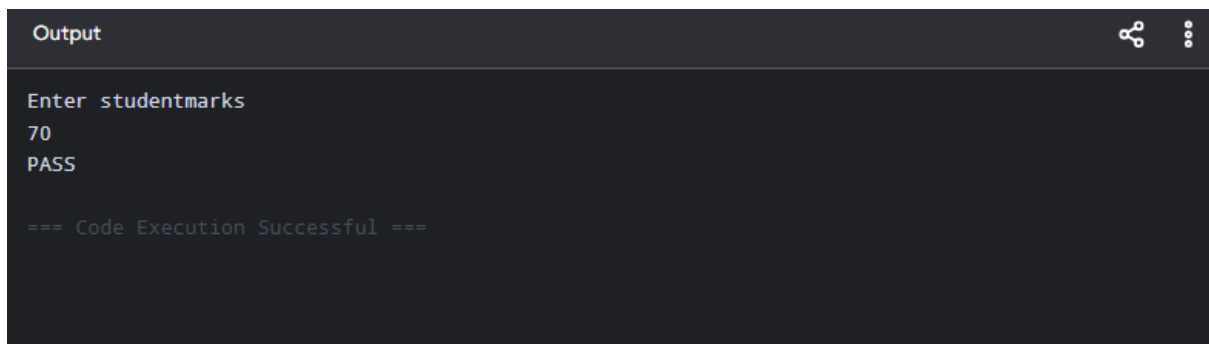

```
Output  
Enter studentmarks  
70  
PASS  
  
=== Code Execution Successful ===
```

Fig 16: Output of student marks using if-else on C Compiler