

Configuration Space

Reference slide: the discrete sweep axes, the discovered gap ordering, and how reduced dataset size grows across the configuration grid.


Sweep Axes

line_count = (1, 2, 3, 4)
z-slice choices = ((0,), (0, 1),
(0, 1, 2))
gap_count = (1, 2, 3, 4)
total = 48 configurations

Cache Reuse

Fit caches are built once for
 $z_{\text{ixs_used}} = (0, 1, 2)$.
Later 1-slice and 2-slice
configurations reuse those fits
instead of refitting.
 $n_{\text{reduced_z}} = \text{gap_count} \times$
 $z_{\text{slice_count}}$.

Gap Ordering In z

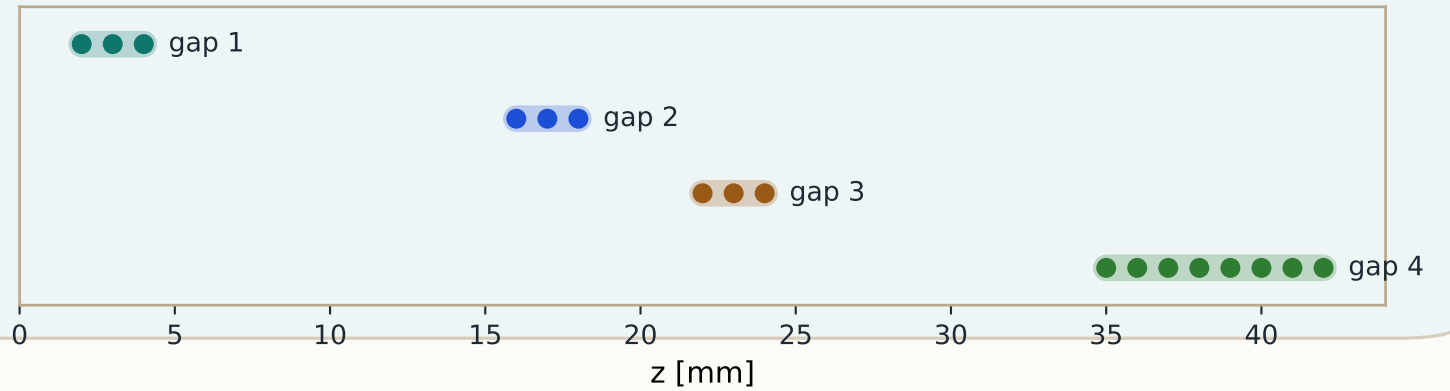

Reduced Points Per Gap

