


Gap And z Coverage

The four discovered gaps occupy distinct z regions. `gap_count` chooses how many of those regions are included, while z_slice_count` chooses how many sampled z positions are retained inside each included gap.`


Discovered Gap Regions Along z

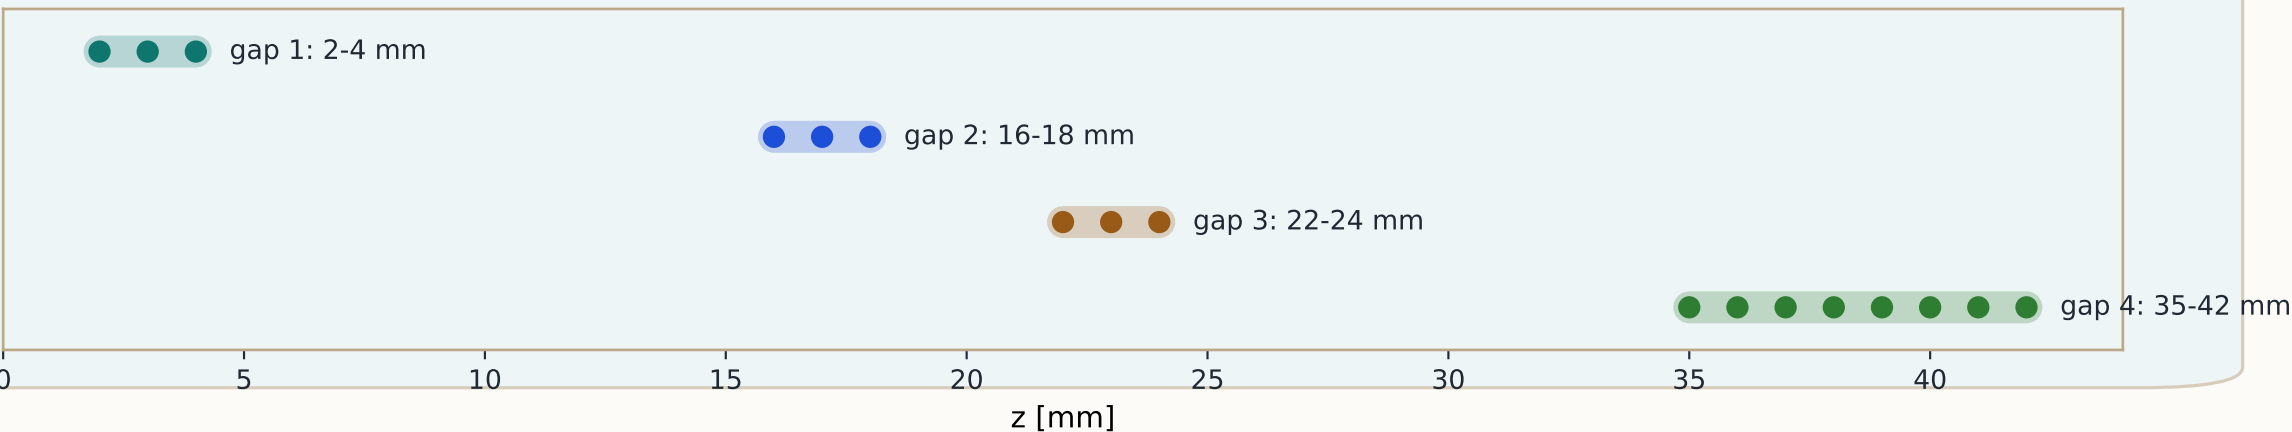

What gap_count Means

The gaps are ordered from highest z to lowest z.
`gap_count = 1` keeps only 35-42 mm.
`gap_count = 4` spans the full 2-42 mm coverage.

Which z Planes Survive?

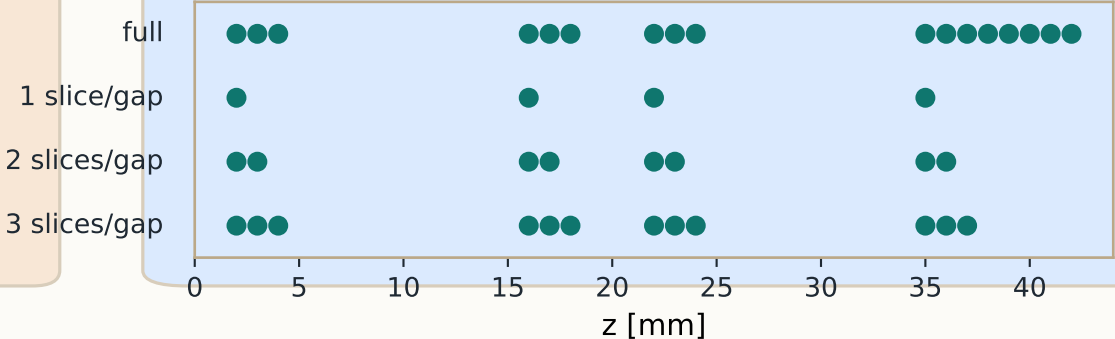

Coverage Formula

$n_{reduced,z} = gap_count * z_slice_count$
full data: 17 z planes
max reduced case: 12 retained planes
`gap_count` chooses regions; `z_slice_count` chooses depth.