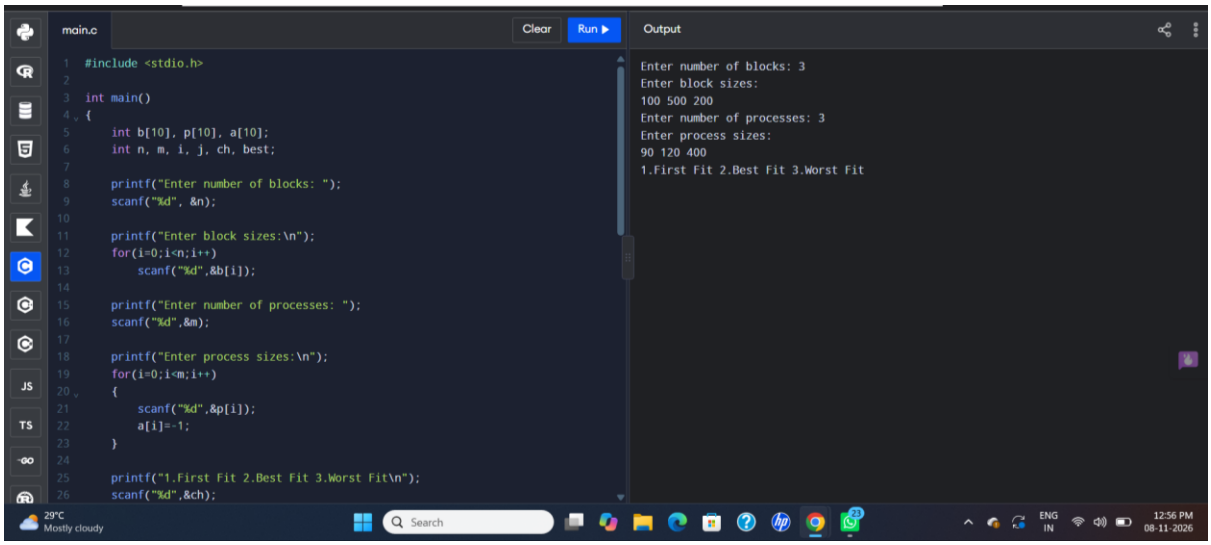
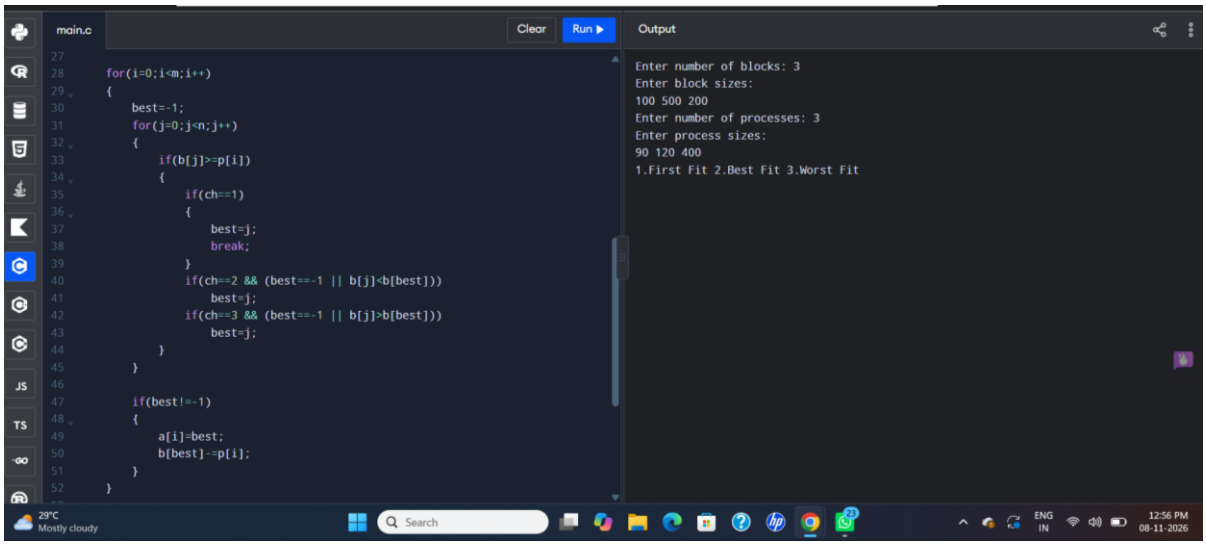
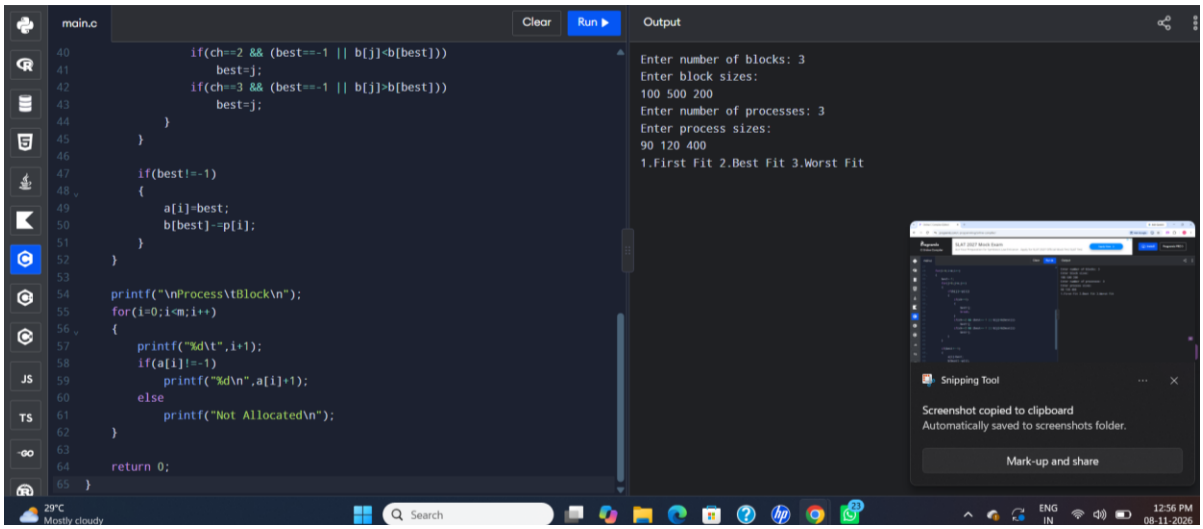
EXERCISE -13


main.c
Clear
Run
Output
#include <stdio.h>
int main()
{
int b[10], p[10], a[10];
int n, m, i, j, ch, best;
printf("Enter number of blocks: ");
scanf("%d", &n);
printf("Enter block sizes:\n");
for(i=0;i<n;i++)
scanf("%d",&b[i]);
printf("Enter number of processes: ");
scanf("%d",&m);
printf("Enter process sizes:\n");
for(i=0;i<m;i++)
{
scanf("%d",&p[i]);
a[i]=-1;
}
printf("1.First Fit 2.Best Fit 3.Worst Fit\n");
scanf("%d",&ch);
Enter number of blocks: 3
Enter block sizes:
100 500 200
Enter number of processes: 3
Enter process sizes:
90 120 400
1.First Fit 2.Best Fit 3.Worst Fit
29°C
Mostly cloudy
Search
ENG
IN
12:56 PM
08-11-2026


main.c
Clear
Run
Output
for(i=0;i<m;i++)
{
best=-1;
for(j=0;j<n;j++)
{
if(b[j]>=p[i])
{
if(ch==1)
{
best=j;
break;
}
if(ch==2 && (best==-1 || b[j]<b[best]))
best=j;
if(ch==3 && (best==-1 || b[j]>b[best]))
best=j;
}
}
if(best!=-1)
{
a[i]=best;
b[best]-=p[i];
}
}
Enter number of blocks: 3
Enter block sizes:
100 500 200
Enter number of processes: 3
Enter process sizes:
90 120 400
1.First Fit 2.Best Fit 3.Worst Fit
29°C
Mostly cloudy
Search
ENG
IN
12:56 PM
08-11-2026


main.c
Clear
Run
Output
if(ch==2 && (best==-1 || b[j]<b[best]))
best=j;
if(ch==3 && (best==-1 || b[j]>b[best]))
best=j;
}
}
if(best!=-1)
{
a[i]=best;
b[best]-=p[i];
}
}
printf("\nProcess\tBlock\n");
for(i=0;i<m;i++)
{
printf("%d\t",i+1);
if(a[i]!=-1)
printf("%d\n",a[i]+1);
else
printf("Not Allocated\n");
}
return 0;
}
Enter number of blocks: 3
Enter block sizes:
100 500 200
Enter number of processes: 3
Enter process sizes:
90 120 400
1.First Fit 2.Best Fit 3.Worst Fit
Snipping Tool
Screenshot copied to clipboard
Automatically saved to screenshots folder.
Mark-up and share
29°C
Mostly cloudy
Search
ENG
IN
12:56 PM
08-11-2026