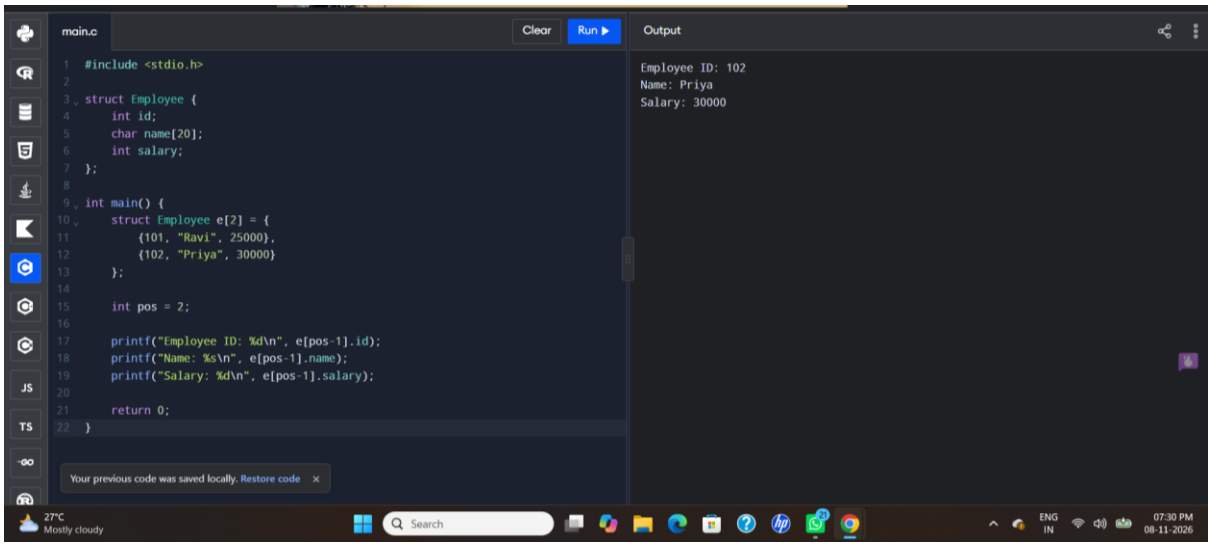
EXERCISE-16


main.c
Clear
Run
Output
#include <stdio.h>
struct Employee {
int id;
char name[20];
int salary;
};
int main() {
struct Employee e[2] = {
{101, "Ravi", 25000},
{102, "Priya", 30000}
};
int pos = 2;
printf("Employee ID: %d\n", e[pos-1].id);
printf("Name: %s\n", e[pos-1].name);
printf("Salary: %d\n", e[pos-1].salary);
return 0;
}
Employee ID: 102
Name: Priya
Salary: 30000
Your previous code was saved locally. Restore code
27°C
Mostly cloudy
Search
ENG
IN
07:30 PM
08-11-2026