
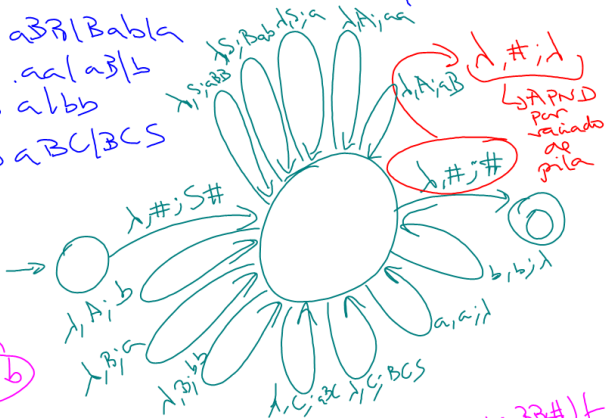


Passar de G/C a um APND equivalente

$$\left\{ \begin{array}{l} S \rightarrow aBb \mid Babb \\ A \rightarrow .aa \mid aB \mid b \\ B \rightarrow a \mid bb \\ C \rightarrow aBC \mid BCs \end{array} \right.$$


$(q_0, abbb; i\#) \vdash (q_1, abbbb; s\#) \vdash (q_2, abbbb; aBB\#) \vdash (q_1, bbbb; BB\#) \vdash$

Passar de um APID a uma GLC



$$S = \begin{bmatrix} q_1 & q_2 \end{bmatrix}$$

$$[g_{12}] \rightarrow$$

$$\{g_1, g_2\} \rightarrow$$

$$[x_5 + x_6]$$

$[g_1 \# g_2]$

$$[g_3 \neq g_0]$$

$\left[\frac{2\pi}{\sqrt{3}} \right]$

$\begin{bmatrix} 43 & 12 \\ 1 & 93 \end{bmatrix}$

23# 24#
1-15 16

$\frac{1}{2} \times \frac{1}{2} = \frac{1}{4}$

$$-9x + 16$$

95#92)

① 工厂

