



All Domains > Algorithms > Sorting > Correctness and the Loop Invariant

Badge Progress (Details)

Points: 1594.64 Rank: 9999

Correctness and the Loop Invariant

by HackerRank

Problem

Submissions

Leaderboard

Discussions

In the previous challenge, you wrote code to perform an *Insertion Sort* on an unsorted array. But how would you prove that the code is correct? I.e. how do you show that for any input your code will provide the right output?

Loop Invariant

In computer science, you could prove it formally with a *loop invariant*, where you state that a desired property is maintained in your loop. Such a proof is broken down into the following parts:

- *Initialization*: It is true (in a limited sense) before the loop runs.
- *Maintenance*: If it's true before an iteration of a loop, it remains true before the next iteration.
- *Termination*: It will terminate in a useful way once it is finished.

Insertion Sort's Invariant

Say, you have some InsertionSort code, where the outer loop goes through the whole array A :


```
for(int i = 1; i < A.length; i++){
    //insertion sort code
}
```


You could then state the following loop invariant:

At the start of every iteration of the outer loop (indexed with i), the subarray until $arr[i]$ consists of the original elements that were there, but in sorted order.

To prove Insertion Sort is correct, you will then demonstrate it for the three stages:

- *Initialization* - The subarray starts with the first element of the array, and it is (obviously) sorted to begin with.
- *Maintenance* - Each iteration of the loop expands the subarray, but keeps the sorted property. An element V gets inserted into the array only when it is greater than the element to its left. Since the elements to its left have already been sorted, it means V is greater than all the elements to its left, so the array remains sorted. (In *Insertion Sort 2* we saw this by printing the array each time an element was properly inserted.)
- *Termination* - The code will terminate after i has reached the last element in the array, which means the sorted subarray has expanded to encompass the entire array. The array is now fully sorted.



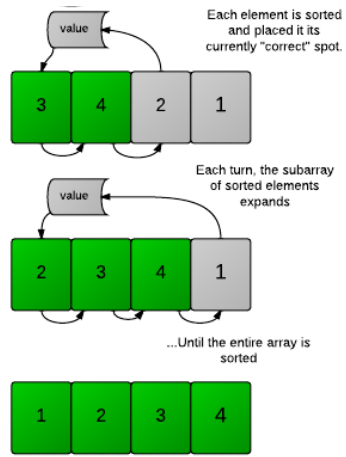

You can often use a similar process to demonstrate the correctness of many algorithms. You can see [these notes](#) for more information.

Challenge

In the InsertionSort code below, there is an error. Can you fix it? Print the array only once, when it is fully sorted.

Details

The Input format and the constraints are the same as in the previous challenges and are presented below.

Input Format

There will be two lines of input:

- s - the size of the array
- ar - the list of numbers that makes up the array

Output Format

Output the numbers in order, space-separated.

Constraints

$$1 \leq s \leq 1000$$

$$-1500 \leq V \leq 1500, V \in ar$$

Sample Input

```
6
1 4 3 5 6 2
```

Sample Output

```
1 2 3 4 5 6
```

f t in

Submissions: [38591](#)

Max Score: 30

Difficulty: Easy

Rate This Challenge:

☆☆☆☆☆

[More](#)

Current Buffer (saved locally, editable)

C#



```
6 using System;
7 using System.Collections.Generic;
8 using System.IO;
9 using System.Linq;
10
11 class Solution {
12     public static void insertionSort (int[] A) {
13         var i = 0;
```



```
14 for (var i = 1; i < A.Length; i++) {  
15     var value = A[i];  
16     j = i - 1;  
17     while (j >= 0 && value < A[j]) {  
18         A[j + 1] = A[j];  
19         j = j - 1;  
20     }  
21     A[j + 1] = value;  
22 }  
23 Console.WriteLine(string.Join(" ", A));  
24 }  
25  
26 static void Main(string[] args) {  
27     Console.ReadLine();  
28     int [] _ar = (from s in Console.ReadLine().Split() select Convert.ToInt32(s)).ToArray();  
29     insertionSort(_ar);  
30 }  
31 }  
32 }
```

Line: 20 Col: 15

 [Upload Code as File](#)☐ Test against custom input[Run Code](#)[Submit Code](#)

Congrats, you solved this challenge!

 Test Case #0 Test Case #1 Test Case #2 Test Case #3[Next Challenge](#)

Copyright © 2017 HackerRank. All Rights Reserved

Join us on IRC at [#hackerrank](#) on freenode for hugs or bugs.[Contest Calendar](#) | [Interview Prep](#) | [Blog](#) | [Scoring](#) | [Environment](#) | [FAQ](#) | [About Us](#) | [Support](#) | [Careers](#) | [Terms Of Service](#) | [Privacy Policy](#) | [Request a Feature](#)