

In [1]:

```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn import preprocessing, svm
from sklearn.model_selection import train_test_split
from sklearn.linear_model import LinearRegression
```

In [2]:

```
df=pd.read_csv(r"C:\Users\raja\Downloads\bottle.csv.zip")  
df
```

C:\Users\raja\AppData\Local\Temp\ipykernel\_17544\367079261.py:1: DtypeWarning: Columns (47,73) have mixed types. Specify dtype option on import or set low\_memory=False.

```
df=pd.read_csv(r"C:\Users\raja\Downloads\bottle.csv.zip")
```

Out[2]:

	Cst_Cnt	Btl_Cnt	Sta_ID	Depth_ID	Depthm	T_degC	Salnty	O2ml_L	STheta
0	1	1	054.0 056.0	19-4903CR-HY-060-0930-05400560-0000A-3	0	10.500	33.4400	NaN	25.64900
1	1	2	054.0 056.0	19-4903CR-HY-060-0930-05400560-0008A-3	8	10.460	33.4400	NaN	25.65600

In [3]:

```
df=df[['Salnty','T_degC']]
df
```

Out[3]:

	Salnty	T_degC							
0	33.4400	10.500	054.0 056.0	19-4903CR-HY-060-0930-05400560-0019A-3	19	10.450	33.4200	NaN	25.64300
1	33.4400	10.460							
2	33.4370	10.460							
3	33.4200	10.450							
4	33.4210	10.450	054.0 056.0	19-4903CR-HY-060-0930-05400560-0020A-7	20	10.450	33.4210	NaN	25.64300
...	...	...							
864858	33.4083	18.744	...	...	...	...	...	...	...
864859	33.4083	18.744							
864860	33.4150	18.692		20-1611SR-MX-310-2239-09340264-0000A-7					
864858	34404	864859	093.4 026.4		0	18.744	33.4083	5.805	23.87055
864861	33.4062	18.161							
864862	33.3880	17.533							
864863 rows × 2 columns									
864859	34404	864860	093.4 026.4	20-1611SR-MX-310-2239-09340264-0002A-3	2	18.744	33.4083	5.805	23.87072
864860	34404	864861	093.4 026.4	20-1611SR-MX-310-2239-09340264-0005A-3	5	18.692	33.4150	5.796	23.88911
864861	34404	864862	093.4 026.4	20-1611SR-MX-310-2239-09340264-0010A-3	10	18.161	33.4062	5.816	24.01426

In [4]: Cst\_Cnt Btl\_Cnt Sta\_ID Depth\_ID Depthm T\_degC Salnty O2ml\_L STheta

```
df.columns=['sal','temp']
df
```

Out[4]:

864862	34404	864863	093.4 026.4	20- 1611SR- MX-310- 2239- 09340264- 0015A-3	15	17.533	33.3880	5.774	24.15297
--------	-------	--------	----------------	--	----	--------	---------	-------	----------

	sal	temp
0	33.4400	10.500
864863 rows × 74 columns		
1	33.4400	10.460
2	33.4370	10.460
3	33.4200	10.450
4	33.4210	10.450
...	...	...
864858	33.4083	18.744
864859	33.4083	18.744
864860	33.4150	18.692
864861	33.4062	18.161
864862	33.3880	17.533

864863 rows × 2 columns

In [5]:

```
df.head()
```

Out[5]:


	sal	temp
0	33.440	10.50
1	33.440	10.46
2	33.437	10.46
3	33.420	10.45
4	33.421	10.45

In [11]:

```
sns.lmplot(x='sal',y='temp',data=df,order=2,ci=0.95)
```

Out[11]:

&lt;seaborn.axisgrid.FacetGrid at 0x1b4e5726020&gt;

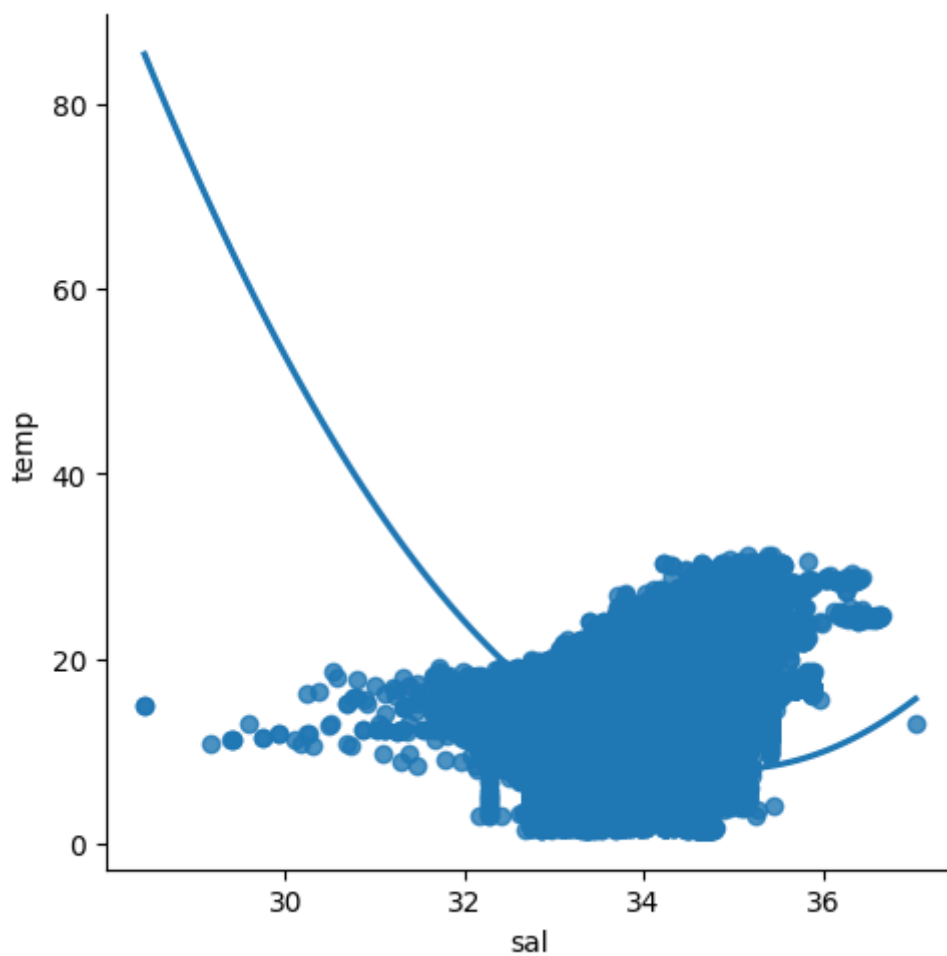

In [7]:

```
df.describe()
```

Out[7]:

	sal	temp
count	817509.000000	853900.000000
mean	33.840350	10.799677
std	0.461843	4.243825
min	28.431000	1.440000
25%	33.488000	7.680000
50%	33.863000	10.060000
75%	34.196900	13.880000
max	37.034000	31.140000

In [8]:

```
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 864863 entries, 0 to 864862
Data columns (total 2 columns):
#   Column  Non-Null Count  Dtype
---  -
0    sal      817509 non-null    float64
1   temp      853900 non-null    float64
dtypes: float64(2)
memory usage: 13.2 MB
```

In [9]:

```
df.fillna(method='ffill',inplace=True)
```

C:\Users\raja\AppData\Local\Temp\ipykernel\_17544\4116506308.py:1: SettingWithCopyWarning:  
A value is trying to be set on a copy of a slice from a DataFrame

See the caveats in the documentation: [https://pandas.pydata.org/pandas-docs/stable/user\\_guide/indexing.html#returning-a-view-versus-a-copy](https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy) ([https://pandas.pydata.org/pandas-docs/stable/user\\_guide/indexing.html#returning-a-view-versus-a-copy](https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy))

```
df.fillna(method='ffill',inplace=True)
```

In [13]:

```
x=np.array(df['sal']).reshape(-1,1)
y=np.array(df['temp']).reshape(-1,1)
```

In [14]:

```
df.dropna(inplace=True)
```

C:\Users\raja\AppData\Local\Temp\ipykernel\_17544\1379821321.py:1: SettingWithCopyWarning:  
A value is trying to be set on a copy of a slice from a DataFrame

See the caveats in the documentation: [https://pandas.pydata.org/pandas-docs/stable/user\\_guide/indexing.html#returning-a-view-versus-a-copy](https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy) ([https://pandas.pydata.org/pandas-docs/stable/user\\_guide/indexing.html#returning-a-view-versus-a-copy](https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy))

```
df.dropna(inplace=True)
```


In [17]:

```
x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.25)
regr=LinearRegression()
regr.fit(x_train,y_train)
print(regr.score(x_test,y_test))
```

```
0.2009178946197172
```

In [18]:

```
y_pred=regr.predict(x_test)
plt.scatter(x_test,y_test,color='b')
plt.plot(x_test,y_pred,color='k')
plt.show()
```

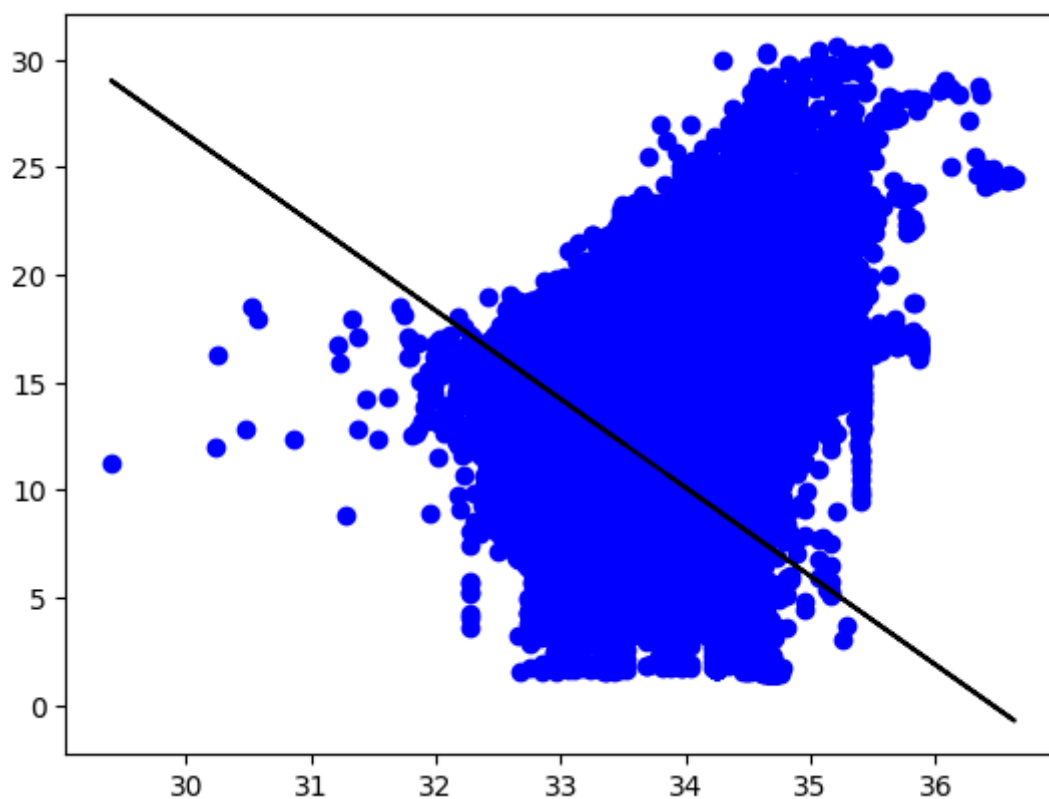


In [19]:

```
df500=df[:][:500]  
sns.lmplot(x='sal',y='temp',data=df500,order=1,ci=None)
```

Out[19]:

<seaborn.axisgrid.FacetGrid at 0x1b4e8843bb0>

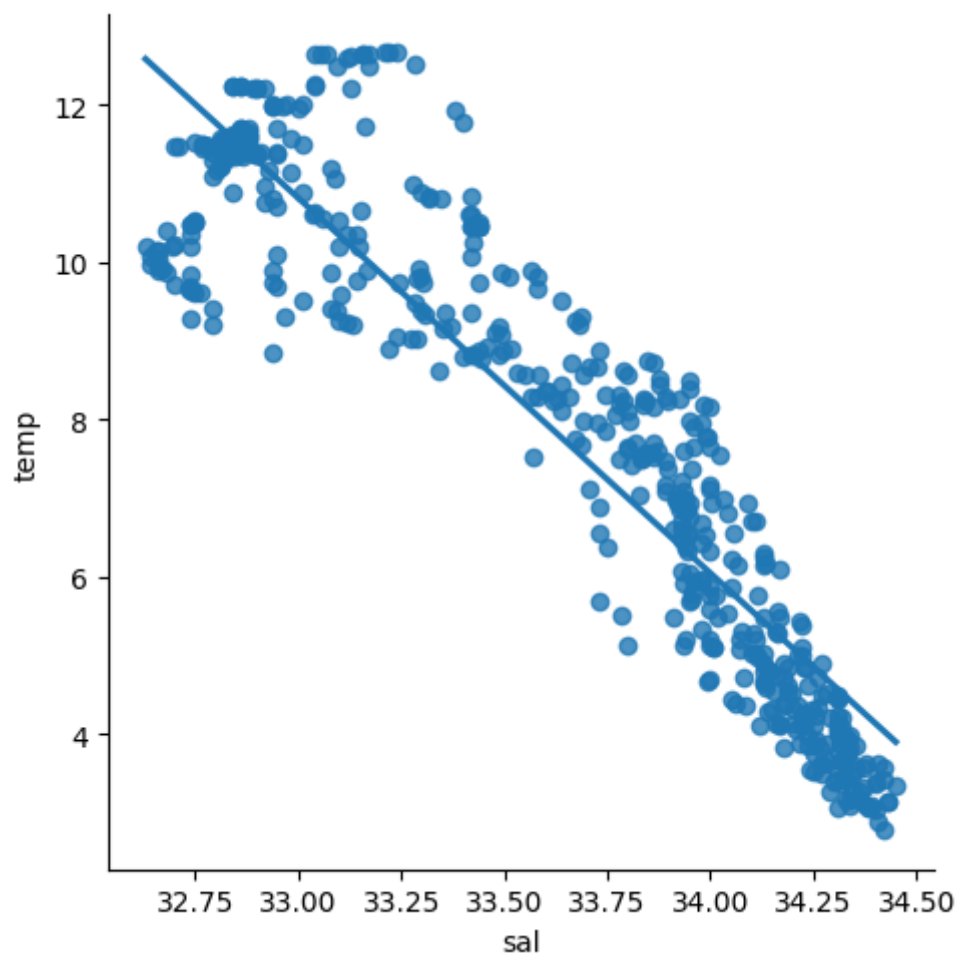




In [23]:

```
df500.fillna(method='ffill', inplace=True)
x=np.array(df500['sal']).reshape(-1,1)
y=np.array(df500['temp']).reshape(-1,1)
df500.dropna(inplace=True)
x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.25)
regr=LinearRegression()
regr.fit(x_train,y_train)
print('regression:',regr.score(x_test,y_test))
y_pred=regr.predict(x_test)
plt.scatter(x_test,y_test,color='b')
plt.plot(x_test,y_pred,color='k')
plt.show()
```

regression: 0.853524675030656

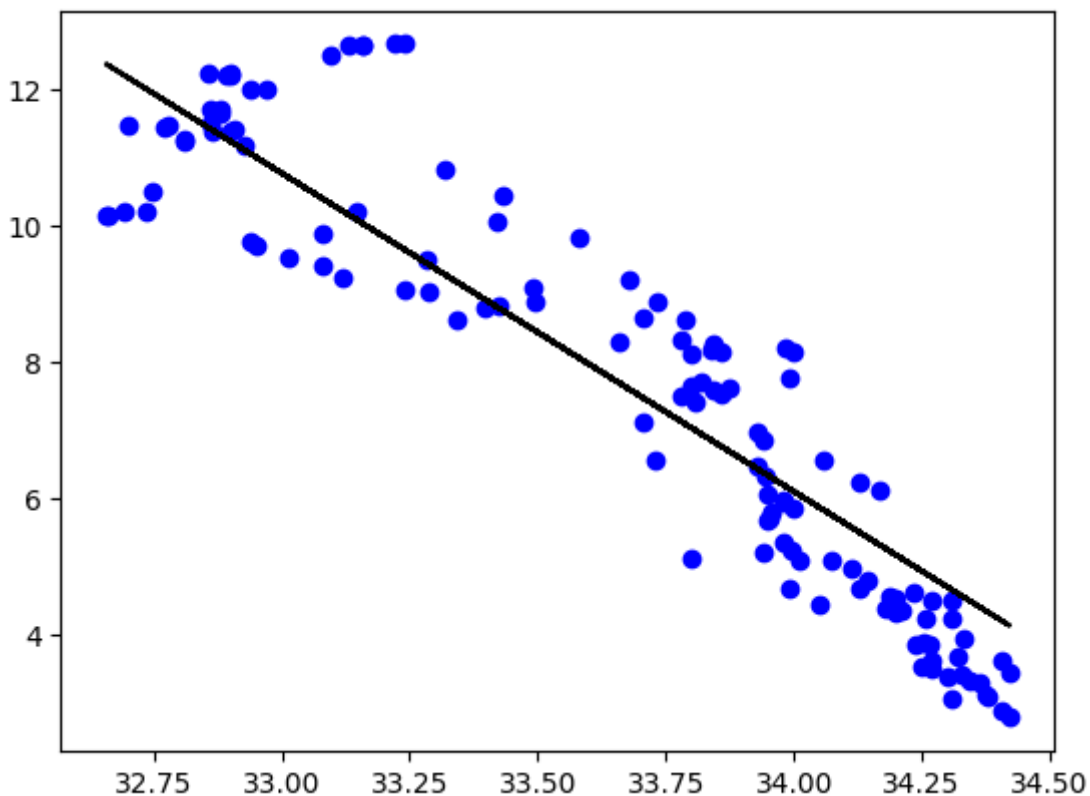

In [24]:

```
from sklearn.linear_model import LinearRegression
from sklearn.metrics import r2_score
model=LinearRegression()
model.fit(x_train,y_train)
y_pred=model.predict(x_test)
r2=r2_score(y_test,y_pred)
print("r2 score:",r2)
```

r2 score: 0.853524675030656

In [ ]: